

**STRONG-POINT®**

# Expert-Grade Fasteners

*Zero to Fastened in Seconds*

**NEW FASTENERS!**

Check out our  
**Strong Timber  
Structural Screws**  
on page 32.



[www.intercorpusa.com](http://www.intercorpusa.com)

**INTERCORP**

Los Angeles  
800.762.2004

New York  
888.322.2262

Chicago  
800.533.9669

Dallas  
800.558.7222

Atlanta  
800.822.9690

Portland  
800.434.5606

Houston  
800.558.7222

Cleveland  
800.533.9669

Miami  
800.822.9690

# Zero to Fastened in Seconds!

**Strong-Point.  
Always the right  
fastener for  
any project.**



**STRONG-POINT**®

A quality construction project requires precision, speed and fasteners that perform beyond what is expected. Your reputation depends on it. *Kill it when you drill it*® with Strong-Point expert-grade construction fasteners.

**For free samples,** or to learn more about our expert-grade construction fasteners, call **800-762-2004** or visit us online at **www.intercorpUSA.com**.



# About Intercorp

Founded in 1988, Intercorp has established itself as an industry leader in the fastener distribution business. Our flagship brand, Strong-Point®, is sold by thousands of distributors to construction professionals throughout the United States. The brand consists of a variety of high-end fasteners including: Self-Drilling, Needle Point, Woodworking, Stainless Steel, Drywall, Post Frame, Outdoor, Timber, Concrete, and Cement Board screws. With an outstanding reputation for customer service, quick delivery, and support for the distribution channel, Intercorp is unmatched when it comes to high-quality fasteners.

**PREMIUM QUALITY** - Premium carbon and stainless steel fasteners are critical to our business. It doesn't go out the door without the Intercorp stamp of approval. This is why we stand firmly behind every transaction we make.

**CUSTOMER SERVICE** - You will come to rely on the knowledge and support of our staff. We are here to help you find solutions.

**WILL CALL** - Orders are ready in 30 minutes or less from one of our 9 warehouses: Los Angeles, New York, Chicago, Dallas, Atlanta, Portland, Houston, Cleveland, Miami.

**FACTORY DIRECT/MILL** - We can import a broad selection of volume fasteners in addition to our standard product line of premium fasteners in steel and stainless steel. Private labeling of containers is also available.

# Terms and Conditions

**TERMS** - Net 30 days OAC. FOB Point of Origin. All orders subject to acceptance by Intercorp. Minimum order is \$50.00.

**DROP SHIPMENTS** - Orders may be drop shipped at the request of the distributor. Normal freight policy will apply.

**SHORTAGES** - Any shortages on your shipment must be reported within 10 days of the shipping date for proper verification and possible adjustment. All packages are sealed when leaving the factory. If a seal is broken when received, submit your claim directly to the delivering carrier for your losses.

**WARRANTY** - Intercorp stands behind all of our products. Any item may be returned due to defective workmanship or materials. The item will be replaced or credit will be issued.



## Competitive Pricing, Huge Inventory, Great Freight Policies

### Warehouse Locations

#### Los Angeles - (800) 762-2004

641 North Poplar Street  
Orange, CA 92868  
Tel: (714) 744-2622  
Fax: (714) 744-4672  
losangeles@intercorpusa.com

#### New York - (888) 322-2262

18 Madison Road  
Fairfield, NJ 07004  
Tel: (973) 227-0111  
Fax: (973) 227-0511  
newyork@intercorpusa.com

#### Chicago - (800) 533-9669

2541 Millennium Drive  
Elgin, IL 60124  
Tel: (847) 841-8860  
Fax: (847) 841-8875  
chicago@intercorpusa.com

#### Dallas - (800) 558-7222

1252 Avenue T  
Grand Prairie, TX 75050  
Tel: (972) 602-1080  
Fax: (972) 602-1117  
dallas@intercorpusa.com

#### Atlanta - (800) 822-9690

2160 Breckinridge Blvd.  
Lawrenceville, GA 30043  
Tel: (770) 326-9960  
Fax: (770) 326-9996  
atlanta@intercorpusa.com



**Same Day Shipping  
From All Nine Locations!**

#### Portland - (800) 434-5606

9494 SW Tualatin-Sherwood Rd.  
Tualatin, OR 97062  
Tel: (503) 783-5550  
Fax: (503) 783-5555  
portland@intercorpusa.com

#### Houston - (800) 558-7222

3851 Yale Street  
Houston, TX 77018  
Tel: (713) 692-1167  
Fax: (713) 692-1274  
houston@intercorpusa.com

#### Cleveland - (800) 533-9669

23901 Aurora Road  
Bedford Heights, OH 44146  
Tel: (216) 750-2265  
Fax: (216) 750-2266  
cleveland@intercorpusa.com

#### Miami - (800) 822-9690

20600 NW 47th Avenue  
Miami Gardens, FL 33055  
Tel: (954) 526-4144  
Fax: (954) 526-4303  
miami@intercorpusa.com

# Table of Contents

## **STRONG-POINT** **Self-Drilling**™

Unslotted Indented Hex Washer Head.....	02, 04-07
Unslotted Indented Hex Washer Head w/Bonded Washer.....	03, 04, 06-07
ITW Buildex - Unslotted Indented Hex Washer Head.....	08
Phillips Pan Head.....	09
Square Drive Pan Head.....	09
Phillips Oval Head.....	09
Phillips #6 Oval Head Sems w/Finishing Washer.....	10
Phillips Flat Head.....	10
Phillips Flat Head Reamer w/Wings.....	11
Phillips/Square Drive Flat Head Pilot Point.....	11
Phillips Wafer Head.....	12
Star Drive Wafer Head.....	12
Phillips Wafer Head w/Wings.....	12
Phillips Bugle Head.....	13
Phillips Bugle Head Pilot Point.....	14
Phillips Pan Head Framing Screws.....	14
Phillips Modified Truss (R/W) Head.....	14
Phillips Pancake Head.....	15
Square Drive Trim Head.....	15
Phillips Trim Head.....	15

## **STRONG-POINT** **Drywall**™

Phillips Bugle Head, Fine Thread.....	17
Phillips Bugle Head, Hi-Low Thread.....	17
Phillips Bugle Head Laminating Screws.....	17
Phillips Bugle Head, Coarse Thread.....	18
Square Drive Bugle Head, Coarse Thread.....	18
Phillips Pan Head Framing Screws.....	18
Phillips Trim Head, Sharp Point.....	19
Square Drive Trim Head, Sharp Point.....	19
Phillips Modified Truss (R/W) Head, K-Lath.....	19

## **STRONG-POINT** **Needle Point**™

Slotted Indented Hex Washer Head.....	21, 22
Slotted Indented Hex Washer Head w/Bonded Washer.....	21
Unslotted Indented Hi-Hex Washer Head, Fine Thread, Razor Point.....	22
Phillips Pancake Head.....	22

## **STRONG-POINT** **Stainless**™

410 Stainless Steel Unslotted Indented HWH, Self-Drilling.....	24
410 Stainless Steel Unslotted Indented HWH w/Washer, Self-Drilling.....	24-25
410 Stainless Steel Phillips Pan Head, Self-Drilling.....	25
410 Stainless Steel Phillips Flat Head, Self-Drilling.....	25
410 Stainless Steel Phillips Modified Truss (R/W) Head, Self-Drilling.....	26
410 Stainless Steel Phillips/Square Drive Pancake Head, Self-Drilling.....	26
410 Stainless Steel Star Drive Flat Head Reamer w/Wings.....	26
305 Stainless Steel Phillips Modified Truss (R/W) Head, Type '17'.....	26
305 Stainless Steel Phillips/Square Drive Pancake Head.....	26
305 Stainless Steel Phillips Bugle Head, Coarse Thread.....	27
305 Stainless Steel Star Drive Flat Head w/Nibs, Coarse Thread, Type '17'.....	27
316 Stainless Steel Star Drive Flat Head w/Nibs, Coarse Thread, Type '17'.....	27
305 Stainless Steel Square Drive Trim Head, Coarse Thread, Type '17'.....	27
305 Stainless Steel Star Drive Trim Head, Coarse Thread, Type '17'.....	27

## **STRONG-POINT** **Strong Timber**™

Star Drive Wafer Head w/Nibs, Twist Knurl, Type '17', WAR Coated.....	33
Unslotted Hex Washer Head, Twist Knurl, Type '17', WAR Coated.....	33

## **STRONG-POINT** **Outdoor**™

Phillips Bugle Head, Coarse Thread.....	29, 30
Square Drive Bugle Head, Coarse Thread.....	29, 31
Square Drive Bugle Head, Coarse Thread, Type '17'.....	30
Star Drive Flat Head w/Nibs, Coarse Thread, Type '17'.....	31
Phillips/Square Drive Low Profile Wafer Head, Type '17'.....	31

## **STRONG-POINT** **Woodworking**™

Phillips Flat Head Particle Board Screws.....	35
Square Drive Flat Head Particle Board Screws.....	35
Face Framing Phillips #7 Pan Head, Type '17'.....	35
Face Framing Square Drive #7 Pan Head, Type '17'.....	35
Face Framing Square Drive #7 Pan Head, Coarse Thread, Type '17'.....	35
Phillips/Square Round Washer Head, Particle Board Screws, Type '17'.....	36
Phillips Flat Head w/Nibs Particle Board Screws, Type '17'.....	36
Square Drive Flat Head w/Nibs Particle Board Screws, Type '17'.....	36-37
Phillips Oval Head Particle Board Screws "Hinge Screws".....	37
Phillips Flat Head Particle Board Screws "Hinge Screws".....	37
Draw Bolt - Joint Fastener.....	37

## **STRONG-POINT** **Polegripper**™

Unslotted Indented Hi-Hex Washer Head w/Shoulder, Type S.....	39
w/EPDM Bonded Washer.....	39
Unslotted Indented Hi-Hex Washer Head w/Shoulder, Hi-Low, Type '17'.....	39
w/EPDM Bonded Washer.....	39
Unslotted Indented Hex Flange Washer Head w/Washer, Type AB.....	39
Unslotted Indented Hex Washer Head w/Washer, Type '17'.....	39

## **STRONG-POINT** **Strongcon**®

Slotted Indented Hex Washer Head, Hi-Low, Diamond Point.....	41
Phillips Flat Head, Hi-Low, Diamond Point.....	41
Carbide Masonry Drill Bit.....	41



Large Diameter Tapcon Anchors, Hi-Low, Zinc, Stainless.....	42
---	----

## **STRONG-POINT** **Cement Board**™

Phillips Wafer Head w/Nibs, Self-Drilling, Cement Board Screws.....	44
Phillips Wafer Head w/Nibs Hi-Low Sharp Point.....	44
Phillips Wafer Head w/Nibs Hi-Low Spoon Point.....	44
Phillips Flat Head w/Nibs and Wings, Self-Drilling, Fiber Board Screws.....	44



E-Z Lite™, E-Z Mini™, Stud Solver™, E-Z Zinc™.....	44
E-Z Plastic Plus™, Twist-N-Lock™, E-Z Toggle™.....	44

## **STRONG-POINT** **Special Application**™

Acoustical Eye Lags.....	46
Acoustical Eye Lag Driver and Star Bits.....	46
Bonded Sealing Washers - Galvanized and 18-8 Stainless Steel.....	46
Pipe Flashings.....	46

# —STRONG-POINT— Self-Drilling™

**STRONG-POINT®**

Attach metal to metal or wood to metal with confidence, using **Expert-Grade** self-drilling screws

## Hex Washer Head



Attaches Metal to Metal  
Lengths 3/8" - 6"  
Zinc Plated or Strong-Shield Coated



Attaches Metal to Metal  
Lengths 1-1/4" - 8"  
Zinc Plated or Strong-Shield Coated

## Hex Washer Head w/Bonded Washer



Attaches Metal to Metal  
Lengths 1/2" - 6"  
Zinc Plated or Strong-Shield Coated



Attaches Metal to Metal  
Lengths 1-1/4" - 3"  
Zinc Plated or Strong-Shield Coated

## Hex Washer Head Garage Door Screw



Attaches Metal to Metal  
Lengths 5/16 x 1" - 2"  
Zinc Plated



Attaches Metal to Metal  
Lengths 3/8" - 3"  
Zinc Plated

## Flat Head



Attaches Metal to Metal  
Lengths 1/2" - 3"  
Zinc Plated

## Oval Head



Attaches Metal to Metal  
Lengths 3/4" - 1-1/2"  
Zinc Plated

## Bugle Head



Attaches Gypsum, Insulation or Wood to Metal  
Lengths 1" - 6"  
Zinc Plated, Phosphate Coated or Ruspert Coated

## Wafer Head



Attaches Plywood to Metal  
Lengths 3/4" - 2"  
Zinc Plated

## Wafer Head w/Wings



Attaches Plywood to Metal  
Length 1-7/16"  
Zinc Plated or WAR Coated

## Modified Truss (R/W) Head



Attaches Wire Lath to Metal Studs  
Lengths 1/2" - 4"  
Zinc Plated or Black Oxide

## Pancake Head



Attaches Panel Clips to Metal Studs  
Lengths 5/8" - 1-1/2"  
Zinc Plated or Strong-Shield Coated

## Pan Head Framing Screw



Attaches Metal Track to Metal Studs  
Length 7/16"  
Zinc Plated or Phosphate Coated

## Bugle Head Pilot Point



Attaches Wood to Metal  
Length 8 x 2"  
Zinc Plated

## Flat Head Reamers w/Wings



Attaches Wood to Metal  
Lengths 1-5/8" - 4-3/4"  
Zinc Plated or WAR Coated

## Flat Head Pilot Point



Attaches Wood to Metal  
Length 10 x 2-1/2"  
WAR Coated


## Trim Head



Attaches Wood to Metal  
Lengths 1-5/8" - 3"  
Zinc Plated or Phosphate Coated

**Unslotted Indented Hex Washer Head, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance




Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 3/8	2	H606	20M	40	.035 - .090	H606V	2,500	H606I	500
6-20 x 1/2	2	H608	15M	35	.035 - .090	H608V	1,875	H608I	375
6-20 x 5/8	2	H610	15M	39	.035 - .090	H610V	1,875	H610I	375
6-20 x 3/4	2	H612	10M	31	.035 - .090	H612V	1,600	H612I	300
8-18 x 1/2	2	H808	10M	35	.035 - .100	H808V	1,500	H808I	300
8-18 x 5/8	2	H810	10M	40	.035 - .100	H810V	1,250	H810I	250
8-18 x 3/4	2	H812	10M	45	.035 - .100	H812V	1,000	H812I	200
8-18 x 1	2	H816	8M	44	.035 - .100	H816V	1,000	H816I	200
8-18 x 1-1/4	2	H820	5M	33	.035 - .100	H820V	750	H820I	125
8-18 x 1-1/2	2	H824	5M	38	.035 - .100	H824V	700	H824I	125
8-18 x 2	2	H832	3M	29	.035 - .100	H832V	500	H832I	100
10-16 x 1/2	2	H1008	8M	40	.035 - .110	H1008V	1,000	H1008I	200
10-16 x 5/8	2	H1010	8M	44	.035 - .110	H1010V	1,000	H1010I	200
10-16 x 3/4	3	H1012	8M	50	.035 - .176	H1012V	800	H1012I	200
10-16 x 3/4**	3	H1012H	6M	42	.035 - .176	H1012HV	700	H1012HI	150
10-16 x 1	3	H1016	5M	40	.035 - .176	H1016V	700	H1016I	150
10-16 x 1-1/4	3	H1020	4M	37	.035 - .176	H1020V	500	H1020I	100
10-16 x 1-1/2	3	H1024	3M	32	.035 - .176	H1024V	500	H1024I	100
10-16 x 2	3	H1032	2M	26	.035 - .176	H1032V	400	H1032I	80
10-16 x 2-1/2	3	H1040	1M	15	.035 - .176	H1040V	300	H1040I	60
10-16 x 3	3	H1048	1M	18	.035 - .176	H1048V	250	H1048I	50
12-14 x 3/4	3	H1212	4M	33	.035 - .210	H1212V	600	H1212I	125
12-14 x 1	3	H1216	4M	40	.035 - .210	H1216V	500	H1216I	100
12-14 x 1-1/4	3	H1220	3M	35	.035 - .210	H1220V	400	H1220I	75
12-14 x 1-1/2	3	H1224	3M	40	.035 - .210	H1224V	400	H1224I	75
12-14 x 2	3	H1232	2M	33	.035 - .210	H1232V	300	H1232I	50
12-14 x 2-1/2	3	H1240	1.5M	30	.035 - .210	H1240V	250	H1240I	50
12-14 x 3	3	H1248	1M	23	.035 - .210	H1248V	200	H1248I	50
12-14 x 4	3	H1264	.5M	16	.035 - .210	H1264V	150	H1264I	30
14-14 x 3/4	3	H1412	4M	50	.060 - .220	H1412V	400	H1412I	80
14-14 x 1	3	H1416	3M	45	.060 - .220	H1416V	350	H1416I	75
14-14 x 1-1/4	3	H1420	2M	35	.060 - .220	H1420V	300	H1420I	60
14-14 x 1-1/2	3	H1424	2M	40	.060 - .220	H1424V	250	H1424I	50
14-14 x 1-3/4	3	H1428	1.5M	34	.060 - .220	H1428V	250	H1428I	50
14-14 x 2	3	H1432	1.5M	38	.060 - .220	H1432V	200	H1432I	40
14-14 x 2-1/2	3	H1440	1M	30	.060 - .220	H1440V	150	H1440I	30
14-14 x 3	3	H1448	1M	35	.060 - .220	H1448V	150	H1448I	30
14-14 x 4	3	H1464	.5M	22	.060 - .220	H1464V	100	H1464I	20
14-14 x 4-1/2	3	H1472	.5M	24	.060 - .220	H1472V	100	H1472I	20
14-14 x 5	3	H1480	.5M	27	.060 - .220	H1480V	100	H1480I	20
14-14 x 6	3	H1496	.5M	31	.060 - .220	H1496V	50	N/A	N/A
14-14 x 7/8 #12 HD***	1	H1	3M	36	.018 - .090	H1V	375	H1I	75

\*\*Hi-Hex Head w/Reverse Serrations - Head Height: .160 - .178

\*\*\*Lap Stitching

**Unslotted Indented Hex Washer Head w/Bonded Washer, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- Bonded washer creates leak proof seal




Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	HA808	5M	28	.035 - .100	1/2" O.D.	HA808V	1,000	HA808I	200
8-18 x 5/8	2	HA810	5M	30	.035 - .100	1/2" O.D.	HA810V	800	HA810I	150
8-18 x 3/4	2	HA812	5M	33	.035 - .100	1/2" O.D.	HA812V	800	HA812I	150
8-18 x 1	2	HA816	4M	30	.035 - .100	1/2" O.D.	HA816V	650	HA816I	125
8-18 x 1-1/4	2	HA820	3M	26	.035 - .100	1/2" O.D.	HA820V	500	HA820I	100
8-18 x 1-1/2	2	HA824	2.5M	24	.035 - .100	1/2" O.D.	HA824V	500	HA824I	100
8-18 x 2	2	HA832	2.5M	29	.035 - .100	1/2" O.D.	HA832V	400	HA832I	100
10-16 x 1/2	2	HA1008	4M	30	.035 - .110	1/2" O.D.	HA1008V	650	HA1008I	130
10-16 x 5/8	2	HA1010	4M	32	.035 - .110	1/2" O.D.	HA1010V	650	HA1010I	130
10-16 x 3/4	3	HA1012	4M	35	.035 - .176	1/2" O.D.	HA1012V	600	HA1012I	125
10-16 x 1	3	HA1016	3M	32	.035 - .176	1/2" O.D.	HA1016V	500	HA1016I	100
10-16 x 1-1/4	3	HA1020	2.5M	30	.035 - .176	1/2" O.D.	HA1020V	400	HA1020I	100
10-16 x 1-1/2	3	HA1024	2M	26	.035 - .176	1/2" O.D.	HA1024V	400	HA1024I	80
10-16 x 2	3	HA1032	1.5M	23	.035 - .176	1/2" O.D.	HA1032V	300	HA1032I	60
10-16 x 2-1/2	3	HA1040	1M	18	.035 - .176	1/2" O.D.	HA1040V	250	HA1040I	50
10-16 x 3	3	HA1048	1M	21	.035 - .176	1/2" O.D.	HA1048V	250	HA1048I	50
12-14 x 3/4	3	HA1212	3M	32	.035 - .210	9/16" O.D.	HA1212V	500	HA1212I	100
12-14 x 1	3	HA1216	3M	37	.035 - .210	9/16" O.D.	HA1216V	400	HA1216I	80
12-14 x 1-1/4	3	HA1220	2.5M	35	.035 - .210	9/16" O.D.	HA1220V	350	HA1220I	75
12-14 x 1-1/2	3	HA1224	2M	31	.035 - .210	9/16" O.D.	HA1224V	300	HA1224I	70
12-14 x 2	3	HA1232	1.5M	29	.035 - .210	9/16" O.D.	HA1232V	250	HA1232I	50
12-14 x 2-1/2	3	HA1240	1M	22	.035 - .210	9/16" O.D.	HA1240V	200	HA1240I	40
12-14 x 3	3	HA1248	1M	26	.035 - .210	9/16" O.D.	HA1248V	200	HA1248I	40
12-14 x 4	3	HA1264	.5M	16	.035 - .210	9/16" O.D.	HA1264V	125	HA1264I	30
14-14 x 3/4	3	HA1412	3M	45	.060 - .220	5/8" O.D.	HA1412V	300	HA1412I	60
14-14 x 1	3	HA1416	2.5M	44	.060 - .220	5/8" O.D.	HA1416V	250	HA1416I	50
14-14 x 1-1/4	3	HA1420	2M	40	.060 - .220	5/8" O.D.	HA1420V	250	HA1420I	50
14-14 x 1-1/2	3	HA1424	2M	45	.060 - .220	5/8" O.D.	HA1424V	200	HA1424I	40
14-14 x 1-3/4	3	HA1428	1.5M	38	.060 - .220	5/8" O.D.	HA1428V	200	HA1428I	40
14-14 x 2	3	HA1432	1.5M	41	.060 - .220	5/8" O.D.	HA1432V	180	HA1432I	35
14-14 x 2-1/2	3	HA1440	1M	33	.060 - .220	5/8" O.D.	HA1440V	150	HA1440I	30
14-14 x 3	3	HA1448	1M	38	.060 - .220	5/8" O.D.	HA1448V	125	HA1448I	25
14-14 x 4	3	HA1464	.5M	23	.060 - .220	5/8" O.D.	HA1464V	100	HA1464I	20
14-14 x 5	3	HA1480	.5M	27	.060 - .220	5/8" O.D.	HA1480V	100	HA1480I	20
14-14 x 6	3	HA1496	.5M	32	.060 - .220	5/8" O.D.	HA1496V	75	N/A	N/A
14-14 x 7/8 #12 HD**	1	HA1	2.5M	30	.018 - .090	5/8" O.D.	HA1V	300	HA1I	60

\*\*Lap Stitching

**Unslotted Indented Hex Washer Head, Strong-Shield Coated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 3/4	3	H1012C	8M	50	.035 - .176	H1012CV	800	H1012CI	200
10-16 x 1	3	H1016C	5M	40	.035 - .176	H1016CV	625	H1016CI	150
10-16 x 1-1/2	3	H1024C	3M	32	.035 - .176	H1024CV	500	H1024CI	100
10-16 x 2	3	H1032C	2M	26	.035 - .176	H1032CV	400	H1032CI	80
12-14 x 3/4	3	H1212C	4M	33	.035 - .210	H1212CV	600	H1212CI	125
12-14 x 1	3	H1216C	4M	40	.035 - .210	H1216CV	500	H1216CI	100
12-14 x 1-1/4	3	H1220C	3M	35	.035 - .210	H1220CV	400	H1220CI	75
12-14 x 1-1/2	3	H1224C	3M	40	.035 - .210	H1224CV	375	H1224CI	75
12-14 x 2	3	H1232C	2M	33	.035 - .210	H1232CV	300	H1232CI	50
12-14 x 2-1/2	3	H1240C	1.5M	30	.035 - .210	H1240CV	250	H1240CI	50
12-14 x 3	3	H1248C	1M	23	.035 - .210	H1248CV	200	H1248CI	50
14-14 x 3/4	3	H1412C	4M	50	.060 - .220	H1412CV	400	H1412CI	80
14-14 x 1	3	H1416C	3M	45	.060 - .220	H1416CV	300	H1416CI	75
14-14 x 1-1/4	3	H1420C	2M	35	.060 - .220	H1420CV	300	H1420CI	60
14-14 x 1-1/2	3	H1424C	2M	40	.060 - .220	H1424CV	250	H1424CI	50
14-14 x 2	3	H1432C	1.5M	38	.060 - .220	H1432CV	200	H1432CI	40
14-14 x 2-1/2	3	H1440C	1M	30	.060 - .220	H1440CV	150	H1440CI	30
14-14 x 3	3	H1448C	1M	35	.060 - .220	H1448CV	150	H1448CI	30
14-14 x 7/8 #12 HD	1	H1C	3M	36	.018 - .090	H1CV	375	H1CI	75

**Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated**

**Material Application**  
Attaches metal to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 3/4	3	HA1012C	4M	35	.035 - .176	1/2" O.D.	HA1012CV	600	HA1012CI	125
10-16 x 1	3	HA1016C	3M	32	.035 - .176	1/2" O.D.	HA1016CV	500	HA1016CI	75
10-16 x 1-1/2	3	HA1024C	2M	26	.035 - .176	1/2" O.D.	HA1024CV	400	HA1024CI	80
10-16 x 2	3	HA1032C	1.5M	23	.035 - .176	1/2" O.D.	HA1032CV	300	HA1032CI	60
12-14 x 3/4	3	HA1212C	3M	32	.035 - .210	9/16" O.D.	HA1212CV	500	HA1212CI	100
12-14 x 1	3	HA1216C	3M	37	.035 - .210	9/16" O.D.	HA1216CV	375	HA1216CI	75
12-14 x 1-1/4	3	HA1220C	2.5M	35	.035 - .210	9/16" O.D.	HA1220CV	350	HA1220CI	75
12-14 x 1-1/2	3	HA1224C	2M	31	.035 - .210	9/16" O.D.	HA1224CV	300	HA1224CI	60
12-14 x 2	3	HA1232C	1.5M	29	.035 - .210	9/16" O.D.	HA1232CV	250	HA1232CI	50
12-14 x 2-1/2	3	HA1240C	1M	22	.035 - .210	9/16" O.D.	HA1240CV	200	HA1240CI	40
12-14 x 3	3	HA1248C	1M	26	.035 - .210	9/16" O.D.	HA1248CV	200	HA1248CI	40
14-14 x 3/4	3	HA1412C	3M	45	.060 - .220	5/8" O.D.	HA1412CV	300	HA1412CI	60
14-14 x 1	3	HA1416C	2.5M	44	.060 - .220	5/8" O.D.	HA1416CV	300	HA1416CI	50
14-14 x 1-1/4	3	HA1420C	2M	40	.060 - .220	5/8" O.D.	HA1420CV	250	HA1420CI	50
14-14 x 1-1/2	3	HA1424C	2M	45	.060 - .220	5/8" O.D.	HA1424CV	200	HA1424CI	40
14-14 x 2	3	HA1432C	1.5M	41	.060 - .220	5/8" O.D.	HA1432CV	180	HA1432CI	35
14-14 x 2-1/2	3	HA1440C	1M	33	.060 - .220	5/8" O.D.	HA1440CV	150	HA1440CI	30
14-14 x 3	3	HA1448C	1M	38	.060 - .220	5/8" O.D.	HA1448CV	125	HA1448CI	25
14-14 x 7/8 #12 HD	1	HA1C	2.5M	30	.018 - .090	5/8" O.D.	HA1CV	300	HA1CI	60


\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.



**Unslotted Indented Hex Washer Head w/Locking Serrations, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
14-14 x 1**	3	H14167	2.5M	46	.060 - .220	H14167V	250	H14167I	50

\*\*7/16 A.F

**Unslotted Indented Hex Washer Head w/Locking Serrations, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
5/16-12 x 1**	3	H1616	2M	50	.060 - .220	H1616V	200	H1616I	40
5/16-12 x 1-1/2**	3	H1624	1.5M	49	.060 - .220	H1624V	150	H1624I	30
5/16-12 x 2**	3	H1632	1M	41	.060 - .220	H1632V	125	H1632I	25

\*\*7/16 A.F

**Unslotted Indented Hex Washer Head, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	H4	4M	36	.125 - .250	H4V	500	H4I	100

**Unslotted Indented Hex Washer Head, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance




Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	H5	3.5M	39	.125 - .500	H5V	400	H5I	100
12-24 x 1-1/2	5	H52	2.5M	33	.125 - .500	H52V	400	H52I	75
12-24 x 2	5	H53	2M	33	.125 - .500	H53V	300	H53I	50
12-24 x 3	5	H54	1M	23	.125 - .500	H54V	200	H54I	40

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Unslotted Indented Hex Washer Head, Strong-Shield Coated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	H4C	4M	36	.125 - .250	H4CV	500	H4CI	100

**Unslotted Indented Hex Washer Head, Strong-Shield Coated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	H5C	3.5M	39	.125 - .500	H5CV	400	H5CI	100
12-24 x 1-1/2	5	H52C	2.5M	33	.125 - .500	H52CV	400	H52CI	80
12-24 x 2	5	H53C	2M	33	.125 - .500	H53CV	300	H53CI	60
12-24 x 3	5	H54C	1M	23	.125 - .500	H54CV	200	H54CI	40

**Unslotted Indented Hex Washer Head w/Bonded Washer, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM F1941 for corrosion resistance
- Bonded washer creates leak proof seal

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	HA4	3M	38	.125 - .250	9/16" O.D.	HA4V	400	HA4I	80

**Unslotted Indented Hex Washer Head w/Bonded Washer, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- Bonded washer creates leak proof seal




Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	HA5	3M	42	.125 - .500	9/16" O.D.	HA5V	375	HA5I	75
12-24 x 1-1/2	5	HA52	2.5M	41	.125 - .500	9/16" O.D.	HA52V	300	HA52I	60
12-24 x 2	5	HA53	2M	38	.125 - .500	9/16" O.D.	HA53V	250	HA53I	50
12-24 x 3	5	HA54	1M	28	.125 - .500	9/16" O.D.	HA54V	200	HA54I	40

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	HA4C	3M	38	.125 - .250	9/16" O.D.	HA4CV	400	HA4CI	80

**Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	HA5C	3M	42	.125 - .500	9/16" O.D.	HA5CV	375	HA5CI	75
12-24 x 1-1/2	5	HA52C	2.5M	41	.125 - .500	9/16" O.D.	HA52CV	300	HA52CI	60
12-24 x 2	5	HA53C	2M	38	.125 - .500	9/16" O.D.	HA53CV	250	HA53CI	50
12-24 x 3	5	HA54C	1M	28	.125 - .500	9/16" O.D.	HA54CV	200	HA54CI	40

**Unslotted Indented Hex Washer Head, Strong-Shield Coated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
1/4-20 x 3	5	H543C	1M	34	.125 - .500	H543CV	125	H543CI	25
1/4-20 x 4	5	H544C	.5M	22	.125 - .500	H544CV	100	H544CI	25

**Unslotted Indented Hex Washer Head, Strong-Shield Coated**

**Material Application**  
Attaches metal to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance




Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
1/4-20 x 5	5	H545C	.5M	26	.125 - .500	H545CV	100	H545CI	20
1/4-20 x 6	5	H546C	.5M	31	.125 - .500	H546CV	75	H546CI	N/A
1/4-20 x 8	5	H548C	.25M	20	.125 - .500	H548CV	N/A	H548CI	N/A

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

## TEKS® SELECT Unslotted Indented Hex Washer Head, Climaseal ACR™

**Material Application**  
Attaches metal to metal.




- Drill point and thread design enable the TEKS fastener to drill and keep with fewer stalls
- Selectively hardened to eliminate the effects of hydrogen assisted stress corrosion
- Climaseal® advanced corrosion resistance coating (ACR) provides the best corrosion resistance available



Size	Pt.	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)
10-16 x 3/4	3	1076000	5M	33	.035 - .150
12-14 x 1	3	1080000	4M	38	.035 - .187
1/4-14 x 1	3	1119000	2.5M	37	.035 - .210
1/4-20 x 1-1/8	4	1124000	2M	30	.210 - .312
1/4-20 x 1-1/2	4	1125000	2M	40	.210 - .312
1/4-20 x 2	4	1078000	1.5M	38	.210 - .312

## TEKS® Unslotted Indented Hex Washer Head, Climaseal®

**Material Application**  
Attaches metal to metal.



- Point has precise cutting edges to improve drill performance with less effort
- Non-walking point provides fast material engagement
- Drills and taps in the broadest range of applications
- Point to thread design maximizes pullout performance and minimizes back out
- Climaseal® finish provides excellent corrosion resistance and lower tapping torque



Size	Pt.	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)
12-24 x 7/8	4	1088000	5M	40	.125 - .250
12-24 x 1-1/4	4.5	1414000	4M	44	.125 - .375
12-24 x 1-1/4	5	1007000	4M	44	.125 - .500
12-24 x 1-1/2	5	1770000	2.5M	33	.125 - .500
1/4-28 x 3**	5	1774000	1M	35	.125 - .500
1/4-28 x 4**	5	1075000	.5M	22	.125 - .500
1/4-28 x 5	5	1641000	.25M	20	.125 - .500
1/4-28 x 6	5	1431000	.25M	25	.125 - .500
1/4-28 x 8	5	1590000	.15M	23	.125 - .500


\*\*5/16" Across Flats HWH

\*Carton weights are approximate and may vary.

**Call us to learn more about all of the ITW Buildex products we carry.**

**Phillips Pan Head, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 3/8	2	P63	20M	36	.035 - .090	P63V	2,500	P63I	500
6-20 x 1/2	2	P64	20M	42	.035 - .090	P64V	2,500	P64I	500
6-20 x 5/8	2	P65	15M	35	.035 - .090	P65V	2,000	P65I	400
6-20 x 3/4	2	P66	10M	29	.035 - .090	P66V	1,600	P66I	300
6-20 x 1	2	P68	10M	35	.035 - .090	P68V	1,500	P68I	300
8-18 x 3/8	2	P83	10M	28	.035 - .100	P83V	2,000	P83I	400
8-18 x 1/2	2	P84	10M	32	.035 - .100	P84V	1,500	P84I	300
8-18 x 5/8	2	P85	10M	37	.035 - .100	P85V	1,300	P85I	250
8-18 x 3/4	2	P86	10M	42	.035 - .100	P86V	1,200	P86I	250
8-18 x 1	2	P88	8M	41	.035 - .100	P88V	1,000	P88I	200
8-18 x 1-1/4	2	P810	5M	31	.035 - .100	P810V	800	P810I	160
8-18 x 1-1/2	2	P812	5M	35	.035 - .100	P812V	700	P812I	150
8-18 x 2	2	P816	3M	27	.035 - .100	P816V	500	P816I	100
10-16 x 1/2	2	P104	10M	45	.035 - .110	P104V	1,000	P104I	200
10-16 x 5/8	2	P105	10M	52	.035 - .110	P105V	1,000	P105I	200
10-16 x 3/4	3	P106	8M	47	.035 - .176	P106V	1,000	P106I	200
10-16 x 1	3	P108	5M	38	.035 - .176	P108V	700	P108I	150
10-16 x 1-1/4	3	P109	5M	41	.035 - .176	P109V	500	P109I	100
10-16 x 1-1/2	3	P110	4M	40	.035 - .176	P110V	500	P110I	100
10-16 x 2	3	P116	3M	38	.035 - .176	P116V	400	P116I	80
10-16 x 2-1/2	3	P120	1.5M	21	.035 - .176	P120V	375	P120I	70
10-16 x 3	3	P124	1M	19	.035 - .176	P124V	250	P124I	50

**Square Drive Pan Head, Zinc CR3+ Plated**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	P84Q	10M	32	.035 - .100	P84QV	1,500	P84QI	300
8-18 x 3/4	2	P86Q	10M	42	.035 - .100	P86QV	1,200	P86QI	250
10-16 x 3/4	3	P106Q	8M	47	.035 - .176	P106QV	1,000	P106QI	200

**Phillips Oval Head, Zinc CR3+ Plated**

**Material Application**  
Attaches wood or metal to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- For counter-sunk holes


Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 3/4	2	O86	10M	40	.035 - .100	O86V	1,200	O86I	250
8-18 x 1	2	O88	7.5M	38	.035 - .100	O88V	1,000	O88I	200
8-18 x 1-1/4	2	O89	6M	36	.035 - .100	O89V	800	O89I	160
8-18 x 1-1/2	2	O90	5M	36	.035 - .100	O90V	800	O90I	150

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Phillips #6 Oval Head Sems, Zinc CR3+ Plated w/Finishing Washer**

**Material Application**  
Attaches metal to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- Commonly used for interior applications

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 3/4	2	E83	8M	34	.035 - .100	N/A	N/A	N/A	N/A
8-18 x 1	2	E84	6M	31	.035 - .100	N/A	N/A	N/A	N/A
8-18 x 1-1/4	2	E85	5M	31	.035 - .100	N/A	N/A	N/A	N/A

**Phillips Flat Head, Zinc CR3+ Plated**

**Material Application**  
Attaches wood or metal to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- For counter-sunk holes


Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	F82	10M	25	.035 - .100	F82V	2,000	F82I	400
8-18 x 3/4	2	F83	10M	35	.035 - .100	F83V	1,500	F83I	300
8-18 x 1	2	F84	8M	34	.035 - .100	F84V	1,200	F84I	250
8-18 x 1-1/4	2	F85	5M	26	.035 - .100	F85V	1,000	F85I	200
8-18 x 1-1/2	2	F86	5M	31	.035 - .100	F86V	800	F86I	150
10-16 x 3/4	3	F106	8M	39	.035 - .176	F106V	1,000	F106I	200
10-16 x 1	3	F108	5M	32	.035 - .176	F108V	800	F108I	150
10-16 x 1-1/4	3	F109	4M	31	.035 - .176	F109V	650	F109I	125
10-16 x 1-1/2	3	F110	4M	37	.035 - .176	F110V	500	F110I	100
10-16 x 2	3	F116	3M	35	.035 - .176	F116V	500	F116I	100
10-16 x 2-1/2	3	F120	1.5M	20	.035 - .176	F120V	375	F120I	75
10-16 x 3	3	F124	1M	17	.035 - .176	F124V	250	F124I	50
12-14 x 1	3	F208	4M	30	.035 - .210	F208V	650	F208I	125
12-14 x 1-1/2	3	F212	3M	35	.035 - .210	F212V	400	F212I	90
12-14 x 2	3	F216	2M	32	.035 - .210	F216V	300	F216I	60
12-14 x 3	3	F224	1M	20	.035 - .210	F224V	250	F224I	50
14-14 x 1	3	F408	3M	42	.060 - .220	F408V	350	F408I	70
14-14 x 1-1/2	3	F412	2M	36	.060 - .220	F412V	250	F412I	50
14-14 x 2	3	F416	1.5M	35	.060 - .220	F416V	200	F416I	40
14-14 x 3	3	F424	1M	30	.060 - .220	F424V	150	F424I	30

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Phillips Flat Head Reamer w/Wings, Zinc CR3+ Plated**

**Material Application**  
Attaches wood to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Wings ream hole in wood preventing “jacking action”
- Used for attaching lumber or headers to steel

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Wood Range	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 1-5/8	3	R158	4M	36	.060 - .176	1/4" - 7/8"	R158V	500	R158I	100
12-24 x 2	3	R200	2M	32	.110 - .210	1/2" - 1-1/8"	R200V	300	R200I	60
12-24 x 2-1/4	3	R214	1.5M	27	.110 - .210	1/2" - 1-3/8"	R214V	250	R214I	50
12-24 x 2-1/2	3	R2123	1.5M	30	.110 - .210	1/2" - 1-5/8"	N/A	N/A	N/A	N/A
12-24 x 2-1/2	4	R212	1.5M	30	.110 - .250	1/2" - 1-1/2"	R212V	250	R212I	50
1/4-20 x 2-3/4	4	R234	1M	30	.110 - .375	3/4" - 1-3/4"	R234V	160	R234I	30
1/4-20 x 3-1/4	4	R314	1M	35	.110 - .375	3/4" - 2-1/4"	R314V	150	R314I	30
1/4-20 x 3-1/2	4	R312	.8M	30	.110 - .375	3/4" - 2-1/2"	R312V	130	R312I	25
1/4-20 x 3-3/4	4	R334	.5M	20	.110 - .375	3/4" - 2-3/4"	R334V	125	R334I	25

**Phillips Flat Head Reamer w/Wings, WAR Coated**

**Material Application**  
Attaches wood to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Exceeds 1,000/hrs. salt spray resistance
- ACQ, pressure, and fire treated lumber compatible
- Wings ream hole in wood preventing “jacking action”
- Used for attaching lumber or headers to steel

**WAR**®

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Wood Range	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 2	3	R200W	2M	32	.110 - .210	1/2" - 1-1/8"	R200WV	300	R200WI	50
12-24 x 2-1/2	4	R212W	1.5M	30	.110 - .250	1/2" - 1-1/2"	R212WV	250	R212WI	50
1/4-20 x 2-3/4	4	R234W	1M	30	.110 - .375	3/4" - 1-3/4"	R234WV	160	R234WI	30
1/4-20 x 3-1/4	4	R314W	1M	35	.110 - .375	3/4" - 2-1/4"	R314WV	150	R314WI	30
1/4-20 x 3-1/2	4	R312W	.8M	30	.110 - .375	3/4" - 2-1/2"	R312WV	130	R312WI	25
1/4-20 x 3-3/4	4	R334W	.5M	20	.110 - .375	3/4" - 2-3/4"	R334WV	125	R334WI	25
1/4-20 x 4-3/4	4	R434W	.5M	27	.110 - .375	3/4" - 3-3/4"	R434WV	100	R434WI	20

**Phillips/Square Drive Flat Head Pilot Point, WAR Coated**

**Material Application**  
Attaches wood to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Exceeds 1,000/hrs. salt spray resistance


**WAR**®

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 2-1/2	3	FP212W	1.5M	21	.035 - .176	FP212WV	300	FP212WI	60

\*Carton weights are approximate and may vary.

**Phillips Wafer Head, Zinc CR3+ Plated**

**Material Application**  
Attaches plywood to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Wood Range	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1	2	W804	8M	38	.035 - .100	1/4" - 1/2"	N/A	N/A	N/A	N/A
10-24 x 3/4	3	W103	7M	35	.035 - .176	1/4" - 3/8"	W103V	1,000	W103I	200
10-24 x 1	3	W104	5M	35	.035 - .176	1/4" - 1/2"	W104V	700	W104I	125
10-24 x 1-1/4	3	W105	3M	27	.035 - .176	1/4" - 3/4"	W105V	500	W105I	100
10-24 x 1-1/2	3	W106	2M	22	.035 - .176	1/4" - 1"	W106V	400	W106I	100
10-24 x 2	3	W108	2M	27	.035 - .176	1/4" - 1-1/2"	W108V	400	W108I	80
1/4-14 x 1-7/8	3	W117	1.5M	28	.048 - .220	1/4" - 1-3/8"	N/A	N/A	N/A	N/A

**Star Drive Wafer Head, Zinc CR3+ Plated**

**Material Application**  
Attaches plywood to metal.




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Wood Range	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 3/4	3	W103T	7M	35	.035 - .176	1/4" - 3/8"	W103TV	1,000	W103TI	200
10-16 x 1	3	W104T	5M	35	.035 - .176	1/4" - 1/2"	W104TV	700	W104TI	150
10-16 x 1-1/4	3	W105T	3M	27	.035 - .176	1/4" - 3/4"	W105TV	500	W105TI	100
10-16 x 1-1/2	3	W106T	2M	22	.035 - .176	1/4" - 1"	W106TV	450	W106TI	100

**Phillips Wafer Head w/Wings, Zinc CR3+ Plated**

**Material Application**  
Attaches plywood to metal.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- Wings ream hole in wood preventing "jacking action"

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Wood Range	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-24 x 1-7/16	3	R107	4M	38	.035 - .176	1/4" - 3/4"	R107V	500	R107I	100

**Phillips Wafer Head w/Wings, WAR Coated**

**Material Application**  
Attaches plywood to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Exceeds 1,000/hrs. salt spray resistance
- ACQ, pressure, and fire treated lumber compatible
- Wings ream hole in wood preventing "jacking action"




Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Wood Range	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-24 x 1-7/16	3	R107W	4M	38	.035 - .176	1/4" - 3/4"	R107WV	500	R107WI	100

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.



**Phillips Bugle Head, Zinc CR3+ Plated**



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM C 954 for attaching gypsum board to steel studs



**Material Application**  
Attaches gypsum, insulation, wood to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 1	2	D610Z	10M	33	.035 - .090	D610ZV	1,500	D610ZI	300
6-20 x 1-1/8	2	D611Z	10M	36	.035 - .090	D611ZV	1,250	D611ZI	250
6-20 x 1-1/4	2	D614Z	8M	32	.035 - .090	D614ZV	1,200	D614ZI	250
6-20 x 1-5/8	2	D615Z	5M	25	.035 - .090	D615ZV	1,000	D615ZI	200
6-20 x 1-7/8	2	D617Z	4M	23	.035 - .090	D617ZV	700	D617ZI	160
8-18 x 2-3/8	2	D823Z	2.5M	24	.035 - .100	D823ZV	400	D823ZI	100
8-18 x 2-5/8	2	D825Z	2M	22	.035 - .100	D825ZV	400	D825ZI	100
8-18 x 3	2	D830Z	2M	24	.035 - .100	D830ZV	300	D830ZI	80
10-16 x 3-1/2	2	D1031Z	1M	17	.035 - .110	D1031ZV	250	D1031ZI	50
10-16 x 4	2	D1040Z	1M	20	.035 - .110	D1040ZV	250	D1040ZI	50
10-16 x 5	2	D1050Z	.5M	20	.035 - .110	D1050ZV	165	D1050ZI	30
10-16 x 6	2	D1060Z	.5M	17	.035 - .110	D1060ZV	125	D1060ZI	N/A

**Phillips Bugle Head, Phosphate Coating**




- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM C 954 for attaching gypsum board to steel studs



**Material Application**  
Attaches gypsum, insulation, wood to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 1	2	D610	10M	33	.035 - .090	D610V	1,500	D610I	300
6-20 x 1-1/8	2	D611	10M	36	.035 - .090	D611V	1,250	D611I	250
6-20 x 1-1/4	2	D614	8M	32	.035 - .090	D614V	1,200	D614I	250
6-20 x 1-5/8	2	D615	5M	25	.035 - .090	D615V	1,000	D615I	200
6-20 x 1-7/8	2	D617	4M	23	.035 - .090	D617V	700	D617I	160
8-18 x 2-3/8	2	D823	2.5M	24	.035 - .100	D823V	400	D823I	100
8-18 x 2-5/8	2	D825	2M	22	.035 - .100	D825V	400	D825I	100
8-18 x 3	2	D830	2M	24	.035 - .100	D830V	300	D830I	80
10-16 x 3-1/2	2	D1031	1M	17	.035 - .110	D1031V	250	D1031I	50
10-16 x 4	2	D1040	1M	20	.035 - .110	D1040V	250	D1040I	50

**Phillips Bugle Head, Ruspert Coating**



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM C 954 for attaching gypsum board to steel studs
- Exceeds 1,000/hr. salt spray resistance

**Material Application**  
Attaches exterior sheathing to metal.


Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 1-1/4	2	D614R	8M	32	.035 - .090	D614RV	1,200	D614RI	250
6-20 x 1-5/8	2	D615R	5M	25	.035 - .090	D615RV	1,000	D615RI	200
6-20 x 1-7/8	2	D617R	4M	23	.035 - .090	D617RV	700	D617RI	160
8-18 x 2-3/8	2	D823R	2.5M	24	.035 - .100	D823RV	500	D823RI	100
8-18 x 2-5/8	2	D825R	2M	22	.035 - .100	D825RV	400	D825RI	100
8-18 x 3	2	D830R	2M	24	.035 - .100	D830RV	400	D830RI	80

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Phillips Bugle Head Pilot Point, Zinc CR3+ Plated**

**Material Application**  
Attaches wood to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Pilot Point prevents “jacking action”
- Used for attaching 3/4” lumber or thinner to steel

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 2	2	D820Z	3.5M	31	.035 - .104	D820ZV	500	D820ZI	100

**Phillips Pan Head Framing Screw, Phosphate Coated**

**Material Application**  
Attaches metal track to metal studs.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 7/16	2	F6	10M	28	.035 - .090	F6V	2,000	F6I	400
7-20 x 7/16	2	F7	10M	28	.035 - .090	F7V	2,000	F7I	400

**Phillips Pan Head Framing Screw, Zinc CR3+ Plated**

**Material Application**  
Attaches metal track to metal studs.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 7/16	2	F6Z	10M	28	.035 - .090	F6ZV	2,000	F6ZI	400
7-20 x 7/16	2	F7Z	10M	28	.035 - .090	F7ZV	2,000	F7ZI	400

**Phillips Modified Truss (R/W) Head, Zinc CR3+ Plated**



**Material Application**  
Attaches wire lath to metal studs or metal to metal.



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	M82Z	10M	37	.035 - .100	M82ZV	1,300	M82ZI	300
8-18 x 3/4	2	M83Z	8M	37	.035 - .100	M83ZV	1,000	M83ZI	200
8-18 x 1	2	M84Z	5M	28	.035 - .100	M84ZV	800	M84ZI	200
8-18 x 1-1/4	2	M85Z	5M	34	.035 - .100	M85ZV	700	M85ZI	150
8-18 x 1-5/8	2	M87Z	4M	32	.035 - .100	M87ZV	600	M87ZI	125
8-18 x 1-7/8	2	M88Z	2M	18	.035 - .100	M88ZV	500	M88ZI	100
8-18 x 2-1/2	2	M92Z	2M	23	.035 - .100	M92ZV	400	M92ZI	80
8-18 x 3	2	M95Z	1.5M	20	.035 - .100	M95ZV	375	M95ZI	75
10-16 x 3/4	3	M106Z	7M	38	.035 - .176	M106ZV	1,000	M106ZI	200
10-16 x 4	3	M1032Z	1M	20	.035 - .176	M1032ZV	200	M1032ZI	50
12-14 x 3/4	3	M126Z	4M	25	.035 - .210	M126ZV	800	M126ZI	160

**Phillips Modified Truss (R/W) Head, Black Oxide**

**Material Application**  
Finishing screw for use when aesthetics are important.




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	M82B	10M	37	.035 - .100	M82BV	1,300	M82BI	300
8-18 x 3/4	2	M83B	8M	37	.035 - .100	M83BV	1,000	M83BI	200
8-18 x 1	2	M84B	5M	28	.035 - .100	M84BV	900	M84BI	200
8-18 x 1-1/4	2	M85B	5M	34	.035 - .100	M85BV	700	M85BI	150

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Phillips Pancake Head, Zinc CR3+ Plated**



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM F1941 for corrosion resistance




**Material Application**


Attaches panel clips to metal studs.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 5/8	3	PC5	8M	41	.035 - .176	PC5V	1,000	PC5I	200
10-16 x 1	3	PC8	5M	34	.035 - .176	PC8V	700	PC8I	150
10-16 x 1-1/2	3	PC12	4M	36	.035 - .176	PC12V	500	PC12I	100

**Phillips Pancake Head, Strong-Shield Coated**



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance



**Material Application**

Attaches panel clips to metal studs.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 1	3	PC8C	5M	34	.035 - .176	PC8CV	700	PC8CI	150
10-16 x 1-1/2	3	PC12C	4M	36	.035 - .176	PC12CV	500	PC12CI	100

**Square Drive Trim Head, Zinc CR3+ Plated**



- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

**Material Application**

Attaches wood to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 1-5/8	2	T1QZ	5M	23	.035 - .090	T1QZV	1,200	T1QZI	250
6-20 x 2-1/4	2	T2QZ	3M	19	.035 - .090	T2QZV	750	T2QZI	150
6-20 x 2-1/4**	2	T2QZF	3M	19	.035 - .090	T2QZV	750	T2QZFI	150
8-18 x 3	2	T3QZ	2M	22	.035 - .100	T3QZV	500	T3QZI	100

\*\*Full Thread

**Square Drive Trim Head, Phosphate Coating**



- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing

**Material Application**

Attaches wood to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
7-19 x 1**	2	TOQ	10M	31	.035 - .090	TOQV	1,500	TOQI	300
6-20 x 1-5/8	2	T1Q	5M	23	.035 - .090	T1QV	1,200	T1QI	250
6-20 x 2-1/4	2	T2Q	3M	19	.035 - .090	T2QV	750	T2QI	150
8-18 x 3	2	T3Q	2M	22	.035 - .100	T3QV	500	T3QI	100

\*\*Full Thread

**Phillips Trim Head, Phosphate Coating**



- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing

**Material Application**

Attaches wood to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 1-5/8	2	T1P	5M	23	.035 - .090	T1PV	1,200	T1PI	250
6-20 x 2-1/4	2	T2P	3M	18	.035 - .090	T2PV	750	T2PI	150

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

# **-STRONG-POINT-** **Drywall**™

**STRONG-POINT**®

## **Gypsum Board, Track, Clip, K-Lath and Trim Screws**

Attach gypsum board to wood or steel in drywall applications with confidence, using **Expert-Grade** drywall screws

### **Bugle Head Fine Thread**



Attaches Gypsum Board to Light Gauge Steel

Lengths  
3/4" - 6"

Phosphate Coated

### **Bugle Head Coarse Thread**



Attaches Gypsum Board to Wood Studs

Lengths  
3/4" - 6"

Phosphate Coated

### **Bugle Head Hi-Low Thread**



Attaches Gypsum Board to Wood or Metal Studs

Lengths  
1" - 3"

Phosphate Coated

### **Bugle Head Laminating Screw**



Attaches Double-Layer Gypsum Board

Length  
1-1/2"

Phosphate Coated

### **Trim Head Sharp Point**



Attaches Wood Trim to Drywall or Studs

Lengths  
1" - 3"

Phosphate Coated

### **Pan Head Framing Screw**



Attaches 20 Gauge Metal Track to 20 Gauge Metal Studs

Length  
7/16"

Phosphate Coated

### **Modified Truss (R/W) Head**



Attaches Wire Lath to Wood or Light Gauge Metal

Lengths  
1/2" - 3"

Zinc Plated or Black Oxide

**Phillips Bugle Head, Fine Thread, Phosphate Coating**



- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM C 1002 for attaching gypsum board to steel studs
- Type 'S' point for fastening gypsum to light gauge steel

**Material Application**

Attaches gypsum board to light gauge steel.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 3/4	606	15M	38	606V	2,000	606I	400
6 x 1	610	10M	30	610V	1,500	610I	300
6 x 1-1/8	611	10M	33	611V	1,500	611I	300
6 x 1-1/4	614	8M	28	614V	1,300	614I	250
6 x 1-1/2	612	6M	23	612V	1,000	612I	200
6 x 1-5/8	615	5M	22	615V	1,000	615I	200
6 x 1-3/4	616	4M	20	616V	800	616I	160
6 x 2	620	3.5M	19	620V	700	620I	175
6 x 2-1/4	624	3M	18	624V	500	624I	125
7 x 2-1/2	722	2.5M	20	722V	500	722I	125
8 x 2-1/2	822	2.5M	22	822V	400	822I	100
8 x 3	830	2M	21	830V	400	830I	100

**Phillips Bugle Head, Fine Thread, Phosphate Coating**



- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM C 1002 for attaching gypsum board to steel studs
- Type 'S' point for fastening gypsum to light gauge steel

**Material Application**

Attaches gypsum board, foam, insulation to light gauge steel.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10 x 3-1/2	1031	1M	17	1031V	250	1031I	50
10 x 3-3/4	1033	.8M	15	1033V	250	1033I	50
10 x 4	1040	.8M	16	1040V	250	1040I	50
10 x 4-1/2	1041	.5M	12	1041V	225	1041I	40
10 x 5	1050	.5M	13	1050V	200	1050I	40
10 x 6	1060	.5M	15	1060V	125	N/A	N/A

**Phillips Bugle Head, Hi-Low Thread, Phosphate Coating**



- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM C 1002 for attaching gypsum board to steel studs
- Type 'S' point for fastening gypsum to light gauge steel
- Used in gypsum board, plastic, & wood to metal applications

**Material Application**

Attaches gypsum board to wood or metal studs.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1	610HL	10M	30	610HLV	1,500	610HLI	300
6 x 1-1/4	614HL	8M	30	614HLV	1,300	614HLI	250
6 x 1-5/8	615HL	5M	22	615HLV	1,000	615HLI	200
6 x 2	620HL	3.5M	19	620HLV	700	620HLI	175
6 x 2-1/4	624HL	3M	18	624HLV	500	624HLI	125
8 x 2-1/2	822HL	2.5M	22	822HLV	400	822HLI	100
8 x 3	830HL	2M	21	830HLV	400	830HLI	100

**Phillips Bugle Head, Laminating Screw, Phosphate Coating**



- Meets ASTM A 548 for carbon steel manufacturing

**Material Application**

Attaches double-layered gypsum board.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10 x 1-1/2	LAM	5M	38	LAMV	625	LAMI	125

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Phillips Bugle Head, Coarse Thread, Phosphate Coating**

**Material Application**

Attaches gypsum board to wood studs.



- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM C 1002 for attaching gypsum board to wood studs

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 3/4	606C	15M	38	606CV	2,000	606CI	400
6 x 1	610C	10M	30	610CV	1,500	610CI	300
6 x 1-1/8	611C	10M	33	611CV	1,500	611CI	300
6 x 1-1/4	614C	8M	29	614CV	1,300	614CI	250
6 x 1-1/2	612C	6M	23	612CV	1,000	612CI	200
6 x 1-5/8	615C	5M	22	615CV	1,000	615CI	200
6 x 1-3/4	616C	4M	20	616CV	800	616CI	160
6 x 2	620C	3.5M	19	620CV	700	620CI	175
6 x 2-1/4	624C	3M	18	624CV	500	624CI	125
7 x 1-1/2	712C	6M	33	N/A	N/A	N/A	N/A
7 x 2	720C	3.5M	21	720CV	700	720CI	175
7 x 2-1/2	722C	2.5M	20	722CV	500	722CI	125
8 x 1-1/4	814C	8M	39	814CV	1,000	814CI	200
8 x 1-1/2	812C	6M	32	812CV	1,000	812CI	200
8 x 2	820C	3.5M	25	820CV	700	820CI	140
8 x 2-1/2	822C	2.5M	22	822CV	400	822CI	100
8 x 3	830C	2M	21	830CV	400	830CI	100

**Phillips Bugle Head, Coarse Thread, Phosphate Coating**

**Material Application**

Attaches gypsum board, foam, insulation to wood.



- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM C 1002 for attaching gypsum board to wood studs

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10 x 3-1/2	1031C	1M	17	1031CV	250	1031CI	50
10 x 3-3/4	1033C	.8M	15	1033CV	250	1033CI	50
10 x 4	1040C	.8M	16	1040CV	250	1040CI	50
10 x 4-1/2	1041C	.5M	12	1041CV	200	1041CI	40
10 x 5	1050C	.5M	13	1050CV	200	1050CI	40
10 x 6	1060C	.5M	15	1060CV	125	N/A	N/A

**Square Drive Bugle Head, Coarse Thread, Phosphate Coating**

**Material Application**

Attaches soft wood to wood studs.



- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM C 1002 for attaching gypsum board to wood studs

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1-1/4	614QC	8M	28	614QCV	1,300	614QCI	250
6 x 1-5/8	615QC	5M	22	615QCV	1,000	615QCI	200
6 x 2	620QC	3.5M	20	620QCV	700	620QCI	175
7 x 2	720QC	3.5M	23	720QCV	700	720QCI	175
8 x 2-1/2	822QC	2.5M	22	822QCV	400	822QCI	100
8 x 3	830QC	2M	21	830QCV	400	830QCI	100

**Phillips Pan Head Framing Screw, Phosphate Coating**

**Material Application**

Attaches 20 gauge metal track to 20 gauge metal studs.



- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM C 1002 for type 'S' products
- Type 'S' point for fastening light gauge steel
- Serrations to prevent spin out

Size	Bulk Part No	Bulk Qty	Lbs*	Gauge	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 7/16	6F	10M	25	20	6FV	2,000	6FI	400
7 x 7/16**	7F	10M	28	20	7FV	2,000	7FI	400

\*\*w/Serrations

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Phillips Trim Head, Sharp Point, Phosphate Coating**

**Material Application**

Attaches wood trim to drywall or studs.



- Meets ASTM A 548 for carbon steel manufacturing
- Used in wood finishing applications

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1-5/8	1PT	5M	20	1PTV	1,200	1PTI	240
6 x 2-1/4	2PT	3M	17	2PTV	750	2PTI	150

**Square Drive Trim Head, Sharp Point, Phosphate Coating**

**Material Application**

Attaches wood trim to drywall or studs.



- Meets ASTM A 548 for carbon steel manufacturing
- Used in wood finishing applications

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1**	0QT	10M	26	0QTV	2,000	0QTI	400
6 x 1-5/8	1QT	5M	20	1QTV	1,200	1QTI	250
6 x 2-1/4	2QT	3M	17	2QTV	750	2QTI	150
8 x 3	3QT	2M	20	3QTV	500	3QTI	100

\*\*Full Thread

**Phillips Modified Truss (R/W) Head, K-Lath, Zinc CR3+ Plated**

**Material Application**

Attaches wire lath to wood or light gauge metal.



- Meets ASTM A 510 for carbon steel manufacturing
- Multipurpose sheet metal screw for light to medium gauge applications
- Zinc plating meets ASTM B 633 for electrodeposited zinc coatings

Size	Bulk Part No	Bulk Qty	Lbs*	Gauge	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1/2	84MZ	10M	35	24 - 20	84MZV	1,250	84MZI	250
8 x 9/16	85MZ	10M	37	24 - 20	85MZV	1,250	85MZI	250
8 x 3/4	86MZ	8M	37	24 - 20	86MZV	1,000	86MZI	200
8 x 1	88MZ	5M	27	24 - 20	88MZV	900	88MZI	200
8 x 1-1/4	89MZ	5M	32	24 - 20	89MZV	700	89MZI	150
8 x 1-5/8	90MZ	4M	34	24 - 20	90MZV	600	90MZI	120
8 x 1-7/8	92MZ	2.5M	23	24 - 20	92MZV	500	92MZI	100
8 x 2-1/2	95MZ	2M	21	24 - 20	95MZV	400	95MZI	100
8 x 3	97MZ	1.5M	20	24 - 20	97MZV	400	97MZI	75

**Phillips Modified Truss (R/W) Head, K-Lath, Black Oxide**

**Material Application**

Finishing screw for use when aesthetics are important.



- Meets ASTM A 510 for carbon steel manufacturing
- Multipurpose sheet metal screw for light to medium gauge applications

Size	Bulk Part No	Bulk Qty	Lbs*	Gauge	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 9/16	85MB	10M	37	24 - 20	85MBV	1,250	85MBI	250
8 x 3/4	86MB	8M	37	24 - 20	86MBV	1,000	86MBI	200
8 x 1	88MB	5M	27	24 - 20	88MBV	900	88MBI	200
8 x 1-1/4	89MB	5M	32	24 - 20	89MBV	700	89MBI	150
8 x 1-5/8	90MB	4M	34	24 - 20	90MBV	600	90MBI	120

\*Carton weights are approximate and may vary.


Note: 1lb. boxes sold 20 per case.

# **STRONG-POINT** *Needle Point*™

**STRONG-POINT**®

Attach light gauge sheet metal to metal with confidence, using **Expert-Grade** Needle Point screws

## Slotted Indented Hex Washer Head




Attaches Light  
Gauge Sheet Metal  
to Sheet Metal

Lengths  
3/8" - 3"

Zinc Plated

## Slotted Indented Hex Washer Head w/Bonded Washer




Attaches Light  
Gauge Sheet Metal  
to Sheet Metal

Lengths  
1/2" - 3"

Zinc Plated

## Slotted Indented Hex Washer Head Painted White



Attaches Light  
Gauge Sheet Metal  
to Sheet Metal

Lengths  
1/2" - 2"

Zinc Plated

## **STRONG-POINT** *Razor*™

## Unslotted Indented Hex Washer Head w/Serrations



Attaches Light  
Gauge Sheet Metal  
to Sheet Metal

Length  
1/2"

Zinc Plated

## Unslotted Indented Hi-Hex Washer Head



Attaches Light  
Gauge Sheet Metal  
to Sheet Metal

Length  
3/4"

Zinc Plated

## Pancake Head




Attaches Panel Clips to  
Wood or Sheet Metal

Length  
1" - 1-1/2"

Zinc Plated,  
Strong-Shield  
Coated



**Slotted Indented Hex Washer Head, Zinc CR3+ Plated**




- Meets ASTM A 510 for carbon steel manufacturing
- Multipurpose sheet metal screw for light gauge applications
- Zinc plating meets ASTM B 633 for electrodeposited zinc coatings

**Material Application**  
Attaches light gauge sheet metal to sheet metal.

Size	Bulk Part No	Bulk Qty	Lbs*	Head Size	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 3/8	N606	20M	38	1/4" A.F. #6 Head	N606V	2,500	N606I	500
7 x 1/2	N708	15M	44	1/4" A.F. #7 Head	N708V	1,700	N708I	350
8 x 1/2	N808	15M	50	1/4" A.F. #8 Head	N808V	1,600	N808I	300
8 x 5/8	N810	10M	35	1/4" A.F. #8 Head	N810V	1,500	N810I	300
8 x 3/4	N812	10M	40	1/4" A.F. #8 Head	N812V	1,250	N812I	250
8 x 1	N816	8M	40	1/4" A.F. #8 Head	N816V	1,000	N816I	200
8 x 1-1/4	N820	5M	29	1/4" A.F. #8 Head	N820V	800	N820I	165
8 x 1-1/2	N824	5M	33	1/4" A.F. #8 Head	N824V	800	N824I	150
8 x 2	N832	3M	27	1/4" A.F. #8 Head	N832V	500	N832I	100
8 x 3	N848	1.5M	19	1/4" A.F. #8 Head	N848V	375	N848I	75
10 x 1/2	N1008	10M	36	1/4" A.F. #8 Head	N1008V	1,300	N1008I	250
10 x 3/4	N1012	8M	38	1/4" A.F. #8 Head	N1012V	1,000	N1012I	200
10 x 1	N1016	5M	31	1/4" A.F. #8 Head	N1016V	800	N1016I	150
10 x 1-1/2	N1024	5M	40	1/4" A.F. #8 Head	N1024V	600	N1024I	125
10 x 1-1/2**	N1024H	3M	28	1/4" A.F. Hi-Head	N1024HV	500	N1024HI	100
10 x 2	N1032	2M	22	1/4" A.F. #8 Head	N1032V	400	N1032I	100
10 x 1/2	N10085	10M	47	5/16" A.F. #10 Head	N10085V	1,100	N10085I	200
10 x 3/4	N10125	8M	47	5/16" A.F. #10 Head	N10125V	800	N10125I	160
10 x 1	N10165	5M	36	5/16" A.F. #10 Head	N10165V	700	N10165I	140
10 x 1-1/2	N10245	3M	29	5/16" A.F. #10 Head	N10245V	500	N10245I	125
10 x 2	N10325	2M	26	5/16" A.F. #10 Head	N10325V	400	N10325I	100
10 x 3	N10485	1.5M	26	5/16" A.F. #10 Head	N10485V	375	N10485I	75

\*\*Hi-Hex Head

**Slotted Indented Hex Washer Head w/Bonded Washer, Zinc CR3+ Plated**



- Meets ASTM A 510 for carbon steel manufacturing
- Multipurpose sheet metal screw for light gauge applications
- Bonded washer creates leak proof seal
- Zinc plating meets ASTM B 633 for electrodeposited zinc coatings


**Material Application**  
Attaches light gauge sheet metal to sheet metal.

Size	Bulk Part No	Bulk Qty	Lbs*	Head Size	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1/2	NA808	5M	28	1/4" A.F. #8 Head	1/2" O. D.	N/A	N/A	N/A	N/A
8 x 3/4	NA812	5M	32	1/4" A.F. #8 Head	1/2" O. D.	NA812V	800	NA812I	150
8 x 1	NA816	4M	28	1/4" A.F. #8 Head	1/2" O. D.	NA816V	700	NA816I	140
8 x 1-1/2	NA824	3M	28	1/4" A.F. #8 Head	1/2" O. D.	NA824V	500	NA824I	100
8 x 2	NA832	2M	23	1/4" A.F. #8 Head	1/2" O. D.	NA832V	500	NA832I	100
8 x 3	NA848	1.5M	21	1/4" A.F. #8 Head	1/2" O. D.	NA848V	375	NA848I	75
10 x 3/4	NA1012	4M	27	1/4" A.F. #8 Head	1/2" O. D.	NA1012V	750	NA1012I	150
10 x 1	NA1016	3M	26	1/4" A.F. #8 Head	1/2" O. D.	NA1016V	500	NA1016I	100
10 x 1-1/2	NA1024	2.5M	26	1/4" A.F. #8 Head	1/2" O. D.	NA1024V	500	NA1024I	100
10 x 2	NA1032	2M	26	1/4" A.F. #8 Head	1/2" O. D.	NA1032V	400	NA1032I	80
10 x 3/4	NA10125	4M	35	5/16" A.F. #10 Head	1/2" O. D.	NA10125V	600	NA10125I	125
10 x 1	NA10165	2.5M	22	5/16" A.F. #10 Head	1/2" O. D.	NA10165V	500	NA10165I	100
10 x 1-1/2	NA10245	2M	23	5/16" A.F. #10 Head	1/2" O. D.	NA10245V	400	NA10245I	80
10 x 2	NA10325	2M	30	5/16" A.F. #10 Head	1/2" O. D.	NA10325V	300	NA10325I	60

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Slotted Indented Hex Washer Head Painted White, Zinc CR3+ Plated**




- Meets ASTM A 510 for carbon steel manufacturing
- Multipurpose sheet metal screw for light gauge applications
- Zinc plating meets ASTM B 633 for electrodeposited zinc coatings

**Material Application**  
Attaches light gauge sheet metal to sheet metal.

Size	Bulk Part No	Bulk Qty	Lbs*	Head Size	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1/2	NW808	15M	49	1/4" A.F. #8 Head	NW808V	1,600	NW808I	300
8 x 3/4	NW812	10M	40	1/4" A.F. #8 Head	NW812V	1,250	NW812I	250
8 x 1-1/2	NW824	5M	33	1/4" A.F. #8 Head	NW824V	800	NW824I	150
8 x 2	NW832	3M	27	1/4" A.F. #8 Head	NW832V	500	NW832I	100

**Unslotted Indented Hex Washer Head w/Serrations, Fine Thread, Razor Point, Zinc CR3+ Plated**




- Meets ASTM A 510 for carbon steel manufacturing
- Razor non-walking point for faster engagement
- Multipurpose sheet metal screw for light gauge applications
- Zinc plating meets ASTM B 633 for electrodeposited zinc coatings

**Material Application**  
Attaches light gauge sheet metal to sheet metal.



Size	Bulk Part No	Bulk Qty	Lbs*	Head Size	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-32 x 1/2	NU808	10M	34	1/4" A.F. #8 Head	NU808V	1,500	NU808I	300

**Unslotted Indented Hi-Hex Washer Head, Fine Thread, Razor Point, Zinc CR3+ Plated**




- Meets ASTM A 510 for carbon steel manufacturing
- Razor non-walking point for faster engagement
- Multipurpose sheet metal screw for light gauge applications
- Zinc plating meets ASTM B 633 for electrodeposited zinc coatings

**Material Application**  
Attaches light gauge sheet metal to sheet metal.



Size	Bulk Part No	Bulk Qty	Lbs*	Head Size	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-24 x 3/4	NU1012H	5M	38	5/16" A.F. #10 Head	NU1012HV	625	NU1012HI	125

**Phillips Pancake Head, Zinc CR3+ Plated**



- Meets ASTM A 510 for carbon steel manufacturing
- Zinc plating meets ASTM B 633 for electrodeposited zinc coatings
- Multipurpose sheet metal screw for light gauge applications

**Material Application**  
Attaches panel clips to wood or sheet metal.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-12 x 1	108PC	5M	34	108PCV	625	108PCI	125
10-12 x 1-1/2	112PC	3M	28	112PCV	500	112PCI	100

**Phillips Pancake Head, Strong-Shield Coated**



- Meets ASTM A 510 for carbon steel manufacturing
- Multipurpose sheet metal screw for light gauge applications
- Exceeds 1,000/hr. salt spray resistance
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible

**Material Application**  
Attaches panel clips to wood or sheet metal.



Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-12 x 1	108PCC	5M	34	108PCCV	625	108PCCI	125
10-12 x 1-1/2	112PCC	3M	28	112PCCV	500	112PCCI	100


\*Carton weights are approximate and may vary.

# STRONG-POINT Stainless™

STRONG-POINT®


Attach metal to metal, wood to metal, and wood to wood with confidence, using **Expert-Grade** stainless steel screws

## 410 Stainless Hex Washer Head




Attaches Metal to Metal

Lengths  
1/2" - 6"




Attaches Metal to Metal

Lengths  
1-1/4" - 2"




Attaches Metal to Metal

Lengths  
1/2" - 5"



Attaches Metal to Metal


Lengths  
1-1/4" - 2"



Attaches Metal to Metal

Lengths  
3/8" - 2"


## 410 Stainless Flat Head



Attaches Metal to Metal

Lengths  
3/4" - 1-1/2"


## 410 Stainless Modified Truss Head



Attaches Metal to Metal

Lengths  
1/2" - 3"

## 305 Stainless Modified Truss Head



Attaches Wood or Light Gauge Metal to Wood

Lengths  
3/4" - 3"

## 410 Stainless Pancake Head



Attaches Panel Clips to Metal Studs

Length  
1"


## 305 Stainless Pancake Head



Attaches Panel Clips to Metal Studs

Length  
1"


## 410 Stainless Flat Head Reamer w/Wings



Attaches Metal to Metal

Lengths  
2-1/2" - 3-1/4"


## 305 Stainless Bugle Head Coarse Thread



Attaches Wood to Wood

Lengths  
1-1/4" - 3"


## 305 Stainless Flat Head w/Nibs Coarse Thread



Attaches Wood to Wood

Lengths  
1-1/4" - 4"


## 316 Stainless Flat Head w/Nibs Coarse Thread



Attaches Wood to Wood

Lengths  
2-1/2" - 3-1/2"

## 305 Stainless Trim Head Coarse Thread




Attaches Wood to Wood

Lengths  
1-5/8" - 3"

**410 Stainless Steel Unslotted Indented Hex Washer Head, Self-Drilling, Passivated & Waxed**

**Material Application**

Attaches metal to metal.




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	4H808	5M	18	.035 - .100	4H808V	1,500	4H808I	300
8-18 x 3/4	2	4H812	5M	23	.035 - .100	4H812V	1,000	4H812I	200
8-18 x 1	2	4H816	4M	22	.035 - .100	4H816V	1,000	4H816I	200
10-16 x 1/2	2	4H1008	5M	26	.035 - .110	4H1008V	1,000	4H1008I	200
10-16 x 3/4	3	4H1012	4M	25	.035 - .176	4H1012V	1,000	4H1012I	200
10-16 x 1	3	4H1016	3M	24	.035 - .176	4H1016V	600	4H1016I	150
10-16 x 1-1/4	3	4H1020	2.5M	23	.035 - .176	4H1020V	500	4H1020I	100
10-16 x 1-1/2	3	4H1024	2M	21	.035 - .176	4H1024V	500	4H1024I	100
10-16 x 2	3	4H1032	1.5M	15	.035 - .176	4H1032V	400	4H1032I	80
12-14 x 3/4	3	4H1212	4M	33	.035 - .210	4H1212V	600	4H1212I	125
12-14 x 1	3	4H1216	3M	30	.035 - .210	4H1216V	500	4H1216I	100
12-14 x 1-1/4	3	4H1220	3M	35	.035 - .210	4H1220V	400	4H1220I	80
12-14 x 1-1/2	3	4H1224	2.5M	33	.035 - .210	4H1224V	400	4H1224I	80
12-14 x 2	3	4H1232	2M	33	.035 - .210	4H1232V	300	4H1232I	60
12-14 x 2-1/2	3	4H1240	1M	18	.035 - .210	4H1240V	250	4H1240I	50
14-14 x 3/4	3	4H1412	3M	38	.060 - .220	4H1412V	400	4H1412I	80
14-14 x 1	3	4H1416	2.5M	38	.060 - .220	4H1416V	350	4H1416I	70
14-14 x 1-1/4	3	4H1420	2M	35	.060 - .220	4H1420V	300	4H1420I	50
14-14 x 1-1/2	3	4H1424	1.5M	30	.060 - .220	4H1424V	250	4H1424I	50
14-14 x 2	3	4H1432	1M	25	.060 - .220	4H1432V	200	4H1432I	40
14-14 x 2-1/2	3	4H1440	.8M	24	.060 - .220	4H1440V	150	4H1440I	30
14-14 x 3	3	4H1448	.5M	17	.060 - .220	4H1448V	150	4H1448I	25
14-14 x 4	3	4H1464	.5M	22	.060 - .220	4H1464V	100	4H1464I	20
14-14 x 5	3	4H1480	.25M	13	.060 - .220	4H1480V	100	4H1480I	20
14-14 x 6	3	4H1496	.25M	16	.060 - .220	4H1496V	75	N/A	N/A
14-14 x 7/8 #12 HD	1	4H1	2.5M	30	.018 - .090	4H1V	400	4H1I	80

**410 Stainless Steel Unslotted Indented Hex Washer Head, Self-Drilling, Passivated & Waxed**

**Material Application**

Attaches metal to metal.




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	4H5	3M	35	.125 - .500	4H5V	375	4H5I	75
12-24 x 1-1/2	5	4H52	2M	26	.125 - .500	4H52V	325	4H52I	65
12-24 x 2	5	4H53	1.5M	24	.125 - .500	4H53V	300	4H53I	60

**410 Stainless Steel Unslotted Indented Hex Washer Head w/Bonded Washer, Self-Drilling, Passivated & Waxed**

**Material Application**

Attaches metal to metal.



- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Bonded washer creates leak proof seal

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	4HA5	3M	42	.125 - .500	9/16" O. D.	4HA5V	375	4HA5I	75
12-24 x 1-1/2	5	4HA52	2M	33	.125 - .500	9/16" O. D.	4HA52V	300	4HA52I	60
12-24 x 2	5	4HA53	1.5M	29	.125 - .500	9/16" O. D.	4HA53V	250	4HA53I	50


\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**410 Stainless Steel Unslotted Indented Hex Washer Head w/Bonded Washer, Self-Drilling, Passivated & Waxed**

**Material Application**

Attaches metal to metal.




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Bonded washer creates leak proof seal

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	4HA808	5M	32	.035 - .100	1/2" O. D.	4HA808V	1,000	4HA808I	200
8-18 x 3/4	2	4HA812	5M	35	.035 - .100	1/2" O. D.	4HA812V	800	4HA812I	150
8-18 x 1	2	4HA816	4M	30	.035 - .100	1/2" O. D.	4HA816V	650	4HA816I	125
10-16 x 3/4	3	4HA1012	4M	35	.035 - .176	1/2" O. D.	4HA1012V	600	4HA1012I	125
10-16 x 1	3	4HA1016	3M	31	.035 - .176	1/2" O. D.	4HA1016V	500	4HA1016I	100
10-16 x 1-1/4	3	4HA1020	2.5M	30	.035 - .176	1/2" O. D.	4HA1020V	400	4HA1020I	100
10-16 x 1-1/2	3	4HA1024	2M	26	.035 - .176	1/2" O. D.	4HA1024V	400	4HA1024I	80
10-16 x 2	3	4HA1032	1.5M	22	.035 - .176	1/2" O. D.	4HA1032V	300	4HA1032I	60
12-14 x 3/4	3	4HA1212	3M	32	.035 - .210	9/16" O. D.	4HA1212V	500	4HA1212I	100
12-14 x 1	3	4HA1216	3M	37	.035 - .210	9/16" O. D.	4HA1216V	400	4HA1216I	80
12-14 x 1-1/4	3	4HA1220	2.5M	35	.035 - .210	9/16" O. D.	4HA1220V	350	4HA1220I	75
12-14 x 1-1/2	3	4HA1224	2.5M	39	.035 - .210	9/16" O. D.	4HA1224V	300	4HA1224I	70
12-14 x 2	3	4HA1232	1.5M	28	.035 - .210	9/16" O. D.	4HA1232V	250	4HA1232I	50
12-14 x 2-1/2	3	4HA1240	1M	22	.035 - .210	9/16" O. D.	4HA1240V	200	4HA1240I	40
14-14 x 3/4	3	4HA1412	3M	45	.060 - .220	5/8" O. D.	4HA1412V	300	4HA1412I	60
14-14 x 1	3	4HA1416	2.5M	44	.060 - .220	5/8" O. D.	4HA1416V	300	4HA1416I	50
14-14 x 1-1/4	3	4HA1420	2M	40	.060 - .220	5/8" O. D.	4HA1420V	250	4HA1420I	50
14-14 x 1-1/2	3	4HA1424	1.5M	34	.060 - .220	5/8" O. D.	4HA1424V	200	4HA1424I	40
14-14 x 2	3	4HA1432	1M	28	.060 - .220	5/8" O. D.	4HA1432V	180	4HA1432I	35
14-14 x 2-1/2	3	4HA1440	.8M	26	.060 - .220	5/8" O. D.	4HA1440V	160	4HA1440I	30
14-14 x 3	3	4HA1448	.5M	18	.060 - .220	5/8" O. D.	4HA1448V	125	4HA1448I	25
14-14 x 4	3	4HA1464	.5M	22	.060 - .220	5/8" O. D.	4HA1464V	100	4HA1464I	20
14-14 x 5	3	4HA1480	.25M	14	.060 - .220	5/8" O. D.	4HA1480V	100	4HA1480I	20
14-14 x 7/8 #12 HD	1	4HA1	2.5M	38	.018 - .090	5/8" O. D.	4HA1V	300	4HA1I	60

**410 Stainless Steel Phillips Pan Head, Self-Drilling, Passivated & Waxed**

**Material Application**

Attaches metal to metal.




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 3/8	2	4P63	20M	36	.035 - .090	4P63V	2,500	4P63I	500
6-20 x 1/2	2	4P64	15M	32	.035 - .090	4P64V	2,500	4P64I	500
8-18 x 1/2	2	4P84	10M	32	.035 - .100	4P84V	1,500	4P84I	300
8-18 x 5/8	2	4P85	8M	30	.035 - .100	4P85V	1,300	4P85I	250
8-18 x 3/4	2	4P86	7M	29	.035 - .100	4P86V	1,200	4P86I	250
8-18 x 1	2	4P88	6M	31	.035 - .100	4P88V	1,000	4P88I	200
8-18 x 1-1/4	2	4P810	5M	31	.035 - .100	4P810V	800	4P810I	160
8-18 x 1-1/2	2	4P812	4M	28	.035 - .100	4P812V	700	4P812I	150
10-16 x 1/2	2	4P104	8M	36	.035 - .110	4P104V	1,000	4P104I	200
10-16 x 3/4	3	4P106	6M	35	.035 - .176	4P106V	1,000	4P106I	200
10-16 x 1	3	4P108	4M	30	.035 - .176	4P108V	700	4P108I	150
10-16 x 1-1/2	3	4P110	3M	24	.035 - .176	4P110V	500	4P110I	100
10-16 x 2	3	4P116	2M	22	.035 - .176	4P116V	400	4P116I	80

**410 Stainless Steel Phillips Flat Head, Self-Drilling, Passivated & Waxed**

**Material Application**

Attaches metal to metal.




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- For counter-sunk holes

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 3/4	2	4F63	10M	24	.035 - .090	4F63V	2,000	4F63I	400
6-20 x 1	2	4F64	8M	25	.035 - .090	4F64V	1,600	4F64I	300
8-18 x 3/4	2	4F83	7M	25	.035 - .100	4F83V	1,400	4F83I	250
8-18 x 1	2	4F84	6M	23	.035 - .100	4F84V	1,200	4F84I	200
8-18 x 1-1/2	2	4F86	4M	24	.035 - .100	4F86V	800	4F86I	160
10-16 x 3/4	3	4F103	6M	29	.035 - .176	4F103V	1,000	4F103I	200
10-16 x 1	3	4F104	4M	26	.035 - .176	4F104V	800	4F104I	160
10-16 x 1-1/2	3	4F106	2.5M	23	.035 - .176	4F106V	500	4F106I	100

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**410 Stainless Steel Phillips Modified Truss (R/W) Head, Self-Drilling, Passivated & Waxed**




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Medium degree of corrosion resistance

**Material Application**

Attaches metal to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	4M82	5M	18	.035 - .100	4M82V	1,300	4M82I	300
8-18 x 3/4	2	4M83	5M	23	.035 - .100	4M83V	1,000	4M83I	200
8-18 x 1	2	4M84	4M	22	.035 - .100	4M84V	800	4M84I	200
8-18 x 1-1/4	2	4M85	3M	20	.035 - .100	4M85V	750	4M85I	150
8-18 x 1-5/8	2	4M87	3M	24	.035 - .100	4M87V	600	4M87I	120
8-18 x 1-7/8	2	4M88	2M	18	.035 - .100	4M88V	500	4M88I	100
8-18 x 2-1/2	2	4M92	1.5M	17	.035 - .100	4M92V	375	4M92I	75
8-18 x 3	2	4M95	1.5M	20	.035 - .100	4M95V	375	4M95I	75
10-16 x 3/4	3	4M106	5M	27	.035 - .176	4M106V	1,000	4M106I	200

**410 Stainless Steel Phillips/Square Drive Pancake Head, Strong-Shield Coated**



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance


**Material Application**

Attaches panel clips to metal studs.



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 1	3	4PC8	4M	30	.035 - .176	4PC8V	650	4PC8I	125

**410 Stainless Steel Star Drive Flat Head Reamer w/Wings, Strong-Shield Coated**



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ, pressure, and fire treated lumber compatible
- Exceeds 1,000/hr. salt spray resistance


**Material Application**

Attaches wood to metal.



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Wood Range	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 2-1/2	4	4RT212	1M	21	.110 - .375	1/2" - 1-1/2"	4RT212V	250	4RT212I	50
1/4-20 x 2-3/4	4	4RT234	.8M	24	.110 - .375	1/2" - 1-3/4"	4RT234V	160	4RT234I	30
1/4-20 x 3-1/4	4	4RT314	.5M	17	.110 - .375	3/4" - 2-1/4"	4RT314V	125	4RT314I	25

**305 Stainless Steel Phillips Modified Truss (R/W) Head, Type '17'**




- Superior penetration through a variety of woods
- Type '17' reduces wood splitting

**Material Application**

Attaches wood or light gauge metal to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 3/4	X86MSS	5M	24	X86MSSV	1,000	X86MSSI	200
8 x 1	X88MSS	4M	22	X88MSSV	1,000	X88MSSI	200
8 x 1-1/4	X89MSS	3M	19	X89MSSV	750	X89MSSI	150
8 x 1-5/8	X90MSS	3M	25	X90MSSV	600	X90MSSI	120
8 x 1-7/8	X92MSS	2M	19	X92MSSV	500	X92MSSI	100
8 x 2-1/2	X95MSS	1.5M	18	X95MSSV	375	X95MSSI	75
8 x 3	X97MSS	1.5M	21	X97MSSV	375	X97MSSI	75

**305 Stainless Steel Phillips/Square Drive Pancake Head**



- Superior penetration through a variety of woods
- For use in non-magnetic applications
- High degree of corrosion resistance

**Material Application**

Attaches panel clips to wood studs.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-12 x 1	108PCSS	4M	27	108PCSSV	650	108PCSSI	125

\*Carton weights are approximate and may vary.

### 305 Stainless Steel Phillips Bugle Head, Coarse Thread



- For fencing, decks, patio furniture, spas
- High degree of corrosion resistance

#### Material Application

Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1-1/4	814CSS	8M	40	814CSSV	1,000	814CSSI	200
8 x 1-5/8	815CSS	5M	31	815CSSV	750	815CSSI	150
8 x 2	820CSS	3.5M	25	820CSSV	500	820CSSI	100
8 x 2-1/2	822CSS	2.5M	23	822CSSV	400	822CSSI	100
8 x 3	830CSS	2M	22	830CSSV	400	830CSSI	80

### 305 Stainless Steel Star Drive Flat Head w/Nibs, Coarse Thread, Type '17'



- Star drive prevents cam out and stripping for improved driveability
- Superior penetration through a variety of woods
- High degree of corrosion resistance
- Type '17' reduces wood splitting

#### Material Application

Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1-1/4	XT814SS	5M	23	XT814SSV	1,000	XT814SSI	200
8 x 1-5/8	XT815SS	4M	23	XT815SSV	800	XT815SSI	160
8 x 2	XT820SS	3M	22	XT820SSV	700	XT820SSI	150
10 x 2-1/2	XT1022SS	2M	24	XT1022SSV	400	XT1022SSI	80
10 x 3	XT1030SS	1.5M	22	XT1030SSV	300	XT1030SSI	60
10 x 3-1/2	XT1031SS	1M	17	XT1031SSV	250	XT1031SSI	50
12 x 4	XT1240SS	1M	28	XT1240SSV	165	XT1240SSI	40

### 316 Stainless Steel Star Drive Flat Head w/Nibs, Coarse Thread, Type '17'



- Star drive prevents cam out and stripping for improved driveability
- Superior penetration through a variety of woods
- Maximum degree of corrosion resistance
- Type '17' reduces wood splitting

#### Material Application

Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10 x 2-1/2	XT1022MG	2M	25	XT1022MGV	400	XT1022MGI	80
10 x 3	XT1030MG	1.5M	22	XT1030MGV	300	XT1030MGI	60
10 x 3-1/2	XT1031MG	1M	17	XT1031MGV	250	XT1031MGI	50

### 305 Stainless Steel Square Drive Trim Head, Coarse Thread, Type '17'



- Superior penetration through a variety of woods
- Type '17' reduces wood splitting

#### Material Application

Exterior wood screw for attaching trim and rails to decks or fences.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
7 x 1-5/8	X1QSS	5M	29	X1QSSV	1,000	X1QSSI	200
7 x 2-1/4	X2QSS	3M	23	X2QSSV	600	X2QSSI	125
7 x 3	X3QSS	2M	21	X3QSSV	500	X3QSSI	100

### 305 Stainless Steel Star Drive Trim Head, Coarse Thread, Type '17'



- Superior penetration through a variety of woods
- Type '17' reduces wood splitting

#### Material Application

Exterior wood screw for attaching trim and rails to decks or fences.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
7 x 1-5/8	X1TSS	5M	29	X1TSSV	1,000	X1TSSI	200
7 x 2-1/4	X2TSS	3M	23	X2TSSV	600	X2TSSI	125
7 x 3	X3TSS	2M	21	X3TSSV	500	X3TSSI	100

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

# STRONG-POINT<sup>TM</sup> Outdoor

STRONG-POINT<sup>®</sup>

## Decking, Fencing, Railing, and Patio Screws

Attach wood to wood in outdoor applications with confidence, using **Expert-Grade** outdoor screws

**Phillips Bugle Head  
Coarse Thread**



Attaches Wood to Wood  
  
Lengths  
3/4" - 6"  
  
Zinc Yellow

**Square Drive Bugle Head  
Coarse Thread**



Attaches Wood to Wood  
  
Lengths  
1-1/4" - 3"  
  
Zinc Yellow

**Phillips Bugle Head  
Coarse Thread**



Attaches Wood to Wood  
  
Lengths  
1" - 6"  
  
Dacrotized<sup>®</sup>

**Square Drive Bugle Head  
Coarse Thread**



Attaches Wood to Wood  
  
Lengths  
2" - 3"  
  
Dacrotized<sup>®</sup>

**Phillips Bugle Head  
Coarse Thread**



Attaches Wood to Wood  
  
Lengths  
1-1/4" - 3"

WAR Coated  
**WAR**<sup>®</sup>  
Corrosion Protection - ACQ Compatible

**Square Drive Bugle Head  
Coarse Thread**



Attaches Wood to Wood  
  
Lengths  
1-5/8" - 3-1/2"

WAR Coated  
**WAR**<sup>®</sup>  
Corrosion Protection - ACQ Compatible

**Star Drive Flat Head w/Nibs  
Coarse Thread**



Attaches Wood to Wood  
  
Lengths  
1-1/4" - 4"  
  
Zinc Yellow

**Star Drive Flat Head w/Nibs  
Coarse Thread**



Attaches Wood to Wood  
  
Lengths  
1-1/4" - 6"

WAR Coated  
**WAR**<sup>®</sup>  
Corrosion Protection - ACQ Compatible

**Phillips/Square Drive Low Profile  
Wafer Head**



Attaches Panel Clips to Wood  
  
Length  
10-8 x 1-1/8"

Strong-Shield Coated





**Phillips Bugle Head, Coarse Thread, Zinc Yellow**



- Meets ASTM A 510 for carbon steel manufacturing
- 24/hr. salt spray resistance
- Product meets ASTM B-117 for salt spray corrosion testing

**Material Application**  
Ideal for interior or outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 3/4	606CY	15M	37	606CYV	2,000	606CYI	400
6 x 1	610CY	10M	30	610CYV	1,500	610CYI	300
6 x 1-1/8	611CY	10M	32	611CYV	1,500	611CYI	300
6 x 1-1/4	614CY	8M	29	614CYV	1,300	614CYI	250
6 x 1-1/2	612CY	6M	26	612CYV	1,000	612CYI	200
6 x 1-5/8	615CY	5M	23	615CYV	1,000	615CYI	200
6 x 2	620CY	3.5M	20	620CYV	700	620CYI	175
6 x 2-1/4	624CY	3M	20	624CYV	500	624CYI	125
7 x 2	720CY	3.5M	23	720CYV	700	720CYI	175
8 x 2-1/2	822CY	2.5M	23	822CYV	400	822CYI	100
8 x 3	830CY	2M	22	830CYV	400	830CYI	100

**Phillips Bugle Head, Coarse Thread, Zinc Yellow**



- Meets ASTM A 510 for carbon steel manufacturing
- 24/hr. salt spray resistance
- Product meets ASTM B-117 for salt spray corrosion testing

**Material Application**  
Ideal for interior or outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10 x 3-1/2	1031SY	1M	17	1031SYV	250	1031SYI	50
10 x 3-3/4	1033SY	.8M	15	1033SYV	250	1033SYI	50
10 x 4	1040SY	.8M	16	1040SYV	250	1040SYI	50
10 x 4-1/2	1041SY	.5M	12	1041SYV	200	1041SYI	40
10 x 5	1050SY	.5M	13	1050SYV	200	1050SYI	40
10 x 6	1060SY	.5M	15	1060SYV	125	N/A	N/A

**Square Drive Bugle Head, Coarse Thread, Zinc Yellow**



- Meets ASTM A 510 for carbon steel manufacturing
- 24/hr. salt spray resistance
- Square drive prevents cam out and stripping

**Material Application**  
Ideal for interior or outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1-1/4	614QCY	8M	28	614QCYV	1,300	614QCYI	250
6 x 1-5/8	615QCY	5M	22	615QCYV	1,000	615QCYI	200
6 x 2	620QCY	3.5M	20	620QCYV	700	620QCYI	175
8 x 2-1/2	822QCY	2.5M	22	822QCYV	400	822QCYI	100
8 x 3	830QCY	2M	21	830QCYV	400	830QCYI	100

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Phillips Bugle Head, Coarse Thread, WAR Coated**




- Exceeds 1,000/hr. salt spray resistance
- Meets ASTM A 510 for carbon steel manufacturing
- ACQ, pressure, and fire treated lumber compatible
- Product meets ASTM B-117 for salt spray corrosion testing

**WAR**

**Material Application**  
Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1-1/4	614CW	8M	29	614CWV	1,300	614CWI	250
6 x 1-5/8	615CW	5M	22	615CWV	1,000	615CWI	200
6 x 2	620CW	3.5M	19	620CWV	700	620CWI	175
8 x 2-1/2	822CW	2.5M	22	822CWV	400	822CWI	100
8 x 3	830CW	2M	21	830CWV	400	830CWI	100

**Square Drive Bugle Head, Coarse Thread, Type '17', WAR Coated**



- Exceeds 1,000/hr. salt spray resistance
- Square drive prevents cam out and stripping
- ACQ, pressure, and fire treated lumber compatible
- Type '17' reduces wood splitting and eliminates the need for pre-drilling

**WAR**

**Material Application**  
Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1-5/8	XQ615W	5M	22	XQ615WV	1,000	XQ615WI	200
6 x 2	XQ620W	3.5M	19	XQ620WV	700	XQ620WI	175
8 x 2-1/2	XQ822W	2.5M	22	XQ822WV	400	XQ822WI	100
8 x 3	XQ830W	2M	21	XQ830WV	400	XQ830WI	100
10 x 3-1/2	XQ1031W	1M	18	XQ1031WV	250	XQ1031WI	50

**Phillips Bugle Head, Coarse Thread, Dacrotized**




- Exterior wood screw used in fencing, decks, patios
- Exceeds 500/hr. salt spray resistance
- Meets ASTM A 510 for carbon steel manufacturing

**Material Application**  
Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1	610CD	10M	30	610CDV	1,500	610CDI	300
6 x 1-1/4	614CD	8M	29	614CDV	1,300	614CDI	250
6 x 1-5/8	615CD	5M	23	615CDV	1,000	615CDI	200
6 x 2	620CD	3.5M	20	620CDV	700	620CDI	175
6 x 2-1/4	624CD	3M	20	624CDV	500	624CDI	125
8 x 2-1/2	822CD	2.5M	22	822CDV	400	822CDI	100
8 x 3	830CD	2M	21	830CDV	400	830CDI	100

**Phillips Bugle Head, Coarse Thread, Dacrotized**




- Exterior wood screw used in fencing, decks, patios
- Exceeds 500/hr. salt spray resistance

**Material Application**  
Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10 x 3-1/2	1031D	1M	17	1031DV	250	1031DI	50
10 x 4	1040D	.8M	16	1040DV	250	1040DI	50
10 x 4-1/2	1041D	.5M	12	1041DV	200	1041DI	40
10 x 5	1050D	.5M	13	1050DV	200	1050DI	40
10 x 6	1060D	.5M	15	1060DV	125	N/A	N/A

\*Carton weights are approximate and may vary.

**Square Drive Bugle Head, Coarse Thread, Dacrotized®**



- Exterior wood screw used in fencing, decks, patios
- Exceeds 500/hr. salt spray resistance
- Square drive prevents cam out and stripping

**Material Application**

Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 2	620QCD	3.5M	20	620QCDV	700	620QCDI	175
8 x 2-1/2	822QCD	2.5M	22	822QCDV	400	822QCDI	100
8 x 3	830QCD	2M	21	830QCDV	400	830QCDI	100

**Star Drive Flat Head w/Nibs, Coarse Thread, Type '17', Zinc Yellow**



- .0003 plating thickness
- 180/hr. salt spray resistance
- Nibs under head provide flush finish
- Star drive prevents cam out and stripping for improved driveability
- Type '17' reduces wood splitting and eliminates the need for pre-drilling

**Material Application**

Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1-1/4	XT814Y	8M	38	XT814YV	1,000	XT814YI	200
8 x 1-5/8	XT815Y	5M	30	XT815YV	800	XT815YI	150
8 x 2	XT820Y	3.5M	25	XT820YV	700	XT820YI	140
9 x 2-1/2	XT922Y	2.5M	26	XT922YV	400	XT922YI	100
9 x 3	XT930Y	2M	24	XT930YV	400	XT930YI	100
10 x 3-1/2	XT1031Y	1M	17	XT1031YV	250	XT1031YI	50
10 x 4	XT1040Y	.8M	16	XT1040YV	250	XT1040YI	50

**Star Drive Flat Head w/Nibs, Coarse Thread, Type '17', WAR Coated**



- Exceeds 1,000/hr. salt spray resistance
- Nibs under head provide flush finish
- ACQ, pressure, and fire treated lumber compatible
- Star drive prevents cam out and stripping for improved driveability
- Type '17' reduces wood splitting and eliminates the need for pre-drilling

**Material Application**

Exterior wood screw for outdoor applications. Attaches wood to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1-1/4	XT814W	8M	38	XT814WV	1,000	XT814WI	200
8 x 1-5/8	XT815W	5M	30	XT815WV	800	XT815WI	150
8 x 2	XT820W	3.5M	25	XT820WV	700	XT820WI	140
9 x 2-1/2	XT922W	2.5M	26	XT922WV	400	XT922WI	100
9 x 3	XT930W	2M	24	XT930WV	400	XT930WI	100
10 x 3-1/2	XT1031W	1M	17	XT1031WV	250	XT1031WI	50
10 x 4	XT1040W	.8M	16	XT1040WV	250	XT1040WI	50
10 x 5	XT1050W	.5M	13	XT1050WV	200	XT1050WI	40
10 x 6	XT1060W	.5M	15	XT1060WV	125	N/A	N/A

**Phillips/Square Drive Low Profile Wafer Head, Type '17', Strong-Shield Coated**



- Rust/Acid Rain Protection
- Exceeds 1,000/hr. salt spray resistance
- Type '17' reduces wood splitting
- ACQ, pressure, and fire treated lumber compatible



**Material Application**

Attaches panel clips to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-8 x 1-1/8	X109WC	4M	24	X109WCV	800	X109WCI	160

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

# STRONG-POINT Strong Timber™ Structural Screws

**NEW ITEM!**

**STRONG-POINT®**

Strong Timber™ structural fasteners are crafted to meet the toughest demands of interior and exterior projects. Engineered for exceptional strength, precision, and effortless installation, they ensure rock-solid wood-to-wood connections—perfect for trusses, framing, and other structures.




**STAR DRIVE WAFER HEAD w/NIBS**


Designed to prevent cam-out and stripping during installation. These fasteners are available in both 1/4" and 5/16" diameters. The nibs ensure easy self-countersinking, while the star drive head offers superior torque control.

**UNSLOTTED HEX WASHER HEAD**

Perfect for high-torque applications. Available in both 1/4" and 5/16" diameters.

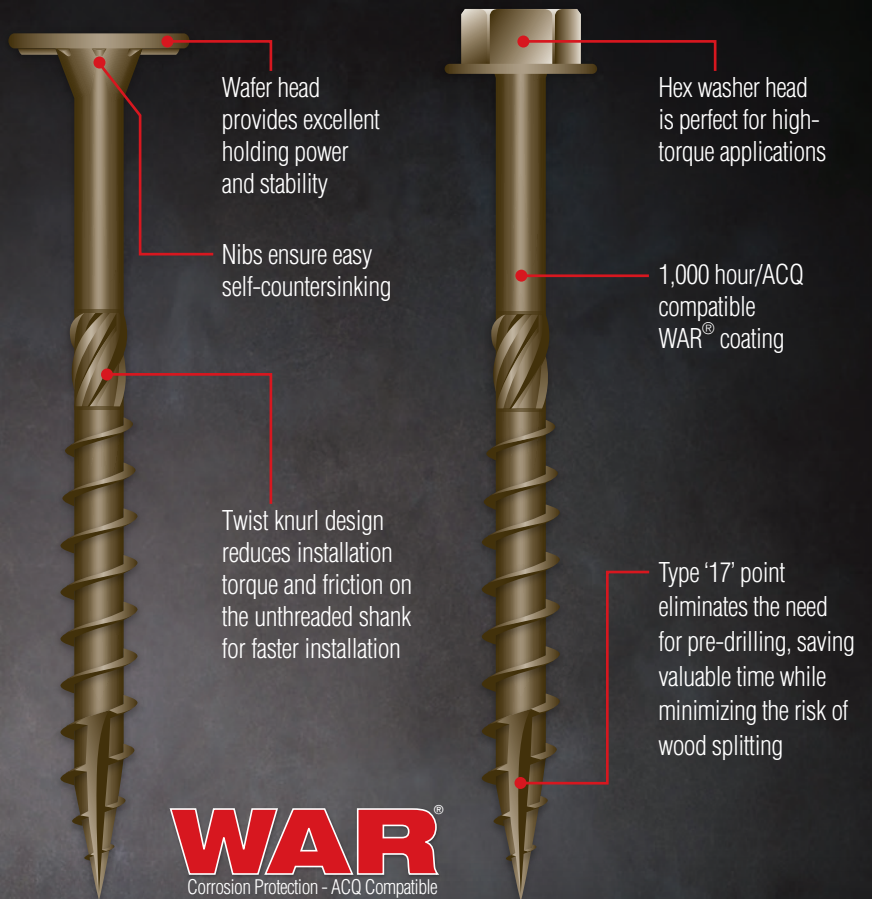

**WAR®**  
Corrosion Protection - ACQ Compatible

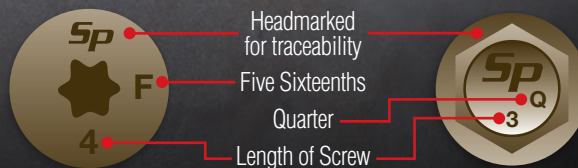

**Star Drive Wafer Head w/Nibs, Twist Knurl, Type '17', WAR Coated**

**Material Application**  
Attaches wood to wood.



- Meets ASTM A 510 for carbon steel manufacturing
- Exceeds 1,000/hrs. salt spray resistance
- ACQ, pressure, and fire treated lumber compatible

**WAR®**

Size	Bulk Part No	Bulk Qty	Lbs*	Packaged Part No	Packaged Qty
1/4 x 3	XW14030W	1M	32	PXW14030W	50
1/4 x 4	XW14040W	.5M	20	PXW14040W	50
1/4 x 5	XW14050W	.5M	24	PXW14050W	50
1/4 x 6	XW14060W	.5M	28	PXW14060W	50
5/16 x 3	XW20030W	.5M	22	PXW20030W	50
5/16 x 4	XW20040W	.5M	27	PXW20040W	50
5/16 x 6	XW20060W	.25M	20	PXW20060W	50
5/16 x 8	XW20080W	.25M	25	PXW20080W	50
5/16 x 10	XW20100W	.25M	31	PXW20100W	50

**Unslotted Hex Washer Head, Twist Knurl, Type '17', WAR Coated**

**Material Application**  
Attaches wood to wood.



- Meets ASTM A 510 for carbon steel manufacturing
- Exceeds 1,000/hrs. salt spray resistance
- ACQ, pressure, and fire treated lumber compatible

**WAR®**

Size	Bulk Part No	Bulk Qty	Lbs*	Packaged Part No	Packaged Qty
1/4 x 3	XH14030W	1M	31	PXH14030W	50
1/4 x 4	XH14040W	.5M	20	PXH14040W	50
1/4 x 5	XH14050W	.5M	24	PXH14050W	50
1/4 x 6	XH14060W	.5M	28	PXH14060W	50
5/16 x 3	XH20030W	.5M	20	PXH20030W	50
5/16 x 4	XH20040W	.5M	25	PXH20040W	50
5/16 x 6	XH20060W	.25M	18	PXH20060W	50

\*Carton weights are approximate and may vary.



# STRONG-POINT Woodworking™

STRONG-POINT®

## Cabinetry, Furniture, Trim, and Hinge Screws

Attach wood to wood in woodworking applications with confidence, using **Expert-Grade** Woodworking screws

### Flat Head Particle Board Screw



Wood Screw for Interior Applications

Lengths  
3/4" - 3"

Plain & Lubed

### Pan Head Face Framing, Type '17'



Attaches Wood to Wood

Lengths  
1-1/4" - 1-1/2"

Black Oxide

### Pan Head Face Framing, Coarse Thread, Type '17'



Attaches Wood to Wood

Lengths  
1-1/4" - 1-1/2"

Black Oxide

### Round Washer Head, Type '17'



Attaches Wood to Wood

Lengths  
1" - 3"

Zinc Plated

### Flat Head w/Nibs Particle Board Screw, Type '17'



Attaches Wood to Wood

Lengths  
1" - 3"

Black Oxide

### Flat Head w/Nibs Particle Board Screw, Type '17'




Attaches Wood to Wood

Lengths  
3/4" - 3"

Zinc Plated

### Trim Head Sharp Point



Attaches Wood Trim to Drywall or Studs

Lengths  
1" - 3"

Phosphate Coated

### Flat Head Particle Board "Hinge Screw"



Wood Screw for Interior Applications

Lengths  
1/2" - 3/4"

Zinc Plated

### Oval Head Particle Board "Hinge Screw"




Wood Screw for Interior Applications

Length  
5/8"

Zinc Plated, Plain



**Phillips Flat Head Particle Board Screw, Plain and Lubed**




- Asymmetrical thread pattern
- Superior holding power
- Resists material slippage
- For cabinet work, furniture assembly

**Material Application**

Wood screw for interior wood applications.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1/2	608L	25M	35	N/A	N/A	N/A	N/A
6 x 5/8	610L	25M	45	N/A	N/A	N/A	N/A
6 x 3/4	612L	20M	44	N/A	N/A	N/A	N/A
8 x 3/4	812L	10M	32	812LV	1,500	812LI	300
8 x 1	816L	10M	40	816LV	1,250	816LI	250
8 x 1-1/4	820L	8M	38	820LV	1,000	820LI	200
8 x 1-1/2	824L	6M	33	824LV	850	824LI	150
8 x 1-5/8	826L	5M	30	826LV	825	826LI	125
8 x 1-3/4	828L	4M	26	828LV	800	828LI	125
8 x 2	832L	3.5M	25	832LV	700	832LI	125
9 x 2-1/2	940L	2.5M	24	940LV	500	940LI	100
9 x 3	948L	2M	23	948LV	400	948LI	100

**Square Drive Flat Head Particle Board Screw, Plain and Lubed**



- Asymmetrical thread pattern
- Superior holding power
- For cabinet work, furniture assembly
- Square drive prevents cam out and stripping

**Material Application**

Wood screw for interior wood applications.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 3/4	812QL	10M	32	812QLV	1,500	812QLI	300
8 x 1	816QL	10M	40	816QLV	1,250	816QLI	250
8 x 1-1/4	820QL	8M	38	820QLV	1,000	820QLI	200
8 x 1-1/2	824QL	6M	33	824QLV	850	824QLI	150
8 x 1-5/8	826QL	5M	30	826QLV	825	826QLI	125
8 x 1-3/4	828QL	4M	26	828QLV	800	828QLI	125
8 x 2	832QL	3.5M	25	832QLV	700	832QLI	125
9 x 2-1/2	940QL	2.5M	24	940QLV	500	940QLI	100
9 x 3	948QL	2M	23	948QLV	400	948QLI	100

**Face Framing Phillips #7 Pan Head, Type '17', Black Oxide**



- Type '17' reduces wood splitting
- Superior holding power
- Fine thread for hardwoods

**Material Application**

Wood to wood cabinet framing assembly.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 1-1/4	XP5	8M	34	N/A	N/A	N/A	N/A
6-20 x 1-1/2	XP6	7M	34	N/A	N/A	N/A	N/A

**Face Framing Square Drive #7 Pan Head, Type '17', Black Oxide**



- Type '17' reduces wood splitting
- Superior holding power
- Fine thread for hardwoods
- Square drive prevents cam out and stripping

**Material Application**

Wood to wood cabinet framing assembly.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 1-1/4	XQ5	8M	34	N/A	N/A	N/A	N/A
6-20 x 1-1/2	XQ6	7M	34	N/A	N/A	N/A	N/A

**Face Framing #7 Square Drive Pan Head, Coarse Thread, Type '17', Black Oxide**



- Type '17' reduces wood splitting
- Superior holding power
- Coarse thread for soft woods
- Square drive prevents cam out and stripping

**Material Application**

Wood to wood cabinet framing assembly.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-9 x 1-1/4	XQ5C	8M	33	N/A	N/A	N/A	N/A
6-9 x 1-1/2	XQ6C	7M	34	N/A	N/A	N/A	N/A


\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.

**Phillips/Square Drive Round Washer Head Particle Board Screw, Type '17', Zinc CR3+ Plated**

**Material Application**

Wood screw for interior wood applications.



- Asymmetrical thread pattern
- Type '17' reduces wood splitting
- Superior holding power
- Combo Phillips/Square drive

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1	X816RWZ	8M	35	X816RWZV	1,000	X816RWZI	200
8 x 1-1/4	X820RWZ	6M	30	X820RWZV	1,000	X820RWZI	200
8 x 1-1/2	X824RWZ	5M	29	X824RWZV	825	X824RWZI	160
8 x 2	X832RWZ	3M	22	X832RWZV	600	X832RWZI	125
8 x 2-1/2	X840RWZ	2M	17	X840RWZV	400	X840RWZI	100
8 x 3	X848RWZ	1.5M	16	X848RWZV	300	X848RWZI	75

**Phillips Flat Head w/Nibs Particle Board Screw, Type '17', Black Oxide**

**Material Application**

Wood screw for interior wood applications.



- Asymmetrical thread pattern
- Type '17' reduces wood splitting
- Superior holding power
- Counter sinking nibs for a flush finish

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1	X816NB	10M	40	X816NBV	1,250	X816NBI	250
8 x 1-1/4	X820NB	8M	38	X820NBV	1,000	X820NBI	200
8 x 1-1/2	X824NB	6M	33	X824NBV	850	X824NBI	150
8 x 1-5/8	X826NB	5M	30	X826NBV	825	X826NBI	125
8 x 1-3/4	X828NB	4M	26	X828NBV	800	X828NBI	125
8 x 2	X832NB	3.5M	25	X832NBV	700	X832NBI	125
9 x 2-1/2	X940NB	2.5M	24	X940NBV	500	X940NBI	100
9 x 3	X948NB	2M	23	X948NBV	400	X948NBI	100

**Square Drive Flat Head w/Nibs Particle Board Screw, Type '17', Black Oxide**

**Material Application**

Wood screw for interior wood applications.



- Asymmetrical thread pattern
- Type '17' reduces wood splitting
- Superior holding power
- Counter sinking nibs for a flush finish

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1	XQ816NB	10M	40	XQ816NBV	1,250	XQ816NBI	250
8 x 1-1/4	XQ820NB	8M	38	XQ820NBV	1,000	XQ820NBI	200
8 x 1-1/2	XQ824NB	6M	33	XQ824NBV	850	XQ824NBI	150
8 x 1-5/8	XQ826NB	5M	30	XQ826NBV	825	XQ826NBI	125
8 x 1-3/4	XQ828NB	4M	26	XQ828NBV	800	XQ828NBI	125
8 x 2	XQ832NB	3.5M	25	XQ832NBV	700	XQ832NBI	125
9 x 2-1/2	XQ940NB	2.5M	24	XQ940NBV	500	XQ940NBI	100
9 x 3	XQ948NB	2M	23	XQ948NBV	400	XQ948NBI	100

**Phillips Flat Head w/Nibs Particle Board Screw, Type '17', Zinc CR3+ Plated**

**Material Application**

Wood screw for interior wood applications.



- Asymmetrical thread pattern
- Type '17' reduces wood splitting
- Superior holding power
- Counter sinking nibs for a flush finish

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 1	X816NZ	10M	40	X816NZV	1,250	X816NZI	250
8 x 1-1/4	X820NZ	8M	38	X820NZV	1,000	X820NZI	200
8 x 1-1/2	X824NZ	6M	33	X824NZV	850	X824NZI	150
8 x 1-5/8	X826NZ	5M	30	X826NZV	825	X826NZI	125
8 x 1-3/4	X828NZ	4M	26	X828NZV	800	X828NZI	125
8 x 2	X832NZ	3.5M	25	X832NZV	700	X832NZI	125
9 x 2-1/2	X940NZ	2.5M	24	X940NZV	500	X940NZI	100
9 x 3	X948NZ	2M	23	X948NZV	400	X948NZI	100

\*Carton weights are approximate and may vary.



**Square Drive Flat Head w/Nibs Particle Board Screw, Type '17', Zinc CR3+ Plated**



- Asymmetrical thread pattern
- Type '17' reduces wood splitting
- Superior holding power
- Counter sinking nibs for a flush finish

**Material Application**

Wood screw for interior wood applications.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8 x 3/4	XQ812NZ	10M	32	XQ812NZV	1,500	XQ812NZI	300
8 x 1	XQ816NZ	10M	40	XQ816NZV	1,250	XQ816NZI	250
8 x 1-1/4	XQ820NZ	8M	38	XQ820NZV	1,000	XQ820NZI	200
8 x 1-1/2	XQ824NZ	6M	33	XQ824NZV	850	XQ824NZI	150
8 x 1-5/8	XQ826NZ	5M	30	XQ826NZV	825	XQ826NZI	125
8 x 1-3/4	XQ828NZ	4M	26	XQ828NZV	800	XQ828NZI	125
8 x 2	XQ832NZ	3.5M	25	XQ832NZV	700	XQ832NZI	125
9 x 2-1/2	XQ940NZ	2.5M	24	XQ940NZV	500	XQ940NZI	100
9 x 3	XQ948NZ	2M	23	XQ948NZV	400	XQ948NZI	100

**Phillips Oval Head Particle Board Screw, "Hinge Screw", Plain**



- Asymmetrical thread pattern
- Used to attach hinges to cabinets and drawers

**Material Application**

Wood screw for interior wood applications.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 5/8	6100L	25M	46	N/A	N/A	N/A	N/A

**Phillips Oval Head Particle Board Screw, "Hinge Screw", Zinc CR3+ Plated**



- Asymmetrical thread pattern
- Used to attach hinges to cabinets and drawers

**Material Application**

Wood screw for interior wood applications.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 5/8	6100LZ	25M	46	N/A	N/A	N/A	N/A

**Phillips Flat Head Particle Board Screw, "Hinge Screw", Zinc CR3+ Plated**




- Asymmetrical thread pattern
- Flat head for counter-sinking

**Material Application**

Wood screw for interior wood applications.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6 x 1/2	608LZ	25M	35	608LZV	4,000	608LZI	1,000
6 x 5/8	610LZ	25M	45	610LZV	3,000	610LZI	750
6 x 3/4	612LZ	20M	44	612LZV	2,500	612LZI	500

**Draw Bolt, Joint Fastener**



- For counter-top assembly
- Superior holding power
- Adjust without special tools

**Material Application**

Used to draw counter-tops together.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
1/4-20 x 3-1/2	DRAW	.5M	48	N/A	N/A	N/A	N/A

\*Carton weights are approximate and may vary.


Note: 1lb. boxes sold 20 per case.

# STRONG-POINT Pole Gripper™


STRONG-POINT®

## For Post Frame Metal to Wood Applications

Attach metal to wood in roofing and siding applications with confidence, using **Expert-Grade** Pole Gripper screws

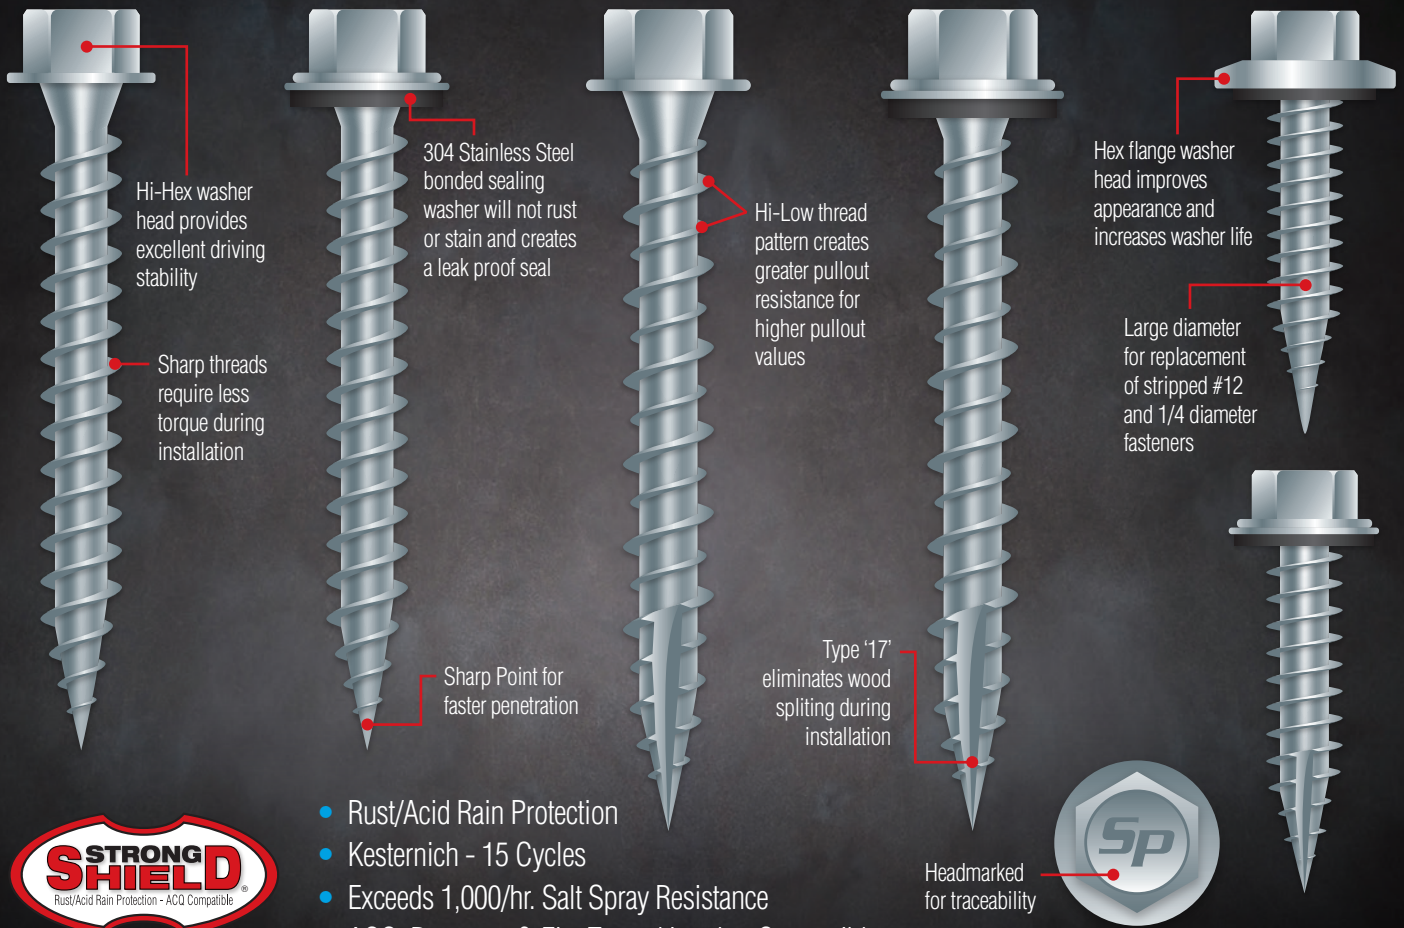

**Unslotted Indented Hi-Hex Washer Head w/Shoulder, Type S, Strong-Shield Coated**



- High degree of corrosion resistance
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance
- Rust/Acid Rain Protection



**Material Application**

Attaches metal to wood. Used in roofing and siding applications.

Size	Bulk Part No	Bulk Qty	Lbs *	5lb Part No	5lb Qty	1lb Part No	1lb Qty
9-15 x 1	PG916	7M	46	PG916V	750	PG916I	150
9-15 x 1-1/2	PG924	4M	36	PG924V	500	PG924I	100
9-15 x 2	PG932	3M	33	PG932V	500	PG932I	100
9-15 x 2-1/2	PG940	1.5M	20	PG940V	375	PG940I	75
9-15 x 3	PG948	1.5M	24	PG948V	300	PG948I	60

**Unslotted Indented Hi-Hex Washer Head w/Shoulder and 304 Stainless Steel Bonded Washer, Type S, Strong-Shield Coated**



- Bonded washer creates leak proof seal
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance
- Rust/Acid Rain Protection



**Material Application**

Attaches metal to wood. Used in roofing and siding applications.

Size	Bulk Part No	Bulk Qty	Lbs *	5lb Part No	5lb Qty	1lb Part No	1lb Qty
9-15 x 1	PGA916	4M	34	PGA916V	500	PGA916I	100
9-15 x 1-1/2	PGA924	2.5M	27	PGA924V	400	PGA924I	80
9-15 x 2	PGA932	2M	26	PGA932V	350	PGA932I	70
9-15 x 2-1/2	PGA940	1.5M	23	PGA940V	300	PGA940I	60
9-15 x 3	PGA948	1M	18	PGA948V	250	PGA948I	50

**Unslotted Indented Hi-Hex Washer Head w/Shoulder, Hi-Low Thread, Type '17', Strong-Shield Coated**



- High degree of corrosion resistance
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance
- Rust/Acid Rain Protection



**Material Application**

Attaches metal to wood. Used in roofing and siding applications.

Size	Bulk Part No	Bulk Qty	Lbs *	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-14 x 1	PG1016	5M	30	PG1016V	700	PG1016I	150
10-14 x 1-1/2	PG1024	3M	25	PG1024V	500	PG1024I	100
10-14 x 2	PG1032	2.5M	26	PG1032V	500	PG1032I	100
10-14 x 2-1/2	PG1040	1.5M	20	PG1040V	375	PG1040I	75
10-14 x 3	PG1048	1M	15	PG1048V	325	PG1048I	50

**Unslotted Indented Hi-Hex Washer Head w/Shoulder and 304 Stainless Steel Bonded Washer, Hi-Low Thread, Type '17', Strong-Shield Coated**



- Bonded washer creates leak proof seal
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance
- Rust/Acid Rain Protection



**Material Application**

Attaches metal to wood. Used in roofing and siding applications.

Size	Bulk Part No	Bulk Qty	Lbs *	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-14 x 1	PGA1016	3M	25	PGA1016V	500	PGA1016I	100
10-14 x 1-1/2	PGA1024	2.5M	26	PGA1024V	400	PGA1024I	80
10-14 x 2	PGA1032	2M	24	PGA1032V	350	PGA1032I	70
10-14 x 2-1/2	PGA1040	1.5M	22	PGA1040V	300	PGA1040I	60
10-14 x 3	PGA1048	1M	17	PGA1048V	250	PGA1048I	50

**Unslotted Indented Hex Flange Washer Head w/Washer, Type AB, Strong-Shield Coated**



- Integral washer creates leak proof seal
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance
- Rust/Acid Rain Protection



**Material Application**

Attaches metal to wood. Used in roofing and siding applications.

Size	Bulk Part No	Bulk Qty	Lbs *	Head Size	5lb Part No	5lb Qty	1lb Part No	1lb Qty
17-14 x 1	PGA1716	2M	38	3/8" A.F.	N/A	N/A	N/A	N/A

**Unslotted Indented Hex Washer Head w/304 Stainless Steel Bonded Washer, Type '17', Strong-Shield Coated**



- Bonded washer creates leak proof seal
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance
- Rust/Acid Rain Protection



**Material Application**

Attaches metal to wood. Used in roofing and siding applications.

Size	Bulk Part No	Bulk Qty	Lbs *	5lb Part No	5lb Qty	1lb Part No	1lb Qty
14-10 x 1	SA1416	2.5M	44	SA1416V	250	SA1416I	50
14-10 x 1-1/2	SA1424	2M	44	SA1424V	200	SA1424I	40
14-10 x 2	SA1432	1.5M	40	SA1432V	180	SA1432I	35
14-10 x 2-1/2	SA1440	1M	32	SA1440V	150	SA1440I	30
14-10 x 3	SA1448	1M	36	SA1448V	125	SA1448I	25

\*Carton weights are approximate and may vary.

# STRONG-POINT Strongcon®

STRONG-POINT®

Attach wood or metal to concrete, brick or cement block with confidence, using our **Expert-Grade Strongcon** screws.




**NEW LONGER LENGTHS NOW AVAILABLE**

1/4 x 5" and 1/4 x 6" both in HEX WASHER HEAD & FLAT HEAD

**AVAILABLE IN BULK or PACKAGED QUANTITIES**

Nationally Recognized Approval Rating

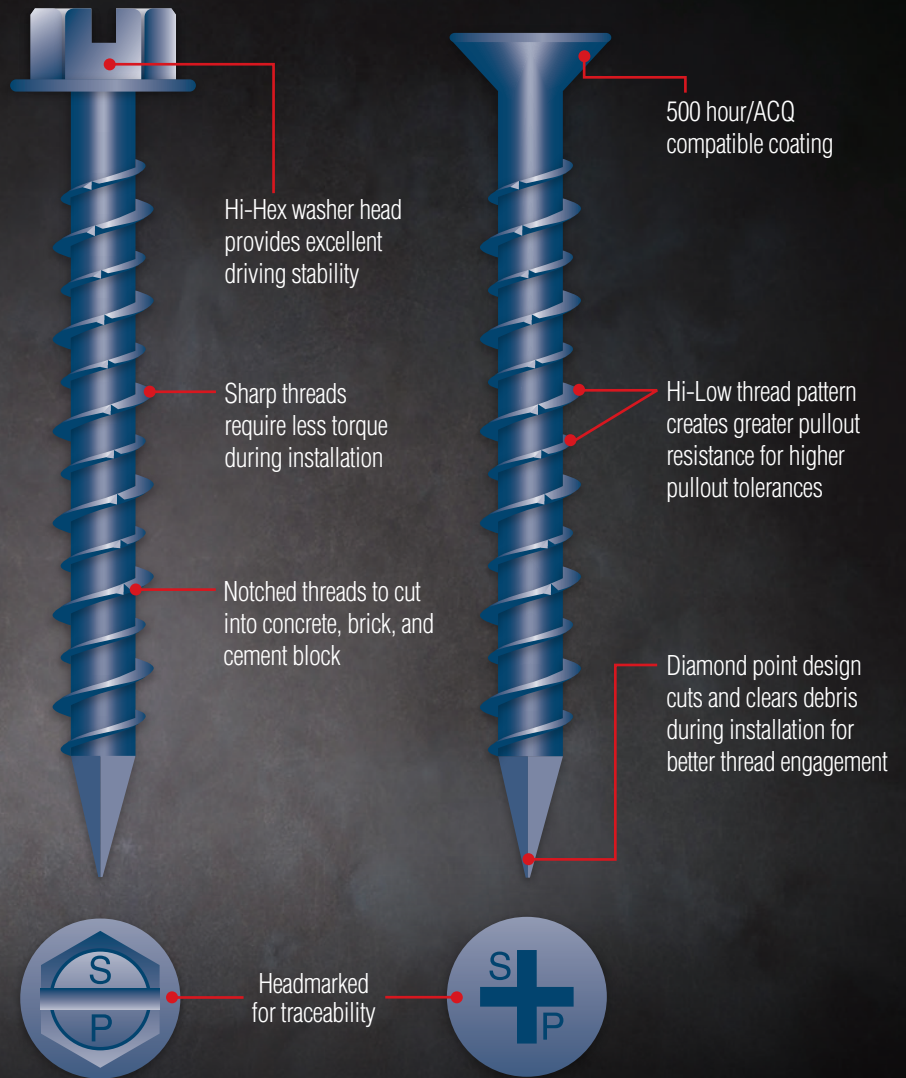

**Slotted Indented Hex Washer Head, Hi-Low, Notched Threads, Diamond Point, Blue Ceramic Coating**



- Meets ASTM A 510 for carbon steel manufacturing
- Exceeds 500/hrs. salt spray resistance
- ACQ Compatible



**Material Application**

Attaches wood or metal to concrete, brick, cement block or masonry.

- Notched threads for cutting into concrete, brick and cement block
- Miami-Dade County Product Control Approved. NOA-15-0930.14

Size	Bulk Part No	Bulk Qty	Lbs*	Head Size	Fixture Thickness	Fixture Recommended Drill Bit	Packaged Part No	Qty**
3/16 x 1-1/4	CH320	5M	41	1/4" A.F.	0 - 1/4"	5/32 x 3-1/2"	PCH320	500
3/16 x 1-3/4	CH328	3M	32	1/4" A.F.	1/4" - 3/4"	5/32 x 3-1/2"	PCH328	500
3/16 x 2-1/4	CH336	2.5M	32	1/4" A.F.	3/4" - 1-1/4"	5/32 x 4-1/2"	PCH336	500
3/16 x 2-3/4	CH344	2M	32	1/4" A.F.	1-1/4" - 1-3/4"	5/32 x 4-1/2"	PCH344	500
3/16 x 3-1/4	CH352	1.5M	28	1/4" A.F.	1-3/4" - 2-1/4"	5/32 x 5-1/2"	PCH352	500
3/16 x 3-3/4	CH360	1M	21	1/4" A.F.	2-1/4" - 2-3/4"	5/32 x 5-1/2"	PCH360	500
3/16 x 4	CH364	1M	23	1/4" A.F.	2-1/2" - 3"	5/32 x 5-1/2"	PCH364	500
1/4 x 1-1/4	CH420	3M	36	5/16" A.F.	0 - 1/4"	3/16 x 3-1/2"	PCH420	500
1/4 x 1-3/4	CH428	2M	33	5/16" A.F.	1/4" - 3/4"	3/16 x 3-1/2"	PCH428	500
1/4 x 2-1/4	CH436	1.5M	30	5/16" A.F.	3/4" - 1-1/4"	3/16 x 4-1/2"	PCH436	500
1/4 x 2-3/4	CH444	1M	25	5/16" A.F.	1-1/4" - 1-3/4"	3/16 x 4-1/2"	PCH444	500
1/4 x 3-1/4	CH452	1M	29	5/16" A.F.	1-3/4" - 2-1/4"	3/16 x 5-1/2"	PCH452	500
1/4 x 3-3/4	CH460	.5M	17	5/16" A.F.	2-1/4" - 2-3/4"	3/16 x 5-1/2"	PCH460	500
1/4 x 4	CH464	.5M	18	5/16" A.F.	2-1/2" - 3"	3/16 x 5-1/2"	PCH464	500
1/4 x 5	CH480	.5M	22	5/16" A.F.	3-1/4" - 4"	3/16 x 6-1/2"	N/A	N/A
1/4 x 6	CH496	.5M	26	5/16" A.F.	4-1/4" - 5"	3/16 x 7-1/2"	N/A	N/A

\*\*5 boxes packaged 100 per box. One drill bit included per box.

**Phillips Flat Head, Hi-Low, Notched Threads, Diamond Point, Blue Ceramic Coating**



- Meets ASTM A 510 for carbon steel manufacturing
- Exceeds 500/hrs. salt spray resistance
- ACQ Compatible



**Material Application**

Attaches wood or metal to concrete, brick, cement block or masonry.

- Notched threads for cutting into concrete, brick and cement block
- Miami-Dade County Product Control Approved. NOA-15-0930.14

Size	Bulk Part No	Bulk Qty	Lbs*	Head Size	Fixture Thickness	Fixture Recommended Drill Bit	Packaged Part No	Qty**
3/16 x 1-1/4	CF320	5M	35	1/4" A.F.	0 - 1/4"	5/32 x 3-1/2"	PCF320	500
3/16 x 1-3/4	CF328	4M	39	1/4" A.F.	1/4" - 3/4"	5/32 x 3-1/2"	PCF328	500
3/16 x 2-1/4	CF336	2.5M	31	1/4" A.F.	3/4" - 1-1/4"	5/32 x 4-1/2"	PCF336	500
3/16 x 2-3/4	CF344	2M	29	1/4" A.F.	1-1/4" - 1-3/4"	5/32 x 4-1/2"	PCF344	500
3/16 x 3-1/4	CF352	1.5M	26	1/4" A.F.	1-3/4" - 2-1/4"	5/32 x 5-1/2"	PCF352	500
3/16 x 3-3/4	CF360	1M	20	1/4" A.F.	2-1/4" - 2-3/4"	5/32 x 5-1/2"	PCF360	500
3/16 x 4	CF364	1M	22	1/4" A.F.	2-1/2" - 3"	5/32 x 5-1/2"	PCF364	500
1/4 x 1-1/4	CF420	3M	37	5/16" A.F.	0 - 1/4"	3/16 x 3-1/2"	PCF420	500
1/4 x 1-3/4	CF428	2M	33	5/16" A.F.	1/4" - 3/4"	3/16 x 3-1/2"	PCF428	500
1/4 x 2-1/4	CF436	1.5M	31	5/16" A.F.	3/4" - 1-1/4"	3/16 x 4-1/2"	PCF436	500
1/4 x 2-3/4	CF444	1M	25	5/16" A.F.	1-1/4" - 1-3/4"	3/16 x 4-1/2"	PCF444	500
1/4 x 3-1/4	CF452	1M	28	5/16" A.F.	1-3/4" - 2-1/4"	3/16 x 5-1/2"	PCF452	500
1/4 x 3-3/4	CF460	.5M	17	5/16" A.F.	2-1/4" - 2-3/4"	3/16 x 5-1/2"	PCF460	500
1/4 x 4	CF464	.5M	18	5/16" A.F.	2-1/2" - 3"	3/16 x 5-1/2"	PCF464	500
1/4 x 5	CF480	.5M	22	5/16" A.F.	3-1/4" - 4"	3/16 x 6-1/2"	N/A	N/A
1/4 x 6	CF496	.5M	26	5/16" A.F.	4-1/4" - 5"	3/16 x 7-1/2"	N/A	N/A

\*\*5 boxes packaged 100 per box. One drill bit included per box.

**Carbide Masonry Drill Bit**



Size	Part No	Qty
5/32 x 3-1/2	MB531	25
5/32 x 4-1/2	MB541	25
5/32 x 5-1/2	MB551	25
3/16 x 3-1/2	MB331	25
3/16 x 4-1/2	MB341	25
3/16 x 5-1/2	MB351	25
3/16 x 6-1/2	MB361	25



\*Carton weights are approximate and may vary.




### Large Diameter Tapcon Anchors

- High performance anchor that cuts its own threads into concrete
- Installs in less than half the time of wedge anchors or adhesive anchors
- Reduce chances for anchor failure due to incorrect bit usage
- Anchor bodies are made of hardened carbon steel
- Single piece design, no nut and washer to assemble
- No special proprietary bits to purchase or lose

### Carbon Steel, Unslotted Indented Hex Washer Head, Zinc Plated

Size	Bulk Part No	Qty/ctn	Lbs/ctn	Max. Thickness of Material to be Fastened
3/8 x 1-3/4	LDT-3816	400	24	1/4
3/8 x 2-1/2	LDT-3824	400	34	1
3/8 x 3	LDT-3830	400	40	1-1/2
3/8 x 4	LDT-3840	400	52	2-1/2
3/8 x 5	LDT-3850	320	60	3-1/2
1/2 x 3	LDT-1230	150	27	1/2
1/2 x 4	LDT-1240	150	36	1-1/2
1/2 x 5	LDT-1250	150	45	2-1/2
1/2 x 6	LDT-1260	120	54	4
5/8 x 3	LDT-5830	100	35	1/4
5/8 x 4	LDT-5840	100	40	1-1/4
5/8 x 5	LDT-5850	100	47	2-1/4
5/8 x 6	LDT-5860	50	27	3-1/4
3/4 x 4-1/2	LDT-3444	50	37	1-1/4
3/4 x 5-1/2	LDT-3454	50	40	2-1/4
3/4 x 6-1/4	LDT-3462	30	27	3



### 410 Stainless Steel, Unslotted Indented Hex Washer Head


Size	Bulk Part No	Qty/ctn	Lbs/ctn	Max. Thickness of Material to be Fastened
3/8 x 1-3/4	SLDT-3816	400	24	1/4
3/8 x 2-1/2	SLDT-3824	400	34	1
3/8 x 3	SLDT-3830	400	40	1-1/2
3/8 x 4	SLDT-3840	400	52	2-1/2
3/8 x 5	SLDT-3850	320	60	3-1/2
1/2 x 3	SLDT-1230	150	27	1/2
1/2 x 4	SLDT-1240	150	36	1-1/2
1/2 x 5	SLDT-1250	150	45	2-1/2

# STRONG-POINT<sup>TM</sup> Cement Board

STRONG-POINT<sup>®</sup>

Attach cement board and fiber board to wood or metal with confidence, using **Expert-Grade** cement board screws

## Phillips Wafer Head w/Nibs, Self Drilling

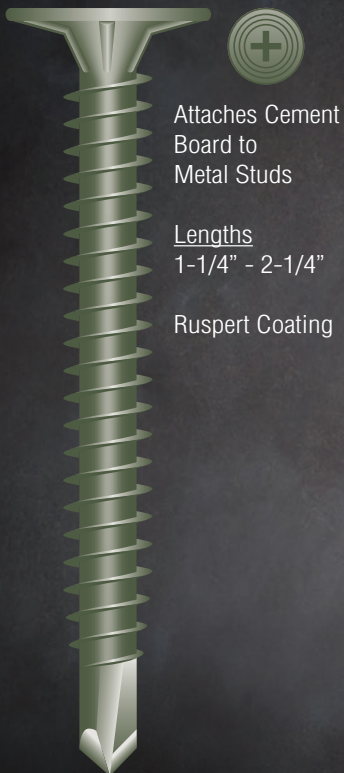


## Phillips Wafer Head w/Nibs, Hi-Low, Sharp Point




## Phillips Wafer Head w/Nibs, Hi-Low Spoon Point



## Phillips Flat Head w/Nibs and Wings, Self-Drilling

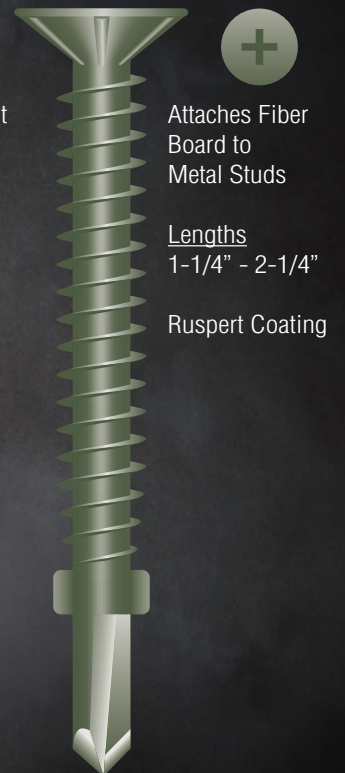

**Phillips Wafer Head w/Nibs, Self-Drilling, Cement Board Screw, Ruspert Coating**



- Ceramic coating provides protection from corrosion
- Designed to work with all backer boards
- Nibs under head clamp board firmly

**Material Application**

Attaches cement board to metal studs.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1-1/4	2	CB814	5M	29	.035 - .100	CB814V	800	CB814I	200
8-18 x 1-5/8	2	CB815	4M	29	.035 - .100	CB815V	650	CB815I	125
8-18 x 2-1/4	2	CB824	3M	30	.035 - .100	CB824V	500	CB824I	100

**Phillips Wafer Head w/Nibs, Hi-Low, Sharp Point, Cement Board Screw, Ruspert Coating**



- Ceramic coating provides protection from corrosion
- Designed to work with all backer boards
- Nibs under head clamp board firmly

**Material Application**

Attaches cement board to wood studs.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-15 x 1-1/4	814CB	5M	31	814CBV	800	814CBI	200
8-15 x 1-5/8	815CB	4M	30	815CBV	650	815CBI	125
8-15 x 2-1/4	824CB	2.5M	25	824CBV	500	824CBI	100

**Phillips Wafer Head w/Nibs, Hi-Low, Spoon Point, Cement Board Screw, Ruspert Coating**




- Ceramic coating provides protection from corrosion
- Designed to work with all backer boards
- Nibs under head clamp board firmly

**Material Application**

Attaches cement board to wood or light gauge metal studs.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-15 x 1-1/4	CB814SPN	5M	29	CB814SPNV	800	CB814SPNI	200
8-15 x 1-5/8	CB815SPN	4M	29	CB815SPNV	650	CB815SPNI	125

**Phillips Flat Head w/Nibs and Wings, Self-Drilling, Fiber Board Screw, Ruspert Coating**



- Ceramic coating provides protection from corrosion
- Nibs under head clamp board firmly
- Wings ream hole in board preventing "jacking action"

**Material Application**

Attaches fiber board to metal studs.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1-1/4	2	FB814R	5M	27	.035 - .100	FB814RV	800	FB814RI	200
8-18 x 1-5/8	2	FB815R	4M	28	.035 - .100	FB815RV	650	FB815RI	125
8-18 x 2-1/4	2	FB824R	3M	30	.035 - .100	FB824RV	500	FB824RI	100

\*Carton weights are approximate and may vary.

Note: 1lb. boxes sold 20 per case.



**Self-Drilling Drywall Anchors**

- No hole preparation necessary; pre-drills own small precise hole in gypsum wallboard
- Installs quickly and easily with a phillips screw driver or square drive bit
- Deep thread design provides strong engagement in 3/8", 1/2" and 5/8" gypsum wallboard
- Replaces plastic plugs and toggles
- Low profile head
- Single point designs for clean cutting installation

Anchor Type	Material	Size	Bulk Part No	Bulk Qty	Packaged Part No	Packaged Qty	Max Fixture Thickness	Accommodates Sheet Metal Screw Size
E-Z Lite™	White Nylon	3/8 x 1-5/16	5006900	10M	5006902	10 - 100 ct. Boxes	3/4"	#6
E-Z Mini™	Zinc	7/16 x 1-1/4	5033900	3M	5033902	10 - 100 ct. Boxes	3/4"	#6, #7, #8
Stud Solver™	Zinc	1/2 x 1-1/8	5052900	1.5M	N/A	N/A	3/4"	Use only with #8 screw provided
E-Z Zinc™	Zinc	1/2 x 1-5/8	5000900	1.5M	5000902	10 - 100 ct. Boxes	3/4"	#6, #7, #8
E-Z Plastic Plus™	White Nylon	1/2 x 1-5/8	5035900	4.5M	5035902	10 - 100 ct. Boxes	3/4"	#6, #7, #8
E-Z Twist-N-Lock™	White Nylon	1/2 x 1-5/8	5061900	4.5M	5061902	10 - 100 ct. Boxes	3/4"	#6, #7, #8
E-Z Toggle™ Pan SMS	Zinc	9/16 x 2-1/2	5014900	.5M	5014901	50 ct. Box	1/2"	#8
E-Z Toggle™ Large Washer Face SMS	Zinc	9/16 x 2-1/2	5017900	.5M	5017901	50 ct. Box	1/2"	#8



# **—STRONG-POINT— Special Application™**

**STRONG-POINT®**

Attach drop ceiling tie wires to wood or metal with confidence, using **Expert-Grade** special application eye lags

## **Acoustical Eye Lag Self-Drilling**



Attaches Drop Ceiling  
Tie Wires to Steel

Lengths  
2" - 3-1/4"

Zinc Plated

## **Acoustical Eye Lag**




Attaches Drop Ceiling  
Tie Wires to Wood

Lengths  
3" - 5"

Plain

**Acoustical Eye Lag, Self-Drilling, Zinc CR3+ Plated**



- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets ASTM A 510 for carbon steel manufacturing

**Material Application**

Attaches drop ceiling tie wires to steel.

Size	Bulk Part No	Bulk Qty	Lbs*
1/4 x 2	EA2	1M	19
1/4 x 3-1/4	EA6	1M	25

**Acoustical Eye Lag, Plain**



- Meets ASTM A 510 for carbon steel manufacturing

**Material Application**

Attaches drop ceiling tie wires to wood.

Size	Bulk Part No	Bulk Qty	Lbs*
1/4 x 3	EA3	1M	22
1/4 x 4	EA4	1M	33
1/4 x 5	EA5	1M	40

**Acoustical Toggle Assembly, Zinc Plated**

- Attaches drop ceiling tie wires to existing ceiling

Size	Bulk Part No	Bulk Qty	Lbs*
1/4-20 x 4-1/4	TOG	.5M	80

**Acoustical Eye Lag Driver**



Size	Part No	Qty
1/4 x 3	EAD	5/ea.

**Star Bits**



Size	Part No	Qty	Lbs*
T-20 x 25mm	T20C	100	1
T-25 x 25mm	T25C	100	1

**Bonded Sealing Washers**

- Creates leak proof seal and provides a moisture barrier when used in conjunction with proper fastener

Size	Galvanized Part	Qty	Stainless Part	Qty	Lbs*
8(10) x 1/2" O.D.	HAW0810	15M	HAW810S	12.5M	28
8(10) x 5/8" O.D.	HAW085	10M	HAW105S	7.5M	29
12 x 9/16" O.D.	HAW1214	15M	HAW12S	12.5M	25

Size	Galvanized Part	Qty	Stainless Part	Qty	Lbs*
12 x 5/8" O.D.	HAW125	7.5M	HAW125S	10M	28
14 x 5/8" O.D.	HAW14	20M	HAW14S	12.5M	29
14 x 1" O.D.	HAW141	3M	HAW141S	3M	33

**Pipe Flashings**



- Designed for maximum weather resistance
- Designed to fit virtually all panel and roof configurations
- Advanced ozone and UV protection
- Flexibility absorbs vibration and pipe movement

Size	Part No	Pipe Size	Qty
Mini	RD051NG	0" - 3/4"	30
#1	RD101NG	1/4" - 2-1/2"	15
#2	RD201NG	1-3/4" - 3"	15
#3	RD301NG	1/4" - 5"	15
#4	RD401NG	3" - 6-1/4"	10
#5	RD501NG	4-1/4" - 7-3/4"	10
#6	RD601NG	5" - 9"	10
#7	RD701NG	6" - 11"	10
#8	RD801NG	7" - 13"	5
#9	RD901NG	9" - 19"	5

**Retrofit Pipe Flashings**



Size	Part No	Pipe Size	Qty
#1	RF101NG-RD	3/4" - 2-3/4"	5
#2	RF201NG-RD	2" - 7-1/4"	5
#3	RF301NG-RD	3-1/4" - 10"	5

**Call us today for a complete listing of all of the Pipe Flashing products we offer!**

\*Carton weights are approximate and may vary.

Self-Drilling Pullout Values (Avg. Lbs.)											
Size	Point	Gauge:	22	20	18	16	14	12	1/8	3/16	1/4
6-20	2		149	277	462	571	855	1043			
8-18	2		260	292	479	685	933	1533			
10-16	2		267	360	534	763	1005	1606			
10-16	3		261	293	487	690	941	1432	2017		
10-24	3			335	496	702	901	1469	2112	2668	
12-14	3		283	333	537	737	1034	1585	2349	2911	
12-24	4				484	679	959	1489	2371	3384	3732
12-24	5				475	672	951	1486	2269	3593	3882
14-14	3		287	339	595	856	1114	1805	2337	4416	4885

Self-Drilling Shear Values (Avg. Lbs.)											
Size	Point	Gauge (Lapped):	22	20	18	16	14	12	1/8	3/16	1/4
6-20	2		510	736	820						
8-18	2		546	721	1031	1049					
10-16	2		574	808	1173	1233					
10-16	3			709	1231	1497	1508				
12-14	3			749	1320	1574	1914	1929			
12-24	4							1989	1972		
12-24	5								2622	2641	2682
14-14	3			905	1401	2040	2509	2573	2738		

# Test Results - **STRONG-POINT** DryWall™

Drywall Screws Pullout Values (Avg. Lbs.)								
Size	Description	Gauge:	22	20	18	16	14	12
6 x 1 - 6 x 1-5/8	Phillips Bugle A/P*		230	325				
6 x 2 - 8 x 3	Phillips Bugle A/P*		166	237	406	505	876	1050
6 x 7/16	Phillips Pan Head Framing A/P*		247	316				
6 x 1 - 6 x 1-5/8	Phillips Bugle S/D**		126	218	366	496	825	1004
6 x 1-7/8 - 8 x 3	Phillips Bugle S/D**		168	227	398	502	888	1050
6 x 7/16	Phillips Pan Head Framing S/D**		156	227	375	547	875	1106

\*A Point (Fine Thread) \*\*Self-Drilling

Drywall Screws Shear Values (Avg. Lbs.)								
Size	Description	Gauged (Lapped):	22	20	18	16	14	12
6 x 1 - 6 x 1-5/8	Phillips Bugle A/P*		532	568				
6 x 2 - 8 x 3	Phillips Bugle A/P*		525	787	966	1044		
6 x 7/16	Phillips Pan Head Framing A/P*		624	747				
6 x 1 - 6 x 1-5/8	Phillips Bugle S/D**		444	721	875	912		
6 x 1-7/8 - 8 x 3	Phillips Bugle S/D**		522	780	937	1025		
6 x 7/16	Phillips Pan Head Framing S/D**		403	626	690	1047		

\*A Point (Fine Thread) \*\*Self-Drilling

The values listed are averages achieved under laboratory conditions and imply no warranty. Appropriate safety factors should be applied to these values for design purposes.

# Inches to Decimal

Inches	Decimal	Inches	Decimal	Inches	Decimal	Inches	Decimal
1/32	.0312	9/32	.2812	17/32	.5312	25/32	.7812
1/16	.0625	5/16	.312	9/16	.5625	13/16	.8125
3/32	.0937	11/32	.3437	19/32	.5937	27/32	.8437
1/8	.125	3/8	.375	5/8	.625	7/8	.875
5/32	.1562	13/32	.4062	21/32	.6562	29/32	.9062
3/16	.1875	7/16	.4375	11/16	.687	15/16	.9375
7/32	.2187	15/32	.4687	23/32	.7187	31/32	.9687
1/4	.250	1/2	.500	3/4	.750	1	1.00

# Gauges to Decimal

Gauge	Decimal	Gauge	Decimal	Gauge	Decimal	Gauge	Decimal
3	.239	12	.105	21	.033	30	.0120
4	.224	13	.090	22	.030	31	.0105
5	.209	14	.075	23	.027	32	.0097
6	.194	15	.067	24	.024	33	.0090
7	.179	16	.060	25	.021	34	.0082
8	.164	17	.054	26	.018	35	.0075
9	.150	18	.048	27	.016	36	.0067
10	.135	19	.042	28	.015	37	.0064
11	.120	20	.036	29	.014	38	.0060

# Drill Capacity Guideline for **STRONG-POINT Self-Drilling**

Point	Diameter	.050	.100	.150	.200	.250	.300	.350	.400	.500	.600	Drill Speed
1	1/4	.018	----- .090									2000
2	6	.035	----- .090									2500
2	8	.035	----- .100									2500
2	10	.035	----- .110									2500
3	10	.035	----- .176									2500
3	12	.035	----- .210									2000
3	1/4	.060	----- .220									1750
4	12		.125	----- .250								1500
5	12		.125	----- .500								1500
5	1/4		.125	----- .500								1500



Coating	Salt Spray *	Kesternich	Application
Black Oxide	24 hrs.	N/A	Used indoors for dry, non-corrosive applications.
Black Phosphate	48 hrs.	N/A	Used indoors for dry, non-corrosive applications.
Clear or Yellow Zinc	24 hrs.	N/A	Used indoors for dry, non-corrosive applications.
Yellow Zinc .0003	180 hrs.	N/A	Used indoors and outdoors for dry, non-corrosive applications.
Dacrotized®	500 hrs.	N/A	Used outdoors for medium corrosive applications.
Ruspert®	1,000 hrs.	N/A	Used indoors and outdoors for high corrosive applications.
WAR®	1,000 hrs.	N/A	Used outdoors for high corrosive applications. ACQ compatible.
Strong-Shield®	1,000 hrs.	15 Cycles	Used outdoors for high corrosive applications. Acid rain protection. ACQ compatible.
410 Stainless Steel	N/A	N/A	Used outdoors for medium corrosive applications. ACQ compatible.
305 Stainless Steel	N/A	N/A	Used outdoors for high corrosive applications. ACQ compatible.

## Coating Description

Coating	Description
Black Oxide	A conversion coating used to add mild corrosion resistance and for appearance.
Black Phosphate	A conversion coating used to add mild corrosion resistance and for lubricity.
Clear or Yellow Zinc	A plating that is applied electrically to fasteners that prevents oxidation of steel by forming a protective barrier.
Yellow Zinc .0003	A plating that is applied electrically to fasteners that prevents oxidation of steel by forming a protective barrier.
Dacrotized®	An immersion zinc flake/chromate dispersion coating with medium corrosion protection.
Ruspert®	A high-grade metal surface processing technology that prevents corrosion. The coating system consists of three layers: a metallic zinc layer, a high-grade anti-corrosion chemical conversion film, and a baked ceramic surface coating.
WAR®	A high-grade metal surface processing technology that prevents corrosion. The coating system consists of three layers: a metallic zinc layer, a passivation, and a high-grade anti-corrosion chemical conversion film.
Strong-Shield®	A high-grade metal surface processing technology that prevents corrosion. The coating system consists of four layers: a metallic zinc layer, a passivation, a layer of functional nano coating used as a sealer, and a high-grade anti-corrosion chemical conversion film.
410 Stainless Steel	A low-carbon grade of hardenable stainless steel. Good corrosion resistance in mild atmospheres. Surface rust may appear.
305 Stainless Steel	A nickel-chromium grade of stainless steel that has a high resistance to corrosion.

\*(Tested in accordance with the American Society of Testing Materials - ASTM B 117)



# Unlock a New Revenue Stream with High-Margin Packaged Fasteners

Not every job needs a bulk box – so why miss the sale?

With Intercorp's expert-grade packaged fasteners, you can serve contractors, pros, and DIYers, who just need a 1 or 5 lb. pound box of fasteners to finish the job.

## Why it works:

- Capture add-on sales and increase margin per transaction
- Choose from 700+ fastener styles and sizes in 1 lb. and 5 lb. options
- Now featuring piece-based packaging for Strongcon and Strong Timber product lines
- Vibrant packaging and signage grab attention and make an impact
- No 5 lb. minimum requirements – purchase what you need without having to order by the case
- Built-in brand trust with Strong-Point performance

Our retail-ready packaging was designed to turn heads and move product, functioning as your silent salesperson and boosting your bottom line.

## Ready to boost your margins and move more product?

*Let's build a packaged fastener program that works for your shelves and your customers*

**STRONG-POINT**<sup>®</sup>



**INTERCORP** 

Los Angeles  
800.762.2004

New York  
888.322.2262

Chicago  
800.533.9669

Dallas  
800.558.7222

Atlanta  
800.822.9690

Portland  
800.434.5606

Houston  
800.558.7222

Cleveland  
800.533.9669

Miami  
800.822.9690

# You + Intercorp = Sustainable Business Results

## Increase YoY Sales By 12-18%

You've always prioritized building better relationships with your customers. That's why you've invested so much into your sales teams.

At Intercorp, we believe your secret to success lies with happy, healthy, highly-educated sales teams. That's why we have partnered with BlueVolt to create Intercorp University, which is designed to help you reach that goal by offering state-of-the-art training on fasteners, ITW products, and our world-class Strong-Point products.



## Your Reps, Supercharged

The right product training doesn't just equip you to succeed — it enables you to directly address customer needs by fostering meaningful connections and building valuable rapport. In fact, 50% of customers want expert advice on what to buy, and 73% value in-depth product knowledge from sales representatives.

By investing in product-specific online training for your teams, you empower them to develop unparalleled brand expertise. This not only enhances their ability to serve customers, but also results in a remarkable 87% increase in sales compared to sales reps lacking such specialized knowledge.



*Intercorp University offers industry and product training on every Strong-Point fastener in your collection.*

**Adds 218% higher revenue per employee**

*Intercorp University is the right provider for product training.*

**Creates 37% more productivity for businesses**

*We explain all the details your reps should know so they can educate customers at their point of need.*

**Takes your business to its next chapter of growth**

## Get Started With Intercorp University

Product training is key to a healthier sales funnel. It's also a crucial differentiator in a 17.2 billion dollar industry.

Here's how to kick off your product training journey with Intercorp University :

1. Scan the QR code to go to Intercorp University.
2. Log in and fill in the form as requested.
3. Wait for an email confirmation to log in and start taking courses.

[go.bluevolt.com/intercorp/s/](https://go.bluevolt.com/intercorp/s/)





**Fast. Knowledgeable. Friendly. Reliable.**

**INTERCORP** 

[www.intercorpusa.com](http://www.intercorpusa.com)

**Los Angeles - (800) 762-2004**

641 North Poplar Street  
Orange, CA 92868  
Tel: (714) 744-2622  
Fax: (714) 744-4672  
[losangeles@intercorpusa.com](mailto:losangeles@intercorpusa.com)

**New York - (888) 322-2262**

18 Madison Road  
Fairfield, NJ 07004  
Tel: (973) 227-0111  
Fax: (973) 227-0511  
[newyork@intercorpusa.com](mailto:newyork@intercorpusa.com)

**Chicago - (800) 533-9669**

2541 Millennium Drive  
Elgin, IL 60124  
Tel: (847) 841-8860  
Fax: (847) 841-8875  
[chicago@intercorpusa.com](mailto:chicago@intercorpusa.com)

**Dallas - (800) 558-7222**

1252 Avenue T  
Grand Prairie, TX 75050  
Tel: (972) 602-1080  
Fax: (972) 602-1117  
[dallas@intercorpusa.com](mailto:dallas@intercorpusa.com)

**Atlanta - (800) 822-9690**

2160 Breckinridge Blvd.  
Lawrenceville, GA 30043  
Tel: (770) 326-9960  
Fax: (770) 326-9996  
[atlanta@intercorpusa.com](mailto:atlanta@intercorpusa.com)

**Portland - (800) 434-5606**

9494 SW Tualatin-Sherwood Rd.  
Tualatin, OR 97062  
Tel: (503) 783-5550  
Fax: (503) 783-5555  
[portland@intercorpusa.com](mailto:portland@intercorpusa.com)

**Houston - (800) 558-7222**

3851 Yale Street  
Houston, TX 77018  
Tel: (713) 692-1167  
Fax: (713) 692-1274  
[houston@intercorpusa.com](mailto:houston@intercorpusa.com)

**Cleveland - (800) 533-9669**

23901 Aurora Road  
Bedford Heights, OH 44146  
Tel: (216) 750-2265  
Fax: (216) 750-2266  
[cleveland@intercorpusa.com](mailto:cleveland@intercorpusa.com)

**Miami - (800) 822-9690**

20600 NW 47th Avenue  
Miami Gardens, FL 33055  
Tel: (954) 526-4144  
Fax: (954) 526-4303  
[miami@intercorpusa.com](mailto:miami@intercorpusa.com)

**STRONG-POINT**®

Get the Point. Strong-Point.

**Same Day Shipping  
From All Nine Locations!**

