Wera
BE A TOOL REBEL

Compact Catalogue



CONTENT

Screwdrivers



Kraftform Stainless Steel	6
Kraftform Plus – Series 900	8
Kraftform Plus – Series 300	11
Kraftform Ball-Grip – Series 1800	28
Flagdriver Series	30
Screwdriving Accessories	31
Kraftform Micro	34
400 T-Handle Series	41
ESD Tools	49

Tools for Electricians



Kraftform Stainless VDE	58
Kraftform 100 VDE	60
Kraftform Kompakt VDE Safe-Torque Speed	68
Kraftform Kompakt VDE Stainless	69
Kraftform Kompakt VDE with ratchet functionality	73
Kraftform Kompakt VDE	76
Kraftform Kompakt Turbo VDE	84
Kraftform 1000 VDE	91
Series T-handle Screwdrivers	92
The Zyklop Ratchet VDE and Accessories	93
Joker VDE Self-setting, Adjustable Spanner	98
Torque-indicators for Electricians	99
Wera 2go E 1 Tool set for electricians	303

Ratchets & Accessories



1/4" Zyklop Speed	102
1/4" Zyklop Metal Push	107
1/4" Zyklop Metal Switch	108
1/4" Zyklop Accessories	110
3/8" Zyklop Speed	120
3/8", Zyklop Comfort Ratchet	124
3/8" Zyklop Metal Push	126
3/8" Zyklop Metal Switch	128
3/8" Zyklop Accessories	130
1/2" Zyklop Speed	145
1/2" Zyklop Hybrid	148
1/2" Zyklop Metal Push	149
1/2" Zyklop Metal Switch	151
1/2" Zyklop Accessories	152
Zyklop Pocket	165
1/2" Koloss	169
Zyklop Mini	172

Tool-Check



Tool-Check Modular	180
Tool-Check PLUS	185
Tool-Check	189

Joker Wrenches & Spanners



6000 Joker Ratcheting Combination Wrenches	194
6001 Joker Switch Ratcheting Combination Wrenches, with Switch Lever	197
6002 Joker Double Open-Ended Wrenches	199
6003 Joker Ring Spanner	199
6004 Joker Self-setting, Adjustable Spanner	205
6005 Joker Double Open-Ended Wrenches	207
6006 Joker Self-setting Double Spanners	207
6007 Joker Ring Ratchet Spanners, long design	209

L-Keys



L-Keys for Hexagon Socket Screws	212
L-Keys for TORX® Screws	227

Kraftform Kompakt with Ratchet Function



Kraftform Kompakt 20 RA-R, 25 RA-R, 26 RA-R, 27 RA, 28 RA	234
Kraftform Kompakt 60 RA-R	237
Kraftform Kompakt 400 RA	238
Kraftform Kompakt 838 with Ratchet Function	241
Kraftform Kompakt Pistol with Ratchet Function	243
Kraftform Kompakt Stubby magazine with Ratchet Function	244
Kraftform Kompakt Vario with Ratchet Function	246

Kraftform Kompakt without Ratchet Functionality



Kraftform Kompakt Turbo	248
Kraftform Kompakt 10, 12	249
Kraftform Kompakt 20, 25, 26, 27, 28	250
Kraftform Kompakt 40, 41	255
Kraftform Kompakt 60, 62	256
Kraftform Kompakt 70, 71	260
Kraftform Kompakt 100	261
Kraftform Kompakt 400	262
Kraftform Kompakt Stubby	262
Kraftform Kompakt Vario without Ratchet Functionality	264
Kraftform Kompakt Accessories	265

Kraftform Kompakt impact screwdriver



Kraftform Kompakt 900	267

Kraftform Kompakt User-Specific Sets



Kraftform Kompakt User-Specific Sets	270

Bitholding Screwdrivers and Adaptors




Bitholding Screwdrivers and Adaptors 277

Roller cabinet and foam inserts



Roller cabinet and foam inserts 282

Wera 2go



Wera 2go 300

Bits



Bits for Phillips Screws 308
Bits for Pozidriv Screws 319
Bits for Plusminus Screws –Slotted/Phillips 326
Bits for Plusminus Screws – Slotted/Pozidriv 327
Bits for TORX® Screws 327
Bits for TORX® BO Screws 335
Bits for TORX PLUS® Screws 337
Bits for TORX PLUS® IPR Screw 338
Bits for Slotted Screws 338
Bits for Hexagon Socket Screws 341
Bits for Hexagon Socket BO Screws 347
Bits for Square Socket Screws 348
Bits for TORQ-SET® Screws 351
Bits for TRI-WING® Screws 352
Bits for Multi-Point Screws 352
Bits for Microstix® Screws 352
Bits for Spanner Screws 353
Nutsetters 353
Internal Thread Insertion Tool 355

Holders and Adaptors



Impaktor Bit Holders 358
Rapidaptor Bit Holders 359
Universal Bit Holders With Quick-Release Chuck 361
Universal Bit Holders With Retaining Ring 362
Universal Bit Holders With Stainless Steel Sleeve 362
Bit Holders With Adjustable Depth-Control Stop 364
Adaptors 364

Bit Sets




Bit-Checks Impaktor 370
Bit-Checks Stainless 373
Bit-Checks / Bit-Safes BiTorsion 374
Bit-Checks Diamond 377
Bit-Checks / Bit-Safes Universal 379
Bit-Checks Wood 387
Bit-Checks Metal 391
Bit Sets for Special Applications 392

Torque Tools



Series 7400 Kraftform Torque Screwdrivers with variable torque value adjustment 400
with a factory pre-set measurement value 405
adjustable to customer requirements within the specified measurement range 410
Series 7500 Kraftform Safe-Torque Speed Torque Screwdrivers 415
Series Torque-indicators 417
Safe-Torque torque wrenches and accessories 419
Series Click-Torque Adjustable Torque Wrenches with Reversible Ratchet 422
Adjustable torque wrenches with reversible ratchet and Torque Lock function 430
Adjustable torque wrenches for clockwise and anti-clockwise torque-control 431
Adjustable torque wrenches for clockwise and anti-clockwise torque-control and Torque Lock function 431
Adjustable Torque Wrenches for Insert Tools 434
Pre-set, Adjustable Torque Wrenches for Insert Tools 439
Insert Tools Series 441
Accessories 455

Impact Driver



Impact Driver 90 Nm 456

Index


Techlex 457
Code No. Index 461
Article No. Index 476


Wera
BE A TOOL REBEL



Screwdrivers

Kraftform Stainless - stainless steel to prevent rust

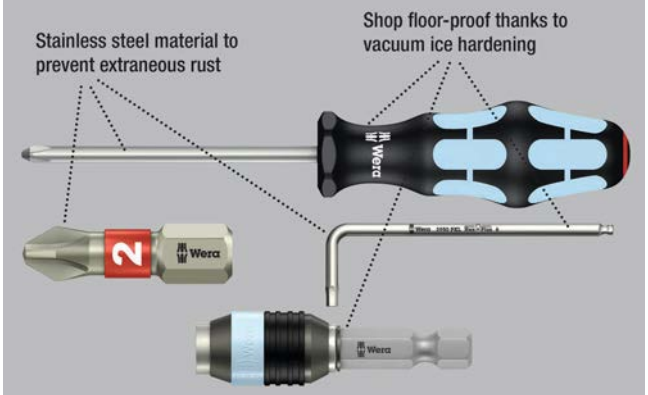


High quality Kraftform Plus screwdriver out of stainless steel. The stainless tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. They can be used for industrial apsplication without hesitation. The Lasertip tip literally bites into the head of the screw and thereby prevents any slipping out of the screw head. Multi-component Kraftform handle for fast and low-fatigue working.


Take it easy Tool Finder: colour coding according to profile and size. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Take it easy tool finder: colour coding according to profile and size
- Hexagonal anti-roll feature against rolling away
- Lasertip tips for more secure fit in the screw head

Lasertip - laser engineered blade

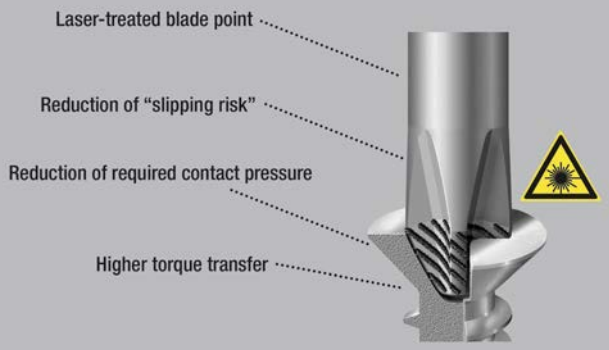


3335 Screwdriver for slotted screws, stainless

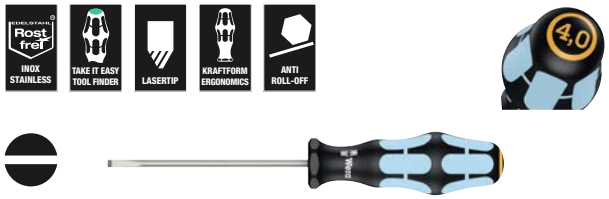

	EAN							
Code	4013288	mm	mm	mm	mm	mm		
05**032001**001 [1]	*107329*	0,5	3,0	3,0	80	81	1/8"	10
05**032002**001 [1]	*107336*	0,6	3,5	3,5	100	81	9/64"	10
05**032003**001	*107343*	0,8	4,0	4,0	100	98	5/32"	10
05**032004**001	*107350*	1,0	5,5	5,5	125	98	7/32"	10

[1] without Lasertip

3334 Screwdriver for slotted screws, stainless

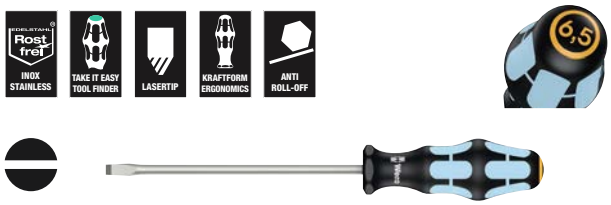

	EAN							
Code	4013288	mm	mm	mm	mm	mm		
05**032005**001	*107367*	1,2	6,5	6,0	150	105	1/4"	10
05**032006**001	*107374*	1,2	8,0	7,0	175	112	5/16"	10
05**032007**001	*107381*	1,6	10,0	9,0	200	112	3/8"	5

3350 PH Screwdriver for Phillips screws, stainless



	EAN							
Code	4013288		mm	mm	mm			
05**032020**001 [1]	*107398*	PH 0	60	81	3,0	2 3/8"		5
05**032021**001	*107404*	PH 1	80	98	4,5	3 1/8"		10
05**032022**001	*107411*	PH 2	100	105	6,0	4"		10
05**032023**001	*107428*	PH 3	150	112	8,0	6"		5

[1] without Lasertip

3355 PZ Screwdriver for Pozidriv screws, stainless



Code	EAN							
	4013288		mm	mm	mm			
05**032030**001 [1]	*107435*	PZ 0	60	81	3,0	2 3/8"		5
05**032031**001	*107442*	PZ 1	80	98	4,5	3 1/8"		10
05**032032**001	*107459*	PZ 2	100	105	6,0	4"		10
05**032033**001	*107466*	PZ 3	150	112	8,0	6"		5

[1] without Lasertip

3367 Screwdriver for TORX® screws, stainless



Code	EAN							
	4013288		mm	mm	mm			
05**032050**001	*107473*	TX 8	60	81	3,5	2 3/8"		10
05**032051**001	*107480*	TX 9	60	81	4,0	2 3/8"		10
05**032052**001	*107497*	TX 10	80	81	4,0	3 1/8"		10
05**032053**001	*107503*	TX 15	80	98	4,0	3 1/8"		10
05**032054**001	*107510*	TX 20	100	98	4,5	4"		10
05**032055**001	*107527*	TX 25	100	105	5,0	4"		10
05**032056**001	*107534*	TX 27	115	105	5,5	4 9/16"		10
05**032057**001	*107541*	TX 30	115	105	6,0	4 9/16"		10
05**032058**001	*107558*	TX 40	130	112	7,0	5 3/16"		10

3368 Screwdriver for square socket screws, stainless

- Stainless screwdriver for square socket screws
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Handle markings simplify finding and sorting of tools
- Hexagonal anti-roll feature against rolling away
- Stainless against extraneous rust

3368 Screwdriver for square socket screws, stainless



Code	EAN							
	4013288		mm	mm	mm			
05**032070**002	*114150*	# 1	80	98	4,5	3 1/8"		10
05**032071**002	*114167*	# 2	100	105	6,0	4"		10

3334/6 Screwdriver set, stainless and rack

- Storage rack for wall-mounting

3334/6 Screwdriver set, stainless and rack



Code	EAN 4013288			
05**032060**001	*111388*			1
			3350 PH 1x PH 1x80; 1x PH 2x100	
			3335 1x 0,5x3,0x80 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	
			3334 1x 1,2x6,5x150	

[1] without Lasertip

3334/3355/6 Screwdriver set, stainless and rack

- Storage rack for wall-mounting

3334/3355/6 Screwdriver set, stainless and rack



Code	EAN 4013288			
05**032061**001	*111395*			1
			3355 PZ 1x PZ 1x80; 1x PZ 2x100	
			3335 1x 0,5x3,0x80 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	
			3334 1x 1,2x6,5x150	

[1] without Lasertip

3334/3350/3355/6 Screwdriver set, stainless and rack

- Storage rack for wall-mounting


3334/3350/3355/6 Screwdriver set, stainless and rack



Code	EAN 4013288			
05**032063**001	*111739*			1
			3350 PH 1x PH 1x80; 1x PH 2x100	
			3355 PZ 1x PZ 1x80; 1x PZ 2x100	
			3335 1x 0,5x3,0x80 [1]	
			3334 1x 1,2x6,5x150	

[1] without Lasertip

Wera Chiseldriver

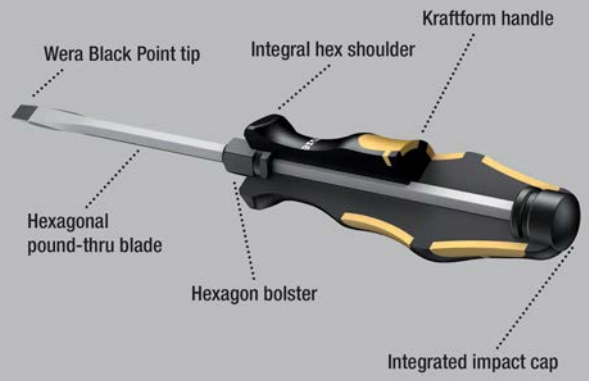

Wera Chiseldriver for fastening, chiselling and loosening seized screws. Multi-component Kraftform handle for fast and low-fatigue working. Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. A hexagon blade out of high quality bit material that extends right through the blade ensures full transfer of force, even when struck with a hammer.

The ductile tempered material prevents the blade from splintering or breaking. Comes with an impact cap for durability and reduced risk of splintering. More torque can be transferred with the help of an open-end or ring spanner applied to the integrated hexagonal bolster.

The Wera Black Point tip and a complex hardening process ensure a long service life of the tip, enhanced corrosion protection and an exact fit. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

932 A Screwdriver for slotted screws



Code	EAN 4013288	mm	mm	mm	mm	mm	mm	
05**018260**001 [1]	*018007*	0,6	3,5	4		80	81	10
05**018262**001	*018014*	0,8	4,5	5	8	90	98	10
05**018264**001	*018021*	1,0	5,5	6	10	100	105	10
05**018266**001	*018038*	1,2	7,0	6	10	125	105	10
05**018268**001	*018045*	1,6	9,0	8	13	150	112	10
05**018270**001	*018052*	1,6	10,0	8	13	175	112	5
05**018272**001 [2]	*018069*	2,0	12,0	10	16	200	117	2
05**018274**001 [2]	*018076*	2,5	14,0	10	16	250	117	2

[1] No throughout blade, no impact cap and no hexagon bolster
[2] Kraftform with non-roll feature, single-component

932 A SB Screwdriver for slotted screws



Code	EAN 4013288		
05**100085**001	*181596*		**932 A** 1x 1.0x5.5x100	10
05**100086**001	*181602*		**932 A** 1x 1.2x7.0x125	10
05**100087**001	*181619*		**932 A** 1x 1.6x9.0x150	10

932 AS Screwdriver for slotted screws

- Hexagonal blade extending through the handle, impact cap with integrated square and bolster

932 AS Screwdriver for slotted screws



Code	EAN 4013288	mm	mm	mm	mm	mm	mm	
05**018300**001	*134486*	0,8	4,5	5	8	100	98	10
05**018301**001	*134462*	1,0	5,5	6	10	113	105	10
05**018302**001	*134455*	1,2	7,0	6	10	138	105	10

917 SPH Screwdriver for Phillips screws





	EAN							
Code	4013288		mm	mm	mm	mm		
05**017005**001	*017734*	PH 1	5	8	80	98	3 1/8"	10
05**017010**001	*017741*	PH 2	6	10	100	105	4"	10
05**017015**001	*017758*	PH 3	8	13	150	112	6"	5
05**017020**001	*017765*	PH 4	10	16	200	117	8"	2

917 SPH SB Screwdriver for Phillips screws





Code	EAN 4013288		
05**100075**001	*181565*	**917 SPH** 1x PH 1x80	10
05**100076**001	*181572*	**917 SPH** 1x PH 2x100	10
05**100077**001	*181589*	**917 SPH** 1x PH 3x150	5

917 SPHS Screwdriver for Phillips screws

- Hexagonal blade extending through the handle, impact cap with integrated square and bolster

917 SPHS Screwdriver for Phillips screws





	EAN							
Code	4013288		mm	mm	mm	mm		
05**017040**001	*134493*	PH 1	5	8	90	98	3 35/64"	10
05**017041**001	*134448*	PH 2	6	10	113	105	4 29/64"	10

918 SPZ Screwdriver for Pozidriv screws





	EAN							
Code	4013288		mm	mm	mm	mm		
05**017050**001	*017772*	PZ 1	5	8	80	98	3 1/8"	10
05**017052**001	*017789*	PZ 2	6	10	100	105	4"	10
05**017054**001	*017796*	PZ 3	8	13	150	112	6"	5
05**017056**001	*017802*	PZ 4	10	16	200	117	8"	2

918 SPZ SB Screwdriver for Pozidriv screws





Code	EAN 4013288		
05**100080**001	*181633*	**918 SPZ** 1x PZ 1x80	10
05**100081**001	*181640*	**918 SPZ** 1x PZ 2x100	10
05**100082**001	*181657*	**918 SPZ** 1x PZ 3x150	5

977 Screwdriver for TORX® screws





	EAN							
Code	4013288		mm	mm	mm	mm		
05**024400**001	*094742*	TX 15	5	8	80	98	3 1/8"	10
05**024401**001	*094759*	TX 20	5	8	90	98	3 1/2"	10
05**024402**001	*094766*	TX 25	6	10	100	105	4"	10
05**024403**001	*094773*	TX 27	6	10	125	105	5"	10
05**024404**001	*094780*	TX 30	8	13	150	112	6"	10
05**024405**001	*094797*	TX 40	8	13	150	112	6"	10

Big Pack 900 Screwdriver set Kraftform Wera: Chiseldriver and rack

- Storage rack for wall-mounting

Big Pack 900 Screwdriver set Kraftform Wera: Chiseldriver and rack





Code	EAN 4013288			
05**133285**001	*176349*			1
			917 SPH 1x PH 1x80; 1x PH 2x100; 1x PH 3x150	
			918 SPZ 1x PZ 1x80; 1x PZ 2x100; 1x PZ 3x150	
			932 A 1x 0,6x3,5x80 [1]; 1x 0,8x4,5x90; 1x 1,0x5,5x100; 1x 1,2x7,0x125; 1x 1,6x9,0x150	
			977 TORX® 1x TX 20x90; 1x TX 25x100	
			Rack 2x 190,0x50,0	

[1] No throughout blade, no impact cap and no hexagon bolster

932/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

- Storage rack for wall-mounting

932/6 Screwdriver set Kraftform Wera: Chiseldriver and rack





Code	EAN 4013288			
05**018282**001	*018090*			1
			917 SPH 1x PH 1x80; 1x PH 2x100	
			932 A 1x 0,6x3,5x80 [1]; 1x 0,8x4,5x90; 1x 1,0x5,5x100; 1x 1,2x7,0x125	

[1] No throughout blade, no impact cap and no hexagon bolster

932 S/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

- Impact cap with integrated square and bolster for the transfer of higher torque
- Storage rack for wall-mounting

932 S/6 Screwdriver set Kraftform Wera: Chiseldriver and rack





Code	EAN 4013288			
05**018283**001	*134479*			1
			917 SPHS 1x PH 1x90; 1x PH 2x113	
			932 A 1x 0,6x3,5x80 [1]	
			932 AS 1x 0,8x4,5x100; 1x 1,0x5,5x113; 1x 1,2x7,0x138	

[1] No throughout blade, no impact cap and no hexagon bolster

932/918/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

- Storage rack for wall-mounting

932/918/6 Screwdriver set Kraftform Wera: Chiseldriver and rack





Code	EAN 4013288			
05**018287**001	*018137*			1
			918 SPZ 1x PZ 1x80; 1x PZ 2x100	
			932 A 1x 0,6x3,5x80 [1]; 1x 0,8x4,5x90; 1x 1,0x5,5x100; 1x 1,2x7,0x125	

[1] No throughout blade, no impact cap and no hexagon bolster

977/6 TORX® Screwdriver set Kraftform Wera: Chiseldriver and rack

- Storage rack for wall-mounting


977/6 TORX® Screwdriver set Kraftform Wera: Chiseldriver and rack





Code	EAN 4013288			
05**024410**001	*094803*			1
			977 TORX® 1x TX 15x80; 1x TX 20x90; 1x TX 25x100; 1x TX 27x125; 1x TX 30x150; 1x TX 40x150	

Kraftform - the shape that adapts to the hand

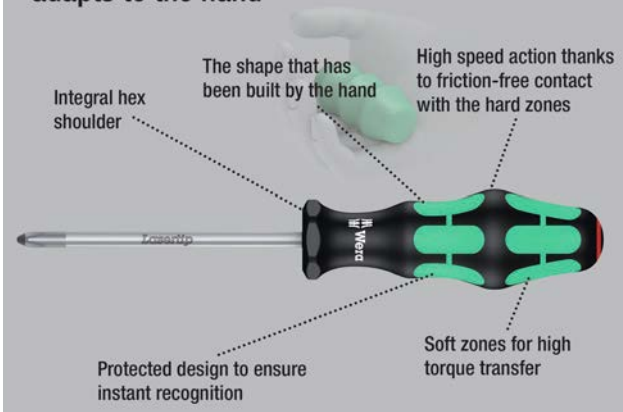


High quality Kraftform Plus screwdriver with electrician's blade. Multi-component Kraftform Plus handle for pleasant, ergonomic working that makes blisters and calluses a thing of the past. Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

The tips of Wera Lasertip screwdrivers are microscopically roughened by means of laser beams. This rough surface literally bites into the head of the screw. Any unintentional slipping out is therefore prevented.

Take it easy tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace and handle markings make for simplified finding and sorting of the tool.

- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Take it easy tool finder: colour coding according to profile and size
- Hexagonal anti-roll feature against rolling away
- Lasertip tips for more secure fit in the screw head

Lasertip - laser engineered blade

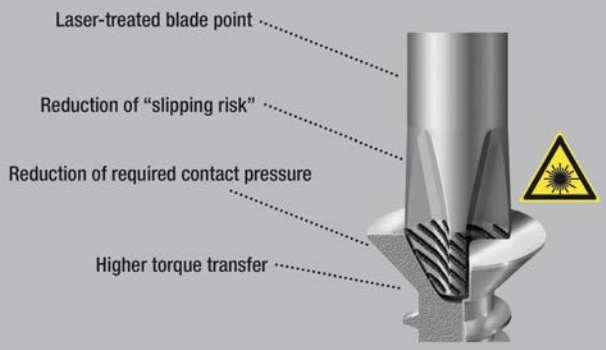

335 Screwdriver for slotted screws








Code	EAN 4013288	mm	mm	mm	mm	mm		
05**008006**001 [1]	*039996*	0,4	2,0	60	70	2,5	5/64"	10
05**110000**001 [1]	*003232*	0,4	2,5	60	70	2,5	3/32"	10
05**008007**001 [1]	*003249*	0,4	2,5	75	70	2,5	3/32"	10
05**110001**001 [1]	*003256*	0,5	3,0	80	81	3,0	1/8"	10
05**008008**001 [1]	*107985*	0,5	3,0	150	81	4,0	1/8"	10
05**008009**001 [1]	*107992*	0,5	3,0	200	81	4,0	1/8"	5
05**008015**001 [1]	*003263*	0,6	3,5	100	81	3,5	9/64"	10
05**110002**001 [1]	*003270*	0,6	3,5	125	81	3,5	9/64"	10
05**110003**001 [1]	*003287*	0,6	3,5	200	81	3,5	9/64"	5
05**110004**001	*003294*	0,8	4,0	100	98	4,0	5/32"	10
05**110005**001	*003300*	0,8	4,0	150	98	4,0	5/32"	10
05**110006**001	*003317*	0,8	4,0	200	98	4,0	5/32"	5
05**008027**001 [1]	*003324*	0,8	4,0	300	98	4,0	5/32"	2
05**110007**001	*003331*	1,0	5,5	125	98	5,5	7/32"	10
05**008055**001	*003348*	1,0	5,5	150	98	5,5	7/32"	10
05**110008**001	*003355*	1,0	5,5	200	98	5,5	7/32"	5
05**008060**001 [1]	*003362*	1,0	5,5	300	98	5,5	7/32"	2
05**008061**001	*108005*	1.2	6.0	100	105	6.0	15/64"	10

[1] without Lasertip

335 SB Slotted screwdriver

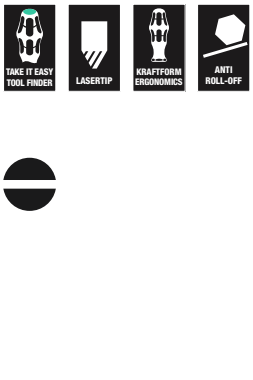

Code	EAN 4013288			
05**100042**001	*181275*		**335** 1x 0.6x3.5x100 [1]	10
05**100043**001	*181251*		**335** 1x 0.8x4.0x100	10
05**100044**001	*181244*		**335** 1x 1.0x5.5x125	10

334 SK Screwdriver for slotted screws

- Hexagonal blade and bolster for higher torque transfer

334 SK Screwdriver for slotted screws



Code	EAN 4013288	mm	mm	mm	mm	mm	mm	
05**007670**001 [1]	*108036*	0,6	3,5	4	-	75	81	10
05**007671**001	*108043*	0,8	4,0	4	-	90	81	10
05**007672**001	*108050*	0,8	4,5	5	8	90	98	10
05**007673**001	*108067*	1,0	5,5	6	10	100	98	10
05**007674**001	*108074*	1,2	6,5	6	10	125	105	10
05**007675**001	*108081*	1,2	7,0	6	10	125	105	10
05**007676**001	*108098*	1,6	9,0	8	13	150	112	10
05**007677**001	*108104*	1,6	10,0	8	13	175	112	5

[1] without Lasertip

334 Screwdriver for slotted screws



Code	EAN 4013288	mm	mm	mm	mm	∅ mm		
05**007610**001	*003058*	0,8	5,0	100	98	5,0	3/16"	10
05**007620**001	*003065*	1,0	6,0	125	105	6,0	1/4"	10
05**340330**001	*102553*	1,0	6,0	150	105	6,0	1/4"	10
05**110010**001	*003089*	1,2	6,5	150	105	6,0	1/4"	10
05**007635**001	*003072*	1,2	7,0	150	105	7,0	9/32"	10
05**007621**001	*108012*	1.2	6.5	200	105	7.0	1/4"	5
05**110011**001	*003096*	1,2	8,0	175	112	7,0	5/16"	5
05**007640**001	*108029*	1,6	8,0	175	112	7,0	5/16"	5
05**110104**001	*003102*	1,6	10,0	200	112	9,0	3/8"	5
05**110105**001 [1]	*003119*	2,0	12,0	250	117	10,0	1/2"	2

[1] without Lasertip

334 SB Screwdriver for slotted screws



Code	EAN 4013288			
05**100030**001	*181411*		**334** 1x 1.2x6.5x150	10
05**100031**001	*181220*		**334** 1x 1.2x8.0x175	5

350 SK PH Screwdriver for Phillips screws

- Hexagonal blade and bolster for higher torque transfer

350 SK PH Screwdriver for Phillips screws



Code	EAN							
	4013288		mm	mm	mm	mm		
05**008750**001 [1]	*108128*	PH 0	4		60	81	2 3/8"	5
05**008751**001	*108135*	PH 1	5	8	80	98	3 1/8"	10
05**008752**001	*108142*	PH 2	6	10	100	105	4"	10
05**008753**001	*108159*	PH 3	8	13	150	112	6"	5

[1] without Lasertip

350 PH Screwdriver for Phillips screws



Code	EAN							
	4013288		mm	mm	mm			
05**008705**001 [1]	*003591*	PH 0	60	81	3,0	2 3/8"		5
05**008706**001 [1]	*108111*	PH 0	100	81	3,0	4"		5
05**008710**001	*003607*	PH 1	80	98	4,5	3 1/8"		10
05**008712**001	*003614*	PH 1	200	98	4,5	8"		2
05**008715**001 [1]	*003621*	PH 1	300	98	4,5	12"		2
05**008720**001	*003638*	PH 2	100	105	6,0	4"		10
05**008723**001	*097996*	PH 2	150	105	6,0	6"		10
05**008725**001	*003645*	PH 2	200	105	6,0	8"		2
05**008730**001 [1]	*003652*	PH 2	300	105	6,0	12"		2
05**008735**001	*003669*	PH 3	150	112	8,0	6"		5
05**008740**001 [1]	*003676*	PH 4	200	112	10,0	8"		2

[1] without Lasertip

350 PH SB Screwdriver for Phillips screws



Code	EAN 4013288			
05**100050**001	*181329*		**350 PH** 1x PH 0x60 [1]	10
05**100051**001	*181336*		**350 PH** 1x PH 1x80	10
05**100052**001	*181343*		**350 PH** 1x PH 2x100	10

[1] without Lasertip

355 SK PZ Screwdriver for Pozidriv screws

- Hexagonal blade and bolster for higher torque transfer

355 SK PZ Screwdriver for Pozidriv screws



Code	EAN							
	4013288		mm	mm	mm	mm		
05**009340**001 [1]	*108180*	PZ 0	4		60	81	2 3/8"	5
05**009341**001	*108197*	PZ 1	5	8	80	98	3 1/8"	10
05**009342**001	*108203*	PZ 2	6	10	100	105	4"	10
05**009343**001	*108210*	PZ 3	8	13	150	112	6"	5

[1] without Lasertip

355 PZ Screwdriver for Pozidriv screws







Code	EAN 4013288		mm	mm	mm			
05**009305**001 [1]	*004024*	PZ 0	60	81	3,0	2 3/8"		10
05**009310**001	*004031*	PZ 1	80	98	4,5	3 1/8"		10
05**009312**001	*004048*	PZ 1	200	98	4,5	8"		2
05**009313**001 [1]	*108166*	PZ 1	300	98	4,5	12"		2
05**009315**001	*004055*	PZ 2	100	105	6,0	4"		10
05**009317**001	*004062*	PZ 2	200	105	6,0	8"		2
05**347743**001	*097040*	PZ 2	250	105	6,0	10"		2
05**009319**001 [1]	*108173*	PZ 2	300	105	6,0	12"		2
05**009320**001	*004079*	PZ 3	150	112	8,0	6"		5
05**009325**001 [1]	*004086*	PZ 4	200	112	10,0	8"		2

[1] without Lasertip

355 PZ SB Screwdriver for Pozidriv screws






Code	EAN 4013288		
05**100055**001	*181282*	**355 PZ** 1x PZ 0x60 [1]	10
05**100056**001	*181299*	**355 PZ** 1x PZ 1x80	10
05**100057**001	*181305*	**355 PZ** 1x PZ 2x100	10

[1] without Lasertip

Hex-Plus - lets hexagon socket screws last longer

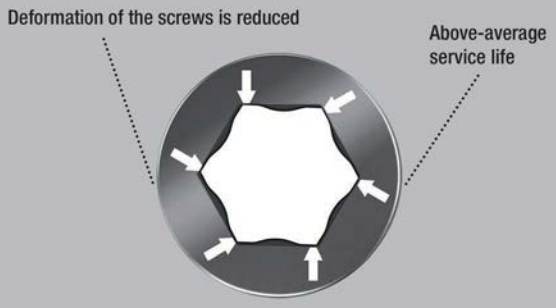

High quality Kraftform Plus screwdriver.

Multi-component Kraftform handle for fast and low-fatigue working. Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

Hex-Plus offers a larger contact surface within the screw head. This reduces the notching effects to a minimum and almost completely eliminates the risk of destroying the screw recess.

Take it easy Tool Finder: colour coding according to profile and size. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

- Hexagonal screwdriver Hex-Plus
- Hex-Plus allows socket head screws to live longer

354 Screwdriver for hexagon socket screws







Code	EAN 4013288	mm	mm	mm	mm			
05**023105**001	*003942*	2,0	75	70	3,0	3"		5
05**023107**001	*003959*	2,5	75	81	3,0	3"		10
05**023110**001	*003966*	3,0	75	81	4,0	3"		10
05**023115**001	*003973*	4,0	75	98	5,0	3"		10
05**023120**001	*003980*	5,0	80	105	6,0	3 1/8"		10
05**023125**001	*003997*	6,0	80	105	7,0	3 1/8"		5
05**023130**001	*004000*	8,0	100	112	10,0	4"		5

352 Ball end screwdriver for hexagon socket screws

- Hexagonal blade and ballpoint for secure working even in difficult installation situations

352 Ball end screwdriver for hexagon socket screws



	EAN							
Code	4013288	mm		mm	mm			
05**022795**001	*032577*	1,5		60	70	2 3/8"		10
05**022800**001	*003751*	2,0		100	70	4"		10
05**138070**001	*003768*	2,5		100	81	4"		10
05**022805**001	*003775*	3,0		100	81	4"		10
05**022810**001	*003782*	4,0		100	98	4"		10
05**022815**001	*003799*	5,0		100	105	4"		10
05**022820**001	*003805*	6,0		125	105	5"		5
05**022825**001	*003812*	8,0		150	112	6"		5
05**022830**001	*003829*	10,0		150	112	6"		5
05**022835**001	*003836*	12,0		150	117	6"		5
05**022905**001	*003843*		5/32"	100	98	4"		5
05**022910**001	*003850*		3/16"	100	105	4"		5
05**022920**001	*003874*		1/4"	125	105	5"		5

TORX® Tools with holding function



High quality Kraftform Plus screwdriver.

Multi-component Kraftform handle for fast and low-fatigue working. Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

Holding function: the wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool.

The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace. Handle markings for simplified finding and sorting of the tool.

- Screwdriver for recessed TORX® screws
- Holding function for TORX® screws
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Handle markings simplify finding and sorting of tools
- Hexagonal anti-roll feature against rolling away

367 TORX® HF Screwdriver with holding function for TORX® screws



	EAN							
Code	4013288		mm	mm	mm			
05**028048**001	*106643*	TX 8	60	81	3,5	2 3/8"		10
05**028049**001	*106650*	TX 9	60	81	4,0	2 3/8"		10
05**028050**001	*100696*	TX 10	80	81	4,0	3 1/8"		10
05**028051**001	*100702*	TX 15	80	98	4,0	3 1/8"		10
05**028052**001	*100719*	TX 20	100	98	4,5	4"		10
05**028070**001	*138415*	TX 20	300	98	4,5	12"		4
05**028053**001	*100726*	TX 25	100	105	5,0	4"		10
05**028071**001	*138408*	TX 25	300	105	6,0	12"		4
05**028054**001	*100733*	TX 27	115	105	5,5	4 9/16"		10
05**028072**001	*138392*	TX 27	300	105	6,0	12"		4
05**028055**001	*100740*	TX 30	115	105	6,0	4 9/16"		10
05**028073**001	*138385*	TX 30	300	105	6,0	12"		4
05**028056**001	*100757*	TX 40	130	112	7,0	5 3/16"		10

367 Screwdriver for TORX® screws



	EAN							
Code	4013288		mm	mm	mm			
05**028000**001	*025852*	TX 5	60	70	3,5	2 3/8"		10
05**028001**001	*004185*	TX 6	60	70	3,5	2 3/8"		10
05**028002**001	*004192*	TX 7	60	70	3,5	2 3/8"		10
05**028003**001	*004208*	TX 8	60	81	3,5	2 3/8"		10
05**028004**001	*004215*	TX 9	60	81	4,0	2 3/8"		10
05**028005**001	*004222*	TX 10	80	81	4,0	3 1/8"		10
05**028008**001	*004239*	TX 15	80	98	4,0	3 1/8"		10
05**028010**001	*004246*	TX 20	100	98	4,5	4"		10
05**028012**001	*004253*	TX 25	100	105	5,0	4"		10
05**028013**001	*004260*	TX 27	115	105	5,5	4 9/16"		10
05**028015**001	*004277*	TX 30	115	105	6,0	4 9/16"		10
05**028020**001	*004284*	TX 40	130	112	7,0	5 1/8"		10

367 SB Screwdriver for TORX® screws



Code	EAN 4013288			
05**100060**001	*181350*		**367 TORX®** 1x TX 10x80	10
05**100061**001	*181367*		**367 TORX®** 1x TX 15x80	10
05**100062**001	*181374*		**367 TORX®** 1x TX 20x100	10
05**100063**001	*181381*		**367 TORX®** 1x TX 25x100	10
05**100064**001	*181398*		**367 TORX®** 1x TX 30x115	10

367 TORX® BO Screwdriver for tamper-proof TORX® screws

High quality Kraftform Plus screwdriver. Multi-component Kraftform handle for fast and low-fatigue working.

TORX® BO screws have a protruding pin in their drive profile. This prevents any unauthorised loosening since the “normal” hex tools cannot move these screws. Only special TORX® BO tools have a bore hole which can slip over the pin.

The Wera Black Point tip and a complex hardening process ensure a long service life of the tip, enhanced corrosion protection and an exact fit.

The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace. Handle markings for simplified finding and sorting of the tool.

- Screwdrivers for recessed TORX® screws with safety pin

367 TORX® BO Screwdriver for tamper-proof TORX® screws



	EAN							
Code	4013288		mm	mm	mm			
05**138257**001	*039965*	TX 7	60	70	3,5	2 3/8"		5
05**138258**001	*039972*	TX 8	60	81	3,5	2 3/8"		5
05**138259**001	*039989*	TX 9	60	81	4,0	2 3/8"		5
05**138260**001	*025869*	TX 10	80	81	4,0	3 1/8"		5
05**138268**001	*108234*	TX 10	300	81	4,0	12"		5
05**138261**001	*025876*	TX 15	80	98	4,0	3 1/8"		5
05**138269**001	*108241*	TX 15	300	98	4,0	12"		2
05**138262**001	*025883*	TX 20	100	98	4,5	4"		5
05**138270**001	*108258*	TX 20	300	98	4,5	12"		2
05**138263**001	*025890*	TX 25	100	105	5,0	4"		5
05**138264**001	*025906*	TX 27	115	105	5,5	4 9/16"		5
05**138265**001	*025913*	TX 30	115	105	6,0	4 9/16"		5
05**138266**001	*025920*	TX 40	130	112	7,0	5 3/16"		5

367 TORX PLUS® Screwdriver for TORX PLUS® screws

High quality Kraftform Plus screwdriver by Wera. TORX PLUS® profile: in comparison to "normal" TORX® profiles, the enlargement of the 6 torque-transferring flanks between the tool and screw is implemented by using an elliptical and not circular profile design.

This means that the power applied when fastening is spread across a larger surface area. Higher torque is transferred and the service life of the screw and tool is also enhanced. Multi-component Kraftform handle for rapid and convenient working.

Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. The Wera Black Point tip offers a perfect fit and optimised corrosion protection. The hexagonal non-roll feature prevents any annoying rolling away at the workplace. Handle markings for simplified finding and sorting of the tools.

367 TORX PLUS® Screwdriver for TORX PLUS® screws

KRAFTFORM ERGONOMICS | ANTI ROLL-OFF | BLACK POINT



	EAN							
Code	4013288		mm	mm	mm			
05**028029**001	*041555*	5 IP	60	70	3,5	2 3/8"		5
05**028030**001	*040091*	6 IP	60	70	3,5	2 3/8"		5
05**028031**001	*040107*	7 IP	60	70	3,5	2 3/8"		5
05**028032**001	*040114*	8 IP	60	70	3,5	2 3/8"		5
05**028033**001	*040121*	9 IP	60	81	4,0	2 3/8"		5
05**028034**001	*040138*	10 IP	80	81	4,0	3 1/8"		5
05**028035**001	*040145*	15 IP	80	98	4,0	3 1/8"		5
05**028036**001	*040152*	20 IP	100	98	4,5	4"		5
05**028037**001	*040169*	25 IP	100	105	5,0	4"		5
05**028038**001	*040176*	30 IP	115	105	6,0	4 9/16"		5

368 Screwdriver for square socket head screws

High quality Kraftform Plus screwdriver for square socket screws. The colour coding system allows the user to quickly find and identify the size needed. Multi-component Kraftform handle for fast and low-fatigue working.

The Wera Black Point tip offers optimised corrosion protection and an exact fit. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace. Handle markings for simplified finding and sorting of the tool.

368 Screwdriver for square socket head screws

BLACK POINT | KRAFTFORM ERGONOMICS | ANTI ROLL-OFF



	EAN							
Code	4013288			mm	mm	mm		
05**117680**001	*028723*		# 00	60	81	3,5	2 3/8"	5
05**117681**001	*028730*		# 0	60	81	4,0	2 3/8"	5
05**117682**001	*028747*		# 1	80	98	4,5	3 1/8"	5
05**117683**001	*028754*		# 1	200	98	4,5	8"	5
05**117684**001	*028761*		# 2	100	105	6,0	4"	5
05**117685**001	*028778*		# 2	200	105	6,0	8"	5
05**117691**001	*040916*		# 2	300	105	6,0	12"	2
05**117686**001	*028785*		# 3	150	112	8,0	6"	5
05**117687**001	*028792*		# 4	200	112	8,0	8"	5

368 SB Screwdriver for square socket head screws

BLACK POINT | KRAFTFORM ERGONOMICS | ANTI ROLL-OFF



Code	EAN 4013288			
05**100070**001	*181404*		**368** 1x # 1x80	5
05**100071**001	*181428*		**368** 1x # 2x100	5
05**100072**001	*181435*		**368** 1x # 3x150	5

338 Actuation tool for terminal blocks (spring cages)

- Special tool for unlocking contact springs in electrotechnical line terminals
- Due to the curved geometry, even terminal blocks that cannot be reached with normal screwdrivers can be operated
- Suitable for spring terminals with a conductor cross-section of up to 1.5 mm² and 2.5 to 4.0 mm²

338 Actuation tool for terminal blocks (spring cages)



	EAN							
Code	4013288	mm	mm	mm	mm	mm		
05**008101**001	*225641*	0,4	2,5	81	81	2,5	3/32"	10
05**008102**001	*225788*	0,6	3,5	81	81	3,5	9/64"	10

391 Hose clamp screwdriver

- Hose clamp screwdriver for hexagon head screws
- Flexible, circular blade

391 Hose clamp screwdriver



	EAN							
Code	4013288	mm	mm	mm				
05**028148**001	*004703*	6	167	98	6 9/16"			5
05**028150**001	*004710*	7	167	98	6 9/16"			5
05**028152**001	*004727*	8	167	98	6 9/16"			5

395 Nutdriver

- Nutsetter for hexagon head screws

395 Nutdriver





	EAN							
Code	4013288	mm	mm	mm	mm			
05**028205**001	*004734*	3,0	125	98	5,0	5"		5
05**028210**001	*004741*	3,5	125	98	6,1	5"		5
05**028215**001	*004758*	4,0	125	98	6,9	5"		5
05**028220**001	*004765*	4,5	125	98	7,1	5"		5
05**028225**001	*004772*	5,0	125	98	8,1	5"		5
05**028230**001	*004789*	5,5	125	98	8,1	5"		5
05**029405**001	*004796*	6,0	125	98	9,1	5"		5
05**029410**001	*004802*	7,0	125	105	11,0	5"		5
05**029415**001	*004819*	8,0	125	105	12,1	5"		5
05**029420**001	*004826*	9,0	125	105	13,1	5"		5
05**029425**001	*004833*	10,0	125	112	14,1	5"		5
05**029430**001	*004840*	11,0	125	112	16,0	5"		5
05**029435**001	*004857*	12,0	125	112	17,1	5"		5
05**029440**001	*004864*	13,0	125	112	18,1	5"		5
05**029445**001	*004871*	14,0	125	112	19,1	5"		5
05**029450**001	*004888*	15,0	125	112	21,0	5"		5

395 HO Nutdriver

High quality nutsetter with hollow shaft by Wera. Hollow shaft for the fastening of threaded rods; only then can the threaded rod with nut slip into the hollow shaft. Multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving.

Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Hexagonal anti-roll feature prevents any rolling away and handle markings make for simplified finding and sorting of the tool; for hexagon head screws.

- Nutsetter for hexagon head screws
- Hollow shaft for protruding threaded rods, chrome-plated

395 HO Nutdriver



	EAN							
Code	4013288	mm		mm	mm	mm		
05**029460**001	*108296*	5,0		90	98	7,2	3 35/64"	5
05**029461**001	*108302*	5,5		90	98	7,2	3 35/64"	5
05**029462**001	*108319*	6,0		90	98	7,2	3 35/64"	5
05**029463**001	*108326*	7,0		90	105	7,2	3 35/64"	5
05**029464**001	*108333*	8,0		90	105	9,3	3 35/64"	5
05**029465**001	*108340*	10,0		90	112	9,3	3 35/64"	5
05**029466**001	*108357*	13,0		90	112	11,0	3 35/64"	5
05**029501**001	*110503*		3/16"	90	98	7,2	3 35/64"	5
05**029502**001	*110510*		1/4"	90	98	7,2	3 35/64"	5
05**029503**001	*110527*		5/16"	90	105	9,3	3 35/64"	5
05**029504**001	*110534*		11/32"	90	105	9,3	3 35/64"	5
05**029505**001	*110541*		3/8"	90	112	9,3	3 35/64"	5
05**029506**001	*110558*		7/16"	90	112	11,0	3 35/64"	5
05**029507**001	*110565*		1/2"	90	112	11,0	3 35/64"	5

Take it easy tool finder with color markings - for quick tool identification

Bits: Take it easy tool finder



Zyklop sockets: Take it easy tool finder



L-Keys: Take it easy tool finder



Joker: Take it easy tool finder



Especially small screwdrivers with short blades for hard to reach areas. The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working.

The blades have all the benefits of the Wera Bit technology. Special surface treatment of the blades for high corrosion protection and optimum fitting accuracy in the screw.

The hexagon anti-roll protection prevents annoying rolling away of bits in the workplace.

- Short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Blades with the benefits of the Wera Bit technology
- Hexagonal anti-roll feature against rolling away
- Take it easy tool finder: colour coding according to profile and size

335 Stubby/carburetor screwdriver



	EAN							
Code	4013288	mm	mm	mm	mm	mm		
05**008840**001	*212115*	0,6	3,5	24,5	54	3,5	9/64"	5
05**008841**001	*212122*	0,8	4,0	24,5	54	4,0	5/32"	5
05**008842**001	*212139*	1,0	5,5	24,5	54	5,5	7/32"	5
05**008843**001	*212146*	1,2	6,5	24,5	54	6,5	1/4"	5
05**008844**001	*212153*	1,2	7,0	24,5	54	8,0	5/16"	5

350 PH Phillips-head Stubby/carburetor screwdriver



	EAN							
Code	4013288		mm	mm	mm			
05**008850**001	*212160*	PH 1	25	54	4,2	1"		5
05**008851**001	*212177*	PH 2	25	54	5,2	1"		5
05**008852**001	*212184*	PH 3	25	54	6,2	1"		5

355 PZ Phillips-head Stubby/carburetor screwdriver



	EAN							
Code	4013288		mm	mm	mm			
05**008853**001	*212191*	PZ 1	25	54	4,5	1"		5
05**008854**001	*212207*	PZ 2	25	54	6,0	1"		5
05**008855**001	*212214*	PZ 3	25	54	8,0	1"		5

367 TORX® Stubby screwdriver



	EAN							
Code	4013288		mm	mm	mm			
05**008856**001	*212245*	TX 10	25	54	3,4	1"		5
05**008857**001	*212252*	TX 15	25	54	3,7	1"		5
05**008858**001	*212269*	TX 20	25	54	4,0	1"		5
05**008859**001	*212276*	TX 25	25	54	4,5	1"		5
05**008860**001	*212283*	TX 27	25	54	5,1	1"		5
05**008861**001	*212290*	TX 30	25	54	5,6	1"		5
05**008862**001	*212306*	TX 40	25	54	-	1"		5

368 Stubby screwdriver for square head socket screws







	EAN							
Code	4013288			mm	mm	mm		
05**008863**001	*212313*		# 01	25	54	4,2	1"	5
05**008864**001	*212320*		# 02	25	54	4,2	1"	5

9650 Magnetic rail Kraftform screwdriver set

Kraftform screwdriver set, 9-piece set, on a magnetic rail. Screwdriver all-round set. Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer.

932 A with pound-thru hexagonal blade and impact cap; 350, 355 and 335 with Lasertip: The tips of Wera Lasertip screwdrivers are microscopically roughened with laser beams.

This rough surface “bites” into the screw head and unintentional slipping is a thing of the past. 160 iS VDE-insulated and with Lasertip.

“Take it easy” Tool finder with colour coding by profile and size stamping - for quick and easy identification of the required tool. The clips hold the tools perfectly. With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall.

- For every application the right tool
- The clips hold the tools perfectly
- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall

9650 Magnetic rail Kraftform screwdriver set






Code	EAN 4013288			
05**051012**001	*228970*			1
			932 A 1x 1,0x5,5x100; 1x 1,2x7,0x125	
			350 1x PH 2x100	
			355 1x PZ 1x80; 1x PZ 2x100	
			367 TORX® 1x TX 20x100; 1x TX 25x100	
			335 1x 0,8x4,0x100	
			160 iS VDE 1x 0,6x3,5x100	
			9611 1x 30,0x400,0	

Kraftform Big Pack 300

- Screwdrivers for slotted, cross-recess Phillips and Pozidriv screws and TORX®

Kraftform Big Pack 300







Code	EAN 4013288			
05**105630**001	*163622*			1
			350 PH 1x PH 1x80; 1x PH 2x100; 1x PH 3x150	
			355 PZ 1x PZ 1x80; 1x PZ 2x100; 1x PZ 3x150	
			367 TORX® 1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100; 1x TX 30x115	
			334 1x 1,2x6,5x150	
			335 1x 0,6x3,5x100 [1]; 1x 0,8x4,0x100	
			Rack 2x 190,0x50,0	

[1] without Lasertip

Kraftform XXL

- For every application the right tool

Kraftform XXL



Code	EAN 4013288			
05**051010**001	*139092*			1
			350 PH 1x PH 1x80; 1x PH 2x100	
			355 PZ 1x PZ 1x80; 1x PZ 2x100	
			932 A 1x 1,0x5,5x100; 1x 1,2x7,0x125	
			334 1x 1,2x6,5x150	
			335 1x 0,8x4,0x100; 1x 1,0x5,5x125	
			160 i VDE 1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1]	
			247 1x 0,5x3,0x70	
			Rack 2x 190,0x50,0	

[1] without Lasertip
*Product not available in the USA and Canada.

Kraftform XXL 2



Code	EAN 4013288			
05**051011**001	*144225*			1
			350 PH 1x PH 2x100	
			355 PZ 1x PZ 1x80; 1x PZ 2x100	
			932 A 1x 1,0x5,5x100; 1x 1,2x7,0x125	
			335 1x 0,8x4,0x100	
			367 TORX® 1x TX 15x80; 1x TX 20x100; 1x TX 25x100	
			160 i VDE 1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1]	
			247 1x 0,5x3,0x70	
			Rack 2x 190,0x50,0	

[1] without Lasertip
*Product not available in the USA and Canada.

Kraftform XXL 3



Code	EAN 4013288			
05**347106**001	*182388*			1
			932 A 1x 1,0x5,5x100; 1x 1,2x7,0x125	
			350 PH 1x PH 1x80; 1x PH 2x100	
			334 1x 1,2x6,5x150	
			335 1x 0,8x4,0x100; 1x 1,0x5,5x125	
			368 1x # 1x80; 1x # 2x100	
			160 i VDE 1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1]	
			Rack 2x 190,0x50,0	

[1] without Lasertip

Kraftform 2go 300

11 Kraftform screwdrivers; with Take it easy Toolfinder; in the Wera 2go 4 quiver; comes with an adjustable partition element for individual sectioning.

- Suitable for docking with the Wera 2go system

Kraftform 2go 300



Code	EAN 4013288			
05**004313**001	*187833*			1
			Wera 2go 4 1x 165,0x165,0x105,0	
			350 PH 1x PH 1x80; 1x PH 2x100	
			355 PZ 1x PZ 1x80; 1x PZ 2x100	
			367 TORX® 1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100; 1x TX 30x115	
			334 SK 1x 0,8x4,5x90; 1x 1,2x7,0x125	
			K120 1x 50,0x120,0	

334 SK/6 Rack Screwdriver set Kraftform Plus Lasertip and rack

- Hexagonal blade and bolster for higher torque transfer

334 SK/6 Rack Screwdriver set Kraftform Plus Lasertip and rack



Code	EAN 4013288			
05**007680**001	*111418*			1
			350 SK PH 1x PH 1x80; 1x PH 2x100	
			334 SK 1x 0,6x3,5x75 [1]; 1x 0,8x4,0x90; 1x 1,0x5,5x100; 1x 1,2x6,5x125	

[1] without Lasertip

334/6 Rack Screwdriver set Kraftform Plus Lasertip and rack



Code	EAN 4013288			
05**105650**001	*003133*			1
			350 PH 1x PH 1x80; 1x PH 2x100	
			334 1x 1,2x6,5x150	
			335 1x 0,5x3,0x80 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	

[1] without Lasertip

334/355 SK/6 Screwdriver set Kraftform Plus Lasertip and rack

- Hexagonal blade and bolster for higher torque transfer

334/355 SK/6 Screwdriver set Kraftform Plus Lasertip and rack



Code	EAN 4013288			
05**007681**001	*111425*			1
			355 SK PZ 1x PZ 1x80; 1x PZ 2x100	
			334 SK 1x 0,6x3,5x75 [1]; 1x 0,8x4,0x90; 1x 1,0x5,5x100; 1x 1,2x6,5x125	

[1] without Lasertip

334/355/6 Rack Screwdriver set Kraftform Plus Lasertip and rack



Code	EAN 4013288			
05**105656**001	*003140*			1
			355 PZ 1x PZ 1x80; 1x PZ 2x100	
			334 1x 1,2x6,5x150	
			335 1x 0,5x3,0x80 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	

[1] without Lasertip

335/350/355/6 Screwdriver set Kraftform Plus Lasertip and rack



Code	EAN 4013288			
05**105622**001	*041616*			1
			350 PH 1x PH 1x80; 1x PH 2x100	
			355 PZ 1x PZ 1x80; 1x PZ 2x100	
			335 1x 0,8x4,0x100; 1x 1,0x5,5x125	

335/350/355/3 Screwdriver set Kraftform Plus 300 mm-long blades

- Extra-long blade for low-lying working situations

335/350/355/3 Screwdriver set Kraftform Plus 300 mm-long blades



Code	EAN 4013288			
05**347735**002	*120991*			1
			335 1x 1,0x5,5x300 [1]	
			350 PH 1x PH 2x300 [1]	
			355 PZ 1x PZ 2x300 [1]	

[1] without Lasertip

335/350/355/4 Screwdriver set Kraftform Plus Lasertip 200 mm-long blades

- Extra-long blade for low-lying working situations

335/350/355/4 Screwdriver set Kraftform Plus Lasertip 200 mm-long blades



Code	EAN 4013288			
05**347736**002	*117397*			1
			350 PH 1x PH 2x200	
			355 PZ 1x PZ 1x200; 1x PZ 2x200	
			335 1x 1,0x5,5x200	

335/350/367/7 Rack Screwdriver set Kraftform Plus Lasertip and rack




Code	EAN 4013288			
05**320540**001	*094704*			1
			350 PH 1x PH 2x100	
			355 PZ 1x PZ 1x80; 1x PZ 2x100	
			335 1x 0,8x4,0x100	
			367 TORX® 1x TX 15x80; 1x TX 20x100; 1x TX 25x100	

367/7 TORX® HF Kraftform Plus Screwdriver set with holding function and rack

- Holding function for TORX® screws, chrome-plated

367/7 TORX® HF Kraftform Plus Screwdriver set with holding function and rack

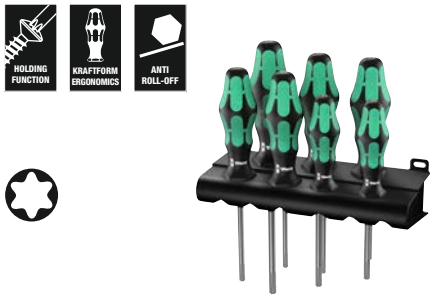

Code	EAN 4013288			
05**223161**001	*118226*			1
			367 TORX® HF 1x TX 8x60; 1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100; 1x TX 27x115; 1x TX 30x115	

367/6 TORX® HF Kraftform Plus Screwdriver set with holding function and rack




Code	EAN 4013288			
05**028059**001	*100764*			1
			367 TORX® HF 1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100; 1x TX 30x115; 1x TX 40x130	

367/4 TORX® HF Kraftform Plus Screwdriver set with holding function and 300 mm-long blades

- Screwdriver for TORX® screws; holding function and extra-long 300 mm blade

367/4 TORX® HF Kraftform Plus Screwdriver set with holding function and 300 mm-long blades

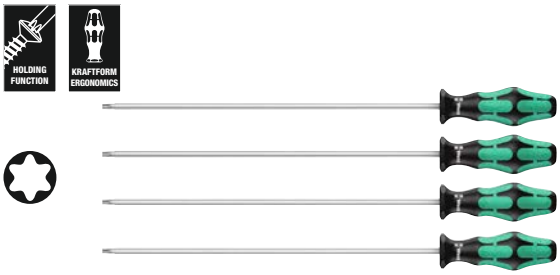

Code	EAN 4013288			
05**028074**001	*138378*			1
			367 TORX® HF 1x TX 20x300; 1x TX 25x300; 1x TX 27x300; 1x TX 30x300	

367/6 TORX® Screwdriver set Kraftform Plus and rack



Code	EAN 4013288			
05**028062**001	*028891*			1
			367 TORX® 1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100; 1x TX 30x115; 1x TX 40x130	

334/368/6 Screwdriver set and rack



Code	EAN 4013288			
05**347778**001	*122735*			1
			350 PH 1x PH 1x80; 1x PH 2x100	
			334 1x 1,2x6,5x150	
			335 1x 0,8x4,0x100	
			368 1x # 1x80; 1x # 2x100	

367/6 TORX® BO Kraftform Plus Screwdriver set and rack

- Screwdrivers for recessed TORX® screws with safety pin

367/6 TORX® BO Kraftform Plus Screwdriver set and rack



Code	EAN 4013288			
05**138250**001	*028907*			1
			367 TORX® BO 1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100; 1x TX 30x115; 1x TX 40x130	

395 HO/7 SM Nutdriver set

- Nutsetter for hexagon head screws
- Hollow shaft for protruding threaded rods, chrome-plated

395 HO/7 SM Nutdriver set



Code	EAN 4013288			
05**029510**001	*111432*			1
			395 HO 1x 5,0x90; 1x 5,5x90; 1x 6,0x90; 1x 7,0x90; 1x 8,0x90; 1x 10,0x90; 1x 13,0x90	

338/2 Set of actuation tools for terminal blocks (spring cages)

Set with 2 actuation tools for spring terminals. The curved blades also make it easy to operate spring terminals in distribution boxes which cannot be reached with a straight blade.

The blade stays in the terminal block, leaving both hands free to insert the wire. Multi-component Kraftform handle for fast and smooth work.

- Special tool for unlocking contact springs in electrotechnical line terminals
- Due to the curved geometry, even terminal blocks that cannot be reached with normal screwdrivers can be operated
- Suitable for spring terminals with a conductor cross-section of up to 1.5 mm² and 2.5 to 4.0 mm²

338/2 Set of actuation tools for terminal blocks (spring cages)



Code	EAN 4013288			
05**008100**001	*225658*			1
			338 1x 0,4x2,5x81; 1x 0,6x3,5x81	

391/3 Hose clamp screwdriver set

- Flexible, circular blade

391/3 Hose clamp Screwdriver set



Code	EAN 4013288			
05**135311**001	*169860*			1
			391 1x 6x167; 1x 7x167; 1x 8x167	

395 HO/3 Sanitary Nutdriver set

- Nutsetter for hexagon head screws, chrome-plated
- With hollow shaft for protruding threaded rods, particularly suitable for installing/removing mixer taps on washbasins

395 HO/3 Sanitary Nutdriver set



Code	EAN 4013288			
05**134275**001	*207616*			1
			395 HO 1x 10,0x90; 1x 13,0x90; 1x $^{7}/_{16}$"x90	

Stubby Set 1 Screwdriver set

Especially small screwdrivers with short blades for hard to reach areas. The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working.

The blades have all the benefits of the Wera Bit technology. Special surface treatment of the blades for high corrosion protection and an optimum fit in the screw head.

The hexagon anti-roll protection prevents annoying rolling away of bits in the workplace.

- Short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Blades with the benefits of the Wera Bit technology
- Hexagonal anti-roll feature against rolling away
- Take it easy tool finder: colour coding according to profile and size

Stubby Set 1 Screwdriver set



Code	EAN 4013288			
05**008870**001	*212337*			1
			335 Stubby 1x 0,6x3,5x24,5; 1x 0,8x4,0x24,5; 1x 1,0x5,5x24,5	
			350 PH Stubby 1x PH 1x25; 1x PH 2x25	

Stubby Set 2 Screwdriver set





Code	EAN 4013288			
05**008871**001	*212344*			1
			335 Stubby 1x 0,6x3,5x24,5; 1x 0,8x4,0x24,5; 1x 1,0x5,5x24,5	
			355 PZ Stubby 1x PZ 1x25; 1x PZ 2x25	


Stubby Set 3 Screwdriver set





Code	EAN 4013288			
05**008872**001	*214096*			1
			350 PH Stubby 1x PH 1x25; 1x PH 2x25	
			335 Stubby 1x 1,0x5,5x24,5	
			368 Stubby 1x # 01x25; 1x # 02x25	


Stubby Set TX 1 Screwdriver set TORX®





Code	EAN 4013288			
05**008876**001	*212351*			1
			367 TORX® Stubby 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	

Bicycle Big Pack 1

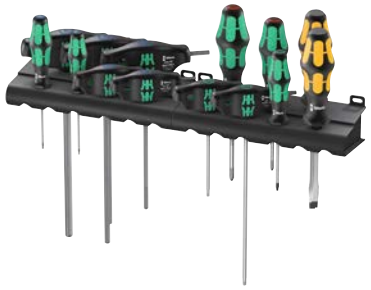

Code	EAN 4013288			
05**004190**001	*220745*			1
			354 Hex-Plus 1x 2,0x75; 1x 2,5x75	
			454 HF 1x 3x100; 1x 4x150; 1x 5x150; 1x 6x200; 1x 8x200	
			367 TORX® 1x TX 10x80	
			467 TORX® HF 1x TX 20x100; 1x TX 25x200	
			932 A 1x 1,0x5,5x100; 1x 1,2x7,0x125	
			350 PH 1x PH 1x80; 1x PH 2x100	

1850 PH Kraftform Ball-Grip Phillips-head screwdriver

Screwdriver with Kraftform handle series 1800 for Phillips-head screws. The handle fits perfectly in the hand. The convex shape allows the transmission of high torques.

The soft handle zones ensure a good grip and low-loss power transmission. The hard handle zones allow a high power transmission, even when pressure is applied with the ball of the hand. The recesses at the upper end of the handle facilitate fine adjustment while screwdriving.

Due to the narrow transition between handle and blade, even sunken screws in narrow areas can be easily reached.

The anti-roll protection at the rear end of the handle hinders the tool from rolling away annoyingly at the workplace. The tips of Wera Lasertip screwdrivers are microscopically roughened with laser beams.

This rough surface “bites” into the screw head which avoids unintentional slipping out of the screw.

- Screwdriver for cross-recess screws, Phillips
- Kraftform series 1800 handle for high torques
- Soft handle zones for high power transmission
- Hard handle zones for palm pressure
- Handle recesses for your fingers allow fine adjustment
- Narrow transition between handle and blade for hard-to-reach and sunken screws in tight areas
- Take it easy tool finder: colour coding according to profile and size
- Lasertip tips for more secure fit in the screw head

1850 PH Kraftform Ball-Grip Phillips-head screwdriver







	EAN							
Code	4013288		mm	mm	mm	mm		
05**007905**001	*222770*	PH 1	50	80	135	4,5	2"	10
05**007906**001	*222695*	PH 2	70	100	135	6,0	2 3/4"	10
05**007907**001	*222701*	PH 2	120	150	135	6,0	4 23/32"	10
05**007908**001	*222718*	PH 3	120	150	135	8,0	4 23/32"	10

1855 PZ Kraftform Ball-Grip Pozidriv-head screwdriver

- Screwdriver for Pozidriv screws

1855 PZ Kraftform Ball-Grip Pozidriv-head screwdriver







	EAN							
Code	4013288		mm	mm	mm	mm		
05**007910**001	*222725*	PZ 2	70	100	135	6,0	2 25/32"	10

1834 Kraftform Ball-Grip Slotted screwdriver – workshop blade

- Slotted screwdriver - workshop blade

1834 Kraftform Ball-Grip Slotted screwdriver – workshop blade







	EAN								
Code	4013288	mm	mm	mm	mm	mm	mm	mm	
05**007900**001	*222671*	1,0	6,0	70	100	135	6,0	10
05**007901**001	*222688*	1,0	6,0	120	150	135	6,0	10

9621 Belt holster Set 2

The tool set for the belt. The tool holster has 5 zones for inserting and accessing the required tools at any time. The holster has a robust construction, is made of tear-resistant material and is also suitable for use in adverse conditions. The included tools can be supplemented or exchanged individually. The holster can be worn on the hips. Ideal for mobile use at different locations.

Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer.


Includes some tools with Lasertip: The tips of Wera Lasertip screwdrivers are microscopically roughened with laser beams. This rough surface “bites” into the screw head and unintentional slipping is a thing of the past. Take it easy tool finder with colour coding by profile and size stamping - for quick and easy identification of the required tool.

Including chiseldriver with pound-thru hexagonal blade made of premium bit material which ensures power transmission without loss even at hammer blows.

Some of the screwdrivers are equipped with ball handles, which allows a lot of pressure to be transferred while screwdriving. The palm encloses the handle from above, which allows high torques and high axial forces.

- Belt holster for perfect tool organization and instant access to the required tools
- Screwdriver for cross recess screws Phillips and Pozidriv, TORX®, slotted (VDE), and chiseldriver for screwdriving, chiselling, mortising
- Some of the tools come with a ball handle to achieve high axial forces and particularly high torques during manual screwdriving

9621 Belt holster Set 2





Code	EAN 4013288			
05**136033**001	*227621*			1
			1850 PH 1x PH 1x80; 1x PH 2x100	
			1834 1x 1,0x6,0x100	
			932 A 1x 1,0x5,5x100	
			162 i VDE PH 1x PH 1x80; 1x PH 2x100	
			160 i VDE 1x 0,6x3,5x100 [1]	
			9522 1x 170,0x240,0	

[1] without Lasertip

1267 A TORX® Flagdriver for TORX® screws

High quality Wera flagdriver for recessed TORX® screws. High torque transfer for small screws. Particularly suitable for exchanging indexable inserts.

The BlackLaser surface treatment provides outstanding surface protection, even against corrosion, and a long service life. Multi-component for outstanding grip.

- TORX® flagdriver for recessed TORX® screws
- Multi-component handle
- Circular blade with BlackLaser treatment for outstanding surface protection and long service life
- High corrosion protection
- High torque transfer for small screws

1267 A TORX® Flagdriver for TORX® screws



	EAN				∅			
Code	4013288		mm	mm	mm			
05**026350**001	*093516*	TX 6	33	62,0	3,0	1 19/64"		10
05**026351**001	*093523*	TX 7	33	62,0	3,0	1 19/64"		10
05**026352**001	*093530*	TX 8	40	69,0	3,0	1 37/64"		10
05**026353**001	*093547*	TX 9	40	69,0	3,0	1 37/64"		10
05**026354**001	*093554*	TX 10	40	69,0	3,0	1 37/64"		10

1267 A TORX PLUS® Flagdriver for TORX PLUS® screws



	EAN				∅			
Code	4013288		mm	mm	mm			
05**026360**001	*093561*	6 IP	33	62,0	3,0	1 19/64"		10
05**026361**001	*093578*	7 IP	33	62,0	3,0	1 19/64"		10
05**026363**001	*093608*	9 IP	40	69,0	3,0	1 37/64"		10

1267 B TORX® combination flagdriver for TORX® and hexagon socket screws

High quality Wera flagdrivers with combination profiles for recessed TORX and socket head screws. High torque can be applied to small screws. Particularly suitable for the replacement of indexable inserts. The BlackLaser surface treatment provides outstanding surface protection, even against corrosion, and a long service life. Multi-component for an especially good grip.

1267 B TORX® Combination flagdriver for TORX® and hexagon socket screws



	EAN							
Code	4013288		mm	mm	mm			
05**026372**001	*093639*	TX 15	3,5	47	86,0	1 27/32"		10
05**026373**001	*093707*	TX 15	4	47	86,0	1 27/32"		10
05**026374**001	*093646*	TX 20	4	47	86,0	1 27/32"		10

1267 B TORX PLUS® Combination flagdriver for TORX PLUS® and hexagon socket screws



	EAN							
Code	4013288		mm	mm	mm			
05**026382**001	*093677*	15 IP	3,5	47	86,0	1 27/32"		10

9500 Magnetiser SB

Wera magnetiser to magnetise and demagnetise tools to ensure the screw remains firmly on the blade.

- To magnetise and demagnetise tool tips
- To magnetise, move the tool tip along the positive side
- To demagnetise, move the tool tip along the negative side

9500 Magnetiser SB



	EAN							
Code	4013288	mm						
05**033404**001	*219589*	64,6						1

1427 Awl



	EAN							
Code	4013288	mm	mm					
05**027405**001	*019998*	105	92	4 3/16"				5

1428 Reamer



	EAN							
Code		mm	mm					
05**027455**001	*020000*	107	92	4 9/32"				5

9611 Magnetic rail for up to 9 Kraftform screwdrivers, empty

- The clips hold the tools perfectly
- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall

9611 Magnetic rail for up to 9 Kraftform screwdrivers, empty



	EAN							
Code	4013288	mm	mm					
05**136414**001	*230690*	30,0	400,0					1

Rack for Kraftform Micro screwdrivers



		mm	mm					
05**134002**001	*100047*	190,0	80					1

Rack for Kraftform screwdrivers




	EAN							
Code	4013288	mm	mm					
05**134001**001	*100030*	190,0	50,0					1

1440/1442 Screw gripper set

Screw gripper set: attachment tool with holding function for screws. Holds all screw profiles securely on the tool.

During the job, the gripper can be pushed up along the blade so that it is not in the way when working with low-lying screws.

- Screw gripper set
- Attachment tool with holding function for screws
- Holds all screw profiles and sizes securely on the tool
- Made out of stable, elastomer material

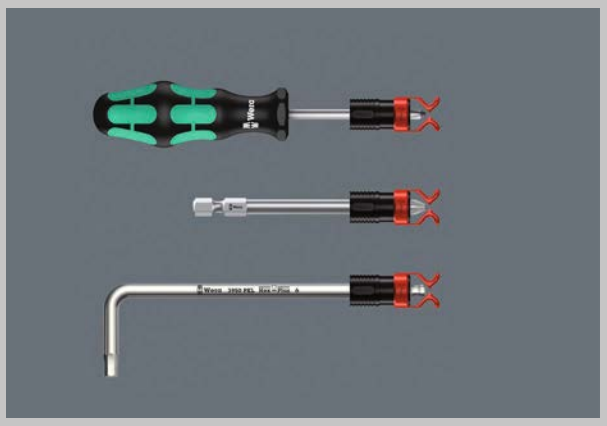


1441 SB Screw gripper attachment for screwdriver blades, long bits and L-keys, with holding function for screws



	EAN	∅						
Code	4013288	mm	mm					
05**073681**001	*140357*	4,5-6,0	41,0					1

1440/1442 Screw gripper set



Code	EAN 4013288			
05**073680**001	*140340*			1
			1440 1x 4,5-6,0x41,0	
			1442 1x 6,0-8,5x41,0	

9108/2 PV Set of installation tools for MC4 Solar connectors

Set consisting of 2 installation tools for MC4 solar connectors (Multi-Contact).

- 2x 9108 installation tools for MC4 solar connectors (Multi-Contact)
- For attaching and disconnecting MC4 connectors
- Glass fibre reinforced plastic

9108/2 PV Set of installation tools for MC4 Solar connectors



Code	EAN 4013288			
05**136700**001	*230461*			1
			9108 2x 115	

9523 Chain riveter spare part kit

- With chain riveter and chain fastener with exchangeable rivet pin for opening and closing bicycle chains. Suitable for single-speed chains, up to 12-speed

9523 Chain riveter spare part kit



Code	EAN 4013288			
05**136039**001	*227867*			1
			9513 Chain Tool	
			9512 Chain-Hook	

Bicycle Set 13

2-piece tyre lever set for the mobile and stationary use. Both tyre levers are made of glass fibre reinforced plastic: 9502 tyre lever with bit mounting, which is also suitable to secure the French valve, and 9503 tyre lever with valve ejector.

With the glass fibre reinforced plastic tyre levers, the tyres can be safely levered off the rim without damaging the rim.

- 2 tyre levers (9502+9503) made of glass fibre reinforced plastic
- Safely lever the tyres off of the rim without damaging the rim
- The 1/4" hexagon mounting in the 9502 tyre lever allows the fixing of French valves and the use of a 1/4" bit
- 9503 tyre lever with valve ejector and deflater

Bicycle Set 15

The ultra compact and lightweight bike tools with two quadruple bits and three tyre levers. Four different screw profiles can be operated with just one bit.

Significant weight savings of over 50 %. The enormous space savings make the Bicycle Set 15 perfect for mobile use. The operability of the large profiles is made possible by the spring compression of the small tips. The bit with a 1/4" hexagon drive (Wera connection series 1) can also be used with e.g. bit ratchets and bitholding screwdrivers with Rapidaptor.


The 9504 tyre lever has a 1/4" mounting for using a 1/4" bit. When both 9504 tyre levers are stacked together, a 4-in-1 bit can be inserted and you get a screwdriving tool. The 9505 tyre lever serves as both valve ejector and bleeder valve. The levers and 4-in-1 bits can be clipped together, so that everything is compact and nothing will be lost.

Bicycle Set 13




Code	EAN 4013288			
05**004184**001	*220585*		**9502** 1x 105.0	5
			9503 1x 105.0	

Bicycle Set 15

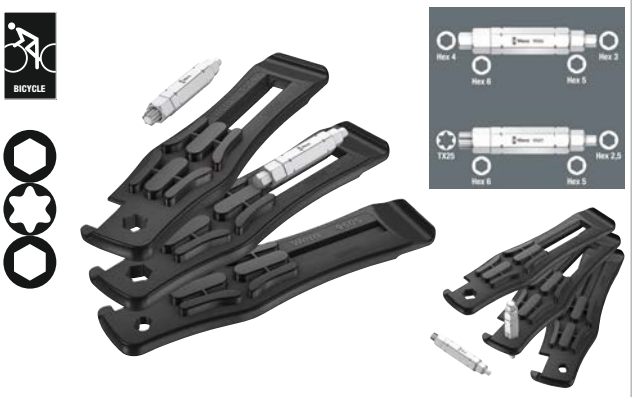

Code	EAN 4013288			
05**004182**001	*222190*			1
			9504 2x 105,0	
			9505 1x 105,0	
			9506 1x 3,0; 4,0; 5,0; 6,0x37	
			9507 1x 2,5; 5,0; 6,0; TX 25x37	

Kraftform Micro - the electronic screwdriver

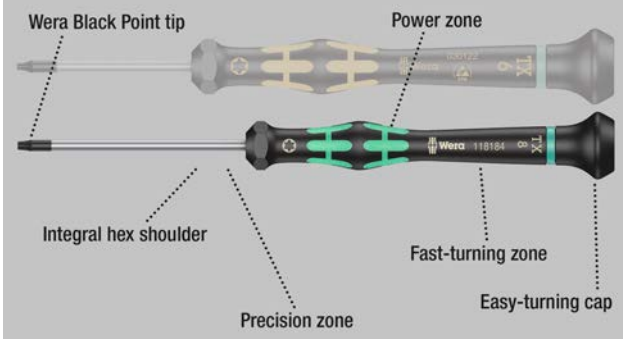

High quality Wera Micro screwdriver for precision mechanical jobs. Rapid twisting results from fixing the hand on the head and using the fast-turning zone just below.

This makes time-consuming grip adjustments unnecessary. Power zones with integrated soft sections ensure the transfer of high loosening and tightening torque; a precision zone for the right rotation angle during fine adjustment work.

The Black Point tip offers optimised corrosion protection and an exact fit. Take it easy tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.

- Multi-component Kraftform Micro handle for fast and ergonomic screwdriving
- Anti-roll feature and swivel cap for rapid twisting
- The Wera Black Point tip offers an exact fit and optimum corrosion protection
- Take it easy tool finder: colour coding according to profile and size
- E.g. for electricians, opticians, precision mechanics, jewellers or IT hardware fitters

2035 Screwdriver for slotted screws for electronic applications





	EAN							
Code	4013288	mm	mm	mm	mm	mm		
05**117990**001	*108418*	0,16	0,8	40	97	2,0	1/32"	10
05**117991**001	*108425*	0,18	1,0	40	97	2,0	0,04"	10
05**117992**001	*108432*	0,20	1,2	40	97	2,0	0,05"	10
05**118002**001	*031877*	0,23	1,5	40	97	2,0	1/16"	10
05**118003**001	*108456*	0,23	1,5	60	97	2,0	1/16"	10
05**118000**001	*031860*	0,25	1,2	40	97	2,0	0,05"	10
05**117993**001	*108463*	0,30	1,8	40	97	2,0	0,07"	10
05**118004**001	*031884*	0,30	1,8	60	97	2,0	0,07"	10
05**118017**001	*151704*	0.30	2.0	50	97	2.0"	5/64"	10
05**117997**001	*194824*	0.35	2.5	40	97	2.5	3/32"	10
05**118005**001	*108470*	0,40	2,0	40	97	2,5	5/64"	10
05**118006**001	*031891*	0,40	2,0	60	97	2,5	5/64"	10
05**118007**001	*108487*	0,40	2,0	100	97	2,5	5/64"	10
05**117994**001	*108494*	0,40	2,5	50	97	2,5	3/32"	10
05**118008**001	*031907*	0,40	2,5	80	97	2,5	3/32"	10
05**117995**001	*108517*	0,50	3,0	50	97	3,0	1/8"	10
05**118010**001	*031914*	0,50	3,0	80	97	3,0	1/8"	10
05**118012**001	*031921*	0,60	3,5	80	97	4,0	9/64"	10
05**118014**001	*031938*	0,80	4,0	80	97	4,0	5/32"	10


2055 PZ Screwdriver for Pozidriv screws for electronic applications





	EAN							
Code	4013288		mm	mm	mm			
05**118030**001	*032195*	PZ 0	60	97	3,0	2 3/8"		10
05**118032**001	*032201*	PZ 1	80	97	4,0	3 1/16"		10

2050 PH Screwdriver for Phillips screws for electronic applications





Code	EAN		mm	mm	mm			
05**345290**001 [1) 2)]	*164506*	PH 000	40	97	1,5/2,5	1 9/16"		10
05**118019**001 [1) 2)]	*108562*	PH 00	40	97	1,8/2,5	1 9/16"		10
05**118020**001 [1)]	*031969*	PH 00	60	97	2,5	2 3/8"		10
05**118026**001 [3)]	*194800*	PH 0	40	97	3,0	1 9/16"		10
05**118022**001 [3)]	*031976*	PH 0	60	97	3,0	2 3/8"		10
05**118023**001	*108579*	PH 1	60	97	4,0	2 3/8"		10
05**118024**001	*031983*	PH 1	80	97	4,0	3 1/8"		10

[1)] Optimised for Asian PH screws


[2)] On the output side, the blade is turned to a nominal length of 10 mm

[3)] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

2067 TORX® HF Screwdriver with holding function for electronic applications

- Holding function for TORX® screws

2067 TORX® HF Screwdriver with holding function for electronic applications





Code	EAN		mm	mm	mm			
05**118180**001	*108623*	TX 4	40	97	2,5	1 9/16"		5
05**118181**001	*108630*	TX 5	40	97	3,0	1 9/16"		5
05**118182**001	*108647*	TX 6	40	97	3,0	1 9/16"		5
05**118183**001	*108654*	TX 7	60	97	3,0	2 3/8"		5
05**118184**001	*108661*	TX 8	60	97	3,0	2 3/8"		5
05**118185**001	*108678*	TX 9	60	97	4,0	2 3/8"		5
05**118186**001	*108685*	TX 10	60	97	4,0	2 3/8"		5


2067 TORX® Screwdriver for TORX® screws for electronic applications





Code	EAN		mm	mm	mm			
05**118035**001	*108593*	TX 1	40	97	2,0	1 9/16"		5
05**118036**001	*108609*	TX 2	40	97	2,0	1 9/16"		5
05**118037**001	*108616*	TX 3	40	97	2,0	1 9/16"		5
05**118039**001	*040084*	TX 4	40	97	2,5	1 9/16"		5
05**118040**001	*032218*	TX 5	40	97	3,0	1 9/16"		5
05**118042**001	*032225*	TX 6	40	97	3,0	1 9/16"		5

2067 TORX® BO Screwdriver for tamper-proof TORX® screws for electronic applications





Code	EAN		mm	mm	mm			
05**118044**001	*032232*	TX 7	60	97	3,0	2 3/8"		5
05**118046**001	*032249*	TX 8	60	97	3,0	2 3/8"		5
05**118048**001	*032256*	TX 9	60	97	4,0	2 3/8"		5
05**118050**001	*032263*	TX 10	60	97	4,0	2 3/8"		5
05**118052**001	*032270*	TX 15	60	97	4,0	2 3/8"		5
05**118054**001	*032287*	TX 20	60	97	4,0	2 3/8"		5

2067 IPR TORX PLUS® Screwdriver for electronic applications






Code	EAN		mm	mm	mm			
05**030160**001	*178749*	1 IPR	40	97	2.0	1 37/64"		5

[1)] Without bore hole

Hex-Plus - lets hexagon socket screws last longer

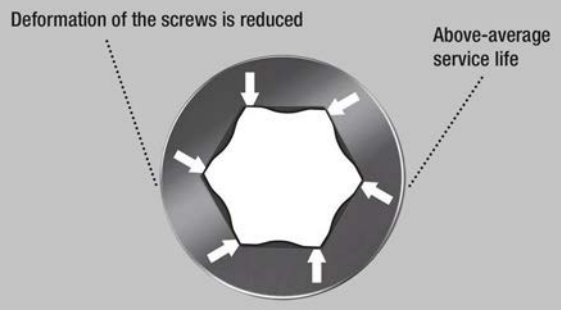

- Kraftform Micro screwdriver for hexagon socket screws
- Hex-Plus allows socket head screws to live longer

2054 Screwdriver for hexagon socket screws for electronic applications






Code	EAN	mm		mm	mm	mm		
05**118060**001	*032072*	0,7		40	97	3,0	1 9/16"	5
05**118062**001	*032089*	0,9		40	97	3,0	1 9/16"	5
05**118064**001	*032096*	1,3		40	97	3,0	1 9/16"	5
05**118066**001	*032102*	1,5		60	97	3,0	2 3/8"	5
05**118068**001	*032119*	2		60	97	3,0	2 3/8"	5
05**118070**001	*032126*	2,5		60	97	4,0	2 3/8"	5
05**118072**001	*032133*	3,0		60	97	4,0	2 3/8"	5
05**345284**001	*152206*	-	0,028"	40	97	3,0	1 9/16"	5
05**345285**001	*152213*	-	0,035"	40	97	3,0	1 9/16"	5
05**118074**001	*032140*	-	0,05"	40	97	3,0	1 9/16"	5
05**118076**001	*032157*	-	1/16"	60	97	3,0	2 3/8"	5
05**118078**001	*032164*	-	5/64"	60	97	3,0	2 3/8"	5
05**118080**001	*032171*	-	3/32"	60	97	4,0	2 3/8"	5
05**118082**001	*032188*	-	7/64"	60	97	4,0	2 3/8"	5
05**118075**001	*108807*	-	1/8"	60	97	4,0	2 3/8"	5

2052 Ball end hexagon screwdriver for electronic applications

- Ballpoint for dependable working even in difficult installation situations

2052 Ball end hexagon screwdriver for electronic applications





Code	EAN	mm		mm	mm	mm		
05**118089**001	*108814*	1,3		60	97	3,0	2 3/8"	5
05**118090**001	*031990*	1,5		60	97	3,0	2 3/8"	5
05**118092**001	*032003*	2,0		60	97	3,0	2 3/8"	5
05**118094**001	*032010*	2,5		60	97	4,0	2 3/8"	5
05**118096**001	*032027*	3,0		60	97	4,0	2 3/8"	5
05**118098**001	*032034*	-	1/16"	60	97	3,0	2 3/8"	5
05**118100**001	*032041*	-	5/64"	60	97	3,0	2 3/8"	5
05**118102**001	*032058*	-	3/32"	60	97	3,0	2 3/8"	5
05**118106**001	*110954*	-	7/64"	60	97	4,0	2 3/8"	5
05**118103**001	*108821*	-	1/8"	60	97	4,0	2 3/8"	5


2072 Screwdriver for Microstix® screws





Code	EAN		mm	mm	mm			
05**118145**001	*194817*	m	40	97	2,5	1 9/16"		5

2069 Nutdriver for electronic applications





	EAN							
Code	4013288	mm		mm	mm	mm		
05**118108**001	*108852*	1,5		60	97	5,7	2 3/8"	5
05**118109**001	*108869*	1,8		60	97	5,7	2 3/8"	5
05**118110**001	*032300*	2,0		60	97	5,7	2 3/8"	5
05**118112**001	*032317*	2,5		60	97	5,7	2 3/8"	5
05**118114**001	*032324*	3,0		60	97	5,7	2 3/8"	5
05**118116**001	*032331*	3,2		60	97	5,7	2 3/8"	5
05**118118**001	*032348*	3,5		60	97	5,7	2 3/8"	5
05**118120**001	*032355*	4,0		60	97	5,7	2 3/8"	5
05**118122**001	*032362*	4,5		60	97	6,4	2 3/8"	5
05**118124**001	*032379*	5,0		60	97	7,0	2 3/8"	5
05**118126**001	*032386*	5,5		60	97	7,8	2 3/8"	5
05**345281**001	*150189*	6,0		60	97	8,5	2 3/8"	5
05**118128**001	*032393*	-	3/32"	60	97	5,7	2 3/8"	5
05**118130**001	*032409*	-	7/64"	60	97	5,7	2 3/8"	5
05**118132**001	*032416*	-	1/8"	60	97	5,7	2 3/8"	5
05**118134**001	*032423*	-	9/64"	60	97	5,7	2 3/8"	5
05**118136**001	*032430*	-	5/32"	60	97	5,7	2 3/8"	5
05**118135**001	*110596*	-	3/16"	60	97	6,6	2 3/8"	5
05**118137**001	*112019*	-	7/32"	60	97	7,8	2 3/8"	5
05**345282**001	*150196*	-	1/4"	60	97	9,0	2 3/8"	5

1429 Chip Removal Tool

- Lifting fork to remove firmly-fitted parts from a circuit board after desoldering

1429 Chip Removal Tool





	EAN							
Code	4013288	mm	mm	mm	mm			
05**027456**001	*112187*	1,0	3,5	50	97			10

1013 Kraftform Micro Bitholding screwdriver

Kraftform Micro holder with ergonomic Kraftform handle for fast and low-fatigue working.

The anti-roll feature prevents any bothersome rolling away at the workplace.

Suitable for take-up of bits with 4 mm halfmoon drive and bits with 4 mm HIOS drive. Ideal for applications on smartphones, cell phones, cameras, electronic equipment, in dental laboratories and dental surgeries.

- Kraftform Micro bit holder
- Multi-component Kraftform Micro handle with anti-roll feature and swivel cap
- Suitable for take-up of bits with 4 mm halfmoon drive and bits with 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

1013 Kraftform Micro Bitholding screwdriver






	EAN							
Code	4013288	mm	mm					
05**051276**001	*183699*	23	97	29/32"				1

1014 Kraftform Micro Bitholding screwdriver

- Bitholding screwdriver for bits with 4 mm external hexagon drive

1014 Kraftform Micro Bitholding screwdriver





	EAN							
Code	4013288	mm	mm	mm				
05**051278**001	*234292*	4	80,0	74,0				1

Kraftform Micro Big Pack 1 Screwdriver set for electronic applications


Wera Micro screwdriver set for fine mechanical screw connections. By supporting the hand on the rotating cap, and by the fast rotating zone below the rotating cap, lightning fast turning is possible.

Time-consuming hand switching is eliminated. Storage and transport in a robust roll-bag, so the correct tool is always at hand.

With Take it easy tool finder: colour coding by profile and size stamping.

- 25-piece Kraftform Micro screwdriver set in a robust and compact roll bag
- Kraftform Micro handle for fast and ergonomic working
- Tools with anti-roll protection and rotating cap for fast turning
- The Wera Black Point tip offers an exact fit and optimum corrosion protection
- Take it easy tool finder: colour coding according to profile and size
- Suitable for electricians, opticians, precision mechanics, jewellers or computer hardware engineers

Kraftform Micro Big Pack 1 Screwdriver set for electronic applications







Code	EAN 4013288			
05**134000**001	*209580*			1
			2050 PH Micro 1x PH 000x40 [1) 2)]; 1x PH 00x40 [1) 2)]; 1x PH 0x40 [3)]	
			2067 TORX® 1x TX 5x40; 1x TX 6x40	
			2067 TORX® HF 1x TX 5x40; 1x TX 6x40; 1x TX 7x60; 1x TX 8x60; 1x TX 10x60	
			2067 TORX PLUS® IPR Micro 1x 1 IPRx40	
			2054 Micro 1x 0,9x40; 1x 1,3x40; 1x 1,5x60; 1x 2x60	
			2035 Micro 1x 0,23x1,5x40; 1x 0,30x1,8x60; 1x 0,35x2,5x40; 1x 0,40x2,0x60; 1x 0,50x3,0x80	
			2069 Micro 1x 4,0x60; 1x 5,5x60	
			2072 1x mx40	
			1429 1x 1,0x3,5x50	
			K 240 1x 50,0x240,0	

[1)] Optimised for Asian PH screws
[2)] On the output side, the blade is turned to a nominal length of 10 mm
[3)] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Kraftform Micro 12 Universal 1 Screwdriver set for electronic applications

- Kraftform Micro set in a robust pouch

Kraftform Micro 12 Universal 1 Screwdriver set for electronic applications







Code	EAN 4013288			
05**073675**001	*165695*			1
			2050 PH Micro 1x PH 00x60 [1)]; 1x PH 0x60 [2)]	
			2067 TORX® HF 1x TX 5x40; 1x TX 6x40	
			2035 Micro 1x 0,23x1,5x40; 1x 0,30x1,8x60; 1x 0,40x2,0x60; 1x 0,40x2,5x80; 1x 0,50x3,0x80	
			2054 Micro 1x 0,9x40; 1x 1,5x60; 1x 2x60	

[1)] Optimised for Asian PH screws
[2)] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Kraftform Micro 12 Electronics 1 Screwdriver set for electronic applications

- Kraftform Micro screwdriver for slotted, Phillips, TORX® BO, Hex, IPR and Microstix® screws plus chip lifter

Kraftform Micro 12 Electronics 1 Screwdriver set for electronic applications



Code	EAN 4013288			
05**073677**001	*194831*			1
			2050 PH Micro 1x PH 000x40 [1] [2]; 1x PH 00x40 [1] [2]; 1x PH 0x40 [3]	
			2067 TORX® BO Micro 1x TX 8x60; 1x TX 10x60	
			2067 TORX PLUS® IPR Micro 1x 1 IPRx40	
			2035 Micro 1x 0,23x1,5x40; 1x 0,35x2,5x40	
			2069 Micro 1x 2,5x60; 1x 3,0x60	
			2072 1x mx40	
			1429 1x 1,0x3,5x50	

[1] Optimised for Asian PH screws

[2] On the output side, the blade is turned to a nominal length of 10 mm

[3] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Kraftform Kompakt Micro 11 Electronics 1

Kraftform Kompakt Micro Set for precision mechanical applications; suitable for the take-up of bits with 4 mm halfmoon drive (Wera series 9) and bits with 4 mm HIOS drive (Wera series 21); handle/interchangeable blade system for rapid blade change; Kaftform Micro handle with twist cap and free-turning zone for rapid twisting, making any time-consuming repositioning of the fingers unnecessary; power zone with integrated soft zones for the transfer of higher tightening and loosening torque; precision zone directly above the blade for the right angle for adjustment work; comes with 10 bits for manual as well as power tool operations; rapid fixing of the bit: just push the bit into the insert for automatic locking and a secure fit.

To change the bit, simply push the sleeve forward and remove; free-turning sleeve for simple guidance of the tool during the screwdriving process.

Kraftform Kompakt Micro 11 Electronics 1




Code	EAN 4013288			
05**073676**001	*194848*			1
			1013 Kraftform Micro 1x 97	
			851/9 C 1x PH 000x44 [1]; 1x PH 00x44 [1]; 1x PH 0x44 [2]	
			867/9 C TORX® 1x TX 8x44	
			867/9 C TORX PLUS® 1x 3 IPx44	
			867/9 IPR TORX® PLUS 1x 1 IPRx44	
			800/9 C 1x 0,35x2,5x44	
			872/9 1x mx44	
			869/9 1x 2,5x44,0; 1x 3,0x44,0	

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Kraftform Kompakt Micro 11 Universal 1





Code	EAN 4013288			
05**135938**001	*178343*			1
			1013 Kraftform Micro 1x 97	
			851/9 C 1x PH 00x44 [1]; 1x PH 0x44 [2]; 1x PH 1x44 [1]	
			840/9 C 1x 1,5x44; 1x 2,0x44	
			800/9 C 1x 0,23x1,5x44; 1x 0,40x2,0x44; **1x 0,50x3,0x44**	
			867/9 C TORX® 1x TX 5x44; 1x TX 6x44	

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

2035/6 A Screwdriver set and rack for electronic applications

- With useful plastic rack

2035/6 A Screwdriver set and rack for electronic applications





Code	EAN 4013288			
05**118150**001	*031945*			1
			2050 PH Micro 1x PH 00x60 [1]; 1x PH 0x60 [2]	
			2035 Micro 1x 0,30x1,8x60; 1x 0,40x2,0x60; 1x 0,40x2,5x80; 1x 0,50x3,0x80	


[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

2035/6 B Screwdriver set and rack for electronic applications

- With useful plastic rack

2035/6 B Screwdriver set and rack for electronic applications






Code	EAN 4013288			
05**118152**001	*031952*			1
			2050 PH Micro 1x PH 0x60 [1]; 1x PH 1x80	
			2035 Micro 1x 0,40x2,5x80;1x 0,50x3,0x80; 1x 0,60x3,5x80; 1x 0,80x4,0x80	

[1] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

2050/6 Screwdriver set and rack for electronic applications

- Kraftform Micro screwdriver for slotted, Phillips-Recess, IPR and Microstix® screws
- With useful plastic rack

2050/6 Screwdriver set and rack for electronic applications





Code	EAN 4013288			
05**030181**001	*194794*			1
			2050 PH Micro 1x PH 000x40 [1] [2]; 1x PH 00x40 [1] [2]; 1x PH 0x40 [3]	
			2067 TORX PLUS® IPR Micro 1x 1 IPRx40	
			2072 1x mx40	
			2035 Micro 1x 0,35x2,5x40	

[1] Optimised for Asian PH screws

[2] On the output side, the blade is turned to a nominal length of 10 mm

[3] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

2052/6 Hexagon Screwdriver set and rack for electronic applications

- Kraftform Micro screwdriver with ballpoint for hexagon socket screws

2052/6 Hexagon Screwdriver set and rack for electronic applications



Code	EAN 4013288			
05**118156**001	*032065*			1
		⬡	**2052 Micro** 1x 1,5x60; 1x 2,0x60; 1x 2,5x60; 1x 3,0x60	
		⬡	**2054 Micro** 1x 0,9x40; 1x 1,3x40	

2067/6 TORX® BO Screwdriver set and rack for electronic applications

- Kraftform Micro screwdriver set for recessed TORX® screws with safety pin

2067/6 TORX® BO Screwdriver set and rack for electronic applications



Code	EAN 4013288			
05**118154**001	*032294*			1
		✿	**2067 TORX® BO Micro** 1x TX 7x60; 1x TX 8x60; 1x TX 9x60; 1x TX 10x60; 1x TX 15x60; 1x TX 20x60	

2069/6 Screwdriver set and rack for electronic applications



Code	EAN 4013288			
05**118158**001	*032447*			1
		◉	**2069 Micro** 1x 2,0x60; 1x 2,5x60; 1x 3,0x60; 1x 3,5x60; 1x 4,0x60; 1x 5,0x60	

Series 400 T-Handle

The ergonomically shaped 2-component T-handle with finger recesses and pleasant surface facilitates very high power transmission and fatigue-free working.

Due to the special surface treatment, the blades receive a high level of corrosion protection. The optimum fitting accuracy of the screw is also guaranteed.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working.
- Take it easy tool finder: colour coding according to profile and size
- With additional short arm for the transmission of extremely high torques due to the leverage of the long arm

454 T-handle hexdriver




Code	EAN 4013288	⬡ mm	mm	mm	mm	mm		
05**023330**001	*207753*	2	100	12	32	65	4"	5
05**023332**001	*207814*	2,5	100	12	32	65	4"	5

454 HF T-handle hexagon screwdriver Hex-Plus with holding function



	EAN							
Code	4013288		mm	mm	mm	mm		
050**23334**001	*207838*	3	100	15	38	77		5
050**23338**001	*207883*	4	100	15	38	77		5
050**23339**001	*207876*	4	150	15	38	77		5
050**23340**001	*207890*	4	200	15	38	77		5
050**23342**001	*207913*	5	100	20	49	99		5
050**23343**001	*207920*	5	150	20	49	99		5
050**23344**001	*207937*	5	200	20	49	99		5
050**23346**001	*207951*	6	100	20	49	99		5
050**23347**001	*207968*	6	150	20	49	99		5
050**23348**001	*207975*	6	200	20	49	99		5
050**23350**001	*208002*	7	200	20	49	99		5
050**23351**001	*208019*	8	100	20	49	99		5
050**23352**001	*208026*	8	150	20	49	99		5
050**23353**001	*208033*	8	200	20	49	99		5
050**23354**001	*208057*	10	100	20	49	99		5
050**23355**001	*208064*	10	200	20	49	99		5

454 Imperial T-handle hexagon screwdriver Hex-Plus, imperial

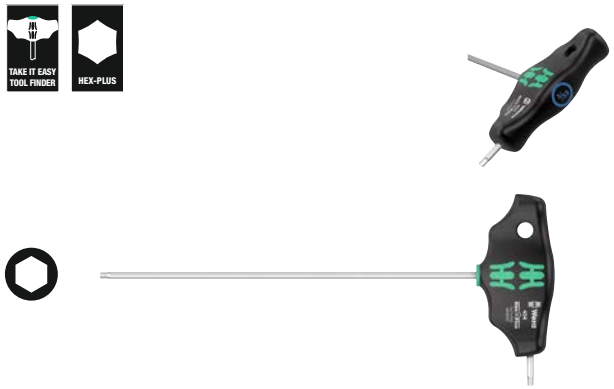


	EAN							
Code	4013288		mm	mm	mm	mm		
050**23356**001	*214133*	5/64"	150	12	32	65		5
050**23357**001	*208071*	3/32"	150	12	32	65		5
050**23358**001	*208088*	7/64"	150	12	32	65		5

454 HF T-handle hexagon screwdriver Hex-Plus with holding function, imperial

- With holding function (HF) on the long arm to securely hold the screw on the tool

454 HF T-handle hexagon screwdriver Hex-Plus with holding function, imperial

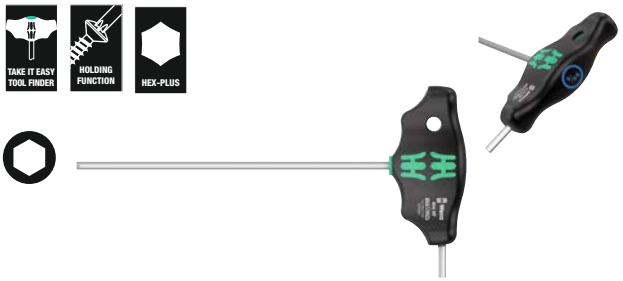


	EAN							
Code	4013288		mm	mm	mm	mm		
050**23359**001	*208095*	1/8"	150	15	38	77		5
050**23360**001	*208101*	9/64"	150	15	38	77		5
050**23361**001	*208118*	5/32"	150	15	38	77		5
050**23362**001	*208125*	3/16"	150	20	49	99		5
050**23363**001	*208132*	7/32"	150	20	49	99		5
050**23364**001	*208149*	1/4"	150	15	49	99		5
050**23365**001	*208156*	5/16"	150	20	49	99		5
050**23366**001	*208163*	3/8"	150	20	49	99		5

467 TORX® HF T-handle screwdriver with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool

467 TORX® HF T-handle screwdriver with holding function

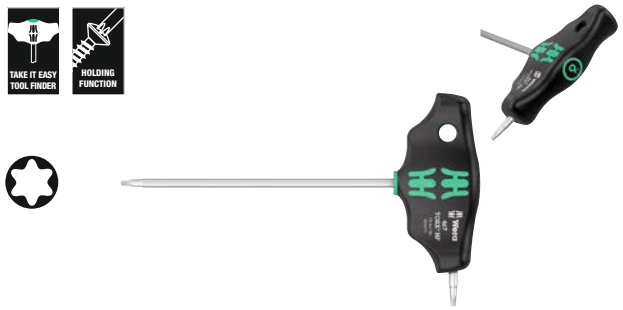


	EAN								
Code	4013288		mm	mm	mm	mm	mm		
050**23367**001	*208217*	TX 6	100	12	32	65	3,0	5	
050**23368**001	*208224*	TX 7	100	12	32	65	3,0	5	
050**23369**001	*208231*	TX 8	100	12	32	65	3,5	5	
050**23370**001	*208248*	TX 9	100	12	32	65	3,5	5	
050**23371**001	*208255*	TX 10	100	12	32	65	4,0	5	
050**23372**001	*208262*	TX 15	100	15	38	77	4,0	5	
050**23373**001	*208279*	TX 20	100	15	38	77	4,5	5	
050**23374**001	*208286*	TX 20	200	15	38	77	4,5	5	
050**23375**001	*208293*	TX 25	100	15	38	77	5,0	5	
050**23376**001	*208309*	TX 25	200	15	38	77	5,0	5	
050**23377**001	*208316*	TX 27	200	20	49	99	6,0	5	
050**23378**001	*208323*	TX 30	200	20	49	99	6,0	5	
050**23379**001	*208330*	TX 40	200	20	49	99	8,0	5	
050**23380**001	*208347*	TX 45	200	20	49	99	9,0	5	

495 T-handle socket wrench screwdrivers



	EAN							
Code	4013288		mm	mm	mm			
05**023381**001	*208354*	5	230	38	77	9"		5
05**023382**001	*208361*	5,5	230	38	77	9"		5
05**023383**001	*208378*	6	230	38	77	9"		5
05**023384**001	*208385*	7	230	49	99	9"		5
05**023385**001	*208392*	8	230	49	99	9"		5
05**023386**001	*208408*	9	230	49	99	9"		5
05**023387**001	*208415*	10	230	49	99	9"		5
05**023389**001	*208439*	11	230	49	99	9"		5
05**023391**001	*208477*	12	230	49	99	9"		5
05**023393**001	*208491*	13	230	49	99	9"		5

Radidaptor - the amazing compact multifunction tool

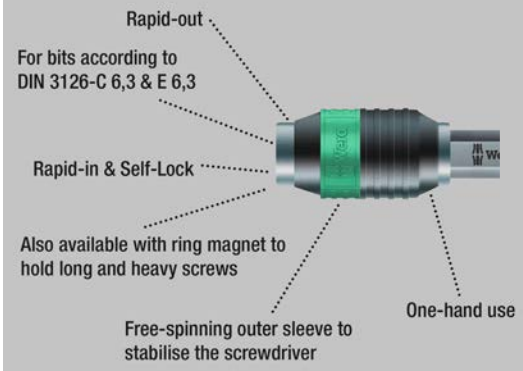

The ergonomically shaped 2-component T-handle with finger recesses and pleasant surface facilitates very high power transmission and fatigue-free working.

For bits with 1/4" hex head drive as per DIN ISO 1173-C 6.3 and E 6.3. With Rapidaptor technology for lightning-fast bit changes.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working.
- With Rapidaptor technology for lightning-fast bit changes
- Bitholders, magnetic, for easier application of the screw
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3

416 R T-handle bitholding screwdriver Rapidaptor



	EAN							
Code	4013288		mm	mm	mm			
05**023404**001	*214157*	1/4"	45	44	99	1 25/32"		2

416 RA T-handle bitholding screwdriver with ratchet function and Rapidaptor quick-release chuck

The integrated ratchet with fine toothing (80 teeth/return angle 4.5°) eases and accelerates screwdriving without having to reposition the tool. The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work. With reversing lever for comfortable clockwise/counterclockwise direction change in one-hand operation.

The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips. The whole hand comes into contact with the handle, friction loss between hand and handle is avoided.

Bit holder for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3. With Rapidaptor technology for lightning-fast bit changes.

- The integrated ratchet with fine toothing ensures fast and safe working
- Reversing lever for comfortable clockwise/counterclockwise direction change
- Convenient working thanks to the ratchet mechanism fully embedded in the handle
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- Fast-rotating sleeve for extremely high working speed
- Rapidaptor bitholding screwdriver with fast-rotating sleeve for lightning-fast bit changes and high working speeds
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3

416 RA T-handle bitholding screwdriver with ratchet function and Rapidaptor quick-release chuck







	EAN							
Code	4013288		mm	mm	mm			
05**023461**001	*222824*	1/4"	45	44	99	1 25/32"		2

411 A RA T-handle adapter screwdriver with ratchet function, 1/4"

The integrated ratchet with fine toothing (80 teeth/return angle 4.5°) eases and accelerates screwdriving without having to reposition the tool.

The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work. With reversing lever for comfortable clockwise/counterclockwise direction change in one-hand operation.

The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips. The whole hand comes into contact with the handle, friction loss between hand and handle is avoided. ¼" socket mounting with secure locking mechanism.

- The integrated ratchet with fine toothing ensures fast and safe working
- Reversing lever for comfortable clockwise/counterclockwise direction change
- Convenient working thanks to the ratchet mechanism fully embedded in the handle
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- Fast-rotating sleeve for extremely high working speed
- 1/4" socket mounting with secure ball lock

411 A RA T-handle adapter screwdriver with ratchet function, 1/4"








	EAN							
Code	4013288		mm	mm	mm			
05**023460**001	*222817*	1/4"	45	44	99	1 25/32"		2

454/7 HF Set 1 screwdiver set T-handle screwdrivers Hex-Plus with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool

454/7 HF Set 1 screwdriver set T-handle screwdrivers Hex-Plus with holding function

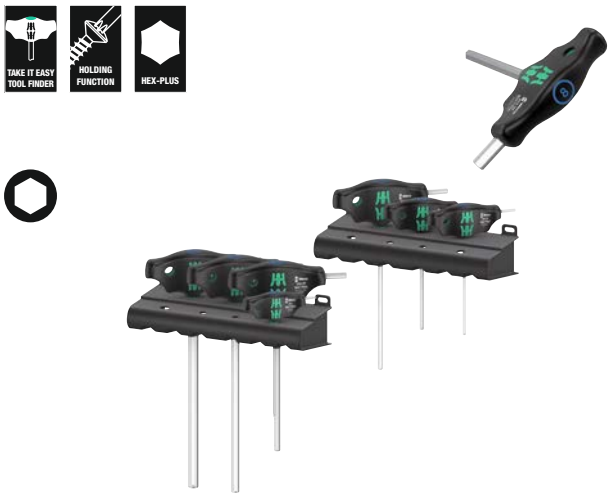

Code	EAN 4013288			
05**023450**001	*214829*			1
		○	**454** 1x 2,5x100	
		○	**454 HF** 1x 3x100; 1x 4x100; 1x 5x150; 1x 6x150; 1x 8x200; 1x 10x200	
			Rack 2x 190,0x50,0	

454/7 HF Set 2 Screwdriver set T-handle Hex-Plus screwdrivers with holding function

- T-handle screwdriver for the transmission of particularly high tightening and loosening torque
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- Take it easy tool finder: colour coding according to profile and size
- With additional short arm for the transmission of extremely high torques due to the leverage of the long arm
- With holding function (HF) on the long arm to securely hold the screw on the tool
- Including metal rack; the rack can be placed upright or hung on the tool wall.

454/7 HF Set 2 Screwdriver set T-handle Hex-Plus screwdrivers with holding function



Code	EAN 4013288			
05**023453**001	*221742*			1
		○	**454** 1x 2,5x100	
		○	**454 HF** 1x 3x100; 1x 4x100; 1x 5x150; 1x 6x150; 1x 8x200; 1x 10x200	
			9604 1x 214,0x78,0	

454/10 HF Set Imperial 1 screwdiver set T-handle screwdrivers Hex-Plus with holding function, imperial

- With holding function (HF) on the long arm to securely hold the screw on the tool

454/10 HF Set Imperial 1 screwdiver set T-handle screwdrivers Hex-Plus with holding function, imperial



Code	EAN 4013288			
05**023451**001	*214836*			1
		O	**454 Imperial** 1x 3/32"x150; 1x 7/64"x150	
		O	**454 Imperial HF** 1x 1/8"x150; 1x 9/64"x150; 1x 5/32"x150; 1x 3/16"x150; 1x 7/32"x150; 1x 1/4"x150; 1x 5/16"x150; 1x 3/8"x150	
			Rack 2x 190,0x50,0	

454/10 HF Set Imperial 2 Screwdriver set T-handle Hex-Plus screwdrivers with holding function, imperial

T-handle screwdriver: The ideal handle shape allows the transmission of particularly high tightening and loosening torque. The ergonomic shape of the handle fills the palm of the hand well, the fingers lie safely in the soft rounded handle recesses. The whole hand makes contact with the handle and friction losses between the hand and the handle are avoided.

With holding function to securely hold the hexagon socket screw on the tool. Special surface treatment of the blades for high corrosion protection and optimum fitting accuracy in the screw. Including metal rack for storage. The rack can be placed on the workbench or hung on the tool wall.

- Including metal rack; the rack can be placed upright or hung on the tool wall.

454/10 HF Set Imperial 2 Screwdriver set T-handle Hex-Plus screwdrivers with holding function, imperial



Code	EAN 4013288			
05**023454**001	*221735*			1
		O	**454 Imperial** 1x 3/32"x150; 1x 7/64"x150	
		O	**454 Imperial HF** 1x 1/8"x150; 1x 9/64"x150; 1x 5/32"x150; 1x 3/16"x150; 1x 7/32"x150; 1x 1/4"x150; 1x 5/16"x150; 1x 3/8"x150	
			9605 1x 214,0x78,0	

454/5 HF SHK Set 1 Screwdriver set T-handle screwdriver Hex-Plus with holding function

- Tool set with 5 T-handle screwdrivers for operations in plumbing, heating and air conditioning
- Extra long blades
- With holding function (HF) on the long arm to securely hold the screw on the tool

454/5 HF SHK Set 1 Screwdriver set T-handle screwdriver Hex-Plus with holding function





Code	EAN 4013288			
05**136070**001	*228000*			1
		○	**454 HF** 1x 4x200; 1x 5x200; 1x 6x200; 1x 7x200; 1x 8x200	

467/7 TORX® HF Set 1 screwdriver set T-handle TORX® screwdrivers with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool

467/7 TORX® HF Set 1 screwdriver set T-handle TORX® screwdrivers with holding function





Code	EAN 4013288			
05**023452**001	*214874*			1
		✪	**467 TORX® HF** 1x TX 10x100; 1x TX 15x100; 1x TX 20x100; 1x TX 25x100; 1x TX 30x200; 1x TX 40x200; 1x TX 45x200	
			Rack 2x 190,0x50,0	

467/7 TORX® HF Set 2 Screwdriver set T-handle TORX® screwdrivers with holding function

T-handle screwdriver: The ideal handle shape allows the transmission of particularly high tightening and loosening torque. The ergonomic shape of the handle fills the palm of the hand well, the fingers lie safely in the soft rounded handle recesses. The whole hand makes contact with the handle and friction losses between the hand and the handle are avoided.

With holding function to securely hold the TORX® screw on the tool. Special surface treatment of the blades for high corrosion protection and optimum fitting accuracy in the screw. Including metal rack for storage. The rack can be placed on the workbench or hung on the tool wall.

- Including metal rack; the rack can be placed upright or hung on the tool wall.

467/7 TORX® HF Set 2 Screwdriver set T-handle TORX® screwdrivers with holding function





Code	EAN 4013288			
05**023456**001	*221728*			1
		✪	**467 TORX® HF** 1x TX 10x100; 1x TX 15x100; 1x TX 20x100; 1x TX 25x100; 1x TX 30x200; 1x TX 40x200; 1x TX 45x200	
			9606 1x 214,0x78,0	

Bicycle set 6

10-piece T-handle screwdriver set for operations on the bike: The ideal handle shape allows the transmission of particularly high tightening and loosening moments. The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips.

The whole hand comes into contact with the handle and friction losses between hand and handle are avoided. With holding function at the long arm to hold the TORX® and hexagonal socket screws (from size 3) securely on the tool. Special surface treatment for high corrosion protection and optimal fitting accuracy in the screw.

With extra-short arm for the transmission of extremely high torques through the leverage of the long arm. Including metal rack for clearly arranged storage in the workshop.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- With holding function (HF) on the long arm to securely hold the screw on the tool
- With additional short arm for the transmission of extremely high torques due to the leverage of the long arm
- Take it easy Tool Finder: colour coding according to profile and size

Bicycle set 6







Code	EAN 4013288			
05**004174**001	*220592*			1
		○	**454** 1x 2,5x100	
		○	**454 HF** 1x 3x100; 1x 4x150; 1x 5x150; 1x 6x200; 1x 8x200; 1x 10x200	
		✪	**467 TORX® HF** 1x TX 10x100; 1x TX 20x100; 1x TX 25x200	

9604 Metal rack for T-handle screwdrivers

Metal rack for T-handle screwdrivers. The rack can be placed on the workbench or hung on the tool wall.

For up to 7 Wera hexagonal socket T-handle screwdrivers.

- Metal rack for T-handle screwdrivers

9604 Metal rack for T-handle screwdrivers



Code	EAN 4013288	mm	mm					
05**136424**001	*223418*	214,0	78,0					1

9605 Metal rack for T-handle screwdrivers

Metal rack for T-handle screwdrivers. The rack can be placed on the workbench or hung on the tool wall.

For up to 10 Wera hexagonal socket T-handle screwdrivers.

- For up to 10 hexagonal socket T-handle screwdrivers

9605 Metal rack for T-handle screwdrivers



Code	EAN 4013288	mm	mm					
05**136425**001	*223425*	214,0	78,0					1

9606 Metal rack for T-handle screwdrivers

Metal rack for T-handle screwdrivers. The rack can be placed on the workbench or hung on the tool wall. For up to 7 Wera TORX® T-handle screwdrivers.

9606 Metal rack for T-handle screwdrivers



	EAN							
Code	4013288	mm	mm					
05**136426**001	*223432*	214,0	78,0					1

ESD Series

ESD-safe Micro screwdriver. Dependable protection against electrostatic energy and associated damage. Rapid twisting results from fixing the hand on the head and using the fast-turning zone just below. This makes time-consuming grip adjustments unnecessary.

Power zones with integrated soft sections ensure the transfer of high loosening and tightening torque; a precision zone for the right rotation angle during fine adjustment work.

The Black Point tip offers optimised corrosion protection and an exact fit. Take it easy Tool Finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- Multi-component Kraftform Micro handle for fast and ergonomic screwdriving
- The Wera Black Point tip offers an exact fit and optimum corrosion protection
- Take it easy Tool Finder: colour coding according to profile and size
- Anti-roll feature and swivel cap for rapid twisting

1578 A ESD Kraftform Micro screwdriver for slotted screws





	EAN							
Code	4013288	mm	mm	mm	mm	mm		
05**030099**001	*215253*	0,16	0,8	40	97	2,0	1/32"	5
05**030101**001	*039040*	0,23	1,5	40	97	2,0	1/16"	5
05**030100**001	*039033*	0,25	1,2	40	97	2,0	0,05"	5
05**030102**001	*039057*	0,30	1,8	60	97	2,0	0,07"	5
05**030108**001	*194763*	0,35	2,5	40	97	2,5	3/32"	5
05**030103**001	*039064*	0,40	2,0	60	97	2,5	5/64"	5
05**030104**001	*039071*	0,40	2,5	80	97	2,5	3/32"	5
05**030105**001	*039088*	0,50	3,0	80	97	3,0	1/8"	5
05**030106**001	*039095*	0,60	3,5	80	97	4,0	9/64"	5
05**030107**001	*039101*	0,80	4,0	80	97	4,0	5/32"	5

1550 PH ESD Kraftform Micro screwdriver for Phillips screws





	EAN							
Code	4013288		mm	mm	mm			
05**030117**001 [1] [2]	*194725*	PH 000	40	97	1,5/2,5	1 9/16"		5
05**030118**001 [1] [2]	*194732*	PH 00	40	97	1,8/2,5	1 9/16"		5
05**030110**001 [2]	*039118*	PH 00	60	97	1,8/2,5	2 3/8"		5
05**030119**001 [3]	*194749*	PH 0	40	97	3,0	1 9/16"		5
05**030111**001 [3]	*039125*	PH 0	60	97	3,0	2 3/8"		5
05**030112**001	*039132*	PH 1	80	97	4,0	3 1/8"		5

[1] Optimised for Asian PH screws

[2] On the output side, the blade is turned to a nominal length of 10 mm

[3] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

1550 PH S ESD Kraftform Micro screwdrivers





	EAN							
Code	4013288		mm	mm				
05**030109**001	*215222*	# 01	40	97	1 9/16"			5


1555 PZ ESD Kraftform Micro screwdriver for Pozidriv screws





	EAN							
Code	4013288		mm	mm	mm			
05**030115**001	*039149*	PZ 0	60	97	3,0	2 3/8"		5
05**030116**001	*039156*	PZ 1	80	97	4,0	3 1/8"		5

TORX® Tools with holding function

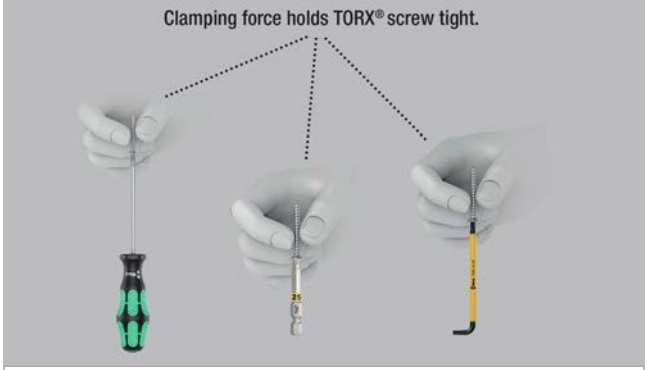

1567 TORX® HF ESD Kraftform Micro screwdriver with holding function for TORX® screws





	EAN							
Code	4013288		mm	mm	mm			
05**030400**001	*183972*	TX 4	40	97	2,5	1 9/16"		5
05**030401**001	*183989*	TX 5	40	97	3,0	1 9/16"		5
05**030402**001	*183996*	TX 6	40	97	3,0	1 9/16"		5
05**030403**001	*184009*	TX 7	60	97	3,0	2 3/8"		5
05**030404**001	*184016*	TX 8	60	97	3,0	2 3/8"		5
05**030405**001	*184023*	TX 9	60	97	4,0	2 3/8"		5
05**030406**001	*184030*	TX 10	60	97	4,0	2 3/8"		5

1567 TORX® ESD Kraftform Micro screwdriver for TORX® screws





	EAN							
Code	4013288		mm	mm	mm			
05**030158**001	*215239*	TX 2	40	97	2,0	1 9/16"		5
05**030159**001	*215246*	TX 3	40	97	2,0	1 9/16"		5
05**030120**001	*039163*	TX 4	40	97	2,5	1 9/16"		5
05**030121**001	*039170*	TX 5	40	97	3,0	1 9/16"		5
05**030122**001	*039187*	TX 6	40	97	3,0	1 9/16"		5

1567 TORX® BO ESD Kraftform Micro screwdriver for tamper-proof TORX® screws





	EAN							
Code	4013288		mm	mm	mm			
05**030113**001	*219473*	TX 6 BO	60	97	3,0	2 3/8"		5
05**030114**001	*219480*	TX 8 BO	60	97	3,0	2 3/8"		5

1567 IPR TORX PLUS® ESD Kraftform Micro screwdriver






	EAN							
Code	4013288		mm	mm	mm			
05**030135**001[1)]	*194756*	1 IPR	40	97	2,0	1 9/16"		5

[1)] Without bore hole

1572 ESD Kraftform Micro screwdriver for Microstix® screws

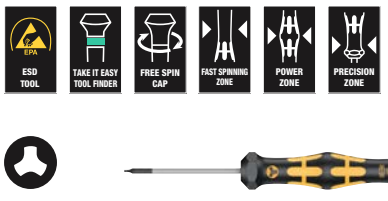



	EAN							
Code	4013288		mm	mm	mm			
05**030080**001	*181169*	m	40	97	2,5	1 9/16"		5
05**030081**001	*181176*	00	40	97	2,5	1 9/16"		5
05**030082**001	*181183*	F	40	97	2,5	1 9/16"		5
05**030083**001	*181190*	0	40	97	2,5	1 9/16"		5
05**030084**001	*181206*	1	40	97	2,5	1 9/16"		5

1573 Pentalobe ESD Kraftform Micro screwdriver

- Kraftform Micro screwdriver for Pentalobe screws

1573 Pentalobe ESD Kraftform Micro screwdriver





	EAN							
Code	4013288		mm	mm	mm			
05**030330**001	*219435*	PL 1,1	40	97	2,0	1 9/16"		5
05**030331**001	*219497*	PL 1,4	40	97	2,0	1 9/16"		5

1569 ESD Nutdriver






	EAN							
Code	4013288		mm	mm	mm			
05**030410**001	*184047*	1,5	60	97	5,7	2 3/8"		5
05**030411**001	*184054*	1,8	60	97	5,7	2 3/8"		5
05**030412**001	*184061*	2,0	60	97	5,7	2 3/8"		5
05**030413**001	*184078*	2,5	60	97	5,7	2 3/8"		5
05**030414**001	*184085*	3,0	60	97	5,7	2 3/8"		5
05**030415**001	*184092*	3,2	60	97	5,7	2 3/8"		5
05**030416**001	*184108*	3,5	60	97	5,7	2 3/8"		5
05**030417**001	*184115*	4,0	60	97	5,7	2 3/8"		5
05**030418**001	*184122*	4,5	60	97	6,4	2 3/8"		5
05**030150**001	*093486*	5,0	60	97	7,0	2 3/8"		5
05**030151**001	*093493*	5,5	60	97	7,8	2 3/8"		5

1529 ESD Chip Removal Tool

- Chip lifter to remove firmly-fitted parts from a circuit board after desoldering

1529 ESD Chip Removal Tool





	EAN							
Code	4013288	mm	mm	mm	mm			
05**027450**001	*219428*	1,0	3,5	50	97			10

Kraftform Micro ESD Big Pack 1
Screwdriver set for electronic applications

Electrostatically secured Wera Micro screwdriver 25-piece set. The included screw profiles are especially suitable for the use on mobile phones and tablets. Safe protection against electrostatic energy and associated damage.

By supporting the hand on the rotating cap, and by the fast rotating zone below the rotating cap, lightning fast turning is possible. Time-consuming hand switching is eliminated.

The power zone with integrated soft zones ensures the transmission of high tightening and loosening moments. Precision zone for correct rotation angles whilst adjusting.

The Black Point tip provides fitting accuracy and optimum corrosion protection.

Take it easy Tool Finder with size stamping and colour coding by profile to find the required tool quickly and easily. Storage and transport in a robust textile bag, so the tool is well protected and always close at hand.

- Included profiles especially suitable for servicing mobile phones, tablets and laptops/desktops
- Storage and transport in a robust textile bag, so the tool is well protected and always close at hand

Kraftform Micro ESD Big Pack 1
Screwdriver set for electronic applications



Code	EAN 4013288			
05**134019**001	*219459*			1
			1550 PH ESD Micro 1x PH 000x40 [1) 2)]; 1x PH 00x40 [1) 2)]; 1x PH 0x40 [3)]; 1x PH 1x80	
			1550 PH S ESD Micro 1x # 01x40	
			1567 TORX® HF ESD Micro 1x TX 8x60; 1x TX 10x60	
			1567 TORX® ESD Micro 1x TX 2x40; 1x TX 3x40; 1x TX 4x40; 1x TX 5x40; 1x TX 6x40	
			1567 TORX® BO ESD Micro 1x TX 6 BOx60; 1x TX 8 BOx60	
			1567 TORX PLUS® IPR ESD 1x 1 IPRx40	
			1572 ESD 1x mx40; 1x 00x40; 1x Fx40; 1x 0x40	
			1573 Pentalobe ESD 1x PL 1,1x40; 1x PL 1,4x40	
			1569 ESD 1x 3,0x60	
			1578 A ESD Micro 1x 0,16x0,8x40; 1x 0,23x1,5x40	
			1529 ESD 1x 1,0x3,5x50	

[1)] Optimised for Asian PH screws

[2)] On the output side, the blade is turned to a nominal length of 10 mm

[3)] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

1578 A/6 ESD Screwdriver set and rack for electronic applications

- Includes practical rack for tidy storage of the screwdrivers

1578 A/6 ESD Screwdriver set and rack for electronic applications





Code	EAN 4013288			
05**030170**001	*113900*			1
		⊕	**1550 PH ESD Micro** 1x PH 0x60 [1]; 1x PH 1x80	
		⊖	**1578 A ESD Micro** 1x 0,23x1,5x40; 1x 0,25x1,2x40; 1x 0,30x1,8x60; 1x 0,40x2,5x80	

[1] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

1550/6 ESD Screwdriver set and rack for electronic applications

- Includes practical rack for tidy storage of the screwdrivers

1550/6 ESD Screwdriver set and rack for electronic applications





Code	EAN 4013288			
05**030180**001	*194787*			1
		⊕	**1550 PH ESD Micro** 1x PH 000x40 [1] [2]; 1x PH 00x40 [1] [2]; 1x PH 0x40 [3]	
		⊖	**1578 A ESD Micro** 1x 0,35x2,5x40	
		✪	**1567 TORX PLUS® IPR ESD** 1x 1 IPRx40	
		✪	**1572 ESD** 1x mx40	

[1] Optimised for Asian PH screws

[2] On the output side, the blade is turned to a nominal length of 10 mm

[3] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

1013 Kraftform Micro ESD bitholding screwdriver

ESD-safe Wera tool. The Kraftform Micro ESD holder for dependable protection against electrostatic energy and associated damage. Electrical surface resistance of ≤ 10^9 Ohm. Ergonomic Kraftform handle for pleasant and low-fatigue working.

Black anti-roll feature prevents any bothersome rolling away at the workplace. Suitable for the take-up of bits with 4 mm half-moon drive and bits with 4 mm HIOS drive. Ideal for applications on smartphones, cell phones, cameras, electrical appliances, in dental labs and dental surgeries.

- Kraftform Micro ESD bit holder
- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- Multi-component Kraftform Micro handle with anti-roll feature and swivel cap
- Suitable for take-up of bits with 4 mm halfmoon drive and bits with 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

1013 Kraftform Micro ESD Bitholding screwdriver





Code	EAN 4013288	mm	mm					
05**300004**001	*168610*	23	97	29/32"				1

Radidaptor - the amazing compact multifunction tool



- ESD bit holder for ESD-safe working
- Surface resistance of ≤ 10^9 Ohm
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Hexagonal anti-roll feature against rolling away
- 1/4" hexagon take-up with Rapidaptor quick-release chuck

816 R ESD Bitholding screwdriver, non-magnetic



	EAN							
Code	4013288		mm					
05**051464**001	*103918*	1/4"	119					2

813 R ESD Bitholding screwdriver, non-magnetic



	EAN							
Code	4013288		mm					
05**051273**001	*103901*	1/4"	90					2

Kraftform Kompakt 60 ESD

ESD-safe Wera tool. 16 bits. Includes bitholder 816 R ESD holder, multi-component for high working speeds and particularly ergonomic screwdriving. Dependable protection against electrostatic energy and associated damage.

Compact set that enables both manual as well as power tool operations. Simple sorting according to profile and size, easy bit removal and reinsertion; with belt clip, 18-piece.

- Suitable for manual and power tool operations
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Rapidaptor quick-release chuck
- Tough viscous bits for universal use
- In robust pouch

Kraftform Kompakt 60 ESD



Code	EAN 4013288			
05**051043**001	*183934*			1
			816 R ESD 1x 1/4"x119	
			851/4 Z PH 1x PH 1x89; 1x PH 2x89; 1x PH 3x89	
			855/4 Z PZ 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89	
			867/4 Z TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			840/4 Z Hex-Plus 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89	
			800/4 Z 1x 1,0x5,5x89	

Kraftform Kompakt Micro 21 ESD 1

Kraftform Kompakt Micro set for precision mechanical work. Suitable for the take-up of bits with 4 mm halfmoon drive (Wera series 9) and bits with 4 mm HIOS drive (Wera series 21). Electrical surface resistance of ≤ 10^9 Ohm for secure protection against electrostatic charge.

Manufactured in accordance with DIN EN 61340-5-1. Compact handle/interchangeable blade system for fast blade change. Kaftform Micro handle with twist cap and free-turning zone for rapid twisting, making any time-consuming repositioning of the fingers unnecessary.

Power zone with integrated soft zones for the transfer of higher tightening and loosening torque. Precision zone directly above the blade for the right angle for adjustment work. Bits for manual as well as power tool operations. Rapid fixing of the bit: just push the bit into the insert for automatic locking and a secure fit. To change the bit, simply push the sleeve forward and remove. Free-turning sleeve for simple guidance of the tool during the screwdriving process.

Kraftform Kompakt Micro 21 ESD 1



Code	EAN 4013288			
05**135973**001	*194855*			1
			1013 Kraftform Micro ESD 1x 97	
			851/9 C 1x PH 000x44 [1]; 1x PH 00x44 [1]; 1x PH 0x44 [2]	
			867/9 C TORX® 1x TX 1x44; 1x TX 2x44; 1x TX 3x44; 1x TX 4x44; 1x TX 5x44	
			867/9 C TORX PLUS® 1x 1 IPx44; 1x 2 IPx44; 1x 3 IPx44; 1x 4 IPx44	
			867/9 IPR TORX® PLUS 1x 1 IPRx44	
			872/9 1x mx44; 1x 00x44; 1x Fx44; 1x 0x44	
			800/9 C 1x 0,23x1,5x44; 1x 0,35x2,5x44	
			869/9 1x 2,5x44,0	

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Kraftform Kompakt Micro 20 ESD 1

- Bit holder suitable for the take-up of bits with 4 mm halfmoon or HIOS drive
- Handle out of material with a surface resistance of ≤ 10^9 Ohm
- Handle/Interchangeable blade system for rapid exchange of the blade
- Kraftform Micro handle with swivel cap for rapid twisting
- Bits for manual as well as power tool operations

Kraftform Kompakt Micro 20 ESD 1



Code	EAN 4013288			
05**073671**001	*169662*			1
			1013 Kraftform Micro ESD 1x 97	
			851/9 C 1x PH 00x44 [1]; 1x PH 0x44 [2]; 1x PH 1x44 [1]	
			867/9 C TORX® 1x TX 1x44; 1x TX 2x44; 1x TX 3x44; 1x TX 4x44; 1x TX 5x44; 1x TX 6x44	
			867/9 C TORX PLUS® 1x 1 IPx44; 1x 2 IPx44; 1x 3 IPx44; 1x 4 IPx44	
			840/9 C 1x 1,5x44; 1x 2,0x44	
			800/9 C 1x 0,23x1,5x44; 1x 0,40x2,0x44; 1x 0,50x3,0x44	
			867/9 IPR TORX® PLUS 1x 1 IPRx44	

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Kraftform Kompakt Micro 11 ESD 1



Code	EAN 4013288			
05**073670**001	*168344*			1
			1013 Kraftform Micro ESD 1x 97	
			851/9 C 1x PH 00x44 [1]; 1x PH 0x44 [2]; 1x PH 1x44 [1]	
			867/9 C TORX® 1x TX 5x44; 1x TX 6x44	
			800/9 C 1x 0,23x1,5x44; 1x 0,40x2,0x44; 1x 0,50x3,0x44	
			840/9 C 1x 1,5x44; 1x 2,0x44	

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Kraftform Kompakt Stubby ESD 1

Handle/interchangeable blade system for lightning fast replacement of the required blade. Especially small ESD bit-holding Stubby screwdriver handle with short blade for eloctrostatically secure working even in hard to reach areas.

Suitable for the mounting of bits with 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1. With strong permanent magnet, which also holds large and heavy screws.

The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working. High-quality bits for universal use. Compact, textile box with high robustness, low weight and volume. Suitable for docking with the Wera 2go system.

- ESD bits hand holder for electrostatically safe working, magnetic
- 851/1 J: bits optimized for Asian PH screws

Kraftform Kompakt Stubby ESD 1



Code	EAN 4013288			
05**057472**001	*214584*			1
			811/1 Stubby ESD 1x 1/4"x54	
			851/1 Z PH 1x PH 0x25; 1x PH 1x25; 1x PH 2x25	
			851/1 J 1x PH 00x25x2,0 [1]	
			800/1 Z 1x 0,5x3,0x25; 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25; 1x 1,2x8,0x25	

[1] Size 00 modificated according to JCIS 00 (Japanese Camera Industrial Standard)

809/1 ESD Stubby Bitholding screwdriver, with retaining ring

- Short compact shape for working in confined spaces
- Bit holder with retaining ring for bits with 1/4" hexagon drive

809/1 ESD Stubby Bitholding screwdriver, with retaining ring



	EAN							
Code	4013288		mm	mm				
05**008882**001	*219206*	1/4"	10	54	3/8"			2

811/1 ESD Stubby Bitholding screwdriver, magnetic

- Short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Hexagonal anti-roll feature against rolling away
- ESD bits hand holder for electrostatically safe working, magnetic
- For 1/4" bits as per DIN ISO 1173-C 6.3

811/1 ESD Stubby Bitholding screwdriver, magnetic



	EAN							
Code			mm	mm				
05**008881**001	*212382*	1/4"	10	54	3/8"			2

9514 ESD Magnetiser SB

Magnetiser. Simply pull the tool along the positive side of the Wera magnetiser and the tool will hold the screw securely on the blade.

To demagnetise, move the tool along the negative side.


- Magnetiser
- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- To magnetise and demagnetise tool tips
- Securely holds the screw on the tool

9514 ESD Magnetiser SB



	EAN							
Code	4013288	mm						
05**073984**001	*225924*	64,6						1

Kraftform Stainless - stainless steel to prevent rust

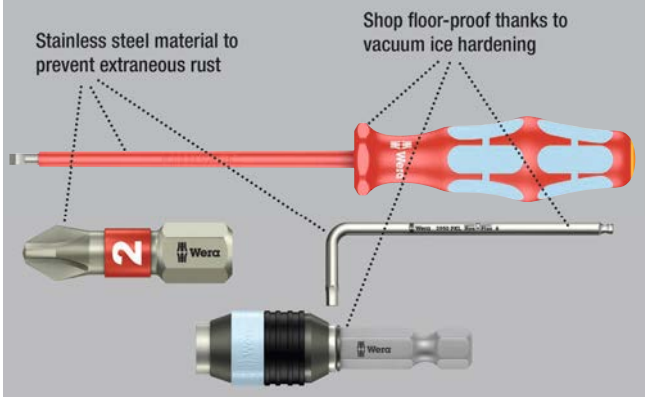


High quality Kraftform Plus VDE screwdriver out of stainless steel by Wera. The stainless tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. They can be used for industrial application without hesitation.

The individual testing of the Kraftform Stainless VDE screwdrivers at 10,000 volts as per DIN EN 60900 (IEC 60900) ensures safe working with voltages of up to 1,000 volts. Secure working is also ensured under extreme conditions and verified with the proven cold impact resistance at -40° C. Kraftform handle for fast and low-fatigue working.

Take it easy Tool Finder: colour coding according to profile and size. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

Lasertip - laser engineered blade

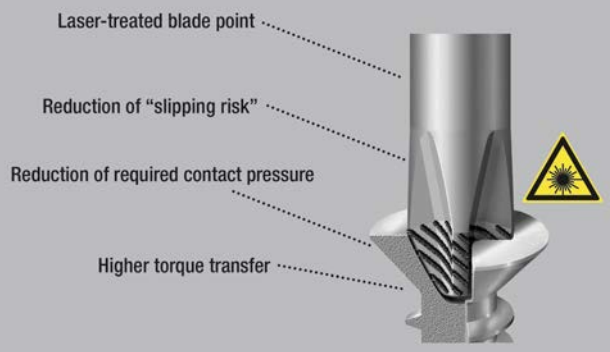

3160 i VDE Insulated Screwdriver for slotted screws, stainless



	EAN							
Code	4013288	mm	mm	mm	mm			
05**022729**001 [1]	*122353*	0,5	3,0	80	81	1/8"	3 1/8"	10
05**022730**001 [1]	*122148*	0,6	3,5	100	81	9/64"	4"	10
05**022731**001	*122155*	0,8	4,0	100	98	5/32"	4"	10
05**022732**001	*122162*	1,0	5,5	125	98	7/32"	5"	10


[1] without Lasertip

3162 i PH VDE Insulated Screwdriver for Phillips screws, stainless



	EAN							
Code	4013288		mm	mm				
05**022733**001	*122179*	PH 1	80	98	3 1/8"			5
05**022734**001	*122186*	PH 2	100	105	4"			5

3165 i PZ VDE Insulated Screwdriver for Pozidriv screws, stainless

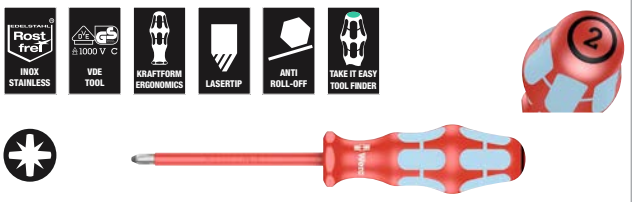

	EAN							
Code	4013288		mm	mm				
05**022740**001	*183941*	PZ 1	80	98	3 1/8"			5
05**022741**001	*183965*	PZ 2	100	105	4"			5

3167 i VDE Insulated TORX® screwdriver, stainless steel



Code	EAN 4013288		mm	mm				
05**022760**001	*220103*	TX 8	80	81	3 1/8"			5
05**022761**001	*220110*	TX 9	80	81	3 1/8"			5
05**022762**001	*220127*	TX 10	80	81	3 1/8"			5
05**022763**001	*220134*	TX 15	80	98	3 1/8"			5
05**022764**001	*220141*	TX 20	80	98	3 1/8"			5
05**022765**001	*220158*	TX 25	100	105	4"			5
05**022766**001	*220165*	TX 30	100	105	4"			5

3160 i/7 Screwdriver set, stainless and rack

- Including useful rack for well-arranged storage of the screwdrivers

3160 i/7 Screwdriver set, stainless and rack



Code	EAN 4013288		
05**022728**001	*118073*		1
			3162 i VDE 1x PH 1x80; 1x PH 2x100
			3160 i VDE 1x 0,5x3,0x80 [1]; 1x 0,6x3,5x100 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125
			3247 1x 0,5x3,0x70

[1] without Lasertip
[*] Product not available in the USA and Canada.

3165 i/6 Screwdriver set, stainless and rack

- Including useful rack for well-arranged storage of the screwdrivers

3165 i/6 Screwdriver set, stainless and rack



Code	EAN 4013288		
05**022745**001	*184207*		1
			3165 i PZ VDE 1x PZ 1x80; 1x PZ 2x100
			3160 i VDE 1x 0,5x3,0x80 [1]; 1x 0,6x3,5x100 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125


[1] without Lasertip

3167 i/7 TORX® Screwdriver set, stainless and rack



Code	EAN 4013288		
05**022767**001	*220172*		1
			3167 i TORX® VDE 1x TX 8x80; 1x TX 9x80; 1x TX 10x80; 1x TX 15x80; 1x TX 20x80; 1x TX 25x100; 1x TX 30x100

Lasertip - laser engineered blade

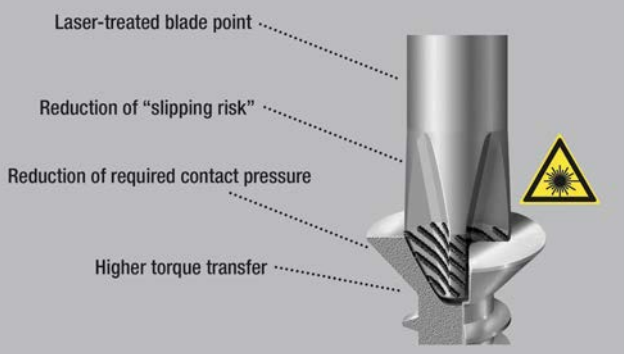


Wera VDE screwdrivers with multi-component Kraftform Plus handle for fast and low-fatigue working: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Individually tested at 10,000 volts for secure work at the permissible voltage of 1,000 volts.

The tips of the Wera Lasertip screwdrivers are microscopically roughened by laser beams. This rough surface literally bites into the head of the screw. Any unintentional slipping out is therefore a thing of the past.

Take it easy Tool Finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

- Insulated blades for secure work at 1,000 volts
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Take it easy Tool Finder: colour coding according to profile and size
- Hexagonal anti-roll feature against rolling away
- Conical blade, Lasertip


160 i VDE Insulated screwdriver for slotted screws

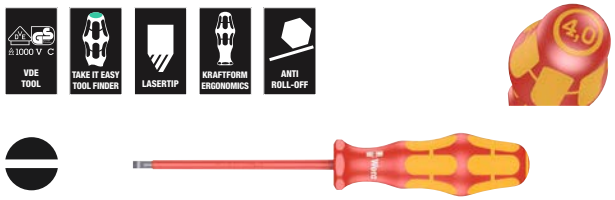

Code	EAN 4013288							
		mm	mm	mm	mm			
05**006100**001 [1]	*027221*	0,4	2,5	80	81	3/32"	3 1/8"	10
05**006105**001 [1]	*027238*	0,5	3,0	100	81	1/8"	4"	10
05**006110**001 [1]	*027245*	0,6	3,5	100	81	9/64"	4"	10
05**006115**001	*027252*	0,8	4,0	100	98	5/32"	4"	10
05**006116**001	*105431*	0,8	4,0	150	98	5/32"	6"	5
05**006120**001	*027269*	1,0	5,5	125	98	7/32"	5"	10
05**006121**001	*105448*	1,0	5,5	200	98	7/32"	8"	5
05**006125**001	*027276*	1,2	6,5	150	105	1/4"	6"	10
05**006126**001	*105455*	1,2	6,5	200	105	1/4"	8"	5
05**006130**001	*027283*	1,2	8,0	175	112	5/16"	7"	5
05**006135**001	*028884*	1,6	8,0	200	112	5/16"	8"	5
05**006140**001	*028877*	1,6	10,0	200	112	3/8"	8"	5

[1] without Lasertip

160 i SB VDE Insulated screwdriver for slotted screws

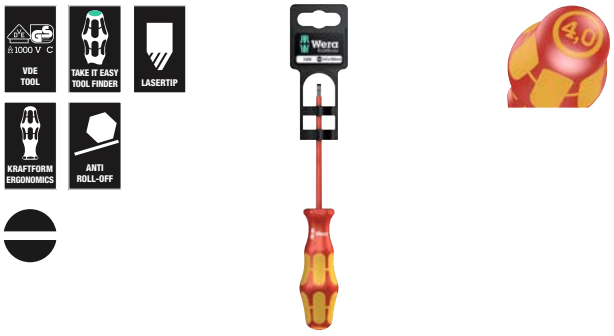

Code	EAN 4013288			
05**100000**001	*181466*		**160 i VDE** 1x 0.4x2.5x80 [1]	10
05**100001**001	*181473*		**160 i VDE** 1x 0.5x3.0x100 [1]	10
05**100002**001	*181480*		**160 i VDE** 1x 0.6x3.5x100 [1]	10
05**100003**001	*181497*		**160 i VDE** 1x 0.8x4.0x100	10
05**100004**001	*181503*		**160 i VDE** 1x 1.0x5.5x125	10

[1] without Lasertip

160 iS VDE Insulated screwdriver with reduced blade diameter for slotted screws

- Reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

160 iS VDE Insulated screwdriver with reduced blade diameter for slotted screws



Code	EAN 4013288							
		mm	mm	mm	mm			
05**006440**001	*160089*	0,6	3,5	100	81	9/64"	4"	10
05**006441**001	*160102*	0,8	4,0	100	98	5/32"	4"	10
05**006442**001	*160126*	1,0	5,5	125	98	7/32"	5"	10

160 iSS VDE Insulated screwdriver with reduced blade and handle diameter for slotted screws


- Reduced blade and handle diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

160 iSS VDE Insulated screwdriver with reduced blade and handle diameter for slotted screws



Code	EAN 4013288							
		mm	mm	mm	mm			
05**020129**001	*179548*	0,8	4,0	100	81	5/32"	4"	5

162 i PH VDE Insulated screwdriver for Phillips screws

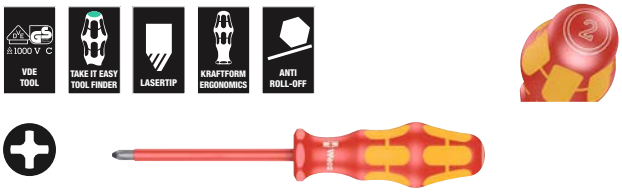

Code	EAN 4013288		mm	mm				
05**006150**001 [1]	*027290*	PH 0	80	81	3 1/8"			5
05**006152**001	*027306*	PH 1	80	98	3 1/8"			5
05**006153**001	*105417*	PH 1	150	98	6"			5
05**006154**001	*027313*	PH 2	100	105	4"			5
05**006159**001	*105424*	PH 2	200	105	8"			5
05**006156**001	*027320*	PH 3	150	112	6"			5
05**006158**001 [1]	*027818*	PH 4	200	112	8"			2

[1] without Lasertip

162 i PH SB VDE Insulated screwdriver for Phillips screws




Code	EAN 4013288		
05**100011**001	*181442*		**162 i PH VDE** 1x PH 1x80	5
05**100012**001	*181459*		**162 i PH VDE** 1x PH 2x100	5

162 iS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws

- Reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

162 iS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws

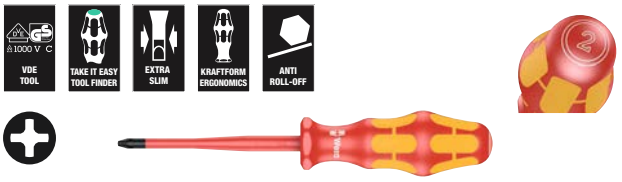


Code	EAN 4013288		mm	mm				
05**006450**001	*160140*	PH 1	80	98	3 1/8"			5
05**006451**001	*160164*	PH 2	100	105	4"			5

162 iSS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws


- Reduced blade and handle diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

162 iSS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws

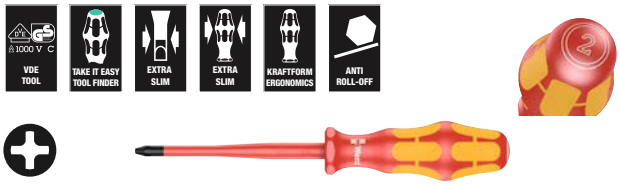

Code	EAN 4013288		mm	mm				
05**020131**001	*179432*	PH 1	80	81	3 1/8"			5
05**020133**001	*179425*	PH 2	100	98	4"			5

165 i PZ VDE Insulated screwdriver for Pozidriv screws

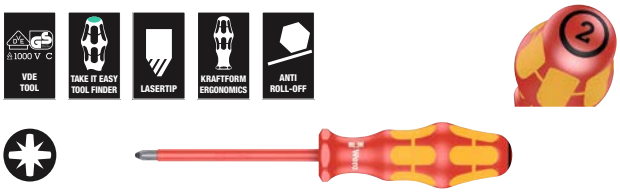

Code	EAN 4013288		mm	mm				
05**006160**001 [1]	*032782*	PZ 0	80	81	3 1/8"			5
05**006162**001	*029836*	PZ 1	80	98	3 1/8"			5
05**006163**001	*105462*	PZ 1	150	98	6"			5
05**006164**001	*029843*	PZ 2	100	105	4"			5
05**006165**001	*105479*	PZ 2	200	105	8"			5
05**006166**001	*029850*	PZ 3	150	112	6"			5
05**006168**001 [1]	*029867*	PZ 4	200	112	8"			2

[1] without Lasertip

165 i PZ SB VDE Insulated screwdriver for Pozidriv screws




Code	EAN 4013288		
05**100015**001	*181510*		**165 i PZ VDE** 1x PZ 1x80	5
05**100016**001	*181527*		**165 i PZ VDE** 1x PZ 2x100	5

165 iS PZ VDE Insulated screwdriver with reduced blade diameter for Pozidriv screws

- Reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

165 iS PZ VDE Insulated screwdriver with reduced blade diameter for Pozidriv screws

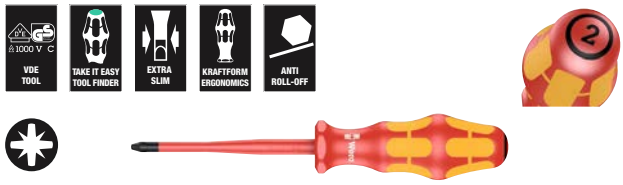

	EAN							
Code	4013288		mm	mm				
05**006460**001	*160188*	PZ 1	80	98	3 1/8"			5
05**006461**001	*160249*	PZ 2	100	105	4"			5

162 i PH/S VDE Insulated screwdriver for PlusMinus screws (Phillips/slotted)


- Combination profile Phillips/slotted

162 i PH/S VDE Insulated screwdriver for PlusMinus screws (Phillips/slotted)



	EAN							
Code	4013288		mm	mm				
05**006380**001	*102614*	# 1	80	98	3 1/8"			5
05**006381**001	*102621*	# 2	100	105	4"			5

162 i PH/S SB VDE Insulated screwdriver for PlusMinus screws (Phillips/slotted)



Code	EAN 4013288		
05**100019**001	*186560*		**162 i PH/S VDE** 1x # 1x80
05**100020**001	*186577*		**162 i PH/S VDE** 1x # 2x100

162 iS PH/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Phillips/slotted)

- Reduced shaft diameter: combination profile Phillips/slotted
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

162 iS PH/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Phillips/slotted)



	EAN							
Code	4013288		mm	mm				
05**006455**001	*160201*	# 1	80	98	3 1/8"			5
05**006456**001	*160225*	# 2	100	105	4"			5

165 i PZ/S VDE Insulated screwdriver for PlusMinus screws (Pozidriv/slotted)

- Combination profile Pozidriv/slotted

165 i PZ/S VDE Insulated screwdriver for PlusMinus screws (Pozidriv/slotted)



	EAN							
Code	4013288		mm	mm				
05**006190**001	*102638*	# 1	80	98	3 1/8"			5
05**006191**001	*102645*	# 2	100	105	4"			5

165 i PZ/S SB VDE Insulated screwdriver for PlusMinus screws (Pozidriv/slotted)



Code	EAN 4013288		
05**100021**001	*186584*		**165 i PZ/S VDE** 1x # 1x80
05**100022**001	*186591*		**165 i PZ/S VDE** 1x # 2x100

165 iS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)

- Reduced shaft diameter: combination profile Pozidriv/slotted
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

165 iS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)



	EAN							
Code	4013288		mm	mm				
05**006465**001	*160263*	# 1	80	98	3 1/8"			5
05**006466**001	*160287*	# 2	100	105	4"			5

165 iSS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)

- Reduced blade and handle diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

165 iSS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)



	EAN							
Code	4013288		mm	mm				
05**020132**001	*179418*	# 1	80	81	3 1/8"			5
05**020134**001	*179401*	# 2	100	98	4"			5

167 i VDE Insulated screwdriver for TORX® screws



	EAN							
Code	4013288		mm	mm				
05**006181**001	*108876*	TX 5	80	81	3 1/8"			5
05**006182**001	*108883*	TX 6	80	81	3 1/8"			5
05**006183**001	*108890*	TX 7	80	81	3 1/8"			5
05**006184**001	*108906*	TX 8	80	81	3 1/8"			5
05**006169**001	*036452*	TX 9	80	81	3 1/8"			5
05**006170**001	*036667*	TX 10	80	81	3 1/8"			5
05**006172**001	*036674*	TX 15	80	98	3 1/8"			5
05**006174**001	*036681*	TX 20	80	98	3 1/8"			5
05**006176**001	*036698*	TX 25	100	105	4"			5
05**006177**001	*036469*	TX 27	100	105	4"			5
05**006178**001	*036704*	TX 30	100	105	4"			5
05**006179**001	*036476*	TX 40	150	112	6"			5

168 i VDE Insulated screwdriver for square socket head screws



	EAN							
Code	4013288			mm	mm			
05**004780**001	*038777*		# 1	80	98	3 1/8"		5
05**004783**001	*105486*		# 1	150	98	6"		5
05**004781**001	*038784*		# 2	100	105	4"		5
05**004784**001	*105493*		# 2	200	105	8"		5
05**004782**001	*040909*		# 3	150	112	6"		5

168 i SB VDE Insulated screwdriver for square socket head screws



Code	EAN 4013288			
05**100024**001	*181534*		**168 i VDE** 1x # 1x80	5
05**100025**001	*181541*		**168 i VDE** 1x # 2x100	5
05**100026**001	*181558*		**168 i VDE** 1x # 3x150	5

190 i VDE Insulated nutdriver





	EAN							
Code	4013288	mm		mm	mm	mm		
05**005300**001	*032485*	5,5		125	98	11,0	5"	5
05**005305**001	*032492*	6,0		125	98	12,0	5"	5
05**005310**001	*032508*	7,0		125	105	14,0	5"	5
05**005315**001	*032515*	8,0		125	105	15,0	5"	5
05**005320**001	*032522*	9,0		125	105	16,0	5"	5
05**005325**001	*032539*	10,0		125	112	17,0	5"	5
05**005330**001	*032546*	11,0		125	112	19,0	5"	5
05**005335**001	*032553*	12,0		125	112	20,0	5"	5
05**005340**001	*032560*	13,0		125	112	21,0	5"	5

247 Single-pole phase tester



	EAN							
Code	4013288	mm	mm	mm	mm			
05**005655**001	*002686*	0,5	3,0	70	3,0	1/8"	2 3/4"	5

**)Product not available in the USA and Canada.

247 SB Single-pole phase tester



Code	EAN 4013288			
05**100100**001	*181664*		**247** 1x 0.5x3.0x70	5

**)Product not available in the USA and Canada.

Kraftform Big Pack 100 VDE


14-piece screwdriver set with individually tested, insulated screwdrivers as per IEC 60900. Individual testing at 10,000 volts so as to ensure safe working at the permitted voltage of 1,000 volts.

- Insulated blades for secure work at 1,000 volts
- Multi-component Kraftform handle for high working speeds and ergonomic screwdriving
- Take it easy Tool Finder: colour coding according to profile and size
- Hexagonal anti-roll feature against rolling away
- Lasertip tips for more secure fit in the screw head

Kraftform Big Pack 100 VDE





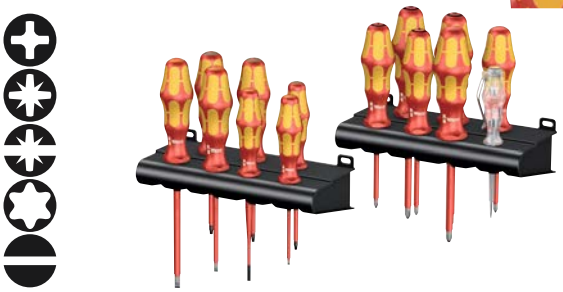

Code	EAN 4013288			
05**105631**001	*163639*			1
			162 i PH VDE 1x PH 1x80; 1x PH 2x100	
			165 i PZ VDE 1x PZ 1x80; 1x PZ 2x100	
			165 i PZ/S VDE 1x # 1x80; 1x # 2x100	
			167 i TORX® VDE 1x TX 10x80; 1x TX 15x80; 1x TX 20x80	
			160 iS 1x 0,6x3,5x100	
			160 i VDE 1x 0,4x2,5x80 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	
			247 1x 0,5x3,0x70	
			Rack 2x 190,0x50,0	

[1] without Lasertip
**)Product not available in the USA and Canada.

Kraftform 2go 100

11 VDE-insulated, Kraftform screwdrivers; with Take it easy Toolfinder; in the Wera 2go 4 quiver; comes with an adjustable partition element for individual sectioning.

- Suitable for docking with the Wera 2go system

Kraftform 2go 100





Code	EAN 4013288			
05**004310**001	*187826*			1
			Wera 2go 4 1x 165,0x165,0x105,0	
		⊕	**162 i PH VDE** 1x PH 1x80; 1x PH 2x100	
		✱	**165 i PZ VDE** 1x PZ 1x80; 1x PZ 2x100	
		✪	**167 i TORX® VDE** 1x TX 10x80; 1x TX 15x80; 1x TX 20x80	
		⊖	**160 i VDE** 1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100; 1x 0,8x4,0x150; 1x 1,0x5,5x200	
		⊖	**160 iS** 1x 0,6x3,5x100	
			K120 1x 50,0x120,0	

[1] without Lasertip

160 i/6 Rack Screwdriver set Kraftform Plus Series 100 + Rack

- Including useful rack for well-arranged storage of the screwdrivers

160 i/6 Rack Screwdriver set Kraftform Plus Series 100 + Rack





Code	EAN 4013288			
05**006145**001	*027887*			1
		⊕	**162 i PH VDE** 1x PH 1x80; 1x PH 2x100	
		⊖	**160 i VDE** 1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	

[1] without Lasertip

160 i/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack

- Including useful rack for well-arranged storage of the screwdrivers

160 i/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack





Code	EAN 4013288			
05**006147**001	*041708*			1
		⊕	**162 i PH VDE** 1x PH 1x80; 1x PH 2x100	
		⊖	**160 i VDE** 1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	
		⊖	**247** 1x 0,5x3,0x70	

[1] without Lasertip
[*] Product not available in the USA and Canada.

160 i/165 i/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack

- Including useful rack for well-arranged storage of the screwdrivers

160 i/165 i/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack





Code	EAN 4013288			
05**006148**001	*041715*			1
		✱	**165 i PZ VDE** 1x PZ 1x80; 1x PZ 2x100	
		⊖	**160 i VDE** 1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	
		⊖	**247** 1x 0,5x3,0x70	

[1] without Lasertip
[*] Product not available in the USA and Canada.

167 i/6 Screwdriver set Kraftform Plus Series 100



Code	EAN 4013288			
05**133356**001	*160072*			1
			167 i TORX® VDE 1x TX 8x80; 1x TX 9x80; 1x TX 10x80; 1x TX 15x80; 1x TX 20x80; 1x TX 25x100	

160 iS/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack. With reduced blade diameter.

- Reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Including useful rack for well-arranged storage of the screwdrivers

160 iS/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack. With reduced blade diameter



Code	EAN 4013288			
05**006480**001	*160713*			1
			162 iS 1x PH 1x80; 1x PH 2x100	
			165 iS PZ/S 1x # 2x100	
			160 iS 1x 0,6x3,5x100; 1x 0,8x4,0x100; 1x 1,0x5,5x125	
			247 1x 0,5x3,0x70	

*) Product not available in the USA and Canada.

160 iSS/7 Screwdriver set Kraftform Plus Series 100. With reduced blade diameters and smaller handle diameters

- Kraftform screwdrivers with reduced blade diameter as well as partially with slim handle design
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Safe work at a voltage of 1,000 volts, individually tested

160 iSS/7 Screwdriver set Kraftform Plus Series 100. With reduced blade diameters and smaller handle diameters




Code	EAN 4013288			
05**135961**001	*178640*			1
			160 iSS 1x 0,8x4,0x100	
			160 iS 1x 0,6x3,5x100; 1x 1,0x5,5x125	
			162 iSS 1x PH 1x80; 1x PH 2x100	
			165 iSS PZ/S 1x # 1x80; 1x # 2x100	

160 i/168 i/6 Rack Screwdriver set Kraftform Plus Series 100, and rack

- Including useful rack for well-arranged storage of the screwdrivers

160 i/168 i/6 Rack Screwdriver set Kraftform Plus Series 100, and rack

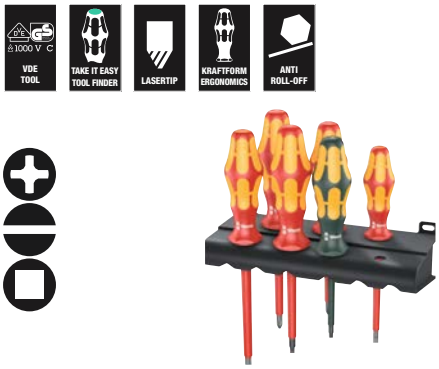

Code	EAN 4013288			
05**347777**001	*122957*			1
			162 i PH VDE 1x PH 1x80; 1x PH 2x100	
			160 i VDE 1x 0,6x3,5x100 [1]; 1x 1,0x5,5x125	
			168 i VDE 1x # 1x80; 1x # 2x100	

[1] without Lasertip

160 i/162 i/167 i/9 Screwdriver set Kraftform Plus Series 100



Code	EAN 4013288			
05**133355**001	*160065*			1
			162 i PH VDE 1x PH 2x100	
			165 i PZ VDE 1x PZ 2x100	
			165 i PZ/S VDE 1x # 1x80; 1x # 2x100	
			167 i TORX® VDE 1x TX 15x80; 1x TX 20x80; 1x TX 25x100	
			160 i VDE 1x 0,4x2,5x80 [1]; 1x 1,0x5,5x125	

[1] without Lasertip

165 iS PZ/S # 1 + 2 Screwdriver set Kraftform Plus series 100. With reduced blade diameter

- Reduced shaft diameter: combination profile - Pozidriv / slotted
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

165 iS PZ/S # 1 + 2 Screwdriver set Kraftform Plus series 100. With reduced blade diameter



Code	EAN 4013288			
05**006470**001	*214317*			1
			165 iS PZ/S 1x # 1x80; 1x # 2x100	

Kraftform Kompakt VDE Safe-Torque Speed control cabinet Set 1

23-piece Kraftform Kompakt VDE set.

One Safe-Torque Speed 7508 VDE torque wrench with five selectable maximum tightening torques (0.4; 0.8; 1.2; 1.6; 2.0 Nm), one 7516 VDE Safe-Torque Speed torque wrench with five selectable maximum tightening torques (0.4; 0.8; 1.2; 1.6; 2.0 Nm), each with a fixed position (Torque Lock) for unlimited loosening and tightening moments, digital torque value display, reliable slip-over mechanism when the set torque is reached, one 817 VDE bitholding screwdriver.

Torque wrenches and bitholding screwdriver solely for Wera VDE blades.

20 VDE blades (each 157 mm length) with Take it easy Tool Finder: colour coding by profile and laser-engraved size indication, most of which with reduced blade diameter, so that even low-lying screw and spring elements can be easily reached and operated.

In a robust textile box for neat storage and convenient transport.

- Individually tested tools as per IEC 60900
- VDE bitholding torque screwdriver 7508 VDE with 5 pre-set values (0.4; 0.8; 1.2; 1.6; 2.0 Nm)
- VDE bitholding torque screwdriver 7516 with 5 pre-set values (2.4; 2.8; 3.2; 3.6; 4.0 Nm)
- Speed: Extremely fast setting of desired torque values
- Torque Lock function: for high tightening and loosening moments without torque
- 817 VDE handle for Kraftform Kompakt interchangeable blades
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool Finder: colour coding by profile and laser-engraved size indication
- Compact and stable tool box with Wera 2go compatibility

Kraftform Kompakt VDE Safe-Torque Speed control cabinet Set 1



Code	EAN 4013288			
05**006633**001	*234261*			1
			7508 VDE 9 mm; 0,4 Nm; 0,8 Nm; 1,2 Nm; 1,6 Nm; 2,0 Nm**;** 192 mm	
			7516 VDE 9 mm; 2,4 Nm; 2,8 Nm; 3,2 Nm; 3,6 Nm; 4,0 Nm**;** 192 mm	
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 62 iS PH/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 65 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 iS TORX® Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 67 i TORX® Take it easy 1x TX 10x157; 1x TX 30x157	
			Kraftform Kompakt VDE 64 i Take it easy 1x 2.5x157; 1x 3.0x157; 1x 4.0x157; 1x 5.0x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0.6x3.5x157; 1x 0.8x4.0x157; 1x 1.0x5.5x157	

7508 VDE Kraftform Safe-Torque Speed Torque screwdriver, 0.4-2.0 Nm

- VDE bladeholding torque screwdriver 7508 VDE with 5 pre-set values (0.4; 0.8; 1.2; 1.6; 2.0 Nm)
- Speed: Extremely fast setting of desired torque values
- Safe: Slip-over torque function which can not be overtightened - for clockwise/counterclockwise torque operation
- Torque Lock function: for high tightening and loosening moments without torque
- With fast-rotating sleeve and mounting for Wera VDE interchangeable blades

7508 VDE Kraftform Safe-Torque Speed Torque screwdriver, 0.4-2.0 Nm



	EAN							
Code	4013288	mm	Nm	Nm	Nm	Nm	Nm	
05**075870**001	*233578*	9	0,4	0,8	1,2	1,6	2,0	1

7516 VDE Kraftform Safe-Torque Speed Torque screwdriver, 2.4-4.0 Nm

- VDE bladeholding torque screwdriver 7516 with 5 pre-set values (2.4; 2.8; 3.2; 3.6; 4.0 Nm)

7516 VDE Kraftform Safe-Torque Speed Torque screwdriver, 2.4-4.0 Nm



	EAN							
Code	4013288	mm	Nm	Nm	Nm	Nm	Nm	
05**075876**001	*233585*	9	2,4	2,8	3,2	3,6	4,0	1

Kraftform Kompakt VDE Stainless 17 extra slim 1 Tool finder

2x 3817 Kraftform VDE bitholding screwdrivers for ergonomic screwdriving. 15 VDE stainless blades, some of which with reduced blade diameter (iS), so that even low-lying screw and spring elements can be easily reached and operated; with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. Individually tested at 10.000 V for safe working at the approved voltage of 1.000 V.

Wera's stainless steel tools are vacuum ice tempered and therefore have the hardness and strength properties required for screw connections. Industrial use is possible without restrictions. In a robust belt pouch.

The pouch is suitable for attachment to walls, shelves, workshop trolleys and the Wera 2go system thanks to the hook and loop fastener system on the back.

Kraftform Kompakt VDE Stainless 17 extra slim 1 Tool finder



Code	EAN 4013288			
05**006631**001	*230034*			1
			3817 VDE Stainless 2x 9x98	
			Kraftform Kompakt VDE 3062 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 3065 iS PZ Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 3065 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 3067 i Take it easy 1x TX 10x157	
			Kraftform Kompakt VDE 3067 iS Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 3060 i Take it easy 1x 0,4x2,5x157; 1x 1,2x6,5x157	
			Kraftform Kompakt VDE 3060 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE Stainless 8 extra slim 1 Tool finder

One 3817 VDE Kraftform bitholding screwdriver for ergonomic screwdriving. 7 VDE stainless blades, some of which with reduced blade diameter (iS), so that even low-lying screw and spring elements can be easily reached and operated; with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V.

Wera's stainless steel tools are vacuum ice tempered and therefore have the hardness and strength properties required for screw connections. Industrial use is possible without restrictions.

In a robust belt pouch. The pouch is suitable for attachment to walls, shelves, workshop trolleys and the Wera 2go system thanks to the hook and loop fastener system on the back.

Kraftform Kompakt VDE Stainless 8 extra slim 1 Tool finder

















Code	EAN 4013288			
05**006630**001	*229656*			1
		◉	**3817 VDE Stainless** 1x 9x98	
		✪	**Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 8x157; 1x TX 9x157; 1x TX 10x157; 1x TX 30x157	
		✪	**Kraftform Kompakt VDE 3067 iS Take it easy** 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

3817 VDE Kraftform Stainless blade-holding handle SB

Premium VDE bitholding screwdriver solely for Wera VDE stainless blades. The handle/blade system allows for lightning-fast change of the required blade and thus a wide range of applications.

Kraftform Plus handle for comfortable ergonomic screwdriving, which avoids blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer.

- Kraftform Kompakt VDE Stainless bitholding handle
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer

3817 VDE Kraftform Stainless blade-holding handle SB













Code	EAN 4013288	mm	mm					
05**003991**001	*220189*	9	98					1

Kraftform Kompakt VDE 3060 i Take it easy SB, stainless steel

VDE stainless blade for the Kraftform Kompakt handle/blade system for lightning-fast blade changes without special tools. Individually tested tools as per IEC 60900. Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V.

Wera's stainless steel tools are vacuum ice hardened and therefore have the hardness and strength properties required for screw connections. Industrial use is possible without restrictions.

- Kraftform Kompakt VDE interchangeable blades for slotted screws
- Insulated, individually tested as per IEC 60900
- Blades made of stainless steel to prevent extraneous rust
- Vacuum ice-hardening provides the required hardness and strength
- 9 mm hex drive with with entry chamfer
- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 3060 i Take it easy SB, stainless steel





Code	EAN 4013288			
05**006575**001	*229236*		**Kraftform Kompakt VDE 3060 i Take it easy** 1x 0.4x2.5x157	5
05**006576**001	*229243*		**Kraftform Kompakt VDE 3060 i Take it easy** 1x 1.2x6.5x157	5

Kraftform Kompakt VDE 3060 iS Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- This means that low-lying screws and spring elements can be accessed and actuated
- Take it easy Tool Finder: Colour coding by profile and aser-engraved size indication

Kraftform Kompakt VDE 3060 iS Take it easy SB, stainless steel





Code	EAN 4013288			
05**006577**001	*229250*		**Kraftform Kompakt VDE 3060 iS Take it easy** 1x 0.6x3.5x157	5
05**006578**001	*229274*		**Kraftform Kompakt VDE 3060 iS Take it easy** 1x 0.8x4.0x157	5
05**006579**001	*229281*		**Kraftform Kompakt VDE 3060 iS Take it easy** 1x 1.0x5.5x157	5

Kraftform Kompakt VDE 3062 iS Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- In this way, low-lying PH screws can be accessed and actuated Take it easy Tool Finder: Colour coding by profile and aser-engraved size indication

Kraftform Kompakt VDE 3062 iS Take it easy SB, stainless steel






Code	EAN 4013288			
05**006580**001	*229304*		**Kraftform Kompakt VDE 3062 iS Take it easy** 1x PH 1x157	5
05**006581**001	*229427*		**Kraftform Kompakt VDE 3062 iS Take it easy** 1x PH 2x157	5

Kraftform Kompakt VDE 3065 iS PZ Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- In this way, low-lying PZ screws can be accessed and actuated
- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 3065 iS PZ Take it easy SB, stainless steel



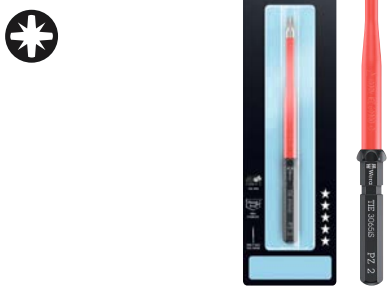

Code	EAN 4013288			
05**006582**001	*229533*		**Kraftform Kompakt VDE 3065 iS PZ Take it easy** 1x PZ 1x157	5
05**006583**001	*229540*		**Kraftform Kompakt VDE 3065 iS PZ Take it easy** 1x PZ 2x157	5

Kraftform Kompakt VDE 3065 iS PZ/S Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- In this way, low-lying PlusMinus screws can be accessed and actuated
  Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 3065 iS PZ/S Take it easy SB, stainless steel





05**006584**001	*229502*		**Kraftform Kompakt VDE 3065 iS PZ/S Take it easy** 1x # 1x157	5
05**006585**001	*229526*		**Kraftform Kompakt VDE 3065 iS PZ/S Take it easy** 1x # 2x157	5

Kraftform Kompakt VDE 3067 iS TORX® Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- In this way, low-lying TORX® screws can be accessed and actuated
- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 3067 iS TORX® Take it easy SB, stainless steel





Code	EAN 4013288			
05**006590**001	*229472*		**Kraftform Kompakt VDE 3067 iS Take it easy** 1x TX 15x157	5
05**006591**001	*229489*		**Kraftform Kompakt VDE 3067 iS Take it easy** 1x TX 20x157	5
05**006592**001	*229496*		**Kraftform Kompakt VDE 3067 iS Take it easy** 1x TX 25x157	5

Kraftform Kompakt VDE 3067 i TORX® Take it easy SB, stainless steel

- Kraftform Kompakt VDE interchangeable blade for TORX® screws
- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 3067 i TORX® Take it easy SB, stainless steel





Code	EAN 4013288			
05**006586**001	*229434*		**Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 8x157	5
05**006587**001	*229441*		**Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 9x157	5
05**006588**001	*229458*		**Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 10x157	5
05**006589**001	*229465*		**Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 30x157	5

837 i RA Kraftform Blade-holding screwdriver with ratchet functionality

Bitholding screwdriver for Wera Kraftform Kompakt VDE blades with ratchet with fine toothing integrated in the handle (40 teeth/return angle 9°). The ratchet accelerates screwdriving without having to reposition the tool.

The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work. The handle/blade system allows for lightning-fast change of the required blade and thus a wide range of applications.

- Kraftform Kompakt VDE Kraftform blade-holding screwdriver with ratchet functionality
- The integrated ratchet with fine toothing ensures fast and safe working
- High working speed: The ratchet allows to “spin” when screwdriving
- Ergonomic intuitive switching to clockwise/counterclockwise or position 0
- Kraftform Plus handle for comfortable ergonomic work

837 i RA Kraftform Blade-holding screwdriver with ratchet functionality





Code	EAN 4013288	mm	mm					
05**057490**001	*229700*	9	115					1

Kraftform Kompakt VDE 24 Allrounder Set 1

The all-rounder set for VDE applications. Two bladeholding screwdrivers 837 i RA and 817 VDE for Kraftform Kompakt VDE blades (837 i RA with ratchet functionality for accelerated screwdriving).

11 Kraftform Kompakt blades for slotted screws, Phillips-head screws (Phillips and Pozidriv) and TORX® screws. Even low-lying screw and spring elements can be reached thanks to the reduced blade diameter. The Take it easy Tool Finder (colour coding by profile as well as laser-engraved size indication) makes it easy to reach for the required blade.

One T-handle with ratchet functionality for 1/4" sockets. The recesses in the fast-rotating sleeve on the blade allow resistance to be generated by finger force which allows the ratchet mechanism to be used even at low resistance of the screw.

9 sockets offer increased safety thanks to the 2-component insulation with a yellow insulation core under an outer red insulation layer. The inner yellow insulation layer becomes visible if the outer red VDE insulation layer is damaged.

All tools are individually tested at 10,000 Volt as per IEC 60900. Space-saving and safe storage in a textile box. The textile box can be docked directly onto the Wera 2go transport system or attached to the workshop trolley, tool wall, etc with the included hook and loop fastener strip.

- Individually tested tools as per IEC 60900
- One Kraftform Kompakt VDE 837 i RA bladeholding screwdriver with ratchet functionality (40 teeth, 9° return angle) for interchangeable blades, one 817 VDE bladeholding screwdriver for interchangeable blades
- One 410 i VDE A RA T-handle adapter screwdriver with ratchet functionality for 1/4" sockets and 1/4" bit sockets
- One Kraftform Kompakt A VDE 712 i adapter blade (1/4" external hexagon to 9 mm external hexagon) for 1/4" sockets and bit sockets
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool Finder: colour coding by profile and laser-engraved size indication
- 9 Zyklop sockets with 2-component insulation (yellow insulation core, which becomes visible if the outer red VDE insulation layer is damaged)
- Space-saving and safe storage in a textile box, which can also be docked onto the Wera 2go system

Kraftform Kompakt VDE 24 Allrounder Set 1





Code	EAN 4013288			
05**006632**001	*234148*			1
			837 i RA 1x 9x115	
			817 VDE 1x 9x98	
			410 i VDE A RA 1x 1/4"x130	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0.4x2.5x157; 1x 1.2x6.5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0.6x3.5x157; 1x 0.8x4.0x157	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 67 iS TORX® Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt A VDE 712 i 1x 1/4"x154	
			8790 A VDE 1x 5.0x41.0; 1x 5.5x41.0; 1x 6.0x41.0; 1x 7.0x41.0; 1x 8.0x41.0; 1x 10.0x41.0; 1x 11.0x41.0; 1x 12.0x41.0; 1x 13.0x41.0	
			9575 1x 230.0x105.0x50.0	

Kraftform Kompakt VDE 17 RA 1

17-piece Kraftform Kompakt VDE set. One 837 i RA blade-holding screwdriver with ratchet functionality (40 teeth, 9° return angle), one 817 VDE bitholding screwdriver, 15 VDE blades with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication. Individually tested tools as per IEC 60900.

Individually tested in a water quench at 10,000 V for safe working at the approved voltage of 1,000 V. In a robust belt pouch.

- One Kraftform Kompakt VDE Kraftform 837 i RA blade-holding screwdriver with ratchet functionality (40 teeth, 9° return angle) for blades, one 817 VDE bitholding screwdriver for blades
- The 837 i RA bitholding screwdriver with ratchet integrated in the handle ensures fast and safe working
- High working speed: The ratchet allows to “spin” when screwdriving
- Ergonomic intuitive switching to clockwise/counterclockwise or position 0
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication
- Individually tested tools as per IEC 60900
- In robust pouch
- Suitable for Wera 2go

Kraftform Kompakt VDE 17 RA 1



Code	EAN 4013288			
05**006618**001	*229694*			1
			837 i RA 1x 9x115	
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 i Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 i Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 65 i PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157; 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157; 1x 1,2x6,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157	

Kraftform Kompakt VDE 17 RA Imperial 1



Code	EAN 4013288			
05**006619**001	*229885*			1
			837 i RA 1x 9x115	
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 i Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 i PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157; 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157; 1x 1,2x6,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157	
			Kraftform Kompakt VDE 68 i Take it easy 1x # 1x157; 1x # 2x157	

Kraftform Kompakt & VDE - every size always available

Kraftform Kompakt VDE 16 Torque 1.2-3.0 Nm extra slim 1 Tool finder

16-piece torque VDE blade set. Includes 14 blades (12 of which with reduced blade diameter) with integrated protective insulation.

With Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. Torque VDE bitholding screwdriver with adjustable torque value from 1.2-3.0 Nm and 817 VDE bitholding screwdriver.

Both with ergonomic Kraftform Plus handle, with hard handle zones ensuring high working speeds while soft handle zones guarantee a high torque transfer.

Kraftform Kompakt VDE 15 Torque 1.2-3.0 Nm extra slim 1 Tool finder


15-piece torque VDE blade set. One torque VDE bitholding screwdriver with adjustable torque value from 1.2-3.0 Nm.

With ergonomic Kraftform Plus handle, with hard handle zones ensuring high working speeds while soft handle zones guarantee a high torque transfer. Includes 14 blades (12 of which with reduced blade diameter) with integrated protective insulation.

With Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool.

In a robust belt pouch. The textile box features a fleece zone at the back. Using the provided self-adhesive hook and loop fastener strips, the textile box can be attached to the Wera 2go components. Or to the wall, shelf or workshop trolley.

Kraftform Kompakt VDE 16 Torque 1.2-3.0 Nm extra slim 1 Tool finder

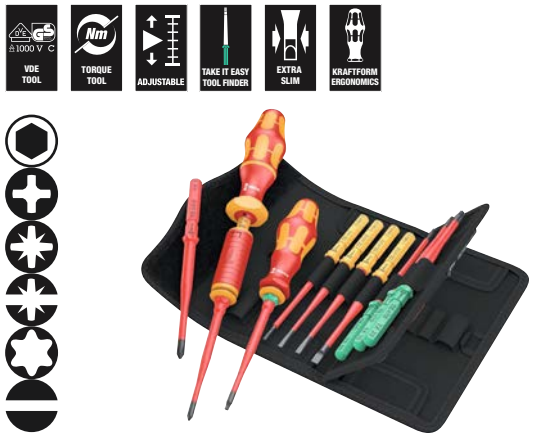

Code	EAN 4013288			
05**006609**001	*229953*			1
			7400 VDE 1x 7441 VDE, 1,2-3,0 Nm	
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 65 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE 15 Torque 1.2-3.0 Nm extra slim 1 Tool finder



Code	EAN 4013288			
05**006605**001	*229915*			1
			7400 VDE 1x 7441 VDE, 1,2-3,0 Nm	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 65 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE Big Pack 1

26-piece Kraftform Kompakt VDE set, 2x 817 VDE Kraftform blade-holding screwdrivers, 24 VDE blades (each 157 mm length) most of them with reduced blade diameter (iS), so that even low-lying screw and spring elements can be easily reached and operated. Individually tested as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V.

Take it easy Tool finder with colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer. The anti-roll protection avoids bits from rolling away annoyingly at the workplace.

- 2 VDE-insulated Kraftform 817 VDE blade-holding screwdrivers with anti-roll protection
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication
- Insulated tools, blades partly with reduced diameter for safe working at up to 1,000 Volt
- Individually tested tools as per IEC 60900
- In robust pouch
- Suitable for Wera 2go

Kraftform Kompakt VDE Big Pack 1





Code	EAN 4013288			
05**006617**001	*229557*			1
			817 VDE 2x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 62 iS PH/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 65 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 8x157; 1x TX 9x157; 1x TX 10x157; 1x TX 30x157	
			Kraftform Kompakt VDE 67 iS Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 64 i Take it easy 1x 2,5x157; 1x 3,0x157; 1x 4,0x157; 1x 5,0x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 1,2x6,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	

Kraftform Kompakt VDE 18 Universal 1 Tool finder

One 817 VDE Kraftform bitholding screwdriver, 12 VDE blades with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool, 4 control cabinet keys, one single-pole phase tester. Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V.

In a robust belt pouch. The textile box features a fleece zone at the back. Using the provided self-adhesive hook and loop fastener strips, the textile box can be attached to the Wera 2go components. Or to the wall, shelf or workshop trolley.

- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 18 Universal 1 Tool finder



Code	EAN 4013288			
05**006613**001	*229991*			1
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 i Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 i Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 62 i PH/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 65 i PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Kraftform Kompakt 96 VK 6,3 1x 6,3x89	
			Kraftform Kompakt 97 VK 8,1 1x 8,1x89	
			Kraftform Kompakt 98 DK 1x 89	
			Kraftform Kompakt 99 FL 1x 89	
			247 1x 0,5x3,0x70	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[**] Product not available in the USA and Canada.

Kraftform Kompakt VDE 18 Imperial 1 Tool finder



Code	EAN 4013288			
05**006616**001	*230027*			1
			817 VDE 2x 9x98	
			Kraftform Kompakt VDE 62 i Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 62 i PH/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 65 i PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Kraftform Kompakt VDE 68 i Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt 96 VK 6,3 1x 6,3x89	
			Kraftform Kompakt 97 VK 8,1 1x 8,1x89	
			Kraftform Kompakt 98 DK 1x 89	
			Kraftform Kompakt 99 FL 1x 89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE 18 Universal 2 Tool finder





Code	EAN 4013288			
05**006614**001	*230010*			1
			817 VDE 2x 9x98	
			Kraftform Kompakt VDE 62 i Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 i Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 62 i PH/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 65 i PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Kraftform Kompakt 96 VK 6,3 1x 6,3x89	
			Kraftform Kompakt 97 VK 8,1 1x 8,1x89	
			Kraftform Kompakt 98 DK 1x 89	
			Kraftform Kompakt 99 FL 1x 89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE 17 extra slim 1 Tool finder

- Individually tested VDE interchangeable blades with reduced blade diameters
- 2 multi-component, ergonomic Kraftform VDE hand-holders with anti-roll protection
- In a robust textile box
- Multifunctional pliers for electrical installation: cable cutting, stripping, gripping, bending, deburring, crimping of wire end ferrules
- Pliers including cable shears with precision cutting edges (inductively hardened) for Cu and Al cables up to 5 x 2.5mm² / Ø 15 mm
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 17 extra slim 1 Tool finder





Code	EAN 4013288			
05**006612**001	*229977*			1
			817 VDE 2x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 65 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			KNIPEX 13 96 200	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE 17 extra slim 2 Tool finder

- The 837 i RA bladeholding screwdriver with a ratchet integrated in the handle ensures fast and safe working
- 817 VDE handle for Kraftform Kompakt interchangeable blades
- 1x Knipex needle-nose combination pliers, 185 mm long

Kraftform Kompakt VDE 17 extra slim 2 Tool finder





Code	EAN 4013288			
05**006610**001	*234131*			1
			837 i RA 1x 9x115	
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 65 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i TORX® Take it easy 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS TORX® Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0.4x2.5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0.6x3.5x157; 1x 0.8x4.0x157; 1x 1.0x5.5x157	
			KNIPEX Needle-nose combination pliers 08 26 185	
			Hook and Loop Fastener Strip 70 1x 50.0x70.0	

Kraftform Kompakt VDE 17 Universal 1 Tool finder

- 17-piece set
- 2 VDE-insulated Kraftform 817 VDE blade-holding screwdrivers with anti-roll protection
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication
- Individually tested tools as per IEC 60900
- In robust pouch
- Suitable for Wera 2go

Kraftform Kompakt VDE 17 Universal 1 Tool finder





Code	EAN 4013288			
05**006611**001	*229564*			1
			817 VDE 2x 9x98	
			Kraftform Kompakt VDE 62 i Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 i Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 65 i PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157; 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157; 1x 1,2x6,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE 16 extra slim 1 Tool finder

- VDE interchangeable blade with reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 16 extra slim 1 Tool finder







Code	EAN 4013288			
05**006608**001	*229946*			1
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 65 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			247 1x 0,5x3,0x70	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

*) Product not available in the USA and Canada.

Kraftform Kompakt VDE 16 Universal 1 Tool finder







Code	EAN 4013288			
05**006607**001	*229922*			1
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 i Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 i Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 65 i PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157; 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			247 1x 0,5x3,0x70	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

*) Product not available in the USA and Canada.

Kraftform Kompakt VDE 7 extra slim 1 Tool finder

- Individually tested VDE interchangeable blades with reduced blade diameters
- In robust folding pouch with Wera 2go compatibility
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 7 extra slim 1 Tool finder





Code	EAN 4013288			
05**006603**001	*229687*			1
		◉	**817 VDE** 1x 9x98	
		✚	**Kraftform Kompakt VDE 62 iS Take it easy** 1x PH 1x157; 1x PH 2x157	
		✪	**Kraftform Kompakt VDE 65 iS PZ/S Take it easy** 1x # 2x157	
		✪	**Kraftform Kompakt VDE 67 iS Take it easy** 1x TX 15x157; 1x TX 20x157	
		▬	**Kraftform Kompakt VDE 60 iS Take it easy** 1x 0,6x3,5x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE 7 Universal 1 Tool finder

One 817 VDE Kraftform bitholding screwdriver and 6 VDE blades with Take it easy Tool finder: Colour coding and laser-engraved size indication. Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V.

In a robust belt pouch. The textile box features a fleece zone at the back. Using the provided self-adhesive hook and loop fastener strips, the textile box can be attached to the Wera 2go components. Or to the wall, shelf or workshop trolley.

- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 7 Universal 1 Tool finder





Code	EAN 4013288			
05**006600**001	*229663*			1
		◉	**817 VDE** 1x 9x98	
		✚	**Kraftform Kompakt VDE 62 i Take it easy** 1x PH 1x157; 1x PH 2x157	
		▬	**Kraftform Kompakt VDE 60 i Take it easy** 1x 0,4x2,5x157; 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE 7 Imperial 1 Tool finder





Code	EAN 4013288			
05**006604**001	*229892*			1
		◉	**817 VDE** 1x 9x98	
		✚	**Kraftform Kompakt VDE 62 i Take it easy** 1x PH 1x157; 1x PH 2x157	
		▬	**Kraftform Kompakt VDE 60 i Take it easy** 1x 0,6x3,5x157; 1x 1,0x5,5x157	
		▢	**Kraftform Kompakt VDE 68 i Take it easy** 1x # 1x157; 1x # 2x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt VDE 7 Universal 2 Tool finder






Code	EAN 4013288			
05**006601**001	*229670*			1
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 65 i Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Series 7400 VDE Kraftform adjustable torque handle (0.3-3.5 Nm)

- Adjustable Kraftform VDE torque holder
- Adjustable torque from 0.3-1.2
- Distinct audible and perceivable excess load signal when the pre-set torque value is reached
- Suitable for Kraftform Kompakt VDE blades
- Rapid exchange of the interchangeable blades

Series 7400 VDE Kraftform adjustable torque handle (0.3-3.5 Nm)





Code	EAN 4013288	Art.No.	mm	Nm	Nm	mm		
05**074752**001	*179111*	7440 VDE	9	0,3-1,2	0,05	192	7 9/16"	1
05**074750**001	*168535*	7441 VDE	9	1,2-3,0	0,10	192	7 9/16"	1
05**074757**001	*184412*	7444 VDE	9	1,7-3,5	0,10	192	7 9/16"	1

Kraftform Kompakt A VDE 712 i Adapter blade, insulated, for 1/4" sockets

- The blade adapts from 9 mm external hexagon to 1/4" external square head
- Suitable for the insulated Wera Kraftform Kompakt VDE bladeholding screwdrivers with 9 mm hexagonal mounting
- For insulated Wera 1/4" sockets and 1/4" bit sockets

Kraftform Kompakt A VDE 712 i Adapter blade, insulated, for 1/4" sockets



Code	EAN 4013288							
			mm	mm				
05**006642**001	*234155*	1/4"	9	154	6"			2

Kraftform Kompakt A VDE 712 i SB Adapter blade, insulated, for 1/4" sockets



Code	EAN 4013288		
05**073702**001	*234162*		**Kraftform Kompakt A VDE 712 i** 1x 1/4"x154	3

Kraftform Kompakt Turbo i 1 Tool finder

Many users wish to carry out screwdriving operations faster without compromises. With a screwdriver which is precise, allows powerful end screwdriving and is also much faster than a conventional screwdriver. The solution: A planetary drive that can be switched on and off: Integrated in the handle it quadruples the working speed in smooth couplings all mechanically. One hand holds the front part of the handle, the second hand turns the back part of the handle.

The turbo function can be switched on and off at the push of a button. Turning it off is recommended for tightening and loosening with high torque as well as for fine adjustments. Robust, maintenance-free steel drive with maximum torque of 14 Nm when the turbo function is deactivated.

In the VDE version, the 827 T i Kraftform Turbo bitholding screwdriver with the Wera VDE blades individually tested as per IEC 60900 ensures fast and safe working even under tension (up to 1,000 volt). VDE blades with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. In a robust belt pouch. The textile box features a fleece zone at the back. Using the provided self-adhesive hook and loop fastener strips, the textile box can be attached to the Wera 2go components. Or to the wall, shelf or workshop trolley.

- 4 times the screwdriving speed thanks to the turbo function (purely mechanical - without battery)
- Activate and deactivate the turbo function by a simple push of a button
- Turbo function especially for smooth couplings
- Can be used without the turbo function like a normal screwdriver for couplings with steadily increasing torque
- Robust, maintenance-free gear made of steel

Kraftform Kompakt Turbo i 1 Tool finder







Code	EAN			
	4013288			
05**006640**001	*230041*			1
		◉	**827 T Kraftform Turbo** 1x 9x125	
		◉	**817 VDE** 1x 9x98	
		✚	**Kraftform Kompakt VDE 62 iS Take it easy** 1x PH 1x157; 1x PH 2x157	
		✚	**Kraftform Kompakt VDE 65 iS Take it easy** 1x PZ 1x157; 1x PZ 2x157	
		✚	**Kraftform Kompakt VDE 65 iS PZ/S Take it easy** 1x # 1x157; 1x # 2x157	
		✪	**Kraftform Kompakt VDE 67 i Take it easy** 1x TX 10x157	
		✪	**Kraftform Kompakt VDE 67 iS Take it easy** 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
		⊖	**Kraftform Kompakt VDE 60 i Take it easy** 1x 0,4x2,5x157	
		⊖	**Kraftform Kompakt VDE 60 iS Take it easy** 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

817 VDE Kraftform blade-holding handle

- Kraftform Kompakt VDE Kraftform handle
- Exclusively for Wera VDE interchangeable blades
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Hexagonal anti-roll feature against rolling away

817 VDE Kraftform blade-holding handle









Code	EAN							
	4013288	mm	mm					
05**003990**001	*104359*	9	102					1


Kraftform Kompakt Turbo i Imperial 1 Tool finder





Code	EAN 4013288			
05**006641**001	*230058*			1
			827 T Kraftform Turbo 1x 9x125	
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 62 iS PH/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Kraftform Kompakt VDE 68 iS Take it easy 1x # 1x157; 1x # 2x157	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

827 T i Kraftform Turbo hand holder

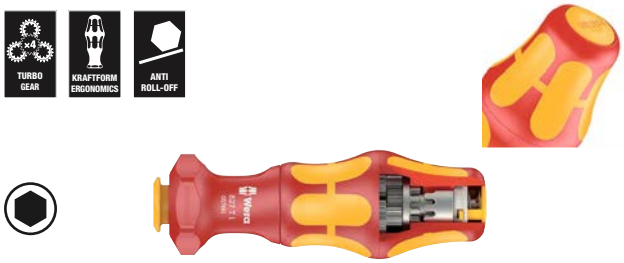

Code	EAN 4013288	mm	mm					
05**057481**001	*214607*	9	125					1

Kraftform Kompakt VDE 60 i Take it easy

VDE blades for Kraftform Kompakt handle/interchangeable blade system for rapid exchange of the blades without any special tools. Individually tested as per IEC 60900. Individual testing at 10,000 volts so as to ensure safe working at the permitted voltage of 1,000 volts.

- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 60 i Take it easy



Code	EAN 4013288	mm	mm	mm				
05**006500**001	*228420*	0,4	2,5	157	3/32"	6 3/16"		5
05**006501**001	*228437*	0,5	3,0	157	1/8"	6 3/16"		5
05**006502**001	*228444*	0,6	3,5	157	9/64"	6 3/16"		5
05**006503**001	*228451*	0,8	4,0	157	5/32"	6 3/16"		5
05**006504**001	*228468*	1,0	5,5	157	7/32"	6 3/16"		5
05**006505**001	*228475*	1,2	6,5	157	1/4"	6 3/16"		5

Kraftform Kompakt VDE 60 i Take it easy SB



Code	EAN 4013288			
05**006550**001	*228925*		**Kraftform Kompakt VDE 60 i Take it easy** 1x 0.4x2.5x157	5
05**006551**001	*228932*		**Kraftform Kompakt VDE 60 i Take it easy** 1x 0.5x3.0x157	5
05**006552**001	*229007*		**Kraftform Kompakt VDE 60 i Take it easy** 1x 0.6x3.5x157	5
05**006553**001	*229014*		**Kraftform Kompakt VDE 60 i Take it easy** 1x 0.8x4.0x157	5
05**006554**001	*229021*		**Kraftform Kompakt VDE 60 i Take it easy** 1x 1.0x5.5x157	5
05**006555**001	*229038*		**Kraftform Kompakt VDE 60 i Take it easy** 1x 1.2x6.5x157	5

Kraftform Kompakt VDE 60 iS Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 60 iS Take it easy



	EAN							
Code	4013288	mm	mm	mm				
05**006506**001	*228482*	0,6	3,5	157	9/64"	6 3/16"		5
05**006507**001	*228499*	0,8	4,0	157	5/32"	6 3/16"		5
05**006508**001	*228505*	1,0	5,5	157	7/32"	6 3/16"		5

Kraftform Kompakt VDE 60 iS Take it easy SB



Code	EAN 4013288			
05**006556**001	*229045*		**Kraftform Kompakt VDE 60 iS Take it easy** 1x 0.6x3.5x157	5
05**006557**001	*229052*		**Kraftform Kompakt VDE 60 iS Take it easy** 1x 0.8x4.0x157	5
05**006558**001	*229069*		**Kraftform Kompakt VDE 60 iS Take it easy** 1x 1.0x5.5x157	5

Kraftform Kompakt VDE 62 i Take it easy



	EAN							
Code	4013288		mm					
05**006509**001	*228512*	PH 0	157	6 3/16"				5
05**006510**001	*228529*	PH 1	157	6 3/16"				5
05**006511**001	*228536*	PH 2	157	6 3/16"				5

Kraftform Kompakt VDE 62 iS Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 62 iS Take it easy



	EAN							
Code	4013288		mm					
05**006512**001	*228543*	PH 1	157	6 3/16"				5
05**006513**001	*228550*	PH 2	157	6 3/16"				5

Kraftform Kompakt VDE 62 iS Take it easy SB



Code	EAN 4013288			
05**006559**001	*229076*		**Kraftform Kompakt VDE 62 iS Take it easy** 1x PH 1x157	5
05**006560**001	*229083*		**Kraftform Kompakt VDE 62 iS Take it easy** 1x PH 2x157	5

Kraftform Kompakt VDE 65 i Take it easy



	EAN							
Code	4013288		mm					
05**006523**001	*228659*	PZ 0	157	6 3/16"				5
05**006524**001	*228666*	PZ 1	157	6 3/16"				5
05**006525**001	*228673*	PZ 2	157	6 3/16"				5

Kraftform Kompakt VDE 65 iS Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 65 iS Take it easy



	EAN							
Code	4013288		mm					
05**006526**001	*228680*	PZ 1	157	6 3/16"				5
05**006527**001	*228697*	PZ 2	157	6 3/16"				5

Kraftform Kompakt VDE 65 iS Take it easy SB



Code	EAN 4013288		
05**006566**001	*229212*		**Kraftform Kompakt VDE 65 iS Take it easy** 1x PZ 1x157	5
05**006567**001	*229229*		**Kraftform Kompakt VDE 65 iS Take it easy** 1x PZ 2x157	5

Kraftform Kompakt VDE 62 i PH/S Take it easy

- Kraftform Kompakt VDE interchangeable blade for PlusMinus screws slotted/Phillips
- Particularly for jobs on terminal blocks, fuse boxes, switches and relays
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 62 i PH/S Take it easy



	EAN							
Code	4013288		mm					
05**006514**001	*228567*	# 1	157	6 3/16"				5
05**006515**001	*228574*	# 2	157	6 3/16"				5

Kraftform Kompakt VDE 62 iS PH/S Take it easy

- Kraftform Kompakt VDE interchangeable blade for PlusMinus screws slotted/Phillips
- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 62 iS PH/S Take it easy



	EAN							
Code	4013288		mm					
05**006516**001	*228581*	# 1	157	6 3/16"				5
05**006517**001	*228598*	# 2	157	6 3/16"				5

Kraftform Kompakt VDE 65 i PZ/S Take it easy

- Combination profile - Pozidriv/slotted
- Particularly for jobs on terminal blocks, fuse boxes, switches and relays
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 65 i PZ/S Take it easy








	EAN							
Code	4013288		mm					
05**006528**001	*228703*	# 1	157	6 3/16"				5
05**006529**001	*228710*	# 2	157	6 3/16"				5

Kraftform Kompakt VDE 65 iS PZ/S Take it easy

- Combination profile - Pozidriv/slotted
- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 65 iS PZ/S Take it easy










	EAN							
Code	4013288		mm					
05**006530**001	*228727*	# 1	157	6 3/16"				5
05**006531**001	*228734*	# 2	157	6 3/16"				5

Kraftform Kompakt VDE 65 iS PZ/S Take it easy SB










Code	EAN 4013288			
05**006568**001	*229199*		**Kraftform Kompakt VDE 65 i PZ/S Take it easy** 1x # 1x157	5
05**006569**001	*229205*		**Kraftform Kompakt VDE 65 iS PZ/S Take it easy** 1x # 2x157	5

Kraftform Kompakt VDE 67 i TORX® Take it easy

- Kraftform Kompakt VDE interchangeable blade for hexagon socket screws
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 67 i TORX® Take it easy








	EAN							
Code	4013288		mm					
05**006532**001	*228758*	TX 8	157	6 3/16"				5
05**006533**001	*228765*	TX 9	157	6 3/16"				5
05**006534**001	*228772*	TX 10	157	6 3/16"				5
05**006535**001	*228789*	TX 15	157	6 3/16"				5
05**006536**001	*228796*	TX 20	157	6 3/16"				5
05**006537**001	*228802*	TX 25	157	6 3/16"				5
05**006538**001	*228819*	TX 27	157	6 3/16"				5
05**006539**001	*228826*	TX 30	157	6 3/16"				5

Kraftform Kompakt VDE 67 i TORX® Take it easy SB



Code	EAN 4013288			
05**006570**001	*229151*		**Kraftform Kompakt VDE 67 i Take it easy** 1x TX 10x157	5
05**006571**001	*229144*		**Kraftform Kompakt VDE 67 i Take it easy** 1x TX 15x157	5
05**006572**001	*229168*		**Kraftform Kompakt VDE 67 i Take it easy** 1x TX 20x157	5
05**006573**001	*229175*		**Kraftform Kompakt VDE 67 i Take it easy** 1x TX 25x157	5
05**006574**001	*229182*		**Kraftform Kompakt VDE 67 i Take it easy** 1x TX 30x157	5

Kraftform Kompakt VDE 67 iS TORX® Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 67 iS TORX® Take it easy



Code	EAN 4013288		mm					
05**006540**001	*228833*	TX 15	157	6 3/16"				5
05**006541**001	*228840*	TX 20	157	6 3/16"				5
05**006542**001	*228857*	TX 25	157	6 3/16"				5

Kraftform Kompakt VDE 68 i Take it easy



Code	EAN 4013288		mm					
05**006543**001	*228864*	# 1	157	6 3/16"				5
05**006544**001	*228871*	# 2	157	6 3/16"				5

Kraftform Kompakt VDE 68 iS Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 68 iS Take it easy



Code	EAN 4013288		mm					
05**006545**001	*228888*	# 1	157	6 3/16"				5
05**006546**001	*228895*	# 2	157	6 3/16"				5

Kraftform Kompakt VDE 64 i Take it easy

- Kraftform Kompakt VDE interchangeable blade for hexagon socket screws
- With Hex-Plus profile (prevents hexagonal socket screws from cylindrical turning)
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt VDE 64 i Take it easy





	EAN							
Code	4013288	mm	mm					
05**006518**001	*228604*	2,5	157	6 3/16"				5
05**006519**001	*228611*	3,0	157	6 3/16"				5
05**006520**001	*228628*	4,0	157	6 3/16"				5
05**006521**001	*228635*	5,0	157	6 3/16"				5
05**006522**001	*228642*	6,0	157	6 3/16"				5

Kraftform Kompakt VDE 64 i Take it easy SB





Code	EAN 4013288			
05**006561**001	*229090*	○	**Kraftform Kompakt VDE 64 i Take it easy** 1x 2.5x157	5
05**006562**001	*229106*	○	**Kraftform Kompakt VDE 64 i Take it easy** 1x 3.0x157	5
05**006563**001	*229113*	○	**Kraftform Kompakt VDE 64 i Take it easy** 1x 4.0x157	5
05**006564**001	*229120*	○	**Kraftform Kompakt VDE 64 i Take it easy** 1x 5.0x157	5
05**006565**001	*229137*	○	**Kraftform Kompakt VDE 64 i Take it easy** 1x 6.0x157	5

Kraftform Kompakt 96 VK 6,3

Glass-fibre reinforced switch cabinet key. Blade for Kraftform Kompakt handle/interchangeable blade system for rapid exchange of the blade without needing any special tools - square socket.

Kraftform Kompakt 96 VK 6,3



	EAN							
Code	4013288	mm	mm					
05**003460**001	*105349*	6,3	89	3 9/16"				5

Kraftform Kompakt 97 VK 8,1

- Kraftform Kompakt switch cabinet key 8.1 mm

Kraftform Kompakt 97 VK 8,1



	EAN							
Code	4013288	mm	mm					
05**003461**001	*105370*	8,1	89	3 9/16"				5

Kraftform Kompakt 98 DK



	EAN							
Code	4013288		mm					
05**003462**001	*105356*		89	3 9/16"				5

Kraftform Kompakt 99 FL



	EAN							
Code	4013288		mm					
05**003463**001	*105363*		89	3 9/16"				5

Kraftform – Series 1000 VDE

Premium Kraftform VDE screwdriver. Multi-component Kraftform handle for fast and gentle work. The Wera Black Point tip and a sophisticated hardening process guarantee a long usability for the tip, increased corrosion protection and exact fitting accuracy.

Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V. The hexagon anti-roll protection avoids bits from rolling away annoyingly at the workplace. Handles marked to find and sort the tools easily.

- Insulated screwdriver for safe working up to 1,000 volts
- Individually tested
- Multi-component Kraftform handle for fast and low-fatigue working
- Handle markings simplify finding and sorting of tools
- The Wera Black Point tip offers an exact fit and optimum corrosion protection

1060 i VDE-insulated Kraftform slotted screwdriver



	EAN							
Code	4013288	mm	mm	mm	mm			
05**051580**001	*222268*	0,4	2,5	80	81	3/32"	3 1/8"	10
05**051582**001	*222275*	0,6	3,5	100	81	9/64"	4"	10
05**051583**001	*222282*	0,8	4,0	100	98	5/32"	4"	10
05**051587**001	*222299*	1,0	5,5	125	98	7/32"	5"	10

1062 i PH VDE-insulated Kraftform Phillips-head screwdriver



	EAN							
Code	4013288		mm	mm				
05**051601**001	*222220*	PH 1	80	98	3 1/8"			5
05**051603**001	*222237*	PH 2	100	105	4"			5

1065 i PZ VDE-insulated Kraftform Phillips-head screwdriver



	EAN							
Code	4013288		mm	mm				
05**051611**001	*222244*	PZ 1	80	98	3 1/8"			5
05**051613**001	*222251*	PZ 2	100	105	4"			5

1060 i/1062 i/6 Kraftform VDE screwdriver set

Premium Kraftform VDE screwdriver set. Multi-component Kraftform handle for fast and gentle work. The Wera Black Point tip and a sophisticated hardening process guarantee a long usability for the tip, increased corrosion protection and exact fitting accuracy.

Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V. The hexagon anti-roll protection avoids bits from rolling away annoyingly at the workplace. Handles marked to find and sort the tools easily.

1060 i/1062 i/6 Kraftform VDE screwdriver set



Code	EAN 4013288			
05**051575**001	*222381*			1
			1062 i PH VDE 1x PH 1x80; 1x PH 2x100	
			1060 i VDE 1x 0,4x2,5x80; 1x 0,6x3,5x100; 1x 0,8x4,0x100; 1x 1,0x5,5x125	

1060 i/1065 i/6 Kraftform VDE screwdriver set



Code	EAN		
	4013288		
05**051576**001	*222374*		1
			1065 i PZ VDE 1x PZ 1x80; 1x PZ 2x100
			1060 i VDE 1x 0,4x2,5x80; 1x 0,6x3,5x100; 1x 0,8x4,0x100; 1x 1,0x5,5x125

410 i VDE A RA VDE-insulated T-handle adapter screwdriver with ratchet functionality for 1/4" sockets

- The fine-toothed ratchet mechanism in the handle ensures fast, powerful and precise working
- The recesses in the fast-rotating sleeve allow resistance to be generated by finger force. This allows the ratchet mechanism to be used even at low resistance of the screw
- Socket mounting with integrated ball lock

410 i VDE A RA VDE-insulated T-handle adapter screwdriver with ratchet functionality for 1/4" sockets



Code	EAN							
	4013288		mm	mm	mm			
05**005121**001	*234100*	1/4"	130	49	99	5 1/8"		1

410 i VDE B RA VDE-insulated T-handle adapter screwdriver with ratchet functionality for 3/8" sockets

- For 3/8" square head sockets with ball lock

410 i VDE B RA VDE-insulated T-handle adapter screwdriver with ratchet functionality for 3/8" sockets



Code	EAN							
	4013288		mm	mm	mm			
05**005122**001	*234117*	3/8"	130	49	99	5 1/8"		1

410 i VDE B VDE-insulated T-handle adapter screwdriver for 3/8" sockets

The shape of the T-handle allows a transmission of particularly high tightening and loosening torque. The geometry of the handle fills the hand well and the fingers lie safely in the soft rounded handle recesses.

This ensures optimal, ergonomic power transmission. Individually tested tool as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V.

Only allowed for 3/8" VDE bit sockets and sockets of the Wera Zyklop VDE series 8740, 8760, 8767, 8790. The coated handle protects even sensitive surfaces from damage.

- 3/8" VDE T-handle screwdriver for the transmission of particularly high tightening and loosening torque
- Ergonomic 2-component T-handle with handle recesses and a pleasant feel for a very high power transmission and fatigue-free working.
- Insulated, individually tested tool as per IEC 60900 for safe working up to 1.000 V
- Only allowed for 3/8" VDE bit sockets and sockets of the Wera Zyklop VDE series 8740, 8760, 8767, 8790

410 i VDE B VDE-insulated T-handle adapter screwdriver for 3/8" sockets



Code	EAN							
	4013288		mm	mm	mm			
05**005120**001	*222664*	3/8"	130	49	99	5 1/8"		1

8790 A VDE Zyklop Socket, insulated, with 1/4" drive

- Individually tested tools as per IEC 60900 at 10,000 V
- Increased safety thanks to 2-component insulation with a yellow insulation core under an outer red insulation layer
- Plastic sleeve protects surfaces from damage

8790 A VDE Zyklop Socket, insulated, with 1/4" drive





	EAN							
Code	4013288	mm	mm	mm	mm			
05**005930**001	*233806*	4,0	41,0	11,8	18,0			1
05**005931**001	*233813*	5,0	41,0	13,0	18,0			1
05**005932**001	*233820*	5,5	41,0	13,7	18,0			1
05**005933**001	*233837*	6,0	41,0	14,3	18,0			1
05**005934**001	*233844*	7,0	41,0	15,8	18,0			1
05**005935**001	*233851*	8,0	41,0	16,8	18,0			1
05**005936**001	*233868*	10,0	41,0	19,3	18,0			1
05**005937**001	*233875*	11,0	41,0	20,8	18,0			1
05**005938**001	*233882*	12,0	41,0	21,8	18,0			1
05**005939**001	*233899*	13,0	41,0	22,8	18,0			1
05**005940**001	*233905*	14,0	41,0	24,7	18,0			1

8767 A VDE HF TORX® Zyklop Bit socket, insulated, with 1/4" drive, with holding function

- For TORX® socket screws
- Extremely short and compact insulated 1/4" bit socket for easy working even in very confined spaces
- The holding function holds screws securely on the tool

8767 A VDE HF TORX® Zyklop Bit socket, insulated, with 1/4" drive, with holding function







	EAN							
Code	4013288		mm	mm	mm			
05**005920**001	*233738*	TX 10	36,0	18,0	9,0			1
05**005921**001	*233745*	TX 15	36,0	18,0	9,0			1
05**005922**001	*233752*	TX 20	36,0	18,0	9,0			1
05**005923**001	*233769*	TX 25	36,0	18,0	9,0			1
05**005924**001	*233776*	TX 27	36,0	18,0	9,0			1
05**005925**001	*233783*	TX 30	36,0	18,0	9,0			1
05**005926**001	*233790*	TX 40	36,0	18,0	9,0			1

8740 A VDE HF Zyklop Bit socket, insulated, with 1/4" drive, with holding function for hexagonal socket screws

- For hexagonal socket head screws
- Extremely short and compact insulated 1/4" bit socket for easy working even in very confined spaces
- The holding function holds screws securely on the tool

8740 A VDE HF Zyklop Bit socket, insulated, with 1/4" drive, with holding function for hexagonal socket screws







	EAN							
Code	4013288	mm	mm	mm	mm			
05**005900**001	*233684*	3,0	45,0	18,0	9,0			1
05**005901**001	*233691*	4,0	45,0	18,0	9,0			1
05**005902**001	*233707*	5,0	45,0	18,0	9,0			1
05**005903**001	*233714*	6,0	45,0	18,0	9,0			1
05**005904**001	*233721*	8,0	47,0	18,0	11,0			1

8794 SA VDE Zyklop extension, insulated, short, 1/4"

- 1/4" VDE Zyklop extension
- Short design
- Individually tested tools as per IEC 60900 at 10,000 V
- Increased safety thanks to 2-component insulation with a yellow insulation core under an outer red insulation layer
- Plastic sleeve protects surfaces from damage

8794 SA VDE Zyklop extension, insulated, short, 1/4"



	EAN							
Code	4013288		mm					
05**005950**001	*233677*	1/4"	91,0					1

8100 SB VDE 1 Zyklop Ratchet set, insulated, switch lever, 3/8" drive, metric

Incredibly compact set arrangement for a lot of tools in a small space. Individually tested ratchet, sockets and extensions as per IEC 60900 at 10,000V for safe working at the approved voltage of 1,000V.

Textile box with very high robustness and durability can be positioned upright for clear storage in the workshop shelf. Additional surface protection through textile outer material. Low weight and volume for easier mobility. Smooth turning mechanism for secure hold and easy removal of VDE sockets.

- Insulated and 100% individually tested Zyklop ratchets, sockets and extensions for safe working up to 1,000 volts
- Fine-toothed ratchet with 80 teeth for a short return angle of 4.5°
- Extremely slim design with a soft, ergonomic grip zone for easy work even in very confined spaces
- Robust and extremely compact textile box with socket holders, which ensure a secure hold and easy socket removal by means of a rotating mechanism
- Tools and textile box protect sensitive surfaces, the box is Wera 2go compatible

8100 SB VDE 1 Zyklop Ratchet set, insulated, switch lever, 3/8" drive, metric



Code	EAN 4013288			
05**004970**001	*190970*			1
			8007 B VDE 1x 3/8"x222,0	
			8790 B VDE 1x 6,0x46,0; 1x 7,0x46,0; 1x 8,0x46,0; 1x 9,0x46,0; 1x 10,0x46,0; 1x 11,0x46,0; 1x 12,0x46,0; 1x 13,0x46,0; 1x 14,0x46,0; 1x 15,0x46,0; 1x 16,0x46,0; 1x 17,0x46,0; 1x 18,0x46,0; 1x 19,0x46,0	
			8794 SB VDE 1x 3/8"x91,0	
			8794 LB VDE 1x 3/8"x166,0	

Belt B VDE 1 Zyklop bit socket set TORX® hexagonal socket with holding function, 3/8" drive

10 Zyklop bit sockets, with 3/8" drive, insulated, individually tested as per IEC 60900. Increased safety due to 2-component isolation with yellow core under red insulation outer layer visible in case of damage to outer red VDE insulation layer. With holding function for TORX® screws to Acument Intellectual Properties specifications or holding function for hexagonal socket screws.

Robust textile belt in the typical Wera design with 10 VDE bit sockets in a compact space. A smooth turning mechanism ensures secure holding and easy removal of the sockets. Includes snap hook for attaching to belt loops or bags. With fleece backing and hook and loop fastener strips for easy attachment e.g. on wall, shelf, workshop trolley and Wera 2go tool transport system.

VDE 3/8" bit socket and holding function for particularly comfortable screwdriving with reduced risk of screw loss when feeding to the component. With increased safety due to yellow insulation core, which becomes visible in case of damage to the outer red VDE insulation layer. Individually tested tool as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V.

- 10-piece 3/8" socket set on robust textile belt
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Extremely short and compact 3/8" bit socket for easy work even in very confined spaces
- The holding function holds screws securely on the tool
- Individually tested tool as per IEC 60900 at 10,000 V for safe working at up to 1,000 volts
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt B VDE 1 Zyklop bit socket set TORX® hexagonal socket with holding function, 3/8" drive



Code	EAN 4013288			
05**004930**001	*210234*			1
			8767 B VDE HF 1x TX 20x55,0; 1x TX 25x55,0; 1x TX 27x55,0; 1x TX 30x55,0; 1x TX 40x55,0; 1x TX 45x59,0	
			8740 B VDE HF 1x 4,0x55,0; 1x 5,0x55,0; 1x 6,0x55,0; 1x 8,0x59,0	
			Belt B VDE 0/10 1x 71,0x209,0	
			K30 1x 30,0x200,0	

8007 B VDE Zyklop ratchet, insulated, with switch lever, with 3/8" drive

- Insulated and 100% individually tested Zyklop ratchet for safe working up to 1,000 volts
- Fine toothing with 80 teeth for a short return angle of only 4.5°
- Extremely slim design with a soft, ergonomic grip zone for easy work even in very confined spaces
- Safe socket lock via push button, convenient direction change thanks to the reversing lever
- Plastic coating protects surfaces from damage

8007 B VDE Zyklop ratchet, insulated, with switch lever, with 3/8" drive





Code	EAN 4013288		mm					
05**004966**001	*190963*	3/8"	222,0					3

8790 B VDE Zyklop 3/8" socket, insulated

- Individually tested tool as per IEC 60900 at 10,000V
- Increased safety due to 2-component isolation with yellow insulation core under red insulation outer layer
- Plastic coating protects surfaces from damage

8790 B VDE Zyklop 3/8" socket, insulated



	EAN							
Code	4013288	mm	mm	mm	mm			
05**004950**001	*192936*	6,0	46,0	14,8	23,0			1
05**004951**001	*192943*	7,0	46,0	15,7	23,0			1
05**004952**001	*192950*	8,0	46,0	17,0	23,0			1
05**004953**001	*192967*	9,0	46,0	18,2	23,0			1
05**004954**001	*192974*	10,0	46,0	19,4	23,0			1
05**004955**001	*192981*	11,0	46,0	20,7	23,0			1
05**004956**001	*192998*	12,0	46,0	23,0	23,0			1
05**004957**001	*193001*	13,0	46,0	23,0	23,0			1
05**004958**001	*193018*	14,0	46,0	24,7	23,0			1
05**004959**001	*193025*	15,0	46,0	26,0	23,0			1
05**004960**001	*193032*	16,0	46,0	26,8	23,0			1
05**004961**001	*193049*	17,0	46,0	29,0	23,0			1
05**004962**001	*193056*	18,0	46,0	29,6	23,0			1
05**004963**001	*193063*	19,0	46,0	30,7	23,0			1

8767 B VDE HF TORX® Zyklop bit socket, insulated, with holding function, 3/8" drive

- The holding function holds screws securely on the tool
- Extremely short and compact 3/8" bit socket for easy work even in very confined spaces

8767 B VDE HF TORX® Zyklop bit socket, insulated, with holding function, 3/8" drive



	EAN							
Code	4013288		mm	mm	mm			
05**004920**001	*210173*	TX 20	55,0	23,0	9,0			1
05**004921**001	*210180*	TX 25	55,0	23,0	9,0			1
05**004922**001	*210197*	TX 27	55,0	23,0	9,0			1
05**004923**001	*210203*	TX 30	55,0	23,0	9,0			1
05**004924**001	*210210*	TX 40	55,0	23,0	9,0			1
05**004925**001	*210227*	TX 45	59,0	23,0	13,0			1

8740 B VDE HF Zyklop Hex bit socket, insulated, with holding function, 3/8" drive

- The holding function holds screws securely on the tool
- Extremely short and compact 3/8" bit socket for easy work even in very confined spaces

8740 B VDE HF Zyklop Hex bit socket, insulated, with holding function, 3/8" drive



	EAN							
Code	4013288	mm	mm	mm	mm			
05**004900**001	*210135*	4,0	55,0	23,0	9,0			1
05**004901**001	*210142*	5,0	55,0	23,0	9,0			1
05**004902**001	*210159*	6,0	55,0	23,0	9,0			1
05**004903**001	*210166*	8,0	59,0	23,0	13,0			1

8760 B VDE XZN Zyklop bit socket, insulated, 3/8" drive, for multi-point socket screws

- Extremely short and compact 3/8" bit socket for easy work even in very confined spaces

8760 B VDE XZN Zyklop bit socket, insulated, 3/8" drive, for multi-point socket screws



	EAN							
Code	4013288		mm	mm	mm			
05**004940**001	*211453*	M 8	59,0	23,0	13,0			1
05**004941**001	*211460*	M 10	59,0	23,0	13,0			1
05**004942**001	*211477*	M 12	59,0	23,0	13,0			1

8794 LB VDE Zyklop extension, insulated, long, 3/8"

- 3/8" VDE Zyklop extension
- Individually tested tool as per IEC 60900 at 10,000 V
- Increased safety due to 2-component isolation with yellow insulation core under red insulation outer layer
- Plastic coating protects surfaces from damage
- Long version

8794 LB VDE Zyklop extension, insulated, long, 3/8"



	EAN							
Code	4013288		mm					
05**004965**001	*190956*	3/8"	166,0					1

8794 SB VDE Zyklop extension, insulated, short, 3/8"

- Short version

8794 SB VDE Zyklop extension, insulated, short, 3/8"



	EAN							
Code	4013288		mm					
05**004964**001	*190949*	3/8"	91,0					1

Socket rail B VDE (textile belt), 10 location, unloaded

- Empty textile belt for 10 VDE socket wrench/bit socket inserts, 3/8"
- Includes a convenient snap hook
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Socket rail B VDE (textile belt), 10 location, unloaded



Code	EAN 4013288			
05**003982**001	*210913*			1
			Belt B VDE 0/10 1x 71,0x209,0	
			K30 1x 30,0x200,0	

6004 Joker VDE 4 Set 1 VDE-insulated self-setting spanner set

Individually tested tools as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1.000 V. The adjustable VDE spanner continuously and automatically grips all hexagonal sizes in the indicated range of dimensions - metric and imperial.

The integrated lever mechanism securely clamps the hexagon screw or bolt between the jaws, which significantly reduces the risk of slippage or damage. The ratchet feature ensures fast and consistent screwdriving without removing the tool.

By using the corner-width rectangular prisms, a back-pivoting angle of only 30° can be achieved. The single-arm design, in conjunction with the ratchet feature and the corner-width prism, makes it possible to work even in confined spaces.

The adjustable Joker 6004 VDE has a naturally comfortable handle thanks to the 2-component plastic insulation.

Safety is increased by the anti-slip protection at the front end of the handle. The sliding function offers contactless and safe opening of the non-insulated jaws, thereby providing extra protection.

- The compact textile box with four adjustable Joker 6004 VDE covers all metric and imperial dimensions in the field of application from 7 to 19 mm or ¼" to ¾"

6004 Joker VDE 4 Set 1 VDE-insulated self-setting spanner set





Code	EAN			
	4013288			
05**020170**001	*221803*			1
			6004 Joker VDE XS 1x 7-10 (¼"-⅜")x119	
			6004 Joker VDE S 1x 10-13 (7/16"-½")x155	
			6004 Joker VDE M 1x 13-16 (½"-⅝")x190	
			6004 Joker VDE L 1x 16-19 (⅝"-¾")x226	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

6004 Joker VDE
VDE-insulated, self-setting spanner

Individually tested tools as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1.000 V. The adjustable VDE spanner continuously and automatically grips all hexagonal sizes in the indicated range of dimensions – metric and imperial.

The integrated lever mechanism securely clamps the hexagon screw or bolt between the jaws, which significantly reduces the risk of slippage or damage.

The ratchet feature ensures fast and consistent screwdriving without removing the tool. By using the corner-width rectangular prisms, a back-pivoting angle of only 30° can be achieved.

The single-arm design, in conjunction with the ratchet feature and the corner-width prism, makes it possible to work even in confined spaces.

The adjustable Joker 6004 VDE has a naturally comfortable handle thanks to the 2-component plastic insulation. Safety is increased by the anti-slip protection at the front end of the handle.

The sliding function offers contactless and safe opening of the non-insulated jaws, thereby providing extra protection.

- The adjustable Joker 6004 VDE covers all metric and imperial dimensions in the respective field of application
- Individually tested tools with insulated handles for safe working up to 1,000 volt, with anti-slip protection and sliding function for contactless and safe opening of the non-insulated jaws
- Automatic and continuous grip of hexagon screws and bolts
- Lever mechanism when gripping avoids slipping and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- Return angle of only 30° through placement in the corner-width rectangular prisms in the mouth

6004 Joker VDE XS VDE-insulated, self-setting spanner









Code	EAN							
	4013288	mm		mm	mm			
05**020150**001	*221797*	7-10	¼"-⅜"	119	7,7			3

6004 Joker VDE S VDE-insulated, self-setting spanner

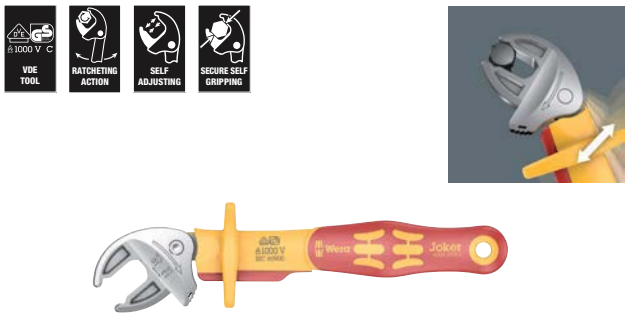


	EAN							
Code	4013288	mm		mm	mm			
05**020151**001	*221766*	10-13	7/16"-1/2"	155	10			3

6004 Joker VDE M VDE-insulated, self-setting spanner

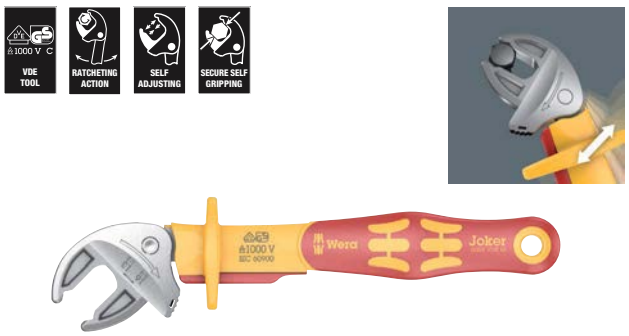

	EAN							
Code	4013288	mm		mm	mm			
05**020152**001	*221780*	13-16	1/2"-5/8"	190	12,4			3

6004 Joker VDE L VDE-insulated self-setting spanner

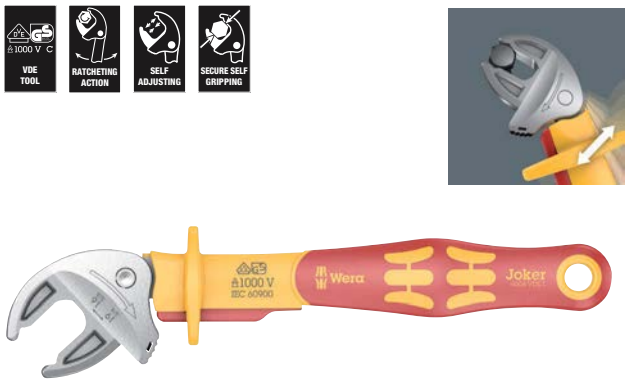

	EAN							
Code	4013288	mm		mm	mm			
05**020153**001	*221773*	16-19	5/8"-3/4"	226	14			3

400 i VDE Hex Insulated torque-indicator

Wera VDE torque indicator with fixed torque for hexagon socket screws. Tamper proof. The robust slip clutch generates a clearly audible and tactile trigger that signals when the set torque is reached, making it impossible to apply any further torque. The loosening torque value is significantly higher than the set tightening torque, therefore no additional tools are needed for loosening screw connections. The shape of the handle perfectly fills the whole hand and fingers comfortably lie in the soft rounded recessed grips. This ensures optimal, ergonomic power transfer. Individually tested tool as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V.

- Insulated, individually tested VDE T-handle torque indicator for safe working up to 1,000V
- T-handle is ideal for transferring controlled tightening torque and high loosening torque
- Error-free screwdriving due to non-slip friction clutch and exact torque transmission
- Distinctly audible and noticeable excess-load signal when the pre-set torque is reached
- Tamper-proof against accidental changing of set torque value

400 i VDE Hex Insulated torque-indicator




	EAN							
Code	4013288		Nm	mm	mm	mm		
05**004980**001	*206398*	4,0	5,0	90	48	100	3 1/2"	1
05**004981**001	*206114*	5,0	5,0	90	48	100	3 1/2"	1





Ratchets & Accessories

Zyklop Speed - incredibly fast and incredibly flexible

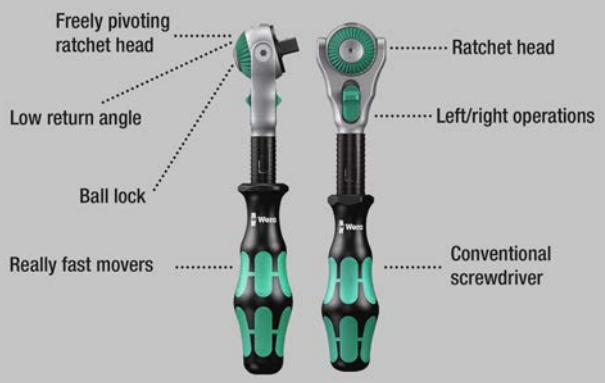

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility. Take it easy Tool Finder with colour coding according to sizes.

- 42-piece ratchet set in robust textile box
- Freely pivoting ratchet head with 5 predefined locking positions
- Bit-sockets with all the advantages of the Wera bit technology
- TORX®, hex plus and hexagon nuts with holding function for screws / nuts
- Take it easy tool finder with colour coding according to sizes
- Suitable for Wera 2go

8100 SA All-in Zyklop Speed Ratchet Set, 1/4" drive, with holding function, metric







Code	EAN 4013288			
05**003755**001	*190994*			1
			8000 A 1x 1/4"x152,0	
			8796 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8790 HMA HF 1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0; 1x 14,0x23,0	
			8767 A HF 1x TX 8x28,0; 1x TX 9x28,0; 1x TX 10x28,0; 1x TX 15x28,0; 1x TX 20x28,0; 1x TX 25x28,0; 1x TX 27x28,0; 1x TX 30x28,0; 1x TX 40x28,0	
			8740 A 1x 2,0x28,0; 1x 2,5x28,0	
			8740 A HF 1x 3,0x28,0; 1x 4,0x28,0; 1x 5,0x28,0; 1x 6,0x28,0; 1x 7,0x28,0; 1x 8,0x28,0	
			8751 A 1x PH 1x28,0; 1x PH 2x28,0; 1x PH 3x28,0	
			8755 A 1x PZ 1x28,0; 1x PZ 2x28,0; 1x PZ 3x28,0	
			8700 A FL 1x 0,8x5,5x28,0; 1x 1,2x6,5x28,0	
			Nut Extractor 1x 14,0x43,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8100 SA 6 Zyklop Speed Ratchet Set, 1/4" drive, metric

- Freely pivoting ratchet head with 5 predefined locking positions
- Fine toothing with 72 teeth
- Small return angle of only 5°
- Free-turning sleeve for high working speeds
- Take it easy tool finder with colour coding according to sizes
- Compact textile box with high robustness, low weight and volume

8100 SA 6 Zyklop Speed Ratchet Set, 1/4" drive, metric



Code	EAN 4013288			
050**04016**001	*174000*			1
			8000 A 1x 1/4"x152,0	
			8790 HMA 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			8794 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			851/4 TZ PH 1x PH 1x50; 1x PH 2x50; 1x PH 3x50	
			855/4 TZ PZ 1x PZ 1x50; 1x PZ 2x50	
			867/4 Z TORX® 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50	
			840/4 Z Hex-Plus 1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8100 SA 9 Zyklop Speed Ratchet Set, 1/4" drive, imperial



Code	EAN 4013288			
050**04019**001	*173843*			1
			8000 A 1x 1/4"x152,0	
			8790 HMA 1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0	
			8794 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			851/4 TZ PH 1x PH 1x50; 1x PH 2x50; 1x PH 3x50	
			855/4 TZ PZ 1x PZ 1x50; 1x PZ 2x50	
			867/4 Z TORX® 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50	
			840/4 Z Hex-Plus 1x 5/32"x50; 1x 3/16"x50; 1x 7/32"x50; 1x 1/4"x50	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Kraftform Kompakt Zyklop MS1 Metal/Speed 1/4"

- Incredibly fast 1/4" Zyklop Speed ratchet with pivoting ratchet head and 5 predefined locking positions
- Extremely slim Zyklop Metal ratchet with long lever
- Return angle of only 5°
- Convenient direction change thanks to switchover lever
- Set in robust textile box

Kraftform Kompakt Zyklop MS1 Metal/Speed 1/4"



Code	EAN 4013288			
05**135949**001	*178633*			1
			8000 A 1x 1/4"x152,0	
			8004 A 1x 1/4"x141,0	
			8796 LA 1x 1/4"x150,0	
			8794 LA 1x 1/4"x150,0	
			8794 SA 1x 1/4"x75,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			8794 A 1x 1/4"x56,0	
			8795 A 1x 1/4"x35,5	

8100 SA 2 Zyklop Speed Ratchet Set, 1/4" drive, metric

- 42-piece set in a robust metal case

8100 SA 2 Zyklop Speed Ratchet Set, 1/4" drive, metric



Code	EAN 4013288			
05**003533**001	*121103*			1
			8000 A 1x 1/4"x152,0	
			8790 HMA 1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0; 1x 14,0x23,0	
			8789 A 1x 1/4"x110,0	
			8794 A 1x 1/4"x56,0	
			8795 A 1x 1/4"x35,5	
			8784 A1 1x 1/4"x1/4"x37,0	
			8796 SA 1x 1/4"x75,0	
			8796 LA 1x 1/4"x150,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	
			867/1 Z TORX® BO 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25	
			800/1 Z 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x8,0x25	

8100 SA 4 Zyklop Speed Ratchet Set, 1/4" drive, imperial

- 41-piece set in a robust metal case

8100 SA 4 Zyklop Speed Ratchet Set, 1/4" drive, imperial





Code	EAN 4013288			
05**003535**001	*121127*			1
			8000 A 1x 1/4"x152,0	
			8790 HMA 1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0; 1x 9/16"x23,0	
			8789 A 1x 1/4"x110,0	
			8794 A 1x 1/4"x56,0	
			8795 A 1x 1/4"x35,5	
			8784 A1 1x 1/4"x1/4"x37,0	
			8796 SA 1x 1/4"x75,0	
			8796 LA 1x 1/4"x150,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	
			867/1 Z TORX® BO 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z Hex-Plus 1x 5/64"x25; 1x 3/32"x25; 1x 1/8"x25; 1x 9/64"x25; 1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25	
			800/1 Z 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x8,0x25	

8100 SA/SC 2 Zyklop Speed Ratchet Set, 1/4" drive and 1/2" drive, metric

- 43-piece set in a robust metal case

8100 SA/SC 2 Zyklop Speed Ratchet Set, 1/4" drive and 1/2" drive, metric





Code	EAN 4013288			
05**160785**001	*126610*			1
			8000 A 1x 1/4"x152,0	
			8790 HMA 1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			8796 LA 1x 1/4"x150,0	
			8000 C 1x 1/2"x277,0	
			8790 HMC 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0; 1x 21,0x37,0; 1x 22,0x37,0; 1x 24,0x37,0	
			8796 LC 1x 1/2"x250,0	
			816 R 1x 1/4"x119	
			800/4 Z 1x 1,0x5,5x89	
			840/4 Z Hex-Plus 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89	
			851/4 Z PH 1x PH 1x89; 1x PH 2x89; 1x PH 3x89	
			855/4 Z PZ 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89	
			867/4 Z TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	

Kraftform Kompakt Zyklop Speed

- Pouch for belt attachment

Kraftform Kompakt Zyklop Speed







Code	EAN 4013288			
05**051045**001	*155313*			1
			8000 A 1x 1/4"x152,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			8794 LA 1x 1/4"x150,0	
			851/4 TZ PH 1x PH 1x50; 1x PH 2x50; 1x PH 3x50	
			855/4 TZ PZ 1x PZ 1x50; 1x PZ 2x50	
			867/4 Z TORX® 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50	
			800/4 Z 1x 1,0x5,5x50	
			840/4 Z Hex-Plus 1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

8000 A Zyklop Speed Ratchet with 1/4" drive

- Combines five different types of a ratchet in one
- Flywheel design and easy-to-grip free-turning sleeve for very high working speeds
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver

8000 A Zyklop Speed Ratchet with 1/4" drive







Code	EAN 4013288		mm					
05**003500**001	*121868*	1/4"	152,0					1

8000 A SB Zyklop Speed Ratchet with 1/4" drive








Code	EAN 4013288		
05**073260**001	*128034*		**8000 A** 1x 1/4"x152.0	3

Zyklop Metal with push-through square

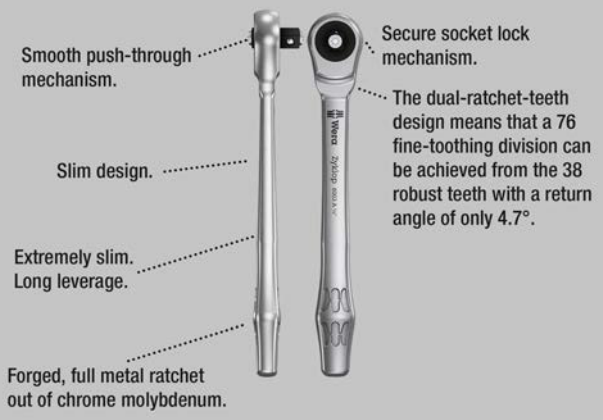

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable. They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Extremely slim ratchet with long lever
- Return angle of only 4.7°
- Absolutely smooth switchover of the non-detachable push-through square
- Take it easy tool finder system

8100 SA 7 Zyklop Metal Ratchet Set with push-through square, 1/4" drive, metric



Code	EAN 4013288			
05**004017**001	*173898*			1
			8003 A 1x 1/4"x141,0	
			8790 HMA 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			8794 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

8100 SA 10 Zyklop Metal Ratchet Set with push-through square, 1/4" drive, imperial



Code	EAN 4013288			
05**004020**001	*173904*			1
			8003 A 1x 1/4"x141,0	
			8790 HMA 1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0	
			8794 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25	
			840/1 Z Hex-Plus 1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25; 1x 1/4"x25	

8003 A Zyklop Metal Ratchet with push-through square and 1/4" drive

- For 1/4" square sockets with ball lock
- Forged, full metal ratchet (chrome-molybdenum); slim design to enable work in very confined spaces
- The dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°
- Absolutely smooth switchover of the non-detachable push-through square

8003 A Zyklop Metal Ratchet with push-through square and 1/4" drive



	EAN							
Code	4013288		mm	mm	mm			
05**004003**001	*174017*	1/4"	141,0	21	22			3

Zyklop Metal with switch lever



Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°

8100 SA 8 Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric



Code	EAN 4013288			
05**004018**001	*173836*			1
			8004 A 1x 1/4"x141,0	
			8790 HMA 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			8794 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8100 SA 11 Zyklop Metal Ratchet Set with switch lever, 1/4" drive, imperial



Code	EAN 4013288			
05**004021**001	*173850*			1
			8004 A 1x 1/4"x141,0	
			8790 HMA 1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0	
			8794 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25	
			840/1 Z Hex-Plus 1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25; 1x 1/4"x25	

8100 SA 12 HF Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric

- Sockets with holding function for screws/bolts/nuts

8100 SA 12 HF Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric



Code	EAN 4013288			
05**003756**001	*190987*			1
			8004 A 1x 1/4"x141	
			8794 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8790 HMA HF 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			Nut Extractor 1x 14,0x43,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8004 A Zyklop Metal Ratchet with switch lever and 1/4" drive

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°
- Secure socket locking

8004 A Zyklop Metal Ratchet with switch lever and 1/4" drive



Code	EAN 4013288							
			mm	mm	mm			
05**004004**001	*174024*	1/4"	141,0	19	22			3

8790 HMA Zyklop 1/4" socket

- 1/4" Zyklop socket
- For manual and power tool operations (non-impact)
- Knurling at lower end to enable easy gripping when used in manual applications
- Equipped with ball stop groove
- Take it easy tool finder with colour coding according to sizes

8790 HMA Zyklop 1/4" socket





Code	EAN		mm		mm	mm	mm	
05**003501**001	*120083*		4,0		23,0	6,9	13,0	1
05**003502**001	*120106*		4,5		23,0	7,5	13,0	1
05**003503**001	*120113*		5,0		23,0	8,2	13,0	1
05**003504**001	*120120*		5,5		23,0	8,8	13,0	1
05**003505**001	*120137*		6,0		23,0	9,4	13,0	1
05**003506**001	*120144*		7,0		23,0	11,0	13,0	1
05**003507**001	*120151*		8,0		23,0	12,0	13,0	1
05**003508**001	*120090*		9,0		23,0	13,0	14,0	1
05**003509**001	*120168*		10,0		23,0	14,5	14,5	1
05**003510**001	*120175*		11,0		23,0	16,0	15,0	1
05**003511**001	*120182*		12,0		23,0	17,0	16,0	1
05**003512**001	*120199*		13,0		23,0	18,0	17,0	1
05**003513**001	*120205*		14,0		23,0	20,0	18,0	1
05**003499**001	*206862*		15,0		23,0	21,5	19,0	1
05**003514**001	*120212*			3/16"	23,0	7,5	13,0	1
05**003515**001	*120229*			7/32"	23,0	8,8	13,0	1
05**003516**001	*120236*			1/4"	23,0	11,0	13,0	1
05**003517**001	*120243*			9/32"	23,0	11,0	13,0	1
05**003518**001	*120250*			5/16"	23,0	12,0	13,0	1
05**003519**001	*120267*			11/32"	23,0	13,0	14,0	1
05**003520**001	*120274*			3/8"	23,0	14,5	14,5	1
05**003521**001	*120281*			7/16"	23,0	16,0	15,0	1
05**003522**001	*120298*			1/2"	23,0	18,0	17,0	1
05**003523**001	*120304*			9/16"	23,0	20,0	18,0	1

8790 HMA HF Zyklop socket with 1/4" drive with holding function

- Socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Chrome vanadium steel, matt chrome-plated
- Equipped with ball stop groove, knurling at lower end for better gripping

8790 HMA HF Zyklop socket with 1/4" drive with holding function







Code	EAN		mm	mm	mm	mm		
05**003717**001	*185631*		4,0	23,0	7,0	11,0		1
05**003718**001	*185648*		4,5	23,0	7,8	11,0		1
05**003719**001	*185655*		5,0	23,0	8,9	11,0		1
05**003720**001	*185662*		5,5	23,0	9,2	11,0		1
05**003721**001	*185679*		6,0	23,0	10,5	11,0		1
05**003722**001	*185686*		7,0	23,0	11,9	11,0		1
05**003723**001	*185693*		8,0	23,0	12,9	11,0		1
05**003724**001	*185709*		9,0	23,0	14,1	12,0		1
05**003725**001	*185716*		10,0	23,0	15,6	12,5		1
05**003726**001	*185723*		11,0	23,0	17,4	13,0		1
05**003727**001	*185730*		12,0	23,0	18,4	14,0		1
05**003728**001	*185747*		13,0	23,0	19,5	15,0		1
05**003729**001	*185754*		14,0	23,0	20,8	16,0		1
05**003010**001	*206855*		15,0	23,0	21,5	18,5		1

Belt A 1 Zyklop socket set with holding function, 1/4" drive

Typically Wera designed robust textile belt with 9 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Sockets with holding function for particularly convenient screw-driving with reduced risk of losing the screw when approaching the workpiece.

Supplied with a non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 10-piece socket set on a robust textile belt, 1/4"
- Sockets with holding function for screws/bolts/nuts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt A 1 Zyklop socket set with holding function, 1/4" drive



Code	EAN 4013288			
05**003880**001	*190758*			1
		◉	**8790 HMA HF** 1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0	
			Nut Extractor 1x 14,0x43,0	
			Belt A 0/9 1x 39,0x238,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Nut Extractor

- Simple removal of nuts contained within Wera HF sockets
- For the simple removal of nuts from 1/4", 3/8", 1/2" sockets with holding function
- Hexagonal anti-roll feature against rolling away

Nut Extractor



Code	EAN 4013288	mm	mm					
05**050005**001	*192554*	14,0	43,0					1

Belt A 4 Zyklop socket set, 1/4" drive

- 9-piece socket set on a robust textile belt, 1/4"
- For manual and power tool operations (non-impact)
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt A 4 Zyklop socket set, 1/4" drive



Code	EAN 4013288			
05**003883**001	*190789*			1
		◉	**8790 HMA** 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			Belt A 0/9 1x 39,0x238,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Magnetic socket rail A 4 Zyklop socket set, 1/4" drive

Socket rail with 9 manual and machine sockets (non-impact), 1/4". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/4"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

Magnetic socket rail A 4 Zyklop socket set, 1/4" drive



Code	EAN 4013288			
05**005400**001	*223197*			1
		◉	**8790 HMA** 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			9600 1x 30,0x270,0	

Belt A Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 1/4" drive



Code	EAN 4013288			
05**003884**001	*194992*			1
		○	**8740 A** 1x 5/64"x28,0; 1x 3/32"x28,0; 1x 7/64"x28,0	
		○	**8740 A HF** 1x 1/8"x28,0; 1x 9/64"x28,0; 1x 5/32"x28,0; 1x 3/16"x28,0; 1x 7/32"x28,0; 1x 1/4"x28,0	
			Belt A 0/9 1x 39,0x238,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Magnetic socket rail A Imperial 1 Zyklop socket set, 1/4" drive, imperial

Socket rail with 9 manual and machine sockets (non-impact), 1/4". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/4"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

Magnetic socket rail A Imperial 1 Zyklop socket set, 1/4" drive, imperial



Code	EAN 4013288			
05**005420**001	*223227*			1
		◉	**8790 HMA** 1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0	
			9600 1x 30,0x270,0	

8790 HMA Deep 1/4" socket

Long 1/4" hand and machine socket (ISO 2725 part 3) with ball intercept ring; for external hexagonal bolts and sockets.

For use in manual and machine operation (non-impact), even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands.

The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile.

Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle.

- Long sockets for low-lying screwdriving, often even with protruding threaded rods in small spaces
- Hexagonal profile enables precise bolting with high power transmission and preserves the profile
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- For manual and machine operation (non-impact), ball intercept ring
- Made of matt chromed chrome-vanadium

8790 HMA Deep 1/4" socket



Code	EAN		mm	mm	mm	mm		
05**004500**001	*210258*		4,0	50,0	6,7	11,8		1
05**004501**001	*210128*		5,0	50,0	8,0	11,8		1
05**004502**001	*210241*		5,5	50,0	8,6	11,8		1
05**004503**001	*210265*		6,0	50,0	9,2	11,8		1
05**004504**001	*210272*		7,0	50,0	10,8	11,8		1
05**004505**001	*210289*		8,0	50,0	11,8	11,0		1
05**004506**001	*210296*		9,0	50,0	12,8	12,0		1
05**004507**001	*210302*		10,0	50,0	14,7	12,8		1
05**004508**001	*210319*		11,0	50,0	15,8	14,0		1
05**004509**001	*210326*		12,0	50,0	16,8	15,0		1
05**004510**001	*210333*		13,0	50,0	17,8	16,0		1
05**004511**001	*210340*		14,0	50,0	19,8	17,0		1
05**004512**001	*210357*		15,0	50,0	20,8	18,0		1

Belt A Deep 1 socket set, 1/4" drive

Robust textile belt in the typical Wera design with 9 long 1/4" manual and machine socket inserts (non-impacting) in a confined space. A smoother turning mechanism ensures a secure holding and easy removal of sockets. Includes snap hook for attaching to belt loops or bags.

With fleece backing and hook and loop fastener strips for easy attachment e.g. on wall, shelf, workshop trolley or the Wera 2go tool transport system.

Long 1/4" manual and mechanical socket wrench inserts (ISO 2725 part 3) from Wera for use in manual and machine operation (non-impacting) even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands. With hexagonal profile and ball-catching groove. The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile.

Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle. For external hexagonal bolts and sockets.

- 9-piece socket set on a robust textile belt, 1/4"
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long 1/4" socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screw-driving with high power transmission
- Take it easy tool finder with colour coding according to sizes

Belt A Deep 1 socket set, 1/4" drive



Code	EAN			
05**004525**001	*210371*			1
			8790 HMA Deep 1x 5,0x50,0; 1x 5,5x50,0; 1x 6,0x50,0; 1x 7,0x50,0; 1x 8,0x50,0; 1x 10,0x50,0; 1x 11,0x50,0; 1x 12,0x50,0; 1x 13,0x50,0	
			Belt A 0/9 1x 39,0x238,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Magnetic socket rail A Deep 1 socket set, 1/4" drive

Socket rail with 9 long manual and machine sockets (non-impact), ¼". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

Long ¼" manual and machine sockets (ISO 2725 part 3) by Wera for manual and (non-impact) machine use even at low lying couplings and protruding thread rods. With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

Slip-proof for easy grip even with oily hands. With hexagon profile and ball stop groove.

The hexagon profile enables the transmission of high forces and loads the edges of the bolt or the screw head less than a double hexagon profile.

Fine-teethed ratchets also make use of a double hexagon profile superfluous, even in confined spaces, thanks to their small return angle.

For external hexagon bolts and screws. The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/4"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long ¼" socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission

Magnetic socket rail A Deep 1 socket set, 1/4" drive



Code	EAN 4013288			
05**005410**001	*223210*			1
		◉	**8790 HMA Deep** 1x 5,0x50,0; 1x 5,5x50,0; 1x 6,0x50,0; 1x 7,0x50,0; 1x 8,0x50,0; 1x 10,0x50,0; 1x 11,0x50,0; 1x 12,0x50,0; 1x 13,0x50,0	
			9600 1x 30,0x270,0	

8767 A TORX® Zyklop bit socket with holding function, 1/4" drive



Code	EAN 4013288		mm	mm	mm	mm	
05**003390**001	*219602*	TX 10	28,0	12,0	12,5	11,0	1
05**003391**001	*219619*	TX 20	28,0	12,0	12,5	11,0	1
05**003392**001	*219626*	TX 25	28,0	12,0	12,5	11,0	1
05**003393**001	*219633*	TX 30	28,0	12,0	12,5	11,0	1

8767 A HF TORX® Zyklop bit socket with holding function, 1/4" drive

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- Chrome vanadium steel, matt chrome-plated

8767 A HF TORX® Zyklop bit socket with holding function, 1/4" drive



Code	EAN 4013288		mm	mm	mm	mm	
05**003360**001	*186829*	TX 8	28,0	12,0	12,5	11,0	1
05**003361**001	*186843*	TX 9	28,0	12,0	12,5	11,0	1
05**003362**001	*186836*	TX 10	28,0	12,0	12,5	11,0	1
05**003363**001	*186850*	TX 15	28,0	12,0	12,5	11,0	1
05**003364**001	*186867*	TX 20	28,0	12,0	12,5	11,0	1
05**003365**001	*186874*	TX 25	28,0	12,0	12,5	11,0	1
05**003366**001	*186881*	TX 25	100,0	12,0	12,5	83,0	1
05**003367**001	*186898*	TX 27	28,0	12,0	12,5	11,0	1
05**003368**001	*186904*	TX 27	100,0	12,0	12,5	83,0	1
05**003369**001	*186911*	TX 30	28,0	12,0	12,5	11,0	1
05**003370**001	*186928*	TX 30	100,0	12,0	12,5	83,0	1
05**003371**001	*186935*	TX 40	28,0	12,0	12,5	11,0	1
05**003372**001	*186942*	TX 40	100,0	12,0	12,5	83,0	1

Belt A 3 TORX® HF Zyklop bit socket set with holding function, 1/4" drive

Typically Wera designed robust textile belt with 9 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket. Especially short, stable bit-sockets with all the advantages of the Wera bit technology.

Bit sockets with holding function for particularly convenient screwdriving with reduced risk of losing the screw when approaching the workpiece. Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 9-piece bit-socket set on a robust textile belt, 1/4"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System
- Take it easy tool finder with colour coding according to sizes

Belt A 3 TORX® HF Zyklop bit socket set with holding function, 1/4" drive



Code	EAN 4013288			
05**003882**001	*190772*			1
		✪	**8767 A HF** 1x TX 8x28,0; 1x TX 9x28,0; 1x TX 10x28,0; 1x TX 15x28,0; 1x 3,7x3,7xTX 20x28,0; 1x 4,1x4,1xTX 25x28,0; 1x 4,8x4,8xTX 27x28,0; 1x 5,4x5,4xTX 30x28,0; 1x 6,5x6,5xTX 40x28,0	
			Belt A 0/9 1x 39,0x238,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

8767 A TORX® HF 1 Zyklop bit socket set with holding function, 1/4" drive

- Compact textile box with high robustness, low weight and volume
- Bit socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually
- Long design

8767 A TORX® HF 1 Zyklop bit socket set with holding function, 1/4" drive




Code	EAN 4013288			
05**003375**001	*191014*			1
		✪	**8767 A HF** 1x TX 25x100,0; 1x TX 27x100,0; 1x TX 30x100,0; 1x TX 40x100,0	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

8740 A HF Zyklop bit socket with holding function, 1/4" drive

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Hex-Plus allows socket head screws to live longer

8740 A HF Zyklop bit socket with holding function, 1/4" drive

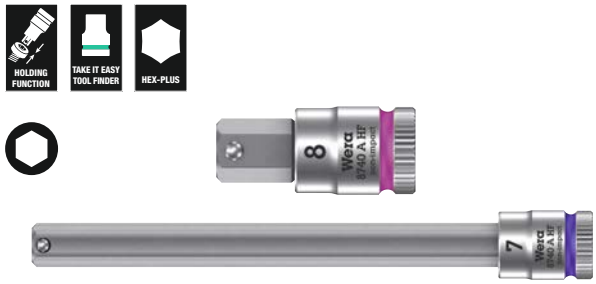


	EAN							
Code	4013288		mm		mm	mm	mm	
05**003332**001	*187123*		3,0		28,0	12,0	12,5	1
05**003333**001	*187178*		4,0		28,0	12,0	12,5	1
05**003334**001	*187185*		4,0		100,0	12,0	12,5	1
05**003335**001	*187192*		5,0		28,0	12,0	12,5	1
05**003336**001	*187208*		5,0		100,0	12,0	12,5	1
05**003337**001	*187215*		6,0		28,0	12,0	12,5	1
05**003338**001	*187222*		6,0		100,0	12,0	12,5	1
05**003341**001	*189547*		7,0		28,0	12,0	12,5	1
05**003342**001	*189554*		7,0		100,0	12,0	12,5	1
05**003339**001	*187239*		8,0		28,0	12,0	12,5	1
05**003340**001	*187246*		8,0		100,0	12,0	12,5	1
05**003383**001	*189868*			1/8"	28,0	12,0	12,5	1
05**003384**001	*189875*			9/64"	28,0	12,0	12,5	1
05**003385**001	*189882*			5/32"	28,0	12,0	12,5	1
05**003386**001	*189899*			3/16"	28,0	12,0	12,5	1
05**003387**001	*189905*			7/32"	28,0	12,0	12,5	1
05**003388**001	*189912*			1/4"	28,0	12,0	12,5	1
05**003389**001	*189844*			5/16"	28,0	12,0	12,5	1

8740 A Zyklop bit socket, 1/4" drive

- Bit socket (non-impact) for manual or machine tool operations
- Hex-Plus allows socket head screws to live longer

8740 A Zyklop bit socket, 1/4" drive

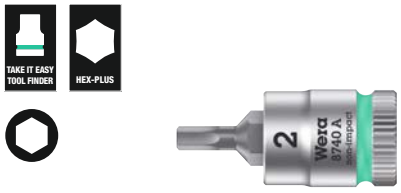

	EAN							
Code	4013288		mm		mm	mm	mm	
05**003330**001	*187154*		2,0		28,0	12,0	12,5	1
05**003331**001	*187161*		2,5		28,0	12,0	12,5	1
05**003380**001	*189820*			5/64"	28,0	12,0	12,5	1
05**003381**001	*189837*			3/32"	28,0	12,0	12,5	1
05**003382**001	*189851*			7/64"	28,0	12,0	12,5	1

Belt A 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/4" drive

Typically Wera designed robust textile belt with 8 in-hex bit-sockets taking up minimal space.

A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 8-piece bit socket set on a robust textile belt, 1/4"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit sockets with retaining function for hexagon socket screws
- Take it easy tool finder with colour coding according to sizes
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt A 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/4" drive



Code	EAN 4013288			
05**003881**001	*190765*			1
		O	**8740 A** 1x 2,0x28,0; 1x 2,5x28,0	
		O	**8740 A HF** 1x 3,0x28,0; 1x 4,0x28,0; 1x 5,0x28,0; 1x 6,0x28,0; 1x 7,0x28,0; 1x 8,0x28,0	
			Belt A 0/8 1x 39,0x220,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

8740 A HF 1 Zyklop bit socket set with holding function, 1/4" drive

- Compact textile box with high robustness, low weight and volume
- Bit socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually
- Long design

8740 A HF 1 Zyklop bit socket set with holding function, 1/4" drive







Code	EAN 4013288			
05**003345**001	*191007*			1
		○	**8740 A HF** 1x 4,0x100,0; 1x 5,0x100,0; 1x 6,0x100,0; 1x 7,0x100,0; 1x 8,0x100,0	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

8751 A Phillips Zyklop bit socket, 1/4" drive

- Extremely short

8751 A Phillips Zyklop bit socket, 1/4" drive



Code	EAN 4013288		mm	mm	mm	mm		
05**003350**001	*187253*	PH 1	28,0	12,0	11,0	12,5		1
05**003351**001	*187260*	PH 2	28,0	12,0	11,0	12,5		1
05**003352**001	*187277*	PH 3	28,0	12,0	11,0	12,5		1

8755 A Pozidriv Zyklop bit socket, 1/4" drive

- Extremely short

8755 A Pozidriv Zyklop bit socket, 1/4" drive




Code	EAN 4013288		mm	mm	mm	mm		
05**003353**001	*187284*	PZ 1	28,0	12,0	11,0	12,5		1
05**003354**001	*187291*	PZ 2	28,0	12,0	11,0	12,5		1
05**003355**001	*187307*	PZ 3	28,0	12,0	11,0	12,5		1

8700 A FL Slotted screws Zyklop bit socket, 1/4" drive

- Extremely short

8700 A FL Slotted screws Zyklop bit socket, 1/4" drive

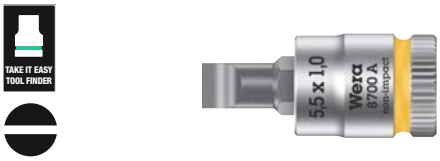

Code	EAN 4013288							
		mm	mm	mm	mm	mm	mm	
05**003320**001	*187314*	0,8	5,5	28,0	12,0	11,0	11,0	1
05**003321**001	*187321*	1,0	5,5	28,0	12,0	11,0	11,0	1
05**003322**001	*187338*	1,2	6,5	28,0	12,0	11,0	11,0	1

8796 LA Zyklop "flexible-lock" extension with free-turning sleeve, long, 1/4"

- For 1/4" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

8796 LA Zyklop "flexible-lock" extension with free-turning sleeve, long, 1/4"



Code	EAN 4013288		mm					
05**003531**001	*121059*	1/4"	150,0					1

8796 SA Zyklop ”flexible-lock” extension with free-turning sleeve, short, 1/4"

- For 1/4" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

8796 SA Zyklop ”flexible-lock” extension with free-turning sleeve, short, 1/4"



	EAN							
Code	4013288		mm					
05**003530**001	*121042*	1/4"	75,0					1

8794 LA Zyklop extension with free-turning sleeve, long, 1/4"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

8794 LA Zyklop extension with free-turning sleeve, long, 1/4"



	EAN							
Code	4013288		mm					
05**003526**001	*121073*	1/4"	150,0					1

8794 SA Zyklop extension with free-turning sleeve, short, 1/4"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

8794 SA Zyklop extension with free-turning sleeve, short, 1/4"



	EAN							
Code	4013288		mm					
05**003525**001	*121066*	1/4"	75,0					1

8789 A Zyklop sliding T-handle, 1/4"

Wera Zyklop T-handle for higher torque transfer. For 1/4" square sockets with ball lock. Adjustable drive, therefore more flexible usage. Out of high quality chrome vanadium steel, matt chrome-plated.

8789 A Zyklop sliding T-handle, 1/4"



	EAN							
Code	4013288		mm					
05**003524**001	*121493*	1/4"	110,0					3

8795 A Zyklop universal joint, 1/4"

Wera Zyklop universal joint for 1/4" square sockets with ball lock.

8795 A Zyklop universal joint, 1/4"



	EAN							
Code	4013288		mm					
05**003528**001	*121509*	1/4"	35,5					1

8784 A1 Zyklop bit adaptor, 1/4"

- 1/4" Zyklop adaptor with quick-release chuck for rapid bit change

8784 A1 Zyklop bit adaptor, 1/4"



	EAN							
Code	4013288			mm				
05**003529**001	*121035*	1/4"	1/4"	37,0				1

8794 A Zyklop wobble extension, 1/4"

Wobble extension for the Wera Zyklop. Swivel angle of 15° in all directions. This ensures rapid and precise work even in confined working situations.

8794 A Zyklop wobble extension, 1/4"



	EAN							
Code	4013288		mm					
05**003527**001	*121080*	1/4"	56,0					1

Socket rail A (textile belt), 9 location, unloaded



Code	EAN 4013288			
05**003891**001	*192424*			1
			Belt A 0/9 1x 39,0x238,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Socket rail A (textile belt), 8 location, unloaded



Code	EAN 4013288			
05**003890**001	*192417*			1
			Belt A 0/8 1x 39,0x220,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	


9600 Magnetic socket rail, 1/4", empty

1 socket rail, empty. For up to 10 sockets and/or bit sockets with 1/4" drive.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.


- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Empty, for up to 10 sockets, 1/4"

9600 Magnetic socket rail, 1/4", empty

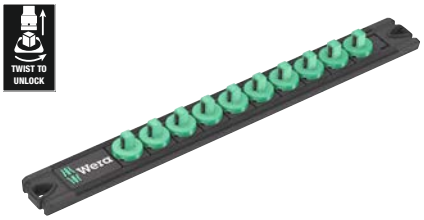

	EAN							
Code	4013288	mm	mm					
05**136420**001	*223326*	30,0	270,0					1

Zyklop Speed - incredibly fast and incredibly flexible

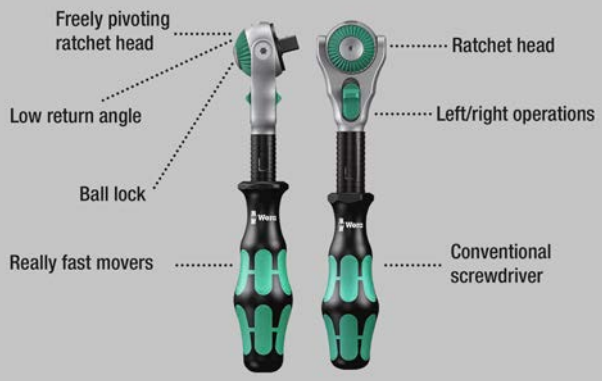

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Freely pivoting ratchet head with 5 predefined locking positions
- Fine toothing with 72 teeth
- Small return angle of only 5°
- Free-turning sleeve for high working speeds
- Take it easy tool finder with colour coding according to sizes
- Compact textile box with high robustness, low weight and volume

8100 SB All-in Zyklop Speed ratchet set, 3/8" drive

- Easy removal of the ratchet thanks to Twist-to-unlock system

8100 SB All-in Zyklop Speed ratchet set, 3/8" drive



Code	EAN 4013288			
05**003536**001	*225573*			1
			8000 B 1x 3/8"x199,0	
			8794 B 1x 3/8"x76,0	
			8796 LB 1x 3/8"x200,0	
			8790 HMB HF 1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0; 1x 15,0x29,0; 1x 16,0x29,0; 1x 17,0x29,0; 1x 18,0x29,0; 1x 19,0x29,0	
			8767 B HF 1x TX 10x35,0; 1x TX 15x35,0; 1x TX 20x35,0; 1x TX 25x35,0; 1x TX 27x35,0; 1x TX 30x35,0; 1x TX 40x35,0; 1x TX 45x38,5; 1x TX 50x38,5	
			8740 B HF 1x 3,0x35,0; 1x 4,0x35,0; 1x 5,0x35,0; 1x 6,0x35,0; 1x 7,0x38,5; 1x 8,0x38,5; 1x 9,0x38,5; 1x 10,0x38,5	
			Nut Extractor 1x 14,0x43,0	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

8100 SB 6 Zyklop Speed Ratchet Set, 3/8" drive, metric



Code	EAN 4013288			
05**004046**001	*173911*			1
			8000 B 1x 3/8"x199,0	
			8790 HMB 1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0	
			8794 LB 1x 3/8"x200,0	
			8794 B 1x 3/8"x76,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			851/4 TZ PH 1x PH 1x50; 1x PH 2x50; 1x PH 3x50	
			855/4 TZ PZ 1x PZ 1x50; 1x PZ 2x50; 1x PZ 3x50	
			867/4 Z TORX® 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50; 1x TX 40x50	
			840/4 Z Hex-Plus 1x 4,0x50; 1x 5,0x50; 1x 6,0x50; 1x 8,0x50	
			800/4 Z 1x 1,0x5,5x50	

8100 SB 9 Zyklop Speed Ratchet Set, 3/8" drive, imperial



Code	EAN 4013288			
05**004049**001	*173980*			1
			8000 B 1x 3/8"x199,0	
			8790 HMB 1x 1/4"x29,0; 1x 5/16"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0	
			8794 LB 1x 3/8"x200,0	
			8794 B 1x 3/8"x76,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			851/4 TZ PH 1x PH 1x50; 1x PH 2x50; 1x PH 3x50	
			855/4 TZ PZ 1x PZ 1x50; 1x PZ 2x50; 1x PZ 3x50	
			867/4 Z TORX® 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50; 1x TX 40x50	
			840/4 Z Hex-Plus 1x 3/16"x50; 1x 7/32"x50; 1x 1/4"x50; 1x 5/16"x50	
			800/4 Z 1x 1,0x5,5x50	

8100 SB 2 Zyklop Speed Ratchet Set, 3/8" drive, metric

- 43-piece set in a robust metal case

8100 SB 2 Zyklop Speed Ratchet Set, 3/8" drive, metric







Code	EAN 4013288			
05**003594**001	*121141*			1
			8000 B 1x 3/8"x199,0	
			8790 HMB 1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 20,0x30,0; 1x 21,0x30,0; 1x 22,0x30,0; 1x 24,0x32,0	
			8789 B 1x 3/8"x165,0	
			8794 B 1x 3/8"x76,0	
			8795 B 1x 3/8"x50,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			8796 SB 1x 3/8"x125,0	
			8796 LB 1x 3/8"x200,0	
			851/1 Z PH 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 2x25; 1x PZ 3x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25; 1x 10,0x25	
			800/1 Z 1x 1,0x5,5x25	

8100 SB 4 Zyklop Speed Ratchet Set, 3/8" drive, imperial

- 38-piece set in a robust metal case

8100 SB 4 Zyklop Speed Ratchet Set, 3/8" drive, imperial








Code	EAN 4013288			
05**003596**001	*121165*			1
			8000 B 1x 3/8"x199,0	
			8790 HMB 1x 1/4"x29,0; 1x 5/16"x29,0; 1x 11/32"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0; 1x 13/16"x30,0; 1x 7/8"x30,0	
			8789 B 1x 3/8"x165,0	
			8794 B 1x 3/8"x76,0	
			8795 B 1x 3/8"x50,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			8796 SB 1x 3/8"x125,0	
			8796 LB 1x 3/8"x200,0	
			851/1 Z PH 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 2x25; 1x PZ 3x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25	
			800/1 Z 1x 1,0x5,5x25	
			840/1 Z Hex-Plus 1x 5/64"x25; 1x 3/32"x25; 1x 1/8"x25; 1x 9/64"x25; 1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25	

Zyklop Speed - incredibly fast and incredibly flexible

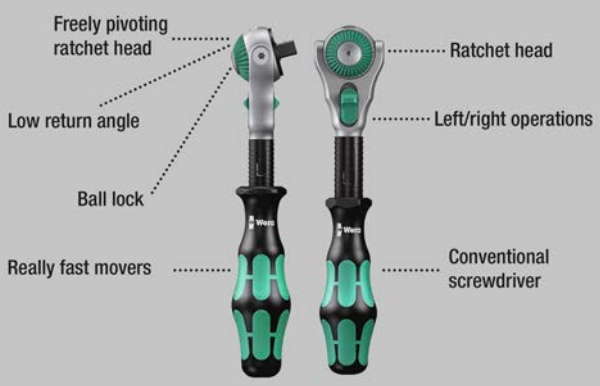

27-piece 3/8" ratchet set for typical bicycle operations with extensive accessories:
1 Zyklop Speed ratchet with 3/8" drive, 10 Zyklop sockets, 2 Zyklop bit sockets with 30mm and extra slim profile area for better accessibility in tight workspaces.

With Take it easy tool finder: Colour coding by size. 1 Zyklop extension (short) with fast-rotating sleeve, 1 Wobble extension, 1 bit adapter, 1 connection part 3/8" external square head to 1/2" external square head, 10 bits, tough, for universal use.

Incredibly compact set arrangement for many tools in a tight space thanks to the highly robust and durable textile box.

Can be placed in an upright position for clearly arranged storage in the workshop shelf. Additional surface protection due to textile outer material. Low weight and small size for better mobility.

- 27-piece 3/8" ratchet set including fine-toothed Zyklop Speed ratchet with swivelling ratchet head, push-button release and right/left switching
- Low return angle of only 5° for working in a small space
- Sockets and bits for the most popular screw profiles for road bikes, mountain bikes and e-bikes
- Assortment in robust textile box with low weight for easy transport
- With adapter from 3/8" square head socket to 1/2" external square head for mounting special bicycle tools

Bicycle set 7



Code	EAN 4013288			
05**004175**001	*220608*			1
			8000 B 1x 3/8"x199,0	
			8790 HMB 1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0	
			8790 HMB Deep 1x 15,0x64,0	
			8740 B 1x 8,0x100,0; 1x 10,0x100,0	
			8794 B 1x 3/8"x76,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			8794 SB 1x 3/8"x125,0	
			781 B 1x 781 B/C, 1/2"x36,0x3/8"	
			840/4 Z Hex-Plus 1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50	
			867/4 Z TORX® 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50	

8000 B Zyklop Speed Ratchet with 3/8" drive

- Combines five different types of a ratchet in one
- Flywheel design and easy-to-grip free-turning sleeve for very high working speeds
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver

8000 B Zyklop Speed Ratchet with 3/8" drive



Code	EAN 4013288		mm					
05**003550**001	*121875*	3/8"	199,0					1

8000 B SB Zyklop Speed Ratchet with 3/8" drive





Code	EAN 4013288			
05**073261**001	*128041*		**8000 B** 1x 3/8"x199.0	3

8100 SB 12 Zyklop Comfort Ratchet set, reversing lever, 3/8" drive, metric

16-piece Zyklop Comfort ratchet set in a light and robust, durable textile box.

The 2-component plastic sleeve of the Zyklop Comfort ratchet makes working comfortable even in the cold and at the same time protects surfaces against damage.

The Zyklop Impaktor sockets stand out with higher-than-average service life even at extreme requirements.

The required size is easily accessible due to the “Take it easy” Tool finder (colour coding by size). The Zyklop extension also makes it easy to operate hard-to-reach screws and bolts.

8100 SB 12 Zyklop Comfort Ratchet set, reversing lever, 3/8" drive, metric





Code	EAN 4013288			
05**005530**001	*227980*			1
			8010 B 1x 3/8"x230,0	
			8790 B Impaktor 1x 8,0x30,0; 1x 10,0x30,0; 1x 11,0x30,0; 1x 12,0x30,0; 1x 13,0x30,0; 1x 14,0x30,0; 1x 15,0x30,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 21,0x32,0; 1x 22,0x32,0; 1x 24,0x32,0	
			8798 B 1x 3/8"x152,4	

8100 SB 13 Zyklop Comfort Ratchet set, reversing lever, 3/8" drive, imperial

- 11-piece Zyklop Comfort ratchet set; imperial sizes

8100 SB 13 Zyklop Comfort Ratchet set, reversing lever, 3/8" drive, imperial





Code	EAN 4013288			
05**005531**001	*227973*			1
			8010 B 1x 3/8"x230,0	
			8790 B Impaktor 1x 1/4"x30,0; 1x 5/16"x30,0; 1x 3/8"x30,0; 1x 7/16"x30,0; 1x 1/2"x30,0; 1x 9/16"x30,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0	
			8798 B 1x 3/8"x152,4	

8010 B Zyklop Comfort Ratchet, with reversing lever, with 3/8" drive

Compelling Wera style Zyklop Comfort ratchet with reversing lever. Comfortable 2-component plastic sleeve. Protects sensitive surfaces. Slim design for working even in very confined spaces.

The fine toothing with 80 teeth allows for a low return angle of only 4.5°. With reversing lever to reverse rotation easily. With safe socket locking via push-button.


8010 B Zyklop Comfort Ratchet, with reversing lever, with 3/8" drive





Code	EAN 4013288		mm					
05**005540**001	*227195*	3/8"	230,0					1

Zyklop Metal with push-through square

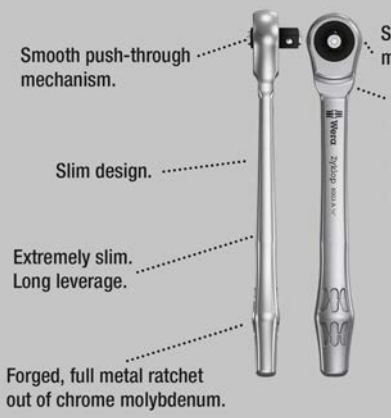

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility. Take it easy Tool Finder with colour coding according to sizes.

- Extremely slim ratchet with long lever
- Return angle of only 4.7°
- Absolutely smooth switchover of the non-detachable push-through square

8100 SB 7 Zyklop Metal Ratchet Set with push-through square, 3/8" drive, metric



Code	EAN 4013288			
05**004047**001	*173867*			1
			8003 B 1x 3/8"x222,0	
			8790 HMB 1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0	
			8794 LB 1x 3/8"x200,0	
			8794 B 1x 3/8"x76,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25	

8100 SB 10 Zyklop Metal Ratchet Set with push-through square, 3/8" drive, imperial





Code	EAN 4013288			
05**004050**001	*173935*			1
			8003 B 1x 3/8"x222,0	
			8790 HMB 1x 1/4"x29,0; 1x 5/16"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0	
			8794 LB 1x 3/8"x200,0	
			8794 B 1x 3/8"x76,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z Hex-Plus 1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25; 1x 1/4"x25; 1x 5/16"x25	

8003 B Zyklop Metal Ratchet with push-through square and 3/8" drive

- Forged, full metal ratchet (chrome-molybdenum); slim design to enable work in very confined spaces.
- The dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°.
- Absolutely smooth switchover of the non-detachable push-through square
- For 3/8" square sockets with ball lock

8003 B Zyklop Metal Ratchet with push-through square and 3/8" drive





Code	EAN 4013288		mm	mm	mm			
05**004033**001	*174031*	3/8"	222,0	27	29			3

Zyklop Metal with switch lever




Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility. Take it easy Tool Finder with colour coding according to sizes.

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°
- Compact textile box with high robustness, low weight and volume

8100 SB 8 Zyklop Metal Ratchet Set with switch lever, 3/8" drive, metric





Code	EAN 4013288			
05**004048**001	*173928*			1
			8004 B 1x 3/8"x222,0	
			8790 HMB 1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0	
			8794 LB 1x 3/8"x200,0	
			8794 B 1x 3/8"x76,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25	

8100 SB 11 Zyklop Metal Ratchet Set with switch lever, 3/8" drive, imperial



Code	EAN 4013288			
05**004051**001	*173959*			1
			8004 B 1x 3/8"x222,0	
			8790 HMB 1x 1/4"x29,0; 1x 5/16"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0	
			8794 LB 1x 3/8"x200,0	
			8794 B 1x 3/8"x76,0	
			8784 B1 1x 1/4"x3/8"x44,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z Hex-Plus 1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25; 1x 1/4"x25; 1x 5/16"x25	

8100 SB HF 1 Zyklop Metal Ratchet Set with switch lever, 3/8" drive, with holding function, metric

- Colour coding of the sockets according to size

8100 SB HF 1 Zyklop Metal Ratchet Set with switch lever, 3/8" drive, with holding function, metric



Code	EAN 4013288			
05**003785**001	*195081*			1
			8004 B 1x 3/8"x222,0	
			8790 HMB HF 1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x29,0; 1x 17,0x29,0; 1x 18,0x29,0; 1x 19,0x29,0	
			8794 LB 1x 3/8"x200,0	
			8794 B 1x 3/8"x76,0	
			Nut Extractor 1x 14,0x43,0	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

The Zyklop Metal Ratchets Switch, 3/8"

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°
- Secure socket locking

8004 B Zyklop Metal Ratchet with switch lever and 3/8" drive



Code	EAN 4013288		mm	mm	mm			
05**004034**001	*174048*	3/8"	222,0	26	29			3

8790 B Impaktor socket with 3/8" drive

- For use with electric or pneumatic wrenches with 3/8" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With Take it easy tool finder: colour coding by size
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools

8790 B Impaktor socket with 3/8" drive





	EAN							
Code	4013288		mm		mm	mm	mm	
05005500001	*227218*		8,0		30,0	14,1	19,0	1
05005501001	*227225*		10,0		30,0	16,6	19,0	1
05005502001	*227232*		11,0		30,0	17,8	19,0	1
05005503001	*227249*		12,0		30,0	18,2	19,0	1
05005504001	*227256*		13,0		30,0	20,0	22,0	1
05005505001	*227263*		14,0		30,0	21,0	22,0	1
05005506001	*227270*		15,0		30,0	22,0	22,0	1
05005507001	*227287*		16,0		30,0	22,0	24,0	1
05005508001	*227294*		17,0		30,0	23,0	25,0	1
05005509001	*227300*		18,0		30,0	23,0	26,0	1
05005510001	*227317*		19,0		30,0	25,0	27,8	1
05005511001	*227324*		21,0		32,0	27,0	30,0	1
05005512001	*227331*		22,0		32,0	28,0	32,0	1
05005513001	*227348*		24,0		32,0	30,0	34,0	1
05005514001	*227362*			1/4"	30,0	11,0	19,0	1
05005515001	*227379*			5/16"	30,0	14,1	19,0	1
05005516001	*227386*			3/8"	30,0	16,6	19,0	1
05005517001	*227393*			7/16"	30,0	17,8	19,0	1
05005518001	*227416*			1/2"	30,0	20,0	22,0	1
05005519001	*227423*			9/16"	30,0	21,0	22,0	1
05005520001	*227430*			5/8"	30,0	22,0	24,0	1
05005521001	*227447*			11/16"	30,0	23,0	25,0	1
05005522001	*227454*			3/4"	30,0	25,0	28,0	1
05005523001	*227461*			13/16"	32,0	27,0	30,0	1
05005524001	*227478*			7/8"	32,0	28,0	32,0	1
05005525001	*227485*			15/16"	32,0	30,0	34,0	1
05005526001	*227492*			1"	32,0	32,0	36,0	1

8790 B Impaktor Deep Socket with 3/8" drive

- Robust Impaktor sockets for extremely high stress; for use with electric or pneumatic wrenches with 3/8" drive
- Long sockets for low lying couplings, also suitable for fitting, protruding thread rods in confined spaces
- Hexagon profile for precise and profile-friendly screwdriving at high power transmission
- With Take it easy tool finder: colour coding by size
- With cross hole and ring socket to attach the safety pin and safety ring of machine operated tools

8790 B Impaktor Deep Socket with 3/8" drive





	EAN							
Code	4013288		mm		mm	mm	mm	
05005550001	*233080*		8,0		63,0	14,1	19,0	1
05005551001	*233097*		10,0		63,0	16,6	19,0	1
05005552001	*233103*		11,0		63,0	17,8	20,0	1
05005553001	*233110*		12,0		63,0	18,2	20,0	1
05005554001	*233127*		13,0		63,0	20,0	22,0	1
05005555001	*233134*		14,0		63,0	21,0	22,0	1
05005556001	*233141*		15,0		63,0	22,0	22,0	1
05005557001	*233158*		16,0		63,0	25,0	22,0	1
05005558001	*233165*		17,0		63,0	26,0	23,0	1
05005559001	*233172*		18,0		63,0	28,0	23,0	1
05005560001	*233189*		19,0		63,0	27,0	25,0	1
05005561001	*233196*		21,0		63,0	30,0	27,0	1
05005562001	*233202*		22,0		63,0	32,0	28,0	1
05005563001	*233219*		24,0		63,0	34,0	30,0	1
05005564001	*233394*			1/4"	63,0	11,0	19,0	1
05005565001	*233400*			5/16"	63,0	14,1	19,0	1
05005566001	*233417*			3/8"	63,0	16,6	19,0	1
05005567001	*233424*			7/16"	63,0	17,8	19,0	1
05005568001	*233431*			1/2"	63,0	20,0	22,0	1
05005569001	*233448*			9/16"	63,0	21,0	22,0	1
05005570001	*233486*			5/8"	63,0	24,0	22,0	1
05005571001	*233493*			11/16"	63,0	25,0	23,0	1
05005572001	*233509*			3/4"	63,0	28,0	25,0	1
05005573001	*233516*			13/16"	63,0	30,0	27,0	1
05005574001	*233523*			7/8"	63,0	32,0	28,0	1
05005575001	*233530*			15/16"	63,0	34,0	30,0	1
05005576001	*233592*			1"	63,0	36,0	32,0	1

8790 HMB Zyklop 3/8" socket

- 3/8" Zyklop socket
- For manual and power tool operations (non-impact)
- Knurling at lower end to enable easy gripping when used in manual applications
- Take it easy tool finder with colour coding according to sizes

8790 HMB Zyklop 3/8" socket



Code	EAN							
	4013288		mm		mm	mm	mm	
05003551001	120311		6,0		29,0	10,5	18,0	1
05003552001	120328		7,0		29,0	11,0	18,0	1
05003553001	120335		8,0		29,0	12,2	18,0	1
05003554001	120342		9,0		29,0	13,5	18,0	1
05003555001	120359		10,0		29,0	14,5	18,0	1
05003556001	120366		11,0		29,0	16,0	18,0	1
05003557001	120373		12,0		29,0	17,0	18,0	1
05003558001	120380		13,0		29,0	18,5	20,0	1
05003559001	120397		14,0		29,0	19,5	22,0	1
05003560001	120403		15,0		29,0	21,0	24,0	1
05003561001	120410		16,0		30,0	22,0	24,0	1
05003562001	120427		17,0		30,0	23,5	24,0	1
05003563001	120434		18,0		30,0	24,5	24,0	1
05003564001	120441		19,0		30,0	26,0	24,0	1
05003565001	120458		20,0		30,0	28,0	25,0	1
05003566001	120465		21,0		30,0	28,0	25,0	1
05003567001	120472		22,0		30,0	32,0	25,0	1
05003568001	120489		24,0		32,0	32,0	25,0	1
05003569001	120496			1/4"	29,0	11,0	18,0	1
05003570001	120502			5/16"	29,0	12,2	18,0	1
05003571001	120519			11/32"	29,0	13,5	18,0	1
05003572001	120526			3/8"	29,0	14,5	18,0	1
05003573001	120533			7/16"	29,0	16,0	18,0	1
05003574001	120649			1/2"	29,0	18,5	20,0	1
05003575001	120557			9/16"	29,0	19,5	22,0	1
05003576001	120564			5/8"	30,0	22,0	24,0	1
05003577001	120571			11/16"	30,0	23,0	24,0	1
05003578001	120588			3/4"	30,0	26,0	24,0	1
05003579001	120595			13/16"	30,0	28,0	25,0	1
05003580001	120601			7/8"	30,0	32,0	25,0	1

8790 HMB HF Zyklop socket with 3/8" drive with holding function

- Socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Chrome vanadium steel, matt chrome-plated
- Equipped with ball stop groove, knurling at lower end for better gripping

8790 HMB HF Zyklop socket with 3/8" drive with holding function



Code	EAN							
	4013288		mm	mm	mm	mm	mm	
05003740001	193919		6,0	29,0	12,7	17,5	6,5	1
05003741001	193926		7,0	29,0	13,2	17,5	6,5	1
05003742001	193933		8,0	29,0	14,2	17,5	6,5	1
05003743001	193940		9,0	29,0	15,7	17,5	6,5	1
05003744001	193957		10,0	29,0	17,0	17,5	8,0	1
05003745001	193964		11,0	29,0	18,2	17,5	9,5	1
05003746001	193971		12,0	29,0	19,0	17,5	9,5	1
05003747001	193988		13,0	29,0	20,4	19,5	9,5	1
05003748001	193995		14,0	29,0	21,5	21,5	12,5	1
05003749001	194008		15,0	29,0	23,5	23,5	12,5	1
05003750001	194015		16,0	29,0	24,2	23,5	12,5	1
05003751001	194022		17,0	29,0	26,0	23,5	12,5	1
05003752001	194039		18,0	29,0	26,5	23,5	12,5	1
05003753001	194046		19,0	29,0	28,0	23,5	12,5	1

9607 Magnetic rail B Impaktor 1

Socket rail with 10 Impaktor socket wrenches for use with electric or pneumatic wrenches with 3/8" drive. The Impaktor technology ensures a higher-than-average service life even at extreme requirements.

The hexagon profile used allows a high power transmission while simultaneously being precise and protecting the profile. With “Take it easy” Tool finder with colour coding by size - for quick and easy identification of the required tool.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 10-piece socket set on socket rail, 3/8"
- Rail with secure socket mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- For use with electric or pneumatic wrenches with 3/8" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools
- With Take it easy tool finder: colour coding by size

9607 Magnetic rail B Impaktor 1





Code	EAN 4013288			
05**005451**001	*227546*			1
		◉	**8790 B Impaktor** 1x 10,0x30,0; 1x 13,0x30,0; 1x 15,0x30,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 21,0x32,0; 1x 22,0x32,0; 1x 24,0x32,0	
			9603 1x 30,0x340,0	

9608 Magnetic rail B Impaktor Imperial 1

- Imperial

9608 Magnetic rail B Impaktor Imperial 1





Code	EAN 4013288			
05**005452**001	*227553*			1
		◉	**8790 B Impaktor** 1x 1/4"x30,0; 1x 5/16"x30,0; 1x 3/8"x30,0; 1x 7/16"x30,0; 1x 1/2"x30,0; 1x 9/16"x30,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0	
			9601 1x 30,0x340,0	

9660 Magnetic rail B Impaktor Deep 1 socket set, 3/8" drive

- 10-piece socket set on socket rail, 3/8"
- Magnetic rail with secure socket mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley

9660 Magnetic rail B Impaktor Deep 1 socket set, 3/8" drive





Code	EAN 4013288			
05**005590**001	*233554*			1
		◉▣	**8790 B Impaktor Deep** 1x 10,0x63,0; 1x 13,0x63,0; 1x 15,0x63,0; 1x 16,0x63,0; 1x 17,0x63,0; 1x 18,0x63,0; 1x 19,0x63,0; 1x 21,0x63,0; 1x 22,0x63,0; 1x 24,0x63,0	
			9601 1x 30,0x340,0	

9661 Magnetic rail B Impaktor Deep Imperial 1 socket set, 3/8" drive

- Imperial sizes
- 9-piece socket set on socket rail, 3/8"
- Magnetic rail with secure socket mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley

9661 Magnetic rail B Impaktor Deep Imperial 1 socket set, 3/8" drive



Code	EAN 4013288			
05**005591**001	*233561*			1
			8790 B Impaktor Deep 1x 1/4"x63,0; 1x 5/16"x63,0; 1x 3/8"x63,0; 1x 7/16"x63,0; 1x 1/2"x63,0; 1x 9/16"x63,0; 1x 5/8"x63,0; 1x 11/16"x63,0; 1x 3/4"x63,0	
			9601 1x 30,0x340,0	

8790 B Impaktor Deep Set 1



Code	EAN 4013288			
05**005580**001	*233639*			1
			8790 B Impaktor Deep 1x 8,0x63,0; 1x 10,0x63,0; 1x 11,0x63,0; 1x 12,0x63,0; 1x 13,0x63,0; 1x 14,0x63,0; 1x 15,0x63,0; 1x 16,0x63,0; 1x 17,0x63,0; 1x 18,0x63,0; 1x 19,0x63,0; 1x 21,0x63,0; 1x 22,0x63,0; 1x 24,0x63,0	

8790 B Impaktor Deep Imperial Set 1

- Imperial sizes

8790 B Impaktor Deep Imperial Set 1



Code	EAN 4013288			
05**005581**001	*233912*			1
			8790 B Impaktor Deep 1x 1/4"x63,0; 1x 5/16"x63,0; 1x 3/8"x63,0; 1x 7/16"x63,0; 1x 1/2"x63,0; 1x 9/16"x63,0; 1x 5/8"x63,0; 1x 11/16"x63,0; 1x 3/4"x63,0; 1x 13/16"x63,0; 1x 7/8"x63,0; 1x 15/16"x63,0; 1x 1"x63,0	

Belt B 1 Zyklop socket set with holding function, 3/8" drive

Typically Wera designed robust textile belt with 9 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets. Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Sockets with holding function for particularly convenient screw-driving with reduced risk of losing the screw when approaching the workpiece. Supplied with a non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 10-piece socket set on a robust textile belt, 1/4"
- Sockets with holding function for screws/bolts/nuts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt B 1 Zyklop socket set with holding function, 3/8" drive



Code	EAN 4013288			
05**003970**001	*194947*			1
		◉	**8790 HMB HF** 1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x29,0; 1x 17,0x29,0; 1x 18,0x29,0; 1x 19,0x29,0	
			Nut Extractor 1x 14,0x43,0	
			Belt B 0/9 1x 45,0x310,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Belt B 4 Zyklop socket set, 3/8" drive

- 9-piece socket set on a robust textile belt, 3/8"
- For manual and power tool operations (non-impact)
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt B 4 Zyklop socket set, 3/8" drive



Code	EAN 4013288			
05**003973**001	*194978*			1
		◉	**8790 HMB** 1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0	
			Belt B 0/9 1x 45,0x310,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Magnetic socket rail B 4 Zyklop socket set, 3/8" drive

Socket rail with 9 manual and machine sockets (non-impact), 3/8". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 3/8"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

Magnetic socket rail B 4 Zyklop socket set, 3/8" drive



Code	EAN 4013288			
05**005430**001	*223234*			1
		◉	**8790 HMB** 1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0	
			9601 1x 30,0x340,0	

Magnetic socket rail B Imperial 1 Zyklop socket set 3/8" drive, imperial

Socket rail with 9 manual and machine sockets (non-impact), 3/8". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily. The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 3/8"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

Magnetic socket rail B Imperial 1 Zyklop socket set 3/8" drive, imperial



Code	EAN 4013288			
05**005450**001	*223258*			1
		◉	**8790 HMB** 1x 1/4"x29,0; 1x 5/16"x29,0; 1x 11/32"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0; 1x 5/8"x30,0; 1x 3/4"x30,0	
			9601 1x 30,0x340,0	

8790 HMB Deep 3/8" socket

Long 3/8" hand and machine socket (ISO 2725 part 3) with ball intercept ring; for external hexagonal bolts and sockets. For use in manual and machine operation (non-impact), even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands. The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile.

Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle.

- Long sockets for low-lying screwdriving, often even with protruding threaded rods in small spaces
- Hexagonal profile enables precise bolting with high power transmission and preserves the profile
- Take it easy tool finder with colour coding according to sizes
- Knurling at lower end to enable easy gripping when used in manual applications
- For manual and machine operation (non-impact), ball intercept ring
- Made of matt chromed chrome-vanadium

8790 HMB Deep 3/8" socket







	EAN							
Code	4013288		mm	mm	mm	mm		
05**004530**001	*210388*		8,0	64,0	12,2	17,0		1
05**004531**001	*210395*		9,0	64,0	13,5	17,0		1
05**004532**001	*210401*		10,0	64,0	14,5	17,0		1
05**004533**001	*210418*		11,0	64,0	15,7	17,0		1
05**004534**001	*210425*		12,0	64,0	16,5	18,0		1
05**004535**001	*210432*		13,0	64,0	19,0	17,0		1
05**004536**001	*210449*		14,0	64,0	20,0	18,0		1
05**004537**001	*210456*		15,0	64,0	22,0	20,0		1
05**004538**001	*210463*		16,0	64,0	22,0	20,0		1
05**004539**001	*210470*		17,0	64,0	24,0	22,0		1
05**004540**001	*210487*		18,0	64,0	26,0	23,0		1
05**004541**001	*210494*		19,0	64,0	26,0	23,0		1
05**004542**001	*210500*		20,0	64,0	28,0	25,0		1
05**004543**001	*210517*		21,0	64,0	28,0	25,0		1
05**004544**001	*210524*		22,0	64,0	30,0	26,0		1

Belt B Deep 1 socket set, 3/8" drive

Robust textile belt in the typical Wera design with 9 long 3/8" manual and machine socket inserts (non-impacting) in a confined space. A smoother turning mechanism ensures a secure holding and easy removal of sockets. Includes snap hook for attaching to belt loops or bags. With fleece backing and hook and loop fastener strips for easy attachment e.g. on wall, shelf, workshop trolley or the Wera 2go tool transport system.

Long 3/8" manual and mechanical socket wrench inserts (ISO 2725 part 3) from Wera for use in manual and machine operation (non-impacting) even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands. With hexagonal profile and ball-catching groove. The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile.

Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle. For external hexagonal bolts and sockets.

- 9-piece socket set on robust textile belt 3/8"
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long 3/8" socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- Take it easy tool finder with colour coding according to sizes

Belt B Deep 1 socket set, 3/8" drive









Code	EAN 4013288		
05**004545**001	*210555*		1
		◉	**8790 HMB Deep** 1x 8,0x64,0; 1x 10,0x64,0; 1x 12,0x64,0; 1x 13,0x64,0; 1x 15,0x64,0; 1x 16,0x64,0; 1x 17,0x64,0; 1x 18,0x64,0; 1x 19,0x64,0
			Belt B 0/9 1x 45,0x310,0
			Hook and Loop Fastener Strip 30 1x 30,0x200,0

Magnetic socket rail B Deep 1 socket set, 3/8" drive

Socket rail with 9 long manual and machine sockets (non-impact), 3/8". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

Long 3/8" manual and machine sockets (ISO 2725 part 3) by Wera for manual and (non-impact) machine use even at low lying couplings and protruding thread rods.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

Slip-proof for easy grip even with oily hands. With hexagon profile and ball stop groove. The hexagon profile enables the transmission of high forces and loads the edges of the bolt or the screw head less than a double hexagon profile.

Fine-teethed ratchets also make use of a double hexagon profile superfluous, even in confined spaces, thanks to their small return angle. For external hexagon bolts and screws.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 3/8"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long 3/8" socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission

Magnetic socket rail B Deep 1 socket set, 3/8" drive



Code	EAN 4013288			
05**005440**001	*223241*			1
			8790 HMB Deep 1x 8,0x64,0; 1x 10,0x64,0; 1x 12,0x64,0; 1x 13,0x64,0; 1x 15,0x64,0; 1x 16,0x64,0; 1x 17,0x64,0; 1x 18,0x64,0; 1x 19,0x64,0	
			9601 1x 30,0x340,0	

8767 B HF TORX® Zyklop bit socket with holding function, 3/8" drive

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- Chrome vanadium steel, matt chrome-plated

8767 B HF TORX® Zyklop bit socket with holding function, 3/8" drive



Code	EAN 4013288			mm	mm	mm		
05**003059**001	*189097*		TX 10	35,0	12,0	17,5		1
05**003060**001	*188830*		TX 15	35,0	12,0	17,5		1
05**003061**001	*188847*		TX 20	35,0	12,0	17,5		1
05**003062**001	*188854*		TX 25	35,0	12,0	17,5		1
05**003063**001	*188861*		TX 25	107,0	12,0	17,5		1
05**003064**001	*188878*		TX 27	35,0	12,0	17,5		1
05**003065**001	*188885*		TX 27	107,0	12,0	17,5		1
05**003066**001	*188892*		TX 30	35,0	12,0	17,5		1
05**003067**001	*188908*		TX 30	107,0	12,0	17,5		1
05**003068**001	*188915*		TX 40	35,0	12,0	17,5		1
05**003069**001	*188922*		TX 40	107,0	12,0	17,5		1
05**003070**001	*188939*		TX 45	38,5	12,0	17,5		1
05**003071**001	*188946*		TX 45	100,0	12,0	17,5		1
05**003072**001	*188953*		TX 50	38,5	12,0	17,5		1
05**003073**001	*188960*		TX 50	100,0	12,0	17,5		1

8767 B TORX® Zyklop Bit socket with 3/8" drive, with extra slim profile area

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- With Take it easy tool finder: colour coding by size
- Knurling on lower end for more grip when used manually.
- Chrome vanadium steel, matt chrome-plated

8767 B TORX® Zyklop Bit socket with 3/8" drive, with extra slim profile area





	EAN							
Code	4013288			mm	mm	mm	mm	
05**003074**001	*227102*		TX 25	107,0	12,0	17,5	81,5	1
05**003075**001	*227119*		TX 30	107,0	12,0	17,5	81,5	1

Belt B 3 TORX® HF Zyklop bit socket set with holding function, 3/8" drive

Typically Wera designed robust textile belt with 9 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket. Especially short, stable bit-sockets with all the advantages of the Wera bit technology.

Bit sockets with holding function for particularly convenient screwdriving with reduced risk of losing the screw when approaching the workpiece. Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 9-piece bit-socket set on a robust textile belt, 3/8"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt B 3 TORX® HF Zyklop bit socket set with holding function, 3/8" drive







Code	EAN 4013288			
05**003972**001	*194961*			1
			8767 B HF 1x TX 10x35,0; 1x TX 15x35,0; 1x TX 20x35,0; 1x TX 25x35,0; 1x TX 27x35,0; 1x TX 30x35,0; 1x TX 40x35,0; 1x TX 45x38,5; 1x TX 50x38,5	
			Belt B 0/9 1x 45,0x310,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

8767 B TORX® HF 1 Zyklop bit socket set with holding function, 3/8" drive

- Bit sockets with holding function for TORX® screws
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually

8767 B TORX® HF 1 Zyklop bit socket set with holding function, 3/8" drive



Code	EAN			
	4013288			
05**003185**001	*195074*			1
			8767 B HF 1x TX 25x107,0; 1x TX 27x107,0; 1x TX 30x107,0; 1x TX 40x107,0; 1x TX 45x100,0; 1x TX 50x100,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8740 B HF Zyklop bit socket with holding function, 3/8" drive

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes

8740 B HF Zyklop bit socket with holding function, 3/8" drive



Code	EAN							
	4013288		mm		mm	mm	mm	
05**003030**001	*188557*		3,0		35,0	12,0	17,5	1
05**003031**001	*188564*		4,0		35,0	12,0	17,5	1
05**003032**001	*188571*		4,0		107,0	12,0	17,5	1
05**003033**001	*188649*		5,0		35,0	12,0	17,5	1
05**003034**001	*188656*		5,0		107,0	12,0	17,5	1
05**003035**001	*188663*		6,0		35,0	12,0	17,5	1
05**003036**001	*188731*		6,0		107,0	12,0	17,5	1
05**003037**001	*188748*		7,0		38,5	12,0	17,5	1
05**003038**001	*188755*		7,0		100,0	12,0	17,5	1
05**003039**001	*188779*		8,0		38,5	12,0	17,5	1
05**003040**001	*188786*		8,0		100,0	12,0	17,5	1
05**003041**001	*188793*		9,0		38,5	12,0	17,5	1
05**003042**001	*188809*		9,0		100,0	12,0	17,5	1
05**003043**001	*188816*		10,0		38,5	12,0	17,5	1
05**003044**001	*188823*		10,0		100,0	12,0	17,5	1
05**003080**001	*193407*			1/8"	35,0	12,0	17,5	1
05**003081**001	*193414*			1/8"	107,0	12,0	17,5	1
05**003082**001	*193421*			9/64"	35,0	12,0	17,5	1
05**003083**001	*193438*			5/32"	35,0	12,0	17,5	1
05**003084**001	*193445*			5/32"	107,0	12,0	17,5	1
05**003085**001	*193452*			3/16"	35,0	12,0	17,5	1
05**003086**001	*193551*			3/16"	107,0	12,0	17,5	1
05**003087**001	*193568*			7/32"	35,0	12,0	17,5	1
05**003088**001	*193575*			7/32"	107,0	12,0	17,5	1
05**003089**001	*193612*			1/4"	35,0	12,0	17,5	1
05**003090**001	*193629*			1/4"	107,0	12,0	17,5	1
05**003091**001	*193636*			5/16"	38,5	12,0	17,5	1
05**003092**001	*193643*			5/16"	100,0	12,0	17,5	1
05**003093**001	*193650*			3/8"	38,5	12,0	17,5	1
05**003094**001	*193667*			3/8"	100,0	12,0	17,5	1

8740 B Zyklop Bit socket with 3/8" drive, with extra slim profile area

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- With Take it easy tool finder: colour coding by size

8740 B Zyklop Bit socket with 3/8" drive, with extra slim profile area





	EAN							
Code	4013288		mm	mm	mm	mm	mm	
05**003050**001	*227058*		4,0	107,0	12,0	17,5	81,5	1
05**003051**001	*227065*		5,0	107,0	12,0	17,5	81,5	1
05**003052**001	*227072*		6,0	107,0	12,0	17,5	81,5	1
05**003054**001	*227089*		8,0	100,0	12,0	17,5	74,5	1
05**003056**001	*227096*		10,0	100,0	12,0	17,5	74,5	1

Belt B 2 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive

Typically Wera designed robust textile belt with 8 in-hex bit-sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly.

Includes a snap hook for secure fastening to a belt loop or pocket. Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 8-piece bit socket set on a robust textile belt, 3/8"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt B 2 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive







Code	EAN 4013288		
05**003971**001	*194954*		1
			8740 B HF 1x 3,0x35,0; 1x 4,0x35,0; 1x 5,0x35,0; 1x 6,0x35,0; 1x 7,0x38,5; 1x 8,0x38,5; 1x 9,0x38,5; 1x 10,0x38,5	
			Belt B 0/8 1x 45,0x275,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

8740 B HF 1 Zyklop bit socket set with holding function, 3/8" drive

- Compact textile box with high robustness, low weight and volume
- Bit socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually
- Long design

8740 B HF 1 Zyklop bit socket set with holding function, 3/8" drive



Code	EAN 4013288			
05**003180**001	*195050*			1
		○	**8740 B HF** 1x 4,0x107,0; 1x 5,0x107,0; 1x 6,0x107,0; 1x 7,0x100,0; 1x 8,0x100,0; 1x 9,0x100,0; 1x 10,0x100,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8740 B HF Imperial 1 Zyklop bit socket set with holding function, 3/8" drive

- Long version
- Imperial

8740 B HF Imperial 1 Zyklop bit socket set with holding function, 3/8" drive



Code	EAN 4013288			
05**003181**001	*195067*			1
		○	**8740 B HF** 1x 1/8"x107,0; 1x 5/32"x107,0; 1x 3/16"x107,0; 1x 7/32"x107,0; 1x 1/4"x107,0; 1x 5/16"x100,0; 1x 3/8"x100,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Belt B Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive

Typically Wera designed robust textile belt with 8 in-hex bit-sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly.

Includes a snap hook for secure fastening to a belt loop or pocket. Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 8-piece bit socket set on a robust textile belt, 3/8"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System
- Imperial

Belt B Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive



Code	EAN 4013288			
05**003974**001	*194985*			1
		O	**8740 B HF** 1x 1/8"x35,0; 1x 9/64"x35,0; 1x 5/32"x35,0; 1x 3/16"x35,0; 1x 7/32"x35,0; 1x 1/4"x35,0; 1x 5/16"x38,5; 1x 3/8"x38,5	
			Belt B 0/8 1x 45,0x275,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Bicycle set 8

7-piece bit socket set with 3/8" drive for typical bicycle operations. Bit sockets with 30mm long and extra slim profile area for better accessibility in tight workspaces. The knurling facilitates manual screwdriving without slipping.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

- Bit sockets with holding function for the most common TORX® and Hex screws
- The holding function holds screws securely on the tool
- With Take it easy tool finder: colour coding by size
- Knurling on lower socket end for more grip when used manually
- In a robust folding bag for easy transport

Bicycle set 8



Code	EAN 4013288			
05**004176**001	*220622*			1
		✪	**8767 B** 1x TX 25x107,0; 1x TX 30x107,0	
		O	**8740 B** 1x 4,0x107,0; 1x 5,0x107,0; 1x 6,0x107,0; 1x 8,0x100,0; 1x 10,0x100,0	
			Hook and Loop Fastener Strip 120 1x 50,0x70,0	

8796 LB Zyklop „flexible-lock“ extension with free-turning sleeve, long, 3/8"

- For 3/8" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

8796 LB Zyklop „flexible-lock“ extension with free-turning sleeve, long, 3/8"



Code	EAN 4013288	■	↕ mm					
05**003592**001	*121325*	3/8"	200,0					1

8796 SB Zyklop „flexible-lock“ extension with free-turning sleeve, short, 3/8"

- Flexible lock system for either locking or rapid exchange of the attached tool
- For 3/8" square sockets with ball lock
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

8796 SB Zyklop „flexible-lock“ extension with free-turning sleeve, short, 3/8"



	EAN							
Code	4013288		mm					
05**003591**001	*121318*	3/8"	125,0					1

8794 LB Zyklop extension with free-turning sleeve, long, 3/8"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

8794 LB Zyklop extension with free-turning sleeve, long, 3/8"



	EAN							
Code	4013288		mm					
05**003583**001	*121288*	3/8"	200,0					1

8794 SB Zyklop extension with free-turning sleeve, short, 3/8"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

8794 SB Zyklop extension with free-turning sleeve, short, 3/8"



	EAN							
Code	4013288		mm					
05**003582**001	*121271*	3/8"	125,0					1

8795 B Zyklop universal joint, 3/8"

Wera Zyklop universal joint for 3/8" square sockets with ball lock.

8795 B Zyklop universal joint, 3/8"



	EAN							
Code	4013288		mm					
05**003585**001	*121523*	3/8"	50,0					1

8794 B Zyklop wobble extension, 3/8"

Wobble extension for the Wera Zyklop. Swivel angle of 15° in all directions. This ensures rapid and precise work even in confined working situations.

8794 B Zyklop wobble extension, 3/8"



	EAN							
Code	4013288		mm					
05**003584**001	*121295*	3/8"	76,0					1

8784 B1 Zyklop bit adaptor, 3/8"

- 3/8" Zyklop adaptor with quick-release chuck for rapid bit change

8784 B1 Zyklop bit adaptor, 3/8"



	EAN							
Code	4013288			mm				
05**003590**001	*121301*	1/4"	3/8"	44,0				1

8789 B Zyklop sliding T-handle, 3/8"

Wera ZyklopT-handle for higher torque transfer. For 3/8" square sockets with ball lock. Adjustable drive for more flexible usage. Out of high quality chrome vanadium steel, matt chrome-plated.

8789 B Zyklop sliding T-handle, 3/8"



	EAN							
Code	4013288		mm					
05**003581**001	*121516*	3/8"	165,0					3

Socket rail B (textile belt), 8 location, unloaded



Code	EAN 4013288			
05**003980**001	*195005*			1
			Belt B 0/8 1x 45,0x275,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Socket rail B (textile belt), 9 location, unloaded



Code	EAN 4013288			
05**003981**001	*195012*			1
			Belt B 0/9 1x 45,0x310,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

9601 Magnetic socket rail, $^3/_8$", empty

1 socket rail, empty. For up to 10 sockets and/or bit sockets with $^3/_8$" drive.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.


- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Empty, for up to 10 sockets, $^3/_8$"

9601 Magnetic socket rail, $^3/_8$", empty



	EAN							
Code	4013288	mm	mm					
05**136421**001	*223333*	30,0	340,0					1

Zyklop Speed - incredibly fast and incredibly flexible

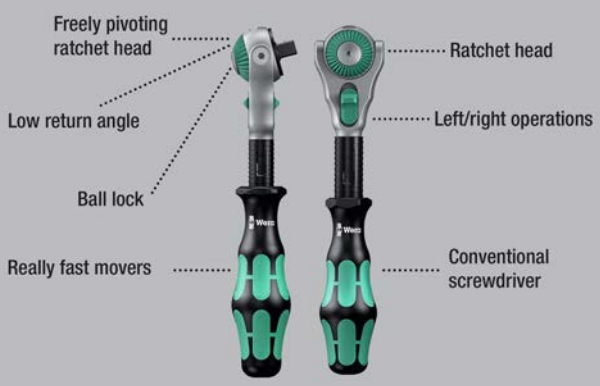

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility. Take it easy Tool Finder with colour coding according to sizes.

- Freely pivoting ratchet head with 5 predefined locking positions
- Fine toothing with 72 teeth
- Small return angle of only 5°
- Free-turning sleeve for high working speeds
- Take it easy tool finder with colour coding according to sizes
- Compact textile box with high robustness, low weight and volume

8100 SC 6 Zyklop Speed Ratchet Set, 1/2" drive, metric



Code	EAN 4013288			
05**004076**001	*173874*			1
			8000 C 1x 1/2"x277,0	
			8790 HMC 1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0	
			8794 LC 1x 1/2"x250,0	
			8794 C 1x 1/2"x52,0	
			8784 C2 1x 5/16"x1/2"x50,0	
			851/2 Z PH 1x PH 2x32; 1x PH 3x32	
			855/2 Z PZ 1x PZ 2x32; 1x PZ 3x32	
			867/2 Z TORX® 1x TX 20x35; 1x TX 25x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35	
			840/2 Z 1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30	

8100 SC 9 Zyklop Speed Ratchet Set, 1/2" drive, imperial





Code	EAN 4013288			
05**004079**001	*173997*			1
			8000 C 1x 1/2"x277,0	
			8790 HMC 1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0; 1x 9/16"x37,0; 1x 19/32"x37,0; 1x 5/8"x37,0; 1x 11/16"x37,0; 1x 3/4"x37,0; 1x 25/32"x37,0; 1x 13/16"x37,0	
			8794 LC 1x 1/2"x250,0	
			8794 C 1x 1/2"x52,0	
			8784 C2 1x 5/16"x1/2"x50,0	
			851/2 Z PH 1x PH 2x32; 1x PH 3x32	
			855/2 Z PZ 1x PZ 2x32; 1x PZ 3x32	
			867/2 Z TORX® 1x TX 20x35; 1x TX 25x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35	
			840/2 Z 1x 7/32"x30; 1x 1/4"x30; 1x 5/16"x30; 1x 3/8"x30	

8100 SC 2 Zyklop Speed Ratchet Set, 1/2" drive, metric

- 37-piece set in a robust metal case





Code	EAN 4013288			
05**003645**001	*121189*			1
			8000 C 1x 1/2"x277,0	
			8790 HMC 1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0; 1x 20,0x37,0; 1x 21,0x37,0; 1x 22,0x37,0; 1x 24,0x37,0; 1x 27,0x40,0; 1x 30,0x42,0; 1x 32,0x42,0	
			8789 C 1x 1/2"x250,0	
			8794 C 1x 1/2"x52,0	
			8795 C 1x 1/2"x69,0	
			8784 C2 1x 5/16"x1/2"x50,0	
			8796 SC 1x 1/2"x125,0	
			8796 LC 1x 1/2"x250,0	
			851/2 Z PH 1x PH 3x32	
			855/2 Z PZ 1x PZ 3x32	
			867/2 Z TORX® 1x TX 20x35; 1x TX 25x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35	
			840/2 Z 1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30	

8100 SC 4 Zyklop Speed Ratchet Set, 1/2" drive, imperial

- 38-piece set in a robust metal case

8100 SC 4 Zyklop Speed Ratchet Set, 1/2" drive, imperial



Code	EAN 4013288			
05**003647**001	*121202*			1
			8000 C 1x 1/2"x277,0	
			8790 HMC 1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0; 1x 9/16"x37,0; 1x 19/32"x37,0; 1x 5/8"x37,0; 1x 11/16"x37,0; 1x 3/4"x37,0; 1x 25/32"x37,0; 1x 13/16"x37,0; 1x 7/8"x37,0; 1x 15/16"x37,0; 1x 31/32"x37,0; 1x 1"x40,0; 1x 1 1/16"x40,0; 1x 1 1/8"x40,0; 1x 1 3/16"x42,0; 1x 1 1/4"x42,0	
			8789 C 1x 1/2"x250,0	
			8794 C 1x 1/2"x52,0	
			8795 C 1x 1/2"x69,0	
			8784 C2 1x 5/16"x1/2"x50,0	
			8796 SC 1x 1/2"x125,0	
			8796 LC 1x 1/2"x250,0	
			851/2 Z PH 1x PH 3x32	
			855/2 Z PZ 1x PZ 3x32	
			867/2 Z TORX® 1x TX 20x35; 1x TX 25x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35	
			840/2 Z 1x 7/32"x30; 1x 1/4"x30; 1x 5/16"x30; 1x 3/8"x30	

8000 C Zyklop Speed Ratchet with 1/2" drive

- Combines five different types of a ratchet in one
- Flywheel design and easy-to-grip free-turning sleeve for very high working speeds
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver

8000 C Zyklop Speed Ratchet with 1/2" drive




Code	EAN 4013288		mm					
05**003600**001	*121882*	1/2"	277,0					1

8000 C SB Zyklop Speed Ratchet with 1/2" drive



Code	EAN 4013288		
05**073262**001	*128058*		**8000 C** 1x 1/2"x277.0	3

Zyklop Hybrid - longer for more torque

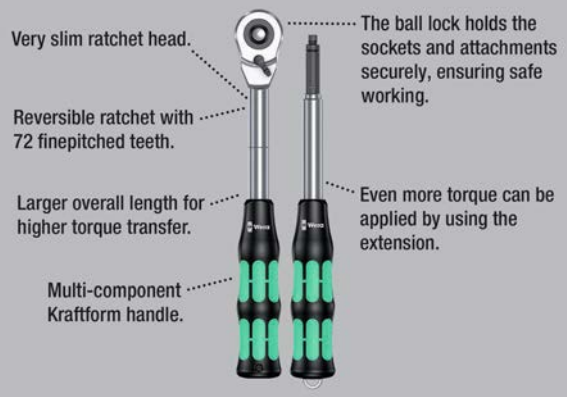

Zyklop Hybrid ratchet set, 1/2" drive, metric. Including Zyklop Hybrid ratchet and Hybrid handle extension.

- Switchover lever for convenient direction change
- Fine-pitched with 72 teeth for a return angle of only 5°
- Compact textile box with high robustness, low weight and volume
- Colour coding of the sockets according to size
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets

8006 SC 1 Zyklop Hybrid Ratchet Set, 1/2" drive, metric



Code	EAN 4013288			
05**004090**001	*182159*			1
		▢	**8006 C** 1x 1/2"x281,0	
			8797 C 1x 271,0	
		▣▢	**8794 LC** 1x 1/2"x250,0	
		◉	**8790 HMC HF** 1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

Zyklop Hybrid Set

Zyklop Hybrid ratchet set, 1/2" drive, metric. Including Zyklop Hybrid ratchet and Hybrid handle extension, extension and 10 sockets.

- Zyklop Hybrid ratchet with long overall length (leverage effect) and slim ratchet head
- Fine-pitched with 72 teeth for a return angle of only 5°
- Extension with unlocking pin

Zyklop Hybrid Set



Code	EAN 4013288			
05**004095**001	*184320*			1
		▢	**8006 C** 1x 1/2"x281,0	
			8797 C 1x 271,0	

8006 C Zyklop Hybrid Ratchet with switch lever and 1/2" drive

Zyklop Hybrid ratchet with switchover lever and 1/2" drive, low weight, ergonomic Kraftform handle with slim head design, long lever and with an extension option.

8006 C Zyklop Hybrid Ratchet with switch lever and 1/2" drive



Code	EAN 4013288	▢	mm	mm	mm			
05**003780**001	*184214*	1/2"	281,0	34	37			3

8797 C Zyklop Hybrid extension


- Can be used with Zyklop Hybrid 8006 C
- To increase the torque to be applied
- Multi-component Kraftform handle optimised to withstand pressure and tensile loads
- With unlocking pin
- Blade out of tough, tempered chrome-molybdenum steel

8797 C Zyklop Hybrid extension



	EAN							
Code	4013288	mm	mm					
05**003781**001	*183200*	271,0	134,0					1

Zyklop Metal with push-through square

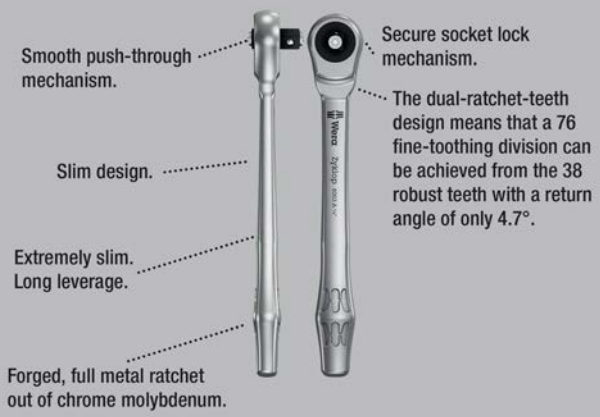

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Extremely slim ratchet with long lever
- Return angle of only 4.7°
- Absolutely smooth switchover of the non-detachable push-through square
- Take it easy tool finder system

8100 SC 7 Zyklop Metal Ratchet Set with push-through square, 1/2" drive, metric



Code	EAN 4013288			
05**004077**001	*173942*			1
			8003 C 1x 1/2"x281,0	
			8790 HMC 1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0	
			8794 LC 1x 1/2"x250,0	
			8794 C 1x 1/2"x52,0	
			8784 C2 1x 5/16"x1/2"x50,0	
			851/2 Z PH 1x PH 2x32; 1x PH 3x32	
			867/2 Z TORX® 1x TX 20x35; 1x TX 25x35; 1x TX 27x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35	
			840/2 Z 1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30	

8100 SC 10 Zyklop Metal Ratchet Set with push-through square, 1/2" drive, imperial



Code	EAN 4013288			
05**004080**001	*173966*			1
			8003 C 1x 1/2"x281,0	
			8790 HMC 1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0; 1x 9/16"x37,0; 1x 19/32"x37,0; 1x 5/8"x37,0; 1x 11/16"x37,0; 1x 3/4"x37,0; 1x 25/32"x37,0; 1x 13/16"x37,0	
			8794 LC 1x 1/2"x250,0	
			8794 C 1x 1/2"x52,0	
			8784 C2 1x 5/16"x1/2"x50,0	
			851/2 Z PH 1x PH 2x32; 1x PH 3x32	
			867/2 Z TORX® 1x TX 20x35; 1x TX 25x35; 1x TX 27x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35	
			840/2 Z 1x 7/32"x30; 1x 1/4"x30; 1x 5/16"x30; 1x 3/8"x30	

8003 C Zyklop Metal Ratchet with push-through square and 1/2" drive

- Forged, full metal ratchet (chrome-molybdenum); slim design to enable work in very confined spaces.
- The dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°.
- Absolutely smooth switchover of the non-detachable push-through square
- For 1/2" square sockets with ball lock

8003 C Zyklop Metal Ratchet with push-through square and 1/2" drive



Code	EAN 4013288		mm	mm	mm			
05**004063**001	*174055*	1/2"	281,0	36	37			3

Zyklop Metal with switch lever



Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°

8100 SC 8 Zyklop Metal Ratchet Set with switch lever, 1/2" drive, metric



Code	EAN 4013288			
05**004078**001	*173881*			1
			8004 C 1x 1/2"x281,0	
			8790 HMC 1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0	
			8794 LC 1x 1/2"x250,0	
			8794 C 1x 1/2"x52,0	
			8784 C2 1x 5/16"x1/2"x50,0	
			851/2 Z PH 1x PH 2x32; 1x PH 3x32	
			867/2 Z TORX® 1x TX 20x35; 1x TX 25x35; 1x TX 27x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35	
			840/2 Z 1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30	

8100 SC 11 Zyklop Metal Ratchet Set with switch lever, 1/2" drive, imperial



Code	EAN 4013288			
05**004081**001	*173973*			1
			8004 C 1x 1/2"x281,0	
			8790 HMC 1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0; 1x 9/16"x37,0; 1x 19/32"x37,0; 1x 5/8"x37,0; 1x 11/16"x37,0; 1x 3/4"x37,0; 1x 25/32"x37,0; 1x 13/16"x37,0	
			8794 LC 1x 1/2"x250,0	
			8794 C 1x 1/2"x52,0	
			8784 C2 1x 5/16"x1/2"x50,0	
			851/2 Z PH 1x PH 2x32; 1x PH 3x32	
			867/2 Z TORX® 1x TX 20x35; 1x TX 25x35; 1x TX 27x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35	
			840/2 Z 1x 7/32"x30; 1x 1/4"x30; 1x 5/16"x30; 1x 3/8"x30	

8004 C Zyklop Metal Ratchet with switch lever and 1/2" drive

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°
- Secure socket locking

8004 C Zyklop Metal Ratchet with switch lever and 1/2" drive



Code	EAN 4013288		mm	mm	mm			
05**004064**001	*174062*	1/2"	281,0	34	37			3

8790 C Impaktor socket with 1/2" drive

Impaktor socket for use with electric or pneumatic impact wrenches with 12.5mm = 1/2" drive. The Impaktor technology ensures above-average service life even under extreme conditions.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. With hexagonal profile and grooved socket.

The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile. For hexagon headed bolts, screws and nuts.

- For use with electric or pneumatic powered impact wrenches with 12.5mm = 1/2" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With Take it easy tool finder: colour coding by size
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools

8790 C Impaktor socket with 1/2" drive



Code	EAN 4013288		mm	mm	mm	mm		
05**004570**001	*210012*		13,0	38,0	21,0	24,0		1
05**004571**001	*210029*		14,0	38,0	22,0	24,0		1
05**004572**001	*210036*		15,0	38,0	24,0	24,0		1
05**004573**001	*210043*		16,0	38,0	24,0	24,0		1
05**004574**001	*210050*		17,0	38,0	26,0	26,0		1
05**004575**001	*210067*		18,0	38,0	28,0	28,0		1
05**004576**001	*210074*		19,0	38,0	28,0	28,0		1
05**004577**001	*210081*		20,0	38,0	26,0	30,0		1
05**004578**001	*210098*		21,0	38,0	26,0	30,0		1

Belt C Impaktor 1 socket set, 1/2" drive

Robust textile belt in the typical Wera design with nine Impaktor socket wrench plug-ins for missions in confined spaces. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets. Including snap hook for attachment on belt loops or bags.

With fleece backing and hook and loop fastener strips for easy attachment e.g. on wall, shelf, workshop trolley and Wera 2go tool transport system. Impaktor sockets for use with electric or pneumatic powered impact wrenches with 12.5mm = 1/2" drive.

Impaktor technology ensures above-average service life, even under extreme conditions. With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. With hexagonal profile and grooved socket.

The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile. For external hexagonal bolts and sockets.

- 9-piece socket set on robust textile belt 1/2"
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Particularly suitable for use with customary impact drivers
- With Take it easy tool finder: colour coding by size
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt C Impaktor 1 socket set, 1/2" drive



Code	EAN 4013288			
05**004580**001	*210104*			1
		◉	**8790 C Impaktor** 1x 13,0x38,0; 1x 14,0x38,0; 1x 15,0x38,0; 1x 16,0x38,0; 1x 17,0x38,0; 1x 18,0x38,0; 1x 19,0x38,0; 1x 20,0x38,0; 1x 21,0x38,0	
			Belt C Impaktor 0/9 1x 71,0x210,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Magnetic socket rail C Impaktor 1 socket set, 1/2" drive

Socket rail with 9 Impaktor sockets for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive.

The Impaktor technology ensures a higher-than-average service life even at extreme requirements.

The hexagon profile used allows a high power transmission while simultaneously being precise and protecting the profile.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/2"
- For use with electric or pneumatic powered impact wrenches with 12.5mm = 1/2" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools

Magnetic socket rail C Impaktor 1 socket set, 1/2" drive



Code	EAN 4013288			
05**005490**001	*223289*			1
		◉	**8790 C Impaktor** 1x 13,0x38,0; 1x 14,0x38,0; 1x 15,0x38,0; 1x 16,0x38,0; 1x 17,0x38,0; 1x 18,0x38,0; 1x 19,0x38,0; 1x 20,0x38,0; 1x 21,0x38,0	
			9602 1x 30,0x370,0	

8790 C Impaktor Deep socket with 1/2" drive

Long Impaktor socket for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive. For use even at low lying couplings and protruding thread rods.

The Impaktor technology ensures a higher-than-average service life even at extreme requirements. With Take it easy tool finder with colour coding by size – to help you find the required tool quickly and easily.

With hexagon profile with socket and well. With hexagon profile with socket and well. The hexagon profile enables the transmission of high forces and loads the edges of the bolt or the screw head less than a double hexagon profile. For external hexagon bolts and screws.

- Robust Impaktor sockets for extremely high stress; for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive
- Long socket wrenches for low lying couplings, also suitable for fitting, protruding thread rods in confined spaces
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools

8790 C Impaktor Deep socket with 1/2" drive



Code	EAN 4013288		mm	mm	mm	mm		
05**004830**001	*221926*		13,0	83,0	21,0	24,0		1
05**004831**001	*221933*		14,0	83,0	22,0	24,0		1
05**004832**001	*221940*		15,0	83,0	24,0	24,0		1
05**004833**001	*221957*		16,0	83,0	24,0	24,0		1
05**004834**001	*221964*		17,0	83,0	26,0	26,0		1
05**004835**001	*221995*		18,0	83,0	28,0	28,0		1
05**004836**001	*222008*		19,0	83,0	28,0	28,0		1
05**004837**001	*222015*		21,0	83,0	30,0	27,0		1
05**004838**001	*222107*		22,0	83,0	32,0	28,0		1
05**004839**001	*222114*		24,0	83,0	34,0	30,0		1
05**004840**001	*222121*		27,0	83,0	38,0	33,0		1

8790 C Impaktor Deep Set 1

Set with 11 Impaktor Deep sockets for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive. Long design for low-lying couplings and protruding thread rods.

The Impaktor technology ensures a higher-than-average service life even at extreme requirements.

The hexagon profile used allows a high power transmission while simultaneously being precise and protecting the profile. With Take it easy tool finder with colour coding by size - for quick and easy identification of the required tool .

- Long ½" sockets for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- For use with electric or pneumatic powered impact wrenches with 12.5mm = 1/2" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools
- With Take it easy tool finder: colour coding by size
- In a robust textile box

8790 C Impaktor Deep Set 1



Code	EAN 4013288			
05**004841**001	*224088*			1
		◉	**8790 C Impaktor Deep** 1x 13,0x83,0; 1x 14,0x83,0; 1x 15,0x83,0; 1x 16,0x83,0; 1x 17,0x83,0; 1x 18,0x83,0; 1x 19,0x83,0; 1x 21,0x83,0; 1x 22,0x83,0; 1x 24,0x83,0; 1x 27,0x83,0	

8790 HMC Zyklop socket with 1/2" drive

- 1/2" inch Zyklop socket
- For manual and power tool operations (non-impact)
- Knurling at lower end to enable easy gripping when used in manual applications
- Equipped with ball stop groove
- Take it easy tool finder with colour coding according to sizes

8790 HMC Zyklop socket with 1/2" drive







Code	EAN		mm		mm	mm	mm	
05003601001	120618		10,0		37,0	15,5	24,0	1
05003602001	120625		11,0		37,0	16,5	24,0	1
05003603001	120656		12,0		37,0	17,5	24,0	1
05003604001	120663		13,0		37,0	19,0	24,0	1
05003605001	120670		14,0		37,0	20,0	24,0	1
05003606001	120687		15,0		37,0	21,0	24,0	1
05003607001	120694		16,0		37,0	22,5	24,0	1
05003608001	120700		17,0		37,0	24,0	26,0	1
05003609001	120717		18,0		37,0	25,0	26,0	1
05003610001	120724		19,0		37,0	26,5	26,0	1
05003611001	120731		20,0		37,0	28,0	26,0	1
05003612001	120748		21,0		37,0	29,0	26,0	1
05003613001	120755		22,0		37,0	30,5	26,0	1
05003614001	120762		24,0		37,0	33,0	28,0	1
05003615001	120779		27,0		40,0	36,5	32,0	1
05003616001	120786		30,0		42,0	40,0	34,0	1
05003617001	120793		32,0		42,0	42,0	36,0	1
05003618001	120809			3/8"	37,0	15,5	24,0	1
05003619001	120816			7/16"	37,0	16,5	24,0	1
05003620001	120823			1/2"	37,0	19,0	24,0	1
05003621001	120830			9/16"	37,0	20,0	24,0	1
05003622001	120847			19/32"	37,0	21,0	24,0	1
05003623001	120854			5/8"	37,0	22,5	24,0	1
05003624001	120861			11/16"	37,0	25,5	26,0	1
05003625001	120878			3/4"	37,0	26,5	26,0	1
05003626001	120885			25/32"	37,0	28,0	26,0	1
05003627001	120892			13/16"	37,0	29,0	26,0	1
05003628001	120908			7/8"	37,0	30,5	26,0	1
05003629001	120915			15/16"	37,0	33,0	28,0	1
05003630001	120922			31/32"	37,0	33,0	28,0	1
05003631001	120939			1"	40,0	36,5	32,0	1
05003632001	120946			1 1/16"	40,0	36,5	32,0	1
05003633001	120953			1 1/8"	40,0	40,0	34,0	1
05003634001	120960			1 3/16"	42,0	40,0	34,0	1
05003635001	120977			1 1/4"	42,0	42,0	36,0	1

8790 HMC HF Zyklop socket with 1/2" drive with holding function

- Socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Chrome vanadium steel, matt chrome-plated
- Equipped with ball stop groove, knurling at lower end for better gripping

8790 HMC HF Zyklop socket with 1/2" drive with holding function











Code	EAN		mm	mm	mm	mm	mm	
05003730001	180957		10,0	37,0	17,8	23,5	10,4	1
05003731001	180964		11,0	37,0	18,8	23,5	10,4	1
05003732001	180971		12,0	37,0	20,4	23,5	11,4	1
05003733001	181022		13,0	37,0	21,4	23,5	11,4	1
05003734001	181039		14,0	37,0	22,6	23,5	11,4	1
05003735001	181046		15,0	37,0	23,6	23,5	12,0	1
05003736001	181053		16,0	37,0	25,0	23,5	12,0	1
05003737001	181060		17,0	37,0	26,8	23,5	12,5	1
05003738001	181077		18,0	37,0	28,0	23,5	12,5	1
05003739001	181084		19,0	37,0	29,2	23,5	14,0	1

Belt C 1 Zyklop socket set with holding function, 1/2" drive

Typically Wera designed robust textile belt with 6 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly.

Includes a snap hook for secure fastening to a belt loop or pocket. Sockets with holding function for particularly convenient screwdriving with reduced risk of losing the screw when approaching the workpiece.

Supplied with a non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 7-piece socket set on a robust textile belt, 1/2"
- Sockets with holding function for screws/bolts/nuts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt C 1 Zyklop socket set with holding function, 1/2" drive







Code	EAN 4013288			
05**003995**001	*204400*			1
		◉	**8790 HMC HF** 1x 10,0x37,0; 1x 13,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 19,0x37,0	
			Nut Extractor 1x 14,0x43,0	
			Belt C 0/6 1x 45,0x275,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Magnetic socket rail C Imperial 1 Zyklop socket set, 1/2" drive, imperial

Socket rail with 9 manual and machine socket wrench inserts (non-impact), 1/2". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/2"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

Magnetic socket rail C Imperial 1 Zyklop socket set, 1/2" drive, imperial





Code	EAN 4013288			
05**005480**001	*223296*			1
		◉	**8790 HMC** 1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0; 1x 9/16"x37,0; 1x 5/8"x37,0; 1x 11/16"x37,0; 1x 3/4"x37,0; 1x 7/8"x37,0; 1x 1"x40,0	
			9602 1x 30,0x370,0	

8790 HMC HF 1 Zyklop socket set with 1/2" drive, with holding function

Socket set with holding function for particularly convenient screwdriving with reduced risk of losing the screw when addressing the workpiece.

- Compact textile box with high robustness, low weight and volume
- Bit socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually

8790 C Wheel Impaktor Socket with 1/2" drive

Impaktor socket, 1/2", for use with impact wrenches, with rotating smooth plastic sleeve for higher working speed, better accuracy during screwdriving and additional rim protection.

- For use with electric or pneumatic impact wrenches with 12.5mm = 1/2" drive
- Robust Impaktor design for extremely high stresses
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- Take it easy tool finder with colour coding according to sizes

8790 HMC HF 1 Zyklop socket set with 1/2" drive, with holding function



Code	EAN 4013288			
05**004203**001	*184238*			1
		⬢	**8790 HMC HF** 1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8790 C Wheel Impaktor Socket with 1/2" drive



Code	EAN 4013288		⬢ mm	mm	∅ mm			
05**004590**001	*210739*		17,0	85,0	30,0			1
05**004591**001	*210746*		19,0	85,0	30,0			1
05**004592**001	*210753*		21,0	85,0	32,0			1

Wheel Impaktor C Set 1 Socket set, 1/2" drive

Three 1/2" Impaktor socket wrench plug-ins, for use with impact wrenches; with rotating smooth plastic sleeve for higher working speed and additional rim protection. Internal plastic insert to protect the wheel bolt surface.

Wheel Impaktor C Set 1 Socket set, 1/2" drive





Code	EAN 4013288			
05**004595**001	*210760*			1
			8790 C Wheel Impaktor 1x 17,0x85,0x30,0; 1x 19,0x85,0x30,0; 1x 21,0x85,0x32,0	

8790 HMC Deep socket with 1/2" drive

Long 1/2" hand and machine socket (ISO 2725 part 3) with ball intercept ring; for external hexagonal bolts and sockets. For use in manual and machine operation (non-impact), even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands.

The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile. Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle.

- Long sockets for low-lying screwdriving, often even with protruding threaded rods in small spaces
- Hexagonal profile enables precise bolting with high power transmission and preserves the profile
- Knurling at lower end to enable easy gripping when used in manual applications
- Made of matt chromed chrome-vanadium

8790 HMC Deep socket with 1/2" drive





Code	EAN 4013288		mm	mm	mm	mm		
05**004550**001	*210562*		10,0	83,0	15,5	21,8		1
05**004551**001	*210579*		11,0	83,0	16,7	22,0		1
05**004552**001	*210586*		12,0	83,0	18,0	22,0		1
05**004553**001	*210593*		13,0	83,0	19,2	22,0		1
05**004554**001	*210609*		14,0	83,0	20,5	22,0		1
05**004555**001	*210616*		15,0	83,0	22,0	20,7		1
05**004556**001	*210623*		16,0	83,0	22,0	20,7		1
05**004557**001	*210630*		17,0	83,0	24,0	22,2		1
05**004558**001	*210647*		18,0	83,0	26,0	23,2		1
05**004559**001	*210654*		19,0	83,0	26,0	23,2		1
05**004560**001	*210661*		20,0	83,0	28,0	25,2		1
05**004561**001	*210678*		21,0	83,0	28,0	25,2		1
05**004562**001	*210685*		22,0	83,0	30,0	27,2		1
05**004563**001	*210692*		24,0	83,0	32,0	28,2		1

Belt C Deep 1 socket set, 1/2" drive

- 6-piece socket set on robust textile belt, 1/2"
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long 1/2"socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- Take it easy tool finder with colour coding according to sizes

Belt C Deep 1 socket set, 1/2" drive



Code	EAN 4013288			
05**004565**001	*210708*			1
		◉	**8790 HMC Deep** 1x 10,0x83,0; 1x 13,0x83,0; 1x 15,0x83,0; 1x 16,0x83,0; 1x 17,0x83,0; 1x 19,0x83,0	
			Belt C 0/6 1x 45,0x275,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Magnetic socket rail C Deep 1 socket set, 1/2" drive



Code	EAN 4013288			
05**005470**001	*223272*			1
		◉	**8790 HMC Deep** 1x 10,0x83,0; 1x 13,0x83,0; 1x 15,0x83,0; 1x 16,0x83,0; 1x 17,0x83,0; 1x 19,0x83,0	
			9602 1x 30,0x370,0	

8790 HMC Deep Socket wrench insert with cutout shaft, with 1/2" drive

Socket for external hexagon bolts and screws, 1/2", long design. Slotted on the side for installing panel connectors.

With ball stop groove. For manual and machine-operated tools (non-impact).

- Slotted on the side for installing top- and side-wired panel connectors

8790 HMC Deep Socket wrench insert with cutout shaft, with 1/2" drive



	EAN	◉						
Code	4013288	mm	mm	mm	mm	mm		
05**138007**001	*233547*	17,0	76,0	24,0	24,0	10,0		1

8767 C HF TORX® Zyklop bit socket with 1/2" drive with holding function

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- Chrome vanadium steel, matt chrome-plated

8767 C HF TORX® Zyklop bit socket with 1/2" drive with holding function



	EAN							
Code	4013288			mm	mm	mm	mm	
05**003830**001	*183316*		TX 20	60,0	16,4	23,5	21,5	1
05**003850**001	*183545*		TX 20	140,0	16,4	23,5	101,5	1
05**003831**001	*183323*		TX 25	60,0	16,4	23,5	21,5	1
05**003851**001	*183552*		TX 25	140,0	16,4	23,5	101,5	1
05**003832**001	*183330*		TX 27	60,0	16,4	23,5	21,5	1
05**003852**001	*183569*		TX 27	140,0	16,4	23,5	101,5	1
05**003833**001	*183347*		TX 30	60,0	16,4	23,5	21,5	1
05**003853**001	*183576*		TX 30	140,0	16,4	23,5	101,5	1
05**003834**001	*183354*		TX 40	60,0	16,4	23,5	21,5	1
05**003854**001	*183583*		TX 40	140,0	16,4	23,5	101,5	1
05**003835**001	*183361*		TX 45	60,0	16,4	23,5	21,5	1
05**003855**001	*184443*		TX 45	140,0	16,4	23,5	101,5	1
05**003836**001	*183378*		TX 50	60,0	21,4	23,5	21,5	1
05**003856**001	*183606*		TX 50	140,0	21,4	23,5	101,5	1
05**003837**001	*183385*		TX 55	60,0	21,4	23,5	21,5	1
05**003857**001	*183613*		TX 55	140,0	21,4	23,5	101,5	1
05**003838**001	*183392*		TX 60	60,0	21,4	23,5	21,5	1
05**003858**001	*183620*		TX 60	140,0	21,4	23,5	101,5	1

Belt C 3 TORX® HF Zyklop bit socket set with holding function, 1/2" drive

Typically Wera designed robust textile belt with 6 in-hex bit-sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 6-piece socket set on robust textile belt, 1/2"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt C 3 TORX® HF Zyklop bit socket set with holding function, 1/2" drive



Code	EAN 4013288		
05**003997**001	*204882*		1
		8767 C HF 1x TX 25x60,0; 1x TX 30x60,0; 1x TX 40x60,0; 1x TX 45x60,0; 1x TX 50x60,0; 1x TX 55x60,0	
		Belt C 0/6 1x 45,0x275,0	
		Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Magnetic socket rail C 4 Zyklop socket set, 1/2" drive

Socket rail with 9 manual and machine sockets (non-impact), 1/2". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/2"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

Magnetic socket rail C 4 Zyklop socket set, 1/2" drive



Code	EAN 4013288			
05**005460**001	*223265*			1
			8790 HMC 1x 10,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0	
			9602 1x 30,0x370,0	

8767 C TORX® HF 1 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume

8767 C TORX® HF 1 Zyklop bit socket set with 1/2" drive, with holding function



Code	EAN 4013288			
05**004202**001	*184276*			1
			8767 C HF 1x TX 20x60,0; 1x TX 25x60,0; 1x TX 27x60,0; 1x TX 30x60,0; 1x TX 40x60,0; 1x TX 45x60,0; 1x TX 50x60,0; 1x TX 55x60,0; 1x TX 60x60,0	

8767 C TORX® HF 2 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume
- Long version

8767 C TORX® HF 2 Zyklop bit socket set with 1/2" drive, with holding function



Code	EAN 4013288			
05**004211**001	*185464*			1
			8767 C HF 1x TX 20x140,0; 1x TX 25x140,0; 1x TX 27x140,0; 1x TX 30x140,0; 1x TX 40x140,0; 1x TX 45x140,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8767 C TORX® HF 3 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume
- Long version

8767 C TORX® HF 3 Zyklop bit socket set with 1/2" drive, with holding function



Code	EAN 4013288			
05**004212**001	*185471*			1
			8767 C HF 1x TX 20x140,0; 1x TX 25x140,0; 1x TX 27x140,0; 1x TX 30x140,0; 1x TX 40x140,0; 1x TX 45x140,0; 1x TX 50x140,0; 1x TX 55x140,0; 1x TX 60x140,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8740 C HF Zyklop bit socket with 1/2" drive with holding function

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- Chrome vanadium steel, matt chrome-plated

8740 C HF Zyklop bit socket with 1/2" drive with holding function



Code	EAN 4013288		mm	mm	mm	mm	mm	
05**003820**001	*183217*		4,0	60,0	14,0	21,5	21,5	1
05**003840**001	*183484*		4,0	140,0	14,0	21,5	101,5	1
05**003821**001	*183224*		5,0	60,0	14,0	21,5	21,5	1
05**003841**001	*183491*		5,0	140,0	14,0	21,5	101,5	1
05**003822**001	*183231*		6,0	60,0	14,0	21,5	21,5	1
05**003842**001	*183507*		6,0	140,0	14,0	21,5	101,5	1
05**003823**001	*183248*		7,0	60,0	14,0	23,5	21,5	1
05**003843**001	*183514*		7,0	140,0	14,0	23,5	101,5	1
05**003824**001	*183255*		8,0	60,0	16,0	23,5	21,5	1
05**003844**001	*183521*		8,0	140,0	16,0	23,5	101,5	1
05**003825**001	*183262*		10,0	60,0	16,0	23,5	21,5	1
05**003845**001	*183538*		10,0	140,0	16,0	23,5	101,5	1
05**003826**001	*183279*		12,0	60,0	21,0	23,5	23,0	1
05**003827**001	*183286*		14,0	60,0	22,0	23,5	23,0	1
05**003828**001	*183293*		17,0	60,0	24,5	25,5	23,0	1
05**003829**001	*183309*		19,0	60,0	26,5	27,5	23,0	1

Belt C 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/2" drive

Typically Wera designed robust textile belt with 6 in-hex bit-sockets taking up minimal space.

A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 6-piece socket set on robust textile belt, 1/2"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Belt C 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/2" drive



Code	EAN 4013288			
05**003996**001	*204424*			1
		O	**8740 C HF** 1x 4,0x60,0; 1x 5,0x60,0; 1x 6,0x60,0; 1x 7,0x60,0; 1x 8,0x60,0; 1x 10,0x60,0	
			Belt C 0/6 1x 45,0x275,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

8740 C HF 1 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume

8740 C HF 1 Zyklop bit socket set with 1/2" drive, with holding function



Code	EAN 4013288			
05**004201**001	*184283*			1
		O	**8740 C HF** 1x 4,0x60,0; 1x 5,0x60,0; 1x 6,0x60,0; 1x 7,0x60,0; 1x 8,0x60,0; 1x 10,0x60,0; 1x 12,0x60,0; 1x 14,0x60,0; 1x 17,0x60,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8740 C HF 2 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume
- Long version

8740 C HF 2 Zyklop bit socket set with 1/2" drive, with holding function




Code	EAN 4013288			
05**004210**001	*185457*			1
		O	**8740 C HF** 1x 4,0x140,0; 1x 5,0x140,0; 1x 6,0x140,0; 1x 7,0x140,0; 1x 8,0x140,0; 1x 10,0x140,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

9529 C SB 1/2" Step wrench

- 5 steps (3/8", 7/16", 1/2", 16 and 21 mm)
- For 1/2" ratchets
- Chrome vanadium steel

9529 C SB 1/2" Step wrench



	EAN							
Code	4013288	mm						
05**136074**001	*228390*	88,0						1

8796 LC Zyklop „flexible-lock“ extension with free-turning sleeve, long, 1/2"

- For 1/2" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

8796 LC Zyklop „flexible-lock“ extension with free-turning sleeve, long, 1/2"



	EAN							
Code	4013288		mm					
05**003643**001	*121462*	1/2"	250,0					1

8796 SC Zyklop „flexible-lock“ extension with free-turning sleeve, short, 1/2"

- For 1/2" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

8796 SC Zyklop „flexible-lock“ extension with free-turning sleeve, short, 1/2"



	EAN							
Code	4013288		mm					
05**003642**001	*121455*	1/2"	125,0					1

8794 LC Zyklop extension with free-turning sleeve, long, 1/2"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

8794 LC Zyklop extension with free-turning sleeve, long, 1/2"



	EAN							
Code	4013288		mm					
05**003638**001	*121431*	1/2"	250,0					1

8794 SC Zyklop extension with free-turning sleeve, short, 1/2"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

8794 SC Zyklop extension with free-turning sleeve, short, 1/2"



	EAN							
Code	4013288		mm					
05**003637**001	*121424*	1/2"	125,0					1

8789 C Zyklop sliding T-handle, 1/2"

Wera Zyklop T-handle for higher torque transfer. For 1/2" square sockets with ball lock. Adjustable drive for more flexible usage. Out of high quality chrome vanadium steel, matt chrome-plated.

8789 C Zyklop sliding T-handle, 1/2"



	EAN							
Code	4013288		mm					
05**003636**001	*121530*	1/2"	250,0					3

8795 C Zyklop universal joint, 1/2"

Wera Zyklop universal joint for 1/2" square sockets with ball lock.

8795 C Zyklop universal joint, 1/2"



	EAN							
Code	4013288		mm					
05**003640**001	*121547*	1/2"	69,0					1

8794 C Zyklop wobble extension, 1/2"

Wobble extension for the Wera Zyklop. Swivel angle of 15° in all directions. This ensures rapid and precise work even in confined working situations.

8794 C Zyklop wobble extension, 1/2"



	EAN							
Code	4013288		mm					
05**003639**001	*121448*	1/2"	52,0					1

8784 C2 Zyklop bit adaptor, 1/2", 5/16"

Adaptor from square to hex. For 5/16" hex bits as per DIN ISO 1173-C 8 and Wera connecting series 2; with quick-release chuck.

8784 C2 Zyklop bit adaptor, 1/2", 5/16"



	EAN							
Code	4013288			mm				
05**003641**001	*119353*	5/16"	1/2"	50,0				1

8009 Zyklop Pocket Set 1

Compact Zyklop ratchet with bit magazine for the pocket. Magnetic direct mounting for 1/4" bits and 3/8" sockets. Rapid tool change thanks to the non-locking mounting.

As the head is lockable at 0°, 15° and 90°, the tool can be used as a ratchet and as a ratchet screwdriver. The fine toothing with 72 teeth allows for a low return angle of 5°.

Wide range of applications thanks to 12 bits integrated in the handle. The robust ratchet mechanism allows for ample torque. Perfect combination of a Zyklop ratchet with a 12-piece screwdriver set.

- Compact Zyklop ratchet with integrated bit magazine
- Thanks to it's clever design the ratchet head doubles up as both a 3/8" square drive ratchet for sockets, and integral 1/4" hexagon drive for screwdriver bits
- Freely pivoting ratchet head with 5 predefined locking positions
- Fine tooth reversible ratchet (72 teeth) for a low return angle of only 5°
- Captive and freely swivelling bit magazine for easy removal and secure storage of the bits

8009 Zyklop Pocket Set 1







Code	EAN 4013288			
05**004280**001	*221834*			1
			8009 1x 3/8"x1/4"x133,0	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 BTZ 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

8009 Zyklop Pocket Imperial Set 1



Code	EAN 4013288			
05**004282**001	*221841*			1
			8009 1x 3/8"x1/4"x133,0	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 Z 1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25; 1x 1/4"x25	
			868/1 Z 1x # 1x25; 1x # 2x25	

8009 Zyklop Pocket Set 2

Compact Zyklop ratchet with bit magazine for the pocket. Magnetic direct mounting for ¼" bits and 3/8" sockets. Rapid tool change thanks to the non-locking mounting. As the head is lockable at 0°, 15° and 90°, the tool can be used as a ratchet and as a ratchet screwdriver.

The fine toothing with 72 teeth allows for a low return angle of 5°. Wide range of applications thanks to 12 bits integrated in the handle. The robust ratchet mechanism allows for ample torque. Perfect combination of a Zyklop ratchet with a 12-piece screwdriver set.

The 75 mm long universal holder for 1/4" bits can be used as an extension. Including sockets in the commonest dimensions. One robust textile holster 9468 to be attached to the belt and docked onto the Wera 2go system.

- Compact Zyklop ratchet with integrated bit magazine
- The magnetic direct mounting simultaneously turns the 3/8" ratchet into a bit ratchet screwdriver with 1/4" bit mounting
- Freely pivoting ratchet head with 5 predefined locking positions
- Fine tooth reversible ratchet (72 teeth) for a low return angle of only 5°
- Captive and freely swivelling bit magazine for easy removal and secure storage of the bits
- Universal holder with stainless steel sleeve and strong permanent magnet, can be used as extension
- Robust textile holster to be attached to the belt and docked onto the Wera 2go system

8009 Zyklop Pocket Set 2



Code	EAN 4013288			
05**004281**001	*223050*			1
			8009 1x 3/8"x1/4"x133,0	
			893/1/1 1x 1/4"x75	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 BTZ 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			8790 HMB 1x 8,0x29,0; 1x 10,0x29,0; 1x 13,0x29,0	
			9468 1x 155,0x65,0	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

8009 Zyklop Pocket Imperial Set 2



Code	EAN 4013288			
05**004283**001	*223067*			1
			8009 1x 3/8"x1/4"x133,0	
			893/1/1 1x 1/4"x75	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 Z 1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25; 1x 1/4"x25	
			868/1 Z 1x # 1x25; 1x # 2x25	
			8790 HMB 1x 5/16"x29,0; 1x 3/8"x29,0; 1x 1/2"x29,0	
			9468 1x 155,0x65,0	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Zyklop Pocket


Comprehensive and space-saving ratchet/screwdriver combination. Compact Zyklop ratchet with bit magazine for the pocket. Magnetic direct mounting for ¼" bits and 3/8" sockets. Rapid tool change thanks to the non-locking mounting. As the head is lockable at 0°, 15° and 90°, the tool can be used as a ratchet and as a ratchet screwdriver. The fine toothing with 72 teeth allows for a low return angle of 5°.

Wide range of applications thanks to 12 bits integrated in the handle. The robust ratchet mechanism allows for ample torque. Perfect combination of a Zyklop ratchet with a 12-piece screwdriver set.

The 75 mm long universal holder for 1/4" bits can be used as an extension. Including sockets in the commonest dimensions. In a textile box, which can be docked onto the Wera 2go system.

- Compact Zyklop ratchet with integrated bit magazine
- The magnetic direct mounting simultaneously turns the 3/8" ratchet into a bit ratchet screwdriver with 1/4" bit mounting
- Freely pivoting ratchet head with 5 predefined locking positions
- Fine tooth reversible ratchet (72 teeth) for a low return angle of only 5°
- Captive and freely swivelling bit magazine for easy removal and secure storage of the bits

8009 Zyklop Pocket Set 3

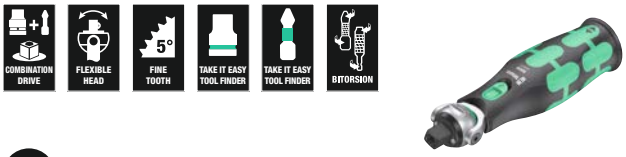





Code	EAN 4013288			
05**004284**001	*227560*			1
			8009 1x 3/8"x1/4"x133,0	
			8794 SB 1x 3/8"x125,0	
			893/1/1 1x 1/4"x75	
			8790 HMB 1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 BTZ 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

8009 Zyklop Pocket Set 4



Code	EAN 4013288			
05**004285**001	*227591*			1
			8009 1x 3/8"x1/4"x133,0	
			8794 SB 1x 3/8"x125,0	
			893/1/1 1x 1/4"x75	
			8790 HMB 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 14,0x29,0; 1x 16,0x30,0; 1x 1/4"x29,0; 1x 5/16"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25	
			800/1 BTZ 1x 0,8x5,5x25; 1x 1,2x6,5x25	
			840/1 BTZ 1x 4,0x25; 1x 6,0x25	
			840/1 Z 1x 3/16"x25; 1x 1/4"x25	
			868/1 Z 1x # 1x25; 1x # 2x25	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Koloss - this ratchet is the best!



The ratchet that can also be safely and officially used as a hammer. The Koloss is a reversible, heavy-duty ratchet that can be used with a load of at least 600 Newton metres. The dual ratchet teeth and the minimum return angle of only 6° ensure rapid and precise screwdriving even in confined situations.

And the best thing: absolutely no impact on the hammer faces, however hard, can destroy the ratchet mechanism.

Multi-component Kraftform handle optimised to withstand pressure, impact and tensile loads; take-up for Koloss extension 8780 C and Koloss centring pin 8781 C at end of handle. Also included in the set: 1 pad to protect materials and surface areas, 1 Koloss extension for the transfer of even more torque, 1 unlocking pin and 1 holster – so the Koloss can always be at hand.

- For loads of at least 600 Newton metres
- Push-through square drive for right/left switchover
- Including hammer function
- Multi-component Kraftform handle optimised to withstand pressure, impact and tensile loads
- Fine-pitched ratchet mechanism, small return angle of 6°

8002 C Koloss All Inclusive Set with ½" drive



Code	EAN 4013288			
05**133862**001	*162403*			1
			8002 C 1x 1/2"x341,0	
			8782 C 1x 50,0	
			8780 C 1x 341,0x137	
			8000 E 1x 40,5	
			8000 HLF 1x 175,0x75,0	

8002 C Koloss ½" with ½" drive



Code	EAN 4013288			
05**003692**001	*144607*			1
			8002 C 1x ½"x341,0	
			8782 C 1x 50,0	
			8000 HLF 1x 175,0x75,0	

8780 C Koloss extension

Extension for the Wera Koloss out of tough, tempered chrome-molybdenum steel. Can be used as an extension with the Wera Koloss 8002 C to increase the torque to be applied. Multi-component Kraftform handle optimised to withstand pressure, impact and tensile loads.
Safety instructions laser-engraved for permanent recognition.

8780 C Koloss extension



	EAN							
Code	4013288	mm	mm					
05**003695**001	*144614*	341,0	137					1

8781 C Koloss centring pin

Centring pin for the Wera Koloss. To align lugs or drill holes. Conical pin, tough, hardened chrome-molybdenum steel.

8781 C Koloss centring pin



	EAN							
Code	4013288	mm	mm					
05**003696**001	*144683*	50	135,0					1

8782 C Koloss pad set

Protective pads for the Wera Koloss. To protect materials and surfaces of workpieces. Flexible thermoplastic, elastomer material offering permanent elasticity and maximum protection.

8782 C Koloss pad set



	EAN							
Code	4013288	#	mm					
05**003697**001	*144690*	2	50,0					1

8000 E Unlocking pin



	EAN							
Code	4013288	mm						
05**136400**001	*194633*	40,5						1

Socket rail C (textile belt), 6 location, unloaded

- Empty socket belt for 6 sockets/bit sockets, ½"
- Includes a convenient snap hook
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

Socket rail C (textile belt), 6 location, unloaded



Code	EAN 4013288			
05**003892**001	*205797*			1
			Belt C 0/6 1x 45,0x275,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	


9602 Magnetic socket rail, 1/2", empty

1 socket rail, empty. For up to 10 sockets and/or bit sockets with 1/2" drive.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Empty, for up to 10 sockets, 1/2"

9602 Magnetic socket rail, 1/2", empty

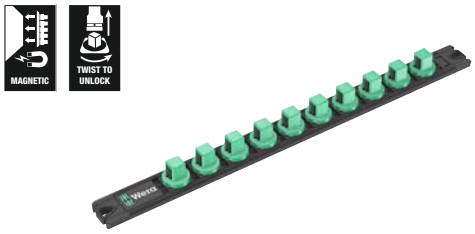

Code	EAN 4013288	mm	mm					
05**136422**001	*223340*	30,0	370,0					1

Socket rail C Impaktor (textile belt), 9 location, unloaded



Code	EAN 4013288			
05**003893**001	*211484*			1
			Belt C Impaktor 0/9 1x 71,0x210,0	
			Hook and Loop Fastener Strip 30 1x 30,0x200,0	

Zyklop Mini - beauty in strength

Zyklop Mini 1
¼" bit ratchet.

Zyklop Mini 2
The Zyklop Mini 2 is suitable for the direct attachment of the special Wera Zyklop sockets 8790 FA. These sockets feature a very low height, ideal for confined working spaces.

Zyklop Mini 3
Mini ratchet suitable for direct mounting of ¼" sockets.



Zyklop Mini 1 & 2 & 3
Fine tooth mechanism (60 teeth), small return angle of only 6° – ideal for precision work.

Zyklop Mini 1 & 2 & 3
Easy switching between left/right operations.

Zyklop Mini 1 & 2 & 3
Its slim design makes it ideal for all particularly confined working situations.

Wera Zyklop Mini 1: a symbiosis of strength and stylishness. Incredibly robust due to its drop-forged, full-steel design. Can withstand torque forces up to 65 Nm.

The petite sizing is particularly suited for work in confined spaces. The thumbwheel allows fast screwdriving. Comes in a set in the proven Wera Bit-Check with socket adaptor and belt clip. Simple tool removal and reinsertion is ensured, very robust and durable.

- Bit-Checks convince due to their functionality in a minimum of space
- Wera Mini ratchet for particularly fast screwdriving even in confined spaces
- Ideal for working in confined spaces
- Tough viscous bits for universal use
- In handy and robust Bit-Check

Bit-Check 30 Zyklop Mini 1





Code	EAN 4013288			
05**073640**001	*144652*			1
			8001 A 1x ¼"x87,0	
			870/1 1x ¼"x25 [1]	
			889/4/1 K 1x ¼"x50	
			851/1 TZ PH 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			855/1 TH PZ 1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	
			867/1 TZ TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			800/1 TZ 1x 1,0x5,5x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25	

[1] With friction ball; for manual nut spinner sockets

Bit-Check 30 Zyklop Mini 2



Code	EAN 4013288			
05**346293**001	*145765*			1
			8001 A 1x 1/4"x87,0	
			889/4/1 K 1x 1/4"x50	
			870/1 1x 1/4"x25 [1]	
			851/1 TZ PH 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			867/1 TZ TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			840/1 Z Hex-Plus 1x 3/32"x25; 1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25; 1x 1/4"x25	
			800/1 TZ 1x 1,0x5,5x25	
			868/1 Z 1x # 1x25; 3x # 2x25; 1x # 3x25	

[1] With friction ball; for manual nut spinner sockets

Kraftform Kompakt Zyklop Mini 2

Ratchets and screws in a Kraftform Kompakt format. These drop-forged, full-steel ratchets, Zyklop Mini 1 and 2, combine filigree design with incredible robustness.

For particularly rapid screwdriving in confined working situations. Zyklop Mini 1 or Zyklop Mini 2 can be used whenever screwdriving with power tools or conventional hand tools is unfeasible for lack of space. 1 bit ratchet Zyklop Mini 1; suitable for the take-up of bits with ¼" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connecting series 1 and 4; also possible to use ¼" sockets by attaching the Wera adaptor 870/1. 1 socket ratchet Zyklop Mini 2; suitable for the direct attachment of Wera Zyklop special sockets 8790 FA.

Kraftform Kompakt Zyklop Mini 2



Code	EAN 4013288			
05**135918**001	*182180*			1
			8001 A 1x 1/4"x87,0	
			8005 Zyklop Mini 2 Ratchet 1x 107	
			813 1x 1/4"x78	
			870/1 1x 1/4"x25 [1]	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			8790 FA 1x 4,0; 1x 5,0; 1x 5,5; 1x 6,0; 1x 7,0; 1x 8,0; 1x 10,0; 1x 12,0; 1x 13,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1] With friction ball; for manual nut spinner sockets

Bit-Check 10 Zyklop Mini BiTorsion 1

Many tools in a minimum of space. The sorting according to drive and size allows rapid accessing of the bits.

The Wera Mini ratchet: drop-forged, full-steel design. Fine-pitched mechanism with 60 teeth that allows a small return angle of only 6° for precise work. Simple left/right switchover. Ergonomically-designed ratchet head and lever.

- 1/4" Mini ratchet and tough viscous bits

Bit-Check 10 Zyklop Mini BiTorsion 1





Code	EAN 4013288			
05**057418**001	*195951*			1
			8001 A 1x 1/4"x87,0	
			851/1 BTZ PH 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 BTZ Hex-Plus 1x 4,0x25; 1x 5,0x25	


Bit-Check 10 Zyklop Mini 1

Many tools in a minimum of space. The sorting according to drive and size allows rapid accessing of the bits. The Wera Mini ratchet: drop-forged, full-steel design.

Fine-pitched mechanism with 60 teeth that allows a small return angle of only 6° for precise work. Simple left/right switchover. Ergonomically-designed ratchet head and lever.

- Tough viscous bits for universal use

Bit-Check 10 Zyklop Mini 1





Code	EAN 4013288			
05**073645**001	*168115*			1
			8001 A 1x 1/4"x87,0	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 Z Hex-Plus 1x 4,0x25; 1x 5,0x25	

Bicycle Set 1

Bicycle repair shops and passionate cyclists love screwdriving on a bicycle. With their Bicycle Set 1, the screwdriving tool specialist Wera offers an assortment of tools that is very mobile thanks to its compact and design-oriented textile folding bag, and offers solutions for the most common screwdriving situations when working with bicycles.

The sturdy bag contains the bit ratchet Zyklop Mini 1 and 10 bits with all the benefits of Wera-Bit technology, specially adapted to the most common screw connections on a bicycle.

With the glass fibre reinforced plastic tyre levers, the tyres can be safely levered off the rim without damaging the rim.

- Compact 14-piece screwdriving tool set for bicycle applications, also for mobile use
- Practical range for DIY assembly work and repairs
- Suitable tools for the most common bolt profiles on road bikes, mountain bikes and e-bikes
- Robust, surface-friendly, compact textile folding bag
- Set including Mini bit ratchet, extension and two tyre levers with additional functions

Bicycle Set 1



Code	EAN 4013288			
05**004170**001	*207623*			1
			8001 A 1x 1/4"x87,0	
			3899/4/1 1x 1/4"x100	
			851/1 Z PH 1x PH 2x25	
			867/1 TORX® 1x TX 10x25; 1x TX 25x25	
			840/1 Z Hex-Plus 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25	
			9502 1x 105.0	
			9503 1x 105.0	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Bicycle Set 9

A lot of bicycle tools in a small space. The sorting of the 9 stainless steel bits by profile and size allows quick access to the right tool. With one Wera Zyklop Mini 1 bit ratchet in a drop-forged solid steel design.

The fine toothing mechanism with 60 teeth allows a small return angle of 6° for precise working. The knurl allows fast screwdriving in cramped situations, when there is no space for ratcheting. Easy left/right switching.

Ergonomically shaped ratchet head and lever. With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

- 10-piece Zyklop Mini set
- Mini ratchet suitable for direct mounting of 1/4" nuts
- Drop-forged full steel design for torques exceeding 65 Nm
- Fine-pitched ratchet mechanism and small return angle of 6°
- Stainless Steel Bits

Bicycle Set 9



Code	EAN 4013288			
05**004177**001	*220646*			1
			8001 A 1x 1/4"x87,0	
			3851/1 TS PH 1x PH 2x25	
			3867/1 TS TORX® 1x TX 10x25; 1x TX 25x25	
			3840/1 TS 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

8001 A Zyklop Mini 1 Bit Ratchet ¼" SB with ¼" drive

The Wera Mini ratchet. Simple operation, even with just one hand, in confined working spaces. Drop-forged, full-steel design and fine-pitched mechanism with 60 teeth that allows a small return angle of 6° for precise working.

The thumbwheel allows rapid fastening in confined situations when there is no space for ratcheting.

Easy left/right switchover. Ergonomically designed ratchet head and lever. Suitable for 1/4" bit and socket take-up.

- Suitable for direct take-up of bits with 1/4" hex head drive
- Drop-forged, full-steel design
- Torque of over 65 Nm
- Fine-pitched ratchet mechanism and small return angle of 6°
- Ideal for working in confined spaces

8001 A Zyklop Mini 1 Bit Ratchet ¼" SB with ¼" drive



Code	EAN 4013288			
05**073230**001	*144638*			1
		◉	**8001 A** 1x 1/4"x87,0	
		○○	**870/1** 1x 1/4"x25 [1]	

[1] With friction ball; for manual nut spinner sockets

8011 Zyklop Mini 4 Bit ratchet, 1/4"

- For bitholding screwdrivers with 1/4" bit mounting

8011 Zyklop Mini 4 Bit ratchet, 1/4"



Code	EAN 4013288		mm					
05**003662**001	*234650*	1/4"	50,0					1

8005 Zyklop Mini 2 Ratchet

Zyklop Mini 2 for the direct take-up of special Wera Zyklop sockets. Combines filigree design with incredible robustness. For particularly rapid screwdriving even in confined working spaces. The Zyklop Mini 2 is the preferred choice whenever fastening with a power tool or conventional hand tool is impossible due to a lack of space.

- Direct attachment of special Zyklop sockets
- Small return angle of 6° for precise working
- Simple left/right switchover
- Ideal for confined working situations

8005 Zyklop Mini 2 Ratchet



Code	EAN 4013288	mm						
05**003660**001	*179616*	107						1

8008 A Zyklop Mini 3 Ratchet with 1/4" drive

The Wera Zyklop Mini 3 ratchet for ¼" sockets. Simplest operation even with just one hand in confined screwdriving challenges. Drop-forged full steel design.

Fine tooth mechanism with 60 teeth allows a small return angle of 6° for precise work.

The knurled wheel allows fast screwdriving in tight spaces when there is no room for ratcheting. Simple left/right switching. Ergonomically shaped ratchet head and lever.

- Mini ratchet suitable for direct mounting of 1/4" nuts
- Drop-forged full steel design for torques exceeding 65 Nm
- Fine-pitched ratchet mechanism and small return angle of 6°
- Simple left/right switchover
- Ideal for working in confined spaces

8008 A Zyklop Mini 3 Ratchet with 1/4" drive



	EAN							
Code	4013288		mm					
05**003793**001	*211699*	1/4"	87,0					1

8790 FA Zyklop socket with 1/4" and Hexagon 11 drive

Zyklop socket with 1/4" and hex drive for manual jobs with a 1/4" ratchet.

8790 FA Zyklop socket with 1/4" and Hexagon 11 drive



	EAN							
Code	4013288	mm	mm	mm	mm	mm		
05**003665**001	*179623*	4,0	9,5	6,4	11,8	18,0		1
05**003666**001	*179630*	4,5	9,5	7,0	11,8	18,0		1
05**003667**001	*179647*	5,0	9,5	7,6	11,8	18,0		1
05**003668**001	*179654*	5,5	9,5	8,2	11,8	18,0		1
05**003669**001	*179661*	6,0	9,5	9,2	11,8	18,0		1
05**003670**001	*183408*	7,0	9,5	10,4	11,8	18,0		1
05**003675**001	*179678*	8,0	9,5	11,5	11,8	18,0		1
05**003690**001	*179685*	10,0	9,5	13,8	11,8	18,0		1
05**003684**001	*183415*	12,0	9,5	16,8	11,8	18,0		1
05**003685**001	*179692*	13,0	9,5	17,8	11,8	18,0		1


Tool-Check PLUS 1
Wera
5.5
6
7
8
10
12
13



Tool-Check

The Tool-Check Modular system
Combine & expand - always the perfect fit!

Tool-Check Modular 1

Very compact 21-piece tool set.

One Kraftform 815/1 bitholding screwdriver, suitable for mounting bits with 1/4" external hexagon drive, one 8011 Zyklop Mini 4 bit ratchet (1/4"), also suitable for 1/4" sockets using the included 870/1 adapter (1/4" external hexagon to 1/4" external square head), one magnetic 899/4/1 bit holder for screwdriver machines, 13 bits with 1/4" external hexagon drive for Phillips-head screws (Phillips and Pozidriv), TORX®, hexagonal socket and slotted screws. BiTorsion (BTZ) for longer tool life, 4 Zyklop 8790 HMA sockets, 1/4".

In the compact Tool-Check Modular 1. Tools can be connected to other components of the Tool-Check Modular system using the rigid Tool-Check Modular adapter 9549 or the flexible Tool-Check Modular hinge 9550.

- Tool-Check Modular: individual combination of different Tool-Check Modular components
- Very compact 21-piece tool set for manual and machine-operated screwdriving
- Perfect for a wide variety of screw connections with ¼" ratchet, hand or machine
- 1/4" 8011 Zyklop Mini 4 bit ratchet for handles with 1/4" bit mounting
- Magnetic 899/4/1 K bit holder for 1/4" hex drive bits; and machine use
- 13 BiTorsion bits (BTZ) for cross recess (Phillips and Pozidriv), TORX®, slotted and hexagonal socket; 25 mm and 50 mm length
- 4x 8790 HMA sockets, 1/4"; one 870/1 adapter (1/4" external hexagon to 1/4" external square head)

Tool-Check Modular 1



Code	EAN 4013288			
05**049000**001	*234230*			1
			815/1 1x 1/4"x78	
			8011 A 1x 1/4"x50,0	
			870/1 1x 1/4"x25 [1]	
			899/4/1 1x 1/4"x50	
			851/1 BTZ 1x PH 1x25	
			851/4 BTZ 1x PH 2x50	
			855/1 BTZ 1x PZ 1x25	
			855/4 BTZ 1x PZ 2x50	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25	
			867/4 TORX® BTZ 1x TX 20x50; 1x TX 25x50	
			800/4 BTZ 1x 0,8x5,5x50	
			840/1 BTZ 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			8790 HMA 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0	

[1] With friction ball; for manual nut spinner sockets

Tool-Check Modular Imperial 1

- 4x 8790 HMA sockets, 1/4", imperial sizes; one adapter 1/4" external hexagon to 1/4" external square head
- 9 BiTorsion bits (BTZ) for Phillips, TORX®, slotted and square head, 4 tough bits (Z) for hexagonal socket screws; 25 mm and 50 mm length

Tool-Check Modular Imperial 1



Code	EAN 4013288			
05**049001**001	*234674*			1
			815/1 1x 1/4"x78	
			8011 A 1x 1/4"x50,0	
			870/1 1x 1/4"x25 [1]	
			899/4/1 1x 1/4"x50	
			851/4 BTZ 1x PH 1x50; 1x PH 2x50	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			800/4 BTZ 1x 0,8x5,5x50	
			840/1 Z 1x 3/32"x25; 1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25	
			868/4 BTZ 1x #1x50; 1x #2x50	
			8790 HMA 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0; 1x 9/16"x23,0	

[1] With friction ball; for manual nut spinner sockets

Tool-Check Modular L-keys Hex-Plus 1

Very compact 7-piece L-key set for hexagonal socket screws.

The Hex-Plus profile offers larger contact surfaces in the screw head. The notch effect is reduced to a minimum and the destruction of the screw head is almost eliminated. The thoroughly chrome-plated design guarantees high corrosion protection. All L-keys are easily accessible due to their laser-engraved size markings.

One adapter 9549 for Tool-Check Modular, which connects different Tool-Check Modular components.

In the compact Tool-Check Modular.

- L-key set for hexagonal socket screws; the Hex-Plus profile reduces cylindrical turning of hexagonal socket screws
- Chrome-plated hexagon L-keys for outstanding surface protection and long service life. High corrosion protection.
- Laser-engraved and thereby wear-resistant size markings on the L-keys
- Adapter 9549: Rigid component to connect further Tool-Check Modular products



Tool-Check Modular L-keys Hex-Plus 1



Code	EAN 4013288			
05**049003**001	*234254*			1
			950 1x 1,5x45 [1]; 1x 2,0x50; 1x 2,5x56; 1x 3,0x63; 1x 4,0x70; 1x 5,0x80; 1x 6,0x90	
			9549 Adapter 1x 10,5x47,0x16,5	

[1] Regular hexagon.

Tool-Check Modular Micro 1

Very compact 21-piece tool set for precision mechanical couplings.


One Kraftform Micro 1014 bitholding screwdriver, suitable for mounting bits with 4 mm external hexagon drive, 20 bits with 4 mm external hexagon drive for Phillips-head screws (Phillips and Pozidriv), TORX®, hexagonal socket and slotted screws.

Tough for universal use, one adapter 9549, which connects different Tool-Check Modular components.

In the compact Tool-Check Modular Micro 1.

- Very compact 21-piece tool set for precision mechanical couplings
- Bitholding screwdriver for bits with 4 mm external hexagon drive
- Multi-component Kraftform Micro handle with anti-roll feature and rotating cap
- 20 bits (4 mm external hexagon drive) for Phillips-head (Phillips and Pozidriv), TORX®, hexagonal socket and slotted
- Adapter 9549: Rigid component to connect further Tool-Check Modular products

Tool-Check Modular Micro 1





Code	EAN 4013288			
05**049002**001	*234247*			1
			1014 1x 4x80,0	
			851/0 Micro 1x PH 000x30; 1x PH 00x30; 1x PH 0x30 [1]; 1x PH 1x30	
			855/0 Micro 1x PZ 0x30; 1x PZ 1x30	
			867/0 Micro TORX® 1x TX 3x30; 1x TX 4x30; 1x TX 5x30; 1x TX 6x30; 1x TX 8x30; 1x TX 10x30	
			840/0 Micro 1x 0,9x30; 1x 1,3x30; 1x 1,5x30; 1x 2,0x30; 1x 2,5x30	
			800/0 Micro 1x 0,3x1,5x30; 1x 0,40x2,5x30; 1x 0,50x3,0x30	
			9549 Adapter 1x 10,5x47,0x16,5	

Tool-Check Modular Set 1

Very compact tool set: Tool-Check Modular Set 1.

Includes: one Tool-Check Modular 1, one Tool-Check Modular Micro 1, one Tool-Check Modular L-key Hex-Plus 1, one adapter 9549 and one flexible hinge 9550 (adapter and hinge for connecting Tool-Check Modular products).

Tool-Check Modular Set 1

MODULAR | KRAFTFORM ERGONOMICS | FREE SPIN CAP | FAST SPINNING ZONE | POWER ZONE | PRECISION ZONE





Code	EAN 4013288			
05**049020**001	*234766*			1
1x Tool-Check Modular 1				
			815/1 1x 1/4"x78	
			8011 A 1x 1/4"x50.0	
			870/1 1x 1/4"x25 [1]	
			899/4/1 1x 1/4"x50	
			851/1 BTZ 1x PH 1x25	
			851/4 BTZ 1x PH 2x50	
			855/1 BTZ 1x PZ 1x25	
			855/4 BTZ 1x PZ 2x50	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25	
			867/4 TORX® BTZ 1x TX 20x50; 1x TX 25x50	
			800/4 BTZ 1x 0.8x5.5x50	
			840/1 BTZ 1x 3.0x25; 1x 4.0x25; 1x 5.0x25; 1x 6.0x25	
			8790 HMA 1x 7.0x23.0; 1x 8.0x23.0; 1x 10.0x23.0; 1x 13.0x23.0	
1x Tool-Check Modular Hex-Plus 1				
			950 1x 1.5x45 [2]; 1x 2.0x50; 1x 2.5x56; 1x 3.0x63; 1x 4.0x70; 1x 5.0x80; 1x 6.0x90	
1x Tool-Check Modular Micro 1				
			1014 1x 4x80.0	
			851/0 Micro 1x PH 000x30; 1x PH 00x30; 1x PH 0x30 [3]; 1x PH 1x30	
			855/0 Micro 1x PZ 0x30; 1x PZ 1x30	
			867/0 Micro TORX® 1x TX 3x30; 1x TX 4x30; 1x TX 5x30; 1x TX 6x30; 1x TX 8x30; 1x TX 10x30	
			840/0 Micro 1x 0.9x30; 1x 1.3x30; 1x 1.5x30; 1x 2.0x30; 1x 2.5x30	
			800/0 Micro 1x 0.3x1.5x30; 1x 0.40x2.5x30; 1x 0.50x3.0x30	
1x 9550 Hinge				
			1x 67.5x91.0x22.0	
1x 9549 Adapter				
			1x 10.5x47.0x16.5	

[1] With friction ball; for manual nut spinner sockets

[2] Regular hexagon

[3] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

Tool-Check Modular Set Imperial 1





Code	EAN 4013288			
05**049025**001	*234773*			1
			1x Tool-Check Modular Imperial 1	
			815/1 1x 1/4"x78	
			8011 A 1x 1/4"x50.0	
			870/1 1x 1/4"x25 [1]	
			899/4/1 1x 1/4"x50	
			851/4 BTZ 1x PH 1x50; 1x PH 2x50	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			800/4 BTZ 1x 0.8x5.5x50	
			840/1 Z 1x 3/32"x25; 1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25	
			868/4 BTZ 1x #1x50; 1x #2x50	
			8790 HMA 1x 3/8"x23.0; 1x 7/16"x23.0; 1x 1/2"x23.0; 1x 9/16"x23.0	
			1x Tool-Check Modular Micro 1	
			1014 1x 4x80.0	
			851/0 Micro 1x PH 000x30; 1x PH 00x30; 1x PH 0x30 [2]; 1x PH 1x30	
			855/0 Micro 1x PZ 0x30; 1x PZ 1x30	
			867/0 Micro TORX® 1x TX 3x30; 1x TX 4x30; 1x TX 5x30; 1x TX 6x30; 1x TX 8x30; 1x TX 10x30	
			840/0 Micro 1x 0.9x30; 1x 1.3x30; 1x 1.5x30; 1x 2.0x30; 1x 2.5x30	
			800/0 Micro 1x 0.3x1.5x30; 1x 0.40x2.5x30; 1x 0.50x3.0x30	
			1x Tool-Check Modular Hex-Plus 1	
			950 1x 1.5x45 [3]; 1x 2.0x50; 1x 2.5x56; 1x 3.0x63; 1x 4.0x70; 1x 5.0x80; 1x 6.0x90	
			1x 9550 Hinge	
			1x 67.5x91.0x22.0	
			1x 9549 Adapter	
			1x 10.5x47.0x16.5	

[1] With friction ball; for manual nut spinner sockets
[2] Regular hexagon
[3] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

9549 Adapter for Tool-Check Modular

- Tool-Check Modular: individual combination of different Tool-Check Modular components
- The adapter allows for a compact connection of two Tool-Check Modular components

9549 Adapter for Tool-Check Modular



Code	EAN 4013288	mm	mm	mm				
05**049005**001	*234681*	10,5	47,0	16,5				1

9550 Hinge for Tool-Check Modular

- Tool-Check Modular: individual combination of different Tool-Check Modular components
- Flexible connection of two Tool-Check Modular components with the hinge
- The hinge allows compact folding up of two Tool-Check Modular components

9550 Hinge for Tool-Check Modular



Code	EAN 4013288	mm	mm	mm				
05**049004**001	*234667*	67,5	91,0	22,0				1

Tool-Check PLUS 1

39-piece set. Very compact tool set for manual and machine use.

The green locking elements of the Tool-Check secure the tools during transport.

Includes one 1/4" bit ratchet in drop-forged solid steel design. Fine toothing mechanism (60 teeth) for a small return angle of 6° for precise working. Easy clockwise/counterclockwise switching. Ergonomically shaped ratchet head and lever. 1/4" sockets can also be used with the Wera 870/1 adapter (1/4" external hexagon to 1/4" external square head) included in the set.

7 Zyklop sockets (1/4") for manual and machine-operated tools; with ball stop groove. Knurling at the rear end for manageability during manual screwdriving. With Take it easy tool finder: colour coding by size – for quick and easy identification of the required tool. Made of matt chrome-plated chrome-vanadium.

28 bits, BTZ and BTH design with BiTorsion zone (prevents the bit from breaking prematurely) and Take it easy tool finder: colour coding by profile and size stamping, tough design (Z) for universal use, Phillips and Pozidriv, TORX®, TORX® BO, slotted and hexagonal socket. In the very compact, functional Tool-Check.

- Very compact 39-piece tool set for manual and machine use
- Perfect for a wide variety of screw connections with Zyklop Mini with 1/4" bit mounting, bitholding screwdriver or bit holder
- Green locking components to secure the tools
- Ideal for mobile use
- 1/4" bit ratchet, Kraftform bitholding screwdriver, BiTorsion bits (BTZ and BTH), Rapidaptor holder, adapter and 1/4" sockets
- Use of 1/4" sockets also possible with the Wera adaptor 870/1
- Take it easy tool finder system

Tool-Check PLUS 1





Code	EAN 4013288			
05**049055**001	*234896*			1
			8001 A 1x 1/4"x87,0	
			813 1x 1/4"x78	
			889/4/1 K 1x 1/4"x50	
			870/1 1x 1/4"x25 [1]	
			851/1 BTZ 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			855/1 BTH 1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			800/1 BTZ 1x 1,0x5,5x25	
			840/1 BTZ 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			840/1 Z 1x 8,0x25	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	

[1] With friction ball; for manual nut spinner sockets

Tool-Check PLUS 2

- With Square-Plus bits (Robertson)

Tool-Check PLUS 2








Code	EAN 4013288			
05**049056**001	*234902*			1
			8001 A 1x 1/4"x87,0	
			889/4/1 K 1x 1/4"x50	
			813 1x 1/4"x78	
			870/1 1x 1/4"x25 [1]	
			851/1 BTZ 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			800/1 BTZ 1x 1,0x5,5x25	
			840/1 BTZ 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			840/1 Z 1x 8,0x25	
			868/1 Z 1x # 1x25; 3x # 2x25; 1x # 3x25	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	

[1] With friction ball; for manual nut spinner sockets

Tool-Check PLUS Imperial 1

- With Square-Plus bits (Robertson)
- Sockets 8790 HMA , 1/4", imperial sizes

Tool-Check PLUS Imperial 1







Code	EAN 4013288			
05**049060**001	*234919*			1
			8001 A 1x 1/4"x87,0	
			889/4/1 K 1x 1/4"x50	
			813 1x 1/4"x78	
			870/1 1x 1/4"x25 [1]	
			851/1 BTZ 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			800/1 BTZ 1x 1,0x5,5x25	
			840/1 Z 1x 3/32"x25; 1x 1/8"x25;1x 5/32"x25; 1x 3/16"x25; 1x 1/4"x2	
			868/1 Z 1x # 1x25; 3x # 2x25; 1x # 3x25	
			8790 HMA 1x 3/16"x23,0; 1x 1/4"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0	

[1] With friction ball; for manual nut spinner sockets

Bicycle Set 3

Bike tool set with ratchet, bits, sockets and a bitholding screwdriver in the very compact Tool-Check. Perfect as a universal companion for a multitude of screwdriving applications.

Premium bitholding screwdriver with Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, soft handle zones for a high torque transfer.

Bit ratchet for quick working when screwdriving with a machine or conventional hand tool is not possible due to space constraints. Rapid reversing from clockwise to counterclockwise rotation and vice versa via the reversing lever. The knurling on the ratchet head allows for quick rotation (with the thumb). Easiest operation, even with just one hand. Ergonomic ratchet head/lever: Kraftform geometry with perfectly shaped contact surfaces for the fingers. Smallest possible tool design thanks to the direct bit mounting in the ratchet head, perfect for low working heights. Small return angle of 6° for precise working. Robust drop-forged solid steel design. Torques of over 65 Nm.

The Rapidaptor bitholding screwdriver with fast-rotating sleeve: Can be used as an extension, for lightning-fast bit changes of even the smallest bit sizes with just one hand.

Bits (BTZ) with BiTorsion zone to cushion peak loads for universal use; tough bits (Z) for universal use.


Hand and machine sockets for nearly all applications. With Take it easy tool finder: colour coding by size – for quick and easy identification of the required tool. Slip-proof for easy grip even with oily hands. With ball stop groove. For external hexagon bolts and screws. Made of matt chrome-plated chrome-vanadium.

With the glass fibre reinforced plastic tyre levers, the tyres can be safely levered off the rim without damaging the rim.

Take a selection of tools out and about with you in the included Bit-Check. With a robust tool pouch.

- Compact 41-piece screwdriving tool set for bicycle operations, also for mobile use
- Including two tyre levers with additional functionality - allowing the take up of 1/4" screwdriver bits

Bicycle Set 3









Code	EAN 4013288			
05**004187**001	**234926**			**1**
			8001 A 1x 1/4"x87,0	
			813 1x 1/4"x78	
			889/4/1 K 1x 1/4"x50	
			870/1 1x 1/4"x25 [1]	
			851/1 BTZ 1x PH 1x25; 2x PH 2x25; 1x PH 3x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 2x TX 20x25; 2x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25	
			800/1 BTZ 1x 0,5x4,0x25; 1x 0,6x4,5x25; 1x 1,0x5,5x25	
			840/1 BTZ 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			840/1 Z 1x 8,0x25	
			842/1 Z 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0; 1x 15,0x23,0	
			9502 1x 105,0	
			9503 1x 105,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1] With friction ball; for manual nut spinner sockets

Bicycle Set 3 A

Bike tool set with ratchet, bits, sockets and a bitholding screwdriver in the very compact Tool-Check. Perfect as a universal companion for a multitude of screwdriving applications. An added extra: The set comes with two pouches– a larger pouch for the complete tool set and a small soft pouch to store the tools safely in your shirt pocket when you are on the go. The soft pouch has additional loops for holding two CO_2 cartridges (the cartridges are not included).

With useful bike tools (chain riveter and chain fastener) to repair bike chains.

Premium bitholding screwdriver with Kraftform Plus handle for comfortable ergonomic screwdriving.

Bit ratchet for quick working when screwdriving with a machine or conventional hand tool is not possible due to space constraints. Rapid reversing from clockwise to counterclockwise rotation and vice versa via the reversing lever. The knurling on the ratchet head allows for quick rotation (with the thumb). Easiest operation, even with just one hand. Ergonomic ratchet head/lever: Kraftform geometry with perfectly shaped contact surfaces for the fingers. The direct bit mounting in the ratchet head provides small tool design for low working heights. Small return angle of 6° for precise working. Robust drop-forged solid steel design. Torques of over 65 Nm.

The Rapidaptor bitholding screwdriver with fast-rotating sleeve: Can be used as an extension, for lightning-fast bit changes for even very small bit sizes with just one hand and without any extra tools.


Bits (BTZ) with BiTorsion zone to cushion peak loads for universal use; tough bits (Z) for universal use.

Zyklop sockets with colour coding by size as well as size stamping – to help you find the required socket quickly and easily. Slip-proof thanks to the knurling at the rear end for easy handling even with oily hands. With ball stop groove. For external hexagon bolts and screws. Made of matt chrome-plated chrome-vanadium.

With the glass fibre reinforced plastic tyre levers, the tyres can be safely levered off the rim without damaging the rim. One tyre lever with valve ejector, one tyre lever with ¼" bit mounting.

- Compact 38-piece bike tool set in a pouch for the workshop and on tour
- With a small soft pouch to take individual tools with you
- With chain riveter and chain fastener with exchangeable rivet pin for opening and closing bicycle chains. Suitable for single-speed chains, up to 12-speed

Bicycle Set 3 A





Code	EAN 4013288			
05**004188**001	*234933*			1
			8001 A 1x ¼"x87,0	
			813 1x ¼"x78	
			3899/4/1 1x ¼"x100	
			889/4/1 K 1x ¼"x50	
			870/1 1x ¼"x25 [1]	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25	
			800/1 BTZ 1x 0,5x4,0x25; 1x 0,6x4,5x25	
			840/1 BTZ 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			840/1 Z 1x 8,0x25	
			842/1 Z 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0; 1x 15,0x23,0	
			9502 1x 105,0	
			9503 1x 105,0	
			9513 Chain Tool	
			9512 Chain-Hook	
			9481 1x 203x85	
			9480 1x 90,0x135,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1] With friction ball; for manual nut spinner sockets

Tool-Check 1

38-piece set. Very compact tool set for manual and machine use. The green locking elements of the Tool-Check secure the tools during transport.


Includes one 1/4" bit ratchet in drop-forged solid steel design. Fine toothing mechanism (60 teeth) for a small return angle of 6° for precise working. Easy clockwise/counterclockwise switching. Ergonomically shaped ratchet head and lever. 1/4" sockets can also be used with the Wera 870/1 adapter (1/4" external hexagon to 1/4" external square head) included in the set.

7 Zyklop sockets (1/4", for manual and machine-operated tools); with ball stop groove. Knurling at the rear end for manageability during manual screwdriving. With Take it easy tool finder: colour coding by size – for quick and easy identification of the required tool. Made of matt chrome-plated chrome-vanadium.

28 tough bits (Phillips and Pozidriv, TORX®, TORX® BO, slotted and hexagonal socket) for universal use. In the very compact, functional Tool-Check.

- Very compact 38-piece tool set for manual and machine use

Tool-Check 1









Code	EAN 4013288			
05**049050**001	*234889*			1
			8001 A 1x 1/4"x87,0	
			889/4/1 K 1x 1/4"x50	
			870/1 1x 1/4"x25 [1]	
			851/1 TZ 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			855/1 TH 1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	
			867/1 TZ TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			800/1 TZ 1x 1,0x5,5x25	
			840/1 Z 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	

[1] With friction ball; for manual nut spinner sockets

Tool-Check Automotive 1







Code	EAN 4013288			
05**049065**001	*234827*			1
			8001 A 1x 1/4"x87,0	
			889/4/1 K 1x 1/4"x50	
			870/1 1x 1/4"x25 [1]	
			851/1 TZ 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			867/1 TZ TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			800/1 TZ 1x 1,0x5,5x25	
			840/1 Z 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25	
			873/1 Five Lobe 1x 20x25; 1x 25x25; 1x 27x25; 1x 30x25	
			860/1 XZN 1x M 4x25; 1x M 5x25; 1x M 6x25; 1x M 8x25	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	

[1] With friction ball; for manual nut spinner sockets

Tool-Check Combi 1

40-piece set. Very compact tool set for manual and machine use. The green locking components of the Tool-Check secure the tools during transport.

Includes one 1/4" bit ratchet in drop-forged solid steel design. Fine toothing mechanism (60 teeth) for a small return angle of 6° for precise working. Easy clockwise/counterclockwise switching. Ergonomically shaped ratchet head and lever. 1/4" sockets can also be used with the Wera 870/1 adapter (1/4" external hexagon to 1/4" external square head) included in the set.

7 Zyklop sockets (1/4") for manual and machine-operated tools; with ball stop groove. Knurling at the rear end for manageability during manual screwdriving. With Take it easy tool finder: colour coding by size - for quick and easy identification of the required tool. Made of matt chrome-plated chrome-vanadium.

28 bits, BTZ and BTH design with BiTorsion zone (prevents the bit from breaking prematurely) and Take it easy toolfinder: colour coding by profile and size, tough design (Z) for universal use, Phillips and Pozidriv, TORX®, TORX® BO, slotted and hexagonal socket.

1x KNIPEX Cobra® 87 01 125 high-tech water pump pliers. In the very compact, functional Tool-Check. One robust pouch.

- Very compact 40-piece tool set for manual and machine use
- 1x KNIPEX Cobra® 87 01 125 high-tech water pump pliers

Tool-Check Combi 1









Code	EAN 4013288			
05**049070**001	*235060*			1
			8001 A 1x 1/4"x87,0	
			813 1x 1/4"x78	
			889/4/1 K 1x 1/4"x50	
			870/1 1x 1/4"x25 [1]	
			851/1 BTZ 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			855/1 BTH 1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			800/1 BTZ 1x 1,0x5,5x25	
			840/1 BTZ 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			840/1 Z 1x 8,0x25	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			KNIPEX Cobra® High-Tech Water Pump Pliers 87 01 125	

[1] With friction ball; for manual nut spinner sockets


15°
Wera
Wera
BE A TOOL REBEL



Joker
Wrenches & Spanners

Joker - Can.Do.Everything.Better.



High quality, metric, combination ratchet wrench by Wera. Everything that a wrench has to be able to do. And a whole lot more. Faster, better, stylish. Yes, a real Joker. The new generation of combination ratchet wrenches.

Suitable for hexagon socket screws, bolts or nuts. Comes with holding function, thanks to the metal plate in the jaw, which reduces the risk of dropping nuts and bolts. The replaceable metal plate in the jaw secures nuts and bolts with its extra hard teeth and reduces the danger of slipping.

The integrated limit stop prevents any slipping around the bolt head and allows higher torque to be applied. The double-hex geometry makes for a positive connection with nuts or bolts and reduces the risk of slipping. A return angle of only 30° at the open end prevents any time consuming flipping of the wrench. The ratchet mechanism at the ring end, with an exceptional, fine-tooth mechanism – 80 teeth in all – enables flexibility even in very confined working spaces.

The specially forged geometry ensures high torque transfer and strength. The ratchet is manufactured out of high performance chrome molybdenum steel with nickel-chrome coating for high corrosion protection. Take it easy Tool Finder with colour coding according to sizes.

- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- The double-hex geometry reduces the risk of slipping
- Return angle of only 30°
- Take it easy tool finder with colour coding according to sizes

6000 Joker Ratcheting combination wrenches





	EAN							
Code	4013288		mm	mm	mm	mm	mm	
05**073268**001	*167309*		8	144	20	5,5	18	3
05**073270**001	*164360*		10	159	22	5,5	21	3
05**073271**001	*167316*		11	165	25	6,3	22	3
05**073272**001	*167323*		12	170,7	26,3	6,6	25	3
05**073273**001	*164377*		13	177	27,3	7	25	3
05**073274**001	*167330*		14	188	29,3	7,5	28	3
05**073275**001	*167347*		15	200	32,3	7,8	28,5	3
05**073276**001	*167392*		16	212	35	8,2	32,7	3
05**073277**001	*164384*		17	224	37,2	8,5	32,7	3
05**073278**001	*167408*		18	235	39	9	33,8	3
05**073279**001	*164391*		19	246	42	9,5	34,8	3

6000 Joker Ratcheting combination wrenches, Imperial





	EAN							
Code	4013288			mm	mm	mm	mm	
05**073280**001	*167354*		5/16"	144	20	5,5	18	3
05**073281**001	*167361*		3/8"	159	22	5,5	21	3
05**073282**001	*167378*		7/16"	165	25	6,3	22	3
05**073283**001	*167385*		1/2"	177	27,3	7	25	3
05**073284**001	*167415*		9/16"	188	29,3	7,5	28	3
05**073285**001	*167422*		5/8"	212	35	8,2	32,7	3
05**073286**001	*167439*		11/16"	235	39	9	33,8	3
05**073287**001	*167446*		3/4"	246	42	9,5	34,8	3

9630 Magnetic rail 6000 Joker 1 Ratcheting combination wrenches set

- 11-piece set
- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall
- The clips hold the tools perfectly

9630 Magnetic rail 6000 Joker 1 Ratcheting combination wrenches set



Code	EAN 4013288			
05**020014**001	*228949*			1
			6000 Joker 1x 8x144; 1x 10x159; 1x 11x165; 1x 12x170,7; 1x 13x177; 1x 14x188; 1x 15x200; 1x 16x212; 1x 17x224; 1x 18x235; 1x 19x246	
			9610 1x 30,0x370,0	

9631 Magnetic rail 6000 Joker 2 Ratcheting combination wrenches set

- 5-piece set

9631 Magnetic rail 6000 Joker 2 Ratcheting combination wrenches set



Code	EAN 4013288			
05**020015**001	*229847*			1
			6000 Joker 1x 8x144; 1x 10x159; 1x 13x177; 1x 17x224; 1x 19x246	
			9610 1x 30,0x370,0	

9632 Magnetic rail 6000 Joker Imperial 1 Ratcheting combination wrenches set

- 8-piece set

9632 Magnetic rail 6000 Joker Imperial 1 Ratcheting combination wrenches set



Code	EAN 4013288			
05**020016**001	*229861*			1
			6000 Joker Imperial 1x $^{5}/_{16}$"x144; 1x $^{3}/_{8}$"x159; 1x $^{7}/_{16}$"x165; 1x $^{1}/_{2}$"x177; 1x $^{9}/_{16}$"x188; 1x $^{5}/_{8}$"x212; 1x $^{11}/_{16}$"x235; 1x $^{3}/_{4}$"x246	
			9610 1x 30,0x370,0	

6000 Joker 11 Set 1 of ratcheting combination wrenches

- In robust pouch

6000 Joker 11 Set 1 of ratcheting combination wrenches



Code	EAN 4013288			
05**020013**001	*167521*			1
			6000 Joker 1x 8x144; 1x 10x159; 1x 11x165; 1x 12x170,7; 1x 13x177; 1x 14x188; 1x 15x200; 1x 16x212; 1x 17x224; 1x 18x235; 1x 19x246	

6000 Joker 8 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

- In robust pouch

6000 Joker 8 Imperial Set 1 Set of ratcheting combination wrenches, Imperial



Code	EAN 4013288			
05**020012**001	*167514*			1
			6000 Joker Imperial 1x $^{5}/_{16}$"x144; 1x $^{3}/_{8}$"x159; 1x $^{7}/_{16}$"x165; 1x $^{1}/_{2}$"x177; 1x $^{9}/_{16}$"x188; 1x $^{5}/_{8}$"x212; 1x $^{11}/_{16}$"x235; 1x $^{3}/_{4}$"x246	

6000/6002 Joker 6 Set 1 Set of ratcheting combination / double open-ended wrenches

- The Joker double open-ended wrench is ideally suited for locking down nuts and bolts.
- In robust pouch

6000/6002 Joker 6 Set 1 Set of ratcheting combination / double open-ended wrenches



Code	EAN 4013288			
05**020022**001	*173034*			1
			6000 Joker 1x 10x159; 1x 13x177; 1x 17x224; 1x 19x246	
			6002 Joker Double 1x 10x13x167; 1x 17x19x235	

6000 Joker 4 Set 1 Set of ratcheting combination wrenches

- In robust pouch

6000 Joker 4 Set 1 Set of ratcheting combination wrenches



Code	EAN 4013288			
05**073290**001	*164407*			1
			6000 Joker 1x 10x159; 1x 13x177; 1x 17x224; 1x 19x246	

6000 Joker 4 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

- In robust pouch

6000 Joker 4 Imperial Set 1 Set of ratcheting combination wrenches, Imperial



Code	EAN 4013288			
05**073295**001	*167460*			1
			6000 Joker Imperial 1x 7/16"x165; 1x 1/2"x177; 1x 9/16"x188; 1x 3/4"x246	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

6001 Joker Switch

Joker ratcheting combination wrenches with angled ratchet head and switch lever. The metal plate in the jaw provides for the holding function which reduces the risk of losing nuts and bolts.

The integrated limit stop can prevent any slipping from the bolt head downwards and enables higher torque to be applied.

The exchangeable metal plate in the jaw securely holds nuts and bolts with its extra hard teeth and reduces the risk of slipping.

The double-hex geometry delivers a very positive connection with nuts or bolts and again provides for a lower risk of any slipping. The low return angle of only 30° at the jaw end avoids any time-consuming flipping of the wrench when fastening.

The reversible ratchet mechanism at the ring end with its fine toothing (80 teeth) ensures great flexibility even in confined spaces. Audibly precise ratchet mechanism.

Additionally, the robust two-piece locking element provides for an extreme stability. Comes with a 15° angled ratchet end for secure work even at high torque. The special forged geometry allows for high torque transfer and high flexural rigidity. Manufactured out of high-performance chrome-molybdenum steel with a nickel-chromium coating for high corrosion protection.

With Take it easy tool finder: colour coding according to size.

- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- Very fine toothing and robust locking element
- Ratchet end angled by 15°
- Take it easy tool finder with colour coding according to sizes

6001 Joker Switch Ratcheting combination wrenches, with switch lever





Code	EAN 4013288		mm	mm	mm	mm	mm	
05**020064**001	*184696*		8	144	20,3	5,5	18	3
05**020065**001	*183903*		10	159	23	5,5	21,5	3
05**020066**001	*183910*		11	165	24,3	6,3	22	3
05**020067**001	*183927*		12	171	26,3	6,6	25	3
05**020068**001	*184702*		13	179	27,3	7	26	3
05**020069**001	*184719*		14	187	30	7,5	28	3
05**020070**001	*184726*		15	199	32	7,8	28,8	3
05**020071**001	*184733*		16	213	35	8,2	31,7	3
05**020072**001	*184740*		17	225	37	8,5	33	3
05**020073**001	*184757*		18	234	39,5	9	34	3
05**020074**001	*184764*		19	246	42	9,5	34,7	3

6001 Joker Switch Ratcheting combination wrenches, with switch lever, imperial





Code	EAN 4013288			mm	mm	mm	mm	
05**020075**001	*184788*		5/16"	144	20,3	5,5	18	3
05**020076**001	*184795*		3/8"	159	23	5,5	21,5	3
05**020077**001	*184801*		7/16"	165	24,3	6,3	22	3
05**020078**001	*184818*		1/2"	171	26,3	6,6	25	3
05**020079**001	*184825*		9/16"	187	30	7,5	28	3
05**020080**001	*184832*		5/8"	213	35	8,2	31,7	3
05**020081**001	*184849*		11/16"	234	39,5	9	34	3
05**020082**001	*184771*		3/4"	246	42	9,5	34,7	3

6001 Joker Switch 11 Set 1 Set of ratcheting combination wrenches

- Compact textile box with high robustness, low weight and volume

6001 Joker Switch 11 Set 1 Set of ratcheting combination wrenches



Code	EAN 4013288			
05**020091**001	*184160*			1
			6001 Joker Switch 1x 8x144; 1x 10x159; 1x 11x165; 1x 12x171; 1x 13x179; 1x 14x187; 1x 15x199; 1x 16x213; 1x 17x225; 1x 18x234; 1x 19x246	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

6001 Joker Switch 8 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

- Compact textile box with high robustness, low weight and volume

6001 Joker Switch 8 Imperial Set 1 Set of ratcheting combination wrenches, Imperial



Code	EAN 4013288			
05**020093**001	*184153*			1
			6001 Joker Switch Imperial 1x $^{5}/_{16}$"x144; 1x $^{3}/_{8}$"x159; 1x $^{7}/_{16}$"x165; 1x $^{1}/_{2}$"x171; 1x $^{9}/_{16}$"x187; 1x $^{5}/_{8}$"x213; 1x $^{11}/_{16}$"x234; 1x $^{3}/_{4}$"x246	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

6001 Joker Switch 4 Set 1 Set of ratcheting combination wrenches

- In robust pouch

6001 Joker Switch 4 Set 1 Set of ratcheting combination wrenches



Code	EAN 4013288			
05**020090**001	*184139*			1
			6001 Joker Switch 1x 10x159; 1x 13x179; 1x 17x225; 1x 19x246	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

6001 Joker Switch 4 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

- In robust pouch

6001 Joker Switch 4 Imperial Set 1 Set of ratcheting combination wrenches, Imperial



Code	EAN 4013288			
05**020092**001	*184146*			1
			6001 Joker Switch Imperial 1x $^{7}/_{16}$"x165; 1x $^{1}/_{2}$"x171; 1x $^{9}/_{16}$"x187; 1x $^{3}/_{4}$"x246	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

6002 Joker Double open-ended wrenches

- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- The double-hex geometry reduces the risk of slipping
- Return angle of only 30°
- Take it easy tool finder with colour coding according to sizes

6002 Joker Double open-ended wrenches



	EAN							
Code	4013288		mm	mm	mm	mm	mm	
05**020259**001	*219015*		8	20	10	23	5,5	3
05**003760**001	*173010*		10	23	13	27	5,5	3
05**003765**001	*173027*		17	37	19	42	8,5	3
05**020260**001	*212764*		20	48	22	51	10	3
05**020261**001	*212771*		22	48	24	51	10	3
05**020262**001	*212788*		24	51	27	60	11	3
05**020263**001	*212795*		27	63	32	66	12	3
05**020264**001	*212801*		30	63	32	66	12	3

6003 Joker ring spanner

As the installation space becomes increasingly tight during screwdriving, it remains necessary that tools enable users to work successfully.

Narrow spaces require additional placement points of the tool. Can spanners be modified so that the placement possibilities of the tool increase?

The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points. A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be "taken" every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces. The Joker 6003 will automatically find the respective placement point after every turn.

The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection. With Take it easy tool finder: colour coding by size.

- Especially suitable for tight spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side angled by 15°
- Take it easy tool finder with colour coding according to sizes

6003 Joker ring spanner



	EAN							
Code	4013288		mm	mm	mm	mm	mm	
05**020190**001	*219039*		5,5	105	16	4	10	3
05**020198**001	*218780*		6	105	16	4	10	3
05**020199**001	*218773*		7	110	17,7	4,2	11,5	3
05**020200**001	*212528*		8	115	19	4,5	12,5	3
05**020219**001	*220097*		9	120	21	4,8	13,5	3
05**020201**001	*212542*		10	125	22	5	15	3
05**020202**001	*212559*		11	135	24,5	5	17	3
05**020203**001	*212566*		12	148	26	5,5	18	3
05**020204**001	*212696*		13	160	27	6	19	3
05**020205**001	*212702*		14	167	29	6	20	3
05**020206**001	*212719*		15	174	32	6	22	3
05**020207**001	*212726*		16	182	35	6,5	23	3
05**020208**001	*212733*		17	190	38	6,5	24,5	3
05**020209**001	*212740*		18	210	39	7,5	26	3
05**020210**001	*212757*		19	230	42	7,5	27,5	3
05**020500**001	*218797*		20	230	45	7,5	29	3
05**020501**001	*218803*		21	260	47	7,5	30	3
05**020502**001	*218841*		22	260	49	7,5	31,5	3
05**020503**001	*218858*		24	280	53	8	36	3
05**020504**001	*218865*		27	300	60	8,5	40	3
05**020505**001	*218872*		30	330	66	9	43	3
05**020506**001	*218889*		32	360	70	9,5	45,5	3
05**020507**001	*218896*		36	460	80	10	50,5	3

6003 Joker ring spanner, imperial



	EAN							
Code	4013288			mm	mm	mm	mm	
05**020220**001	*219046*		1/4"	105	16	4	10	3
05**020211**001	*212979*		5/16"	115	19	4,5	12,5	3
05**020212**001	*212986*		3/8"	125	22	5	15	3
05**020213**001	*212993*		7/16"	135	24,5	5	17	3
05**020214**001	*213006*		1/2"	160	26	6	19	3
05**020215**001	*213013*		9/16"	167	29	6	20	3
05**020216**001	*213020*		5/8"	182	35	6,5	23	3
05**020217**001	*213037*		11/16"	210	40	7,5	26	3
05**020218**001	*213044*		3/4"	230	42	7,5	27,5	3

6003 Joker Pedal ring spanner

The extra thin pedal wrench 6003 Joker Pedal is ideal for narrow installation spaces.

- Especially suitable for tight spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side angled by 15°
- Joker 6003 pedal size 15 with flat mouth to mount and dismount pedals
- With Take it easy tool finder: colour coding by size

6003 Joker Pedal ring spanner





	EAN							
Code	4013288		mm	mm	mm	mm	mm	
05**020221**001	*220677*		15	174	32	4,5	22	1

6003 Joker 22 Set 1 ring spanner set

As the installation space becomes increasingly tight during screwdriving, tools are necessary that enable users to work successfully even in such situations. Narrow spaces require additional placement points of the tool.

Can spanners be modified so that the placement possibilities of the tool increase? The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points.

A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be engaged every 15°. The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces.

The Joker 6003 will automatically find the respective placement point after every turn. The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection. With tool finder Take it easy: colour coding by size.

- 22-piece ring spanner set - particularly suitable for narrow installation spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side angled by 15°

6003 Joker 22 Set 1 ring spanner set





Code	EAN 4013288			
05**020232**001	*221087*			1
			6003 Joker 1x 5,5x105; 1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230; 1x 20x230; 1x 21x260; 1x 22x260; 1x 24x280; 1x 27x300; 1x 30x330; 1x 32x360	

6003 Joker 15 Set 1 combination wrench set

- In robust pouch

6003 Joker 15 Set 1 combination wrench set



Code	EAN 4013288			
050**2030**2001	*222657*			1
			6003 Joker 1x 5,5x105; 1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

6003 Joker 11 Set 1 ring spanner set

- In robust pouch

6003 Joker 11 Set 1 ring spanner set



Code	EAN 4013288			
050**2023**1001	*214195*			1
			6003 Joker 1x 8x115; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

6003 Joker 8 Imperial Set 1 ring spanner set, Imperial

- In robust pouch

6003 Joker 8 Imperial Set 1 ring spanner set, Imperial



Code	EAN 4013288			
050**2024**1001	*214201*			1
			6003 Joker Imperial 1x $^{5}/_{16}$"x115; 1x $^{3}/_{8}$"x125; 1x $^{7}/_{16}$"x135; 1x $^{1}/_{2}$"x160; 1x $^{9}/_{16}$"x167; 1x $^{5}/_{8}$"x182; 1x $^{11}/_{16}$"x210; 1x $^{3}/_{4}$"x230	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

6003 Joker 5 Set 1 ring spanner set

- In robust pouch

6003 Joker 5 Set 1 ring spanner set



Code	EAN 4013288			
050**2023**0001	*214171*			1
			6003 Joker 1x 8x115; 1x 10x125; 1x 13x160; 1x 17x190; 1x 19x230	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Bicycle set 10

5-piece Joker 6003 spanner set; size 15 in an extra-slim design. As the working space is very narrow when working on your bike, tools are necessary that enable users to work successfully even in such situations. Narrow spaces require additional placement points of the tool.

Can spanners be modified so that the placement possibilities of the tool increase? The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points. A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be engaged every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces. The Joker 6003 will automatically find the respective placement point after every turn.

The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection. With tool finder Take it easy: colour coding by size.

The Joker bags are suitable for attachment to walls, shelves, workshop trolleys and the Wera 2go system thanks to the hook and loop fastener system on the back.

- Particularly suitable for narrow screwdriving situations on the bike
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth "takes" the screw every 15°
- Slim ring side angled by 15°
- Joker 6003 pedal size 15 with flat mouth to mount and dismount pedals

Bicycle set 10



Code	EAN 4013288			
05**004178**001	*220653*			1
			6003 Joker 1x 8x115; 1x 9x120; 1x 10x125; 1x 13x160	
			6003 Joker Pedal 1x 15x174	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Bicycle set 12

12-piece Joker 6003 spanner set; size 15 in an extra-slim design. As the working space is very narrow when working on your bike, tools are necessary that enable users to work successfully even in such situations.

Narrow spaces require additional placement points of the tool. Can spanners be modified so that the placement possibilities of the tool increase?

The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points. A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be engaged every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces. The Joker 6003 will automatically find the respective placement point after every turn. The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection. With tool finder Take it easy: colour coding by size.

The Joker bags are suitable for attachment to walls, shelves, workshop trolleys and the Wera 2go system thanks to the hook and loop fastener system on the back.

- Especially suitable for tight spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side angled by 15°
- Joker 6003 pedal size 15 with flat mouth to mount and dismount pedals
- With Take it easy tool finder: colour coding by size
- In robust pouch

Bicycle set 12



Code	EAN 4013288			
05**004181**001	*220721*			1
			6003 Joker 1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 16x182; 1x 17x190	
			6003 Joker Pedal 1x 15x174	

6003 Joker 5 Imperial Set 1 ring spanner set, Imperial

- In robust pouch

6003 Joker 5 Imperial Set 1 ring spanner set, Imperial



Code	EAN 4013288			
05**020240**001	*214188*			1
			6003 Joker Imperial 1x $^{5}/_{16}$"x115; 1x $^{3}/_{8}$"x125; 1x $^{1}/_{2}$"x160; 1x $^{9}/_{16}$"x167; 1x $^{3}/_{4}$"x230	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

6003 Joker 4 Set 1 Ring spanner set

As the installation space becomes increasingly tight during screwdriving, it is necessary that tools enable users to work successfully even in such situations. Narrow spaces require additional placement points of the tool.

Can spanners be modified to increase the placement possibilities of the tool? The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points.

A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be engaged every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces.

The Joker 6003 will automatically find the respective placement point after every turn. The slim yet robust ring side is angled by 15° to the tool axis.

The high-quality surface treatment achieves a high and long-lasting corrosion protection.

With Take it easy tool finder: Colour coding by size. The wear-free material of the clip guarantees easy removal and a secure hold of the spanners.

- Joker open-ended and combination wrenches and in a new clip for space-saving storage in the tool bag

6003 Joker 4 Set 1 Ring spanner set



Code	EAN 4013288			
05**020228**001	*225665*			1
			6003 Joker 1x 8x115; 1x 10x125; 1x 12x148; 1x 13x160	

6003 Joker 4 Set Imperial 1 Ring spanner set

- Joker open-ended and combination wrenches and in a new clip for space-saving storage in the tool bag

6003 Joker 4 Set Imperial 1 Ring spanner set



Code	EAN 4013288			
05**020229**001	*225672*			1
			6003 Joker Imperial 1x 5/16"x115; 1x 3/8"x125; 1x 7/16"x135; 1x 1/2"x160	

9640 Magnetic rail 6003 Joker 1 Ring spanner set

- 11-piece set
- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall
- The clips hold the tools perfectly

9640 Magnetic rail 6003 Joker 1 Ring spanner set



Code	EAN 4013288			
05**020233**001	*228963*			1
			6003 Joker 1x 8x115; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230,0	
			9610 1x 30,0x370,0	

9641 Magnetic rail 6003 Joker 2 Ring spanner set

- 5-piece set

9641 Magnetic rail 6003 Joker 2 Ring spanner set



Code	EAN 4013288			
05**020234**001	*229854*			1
			6003 Joker 1x 8x115; 1x 10x125; 1x 13x160; 1x 17x190; 1x 19x230,0	
			9610 1x 30,0x370,0	

9642 Magnetic rail 6003 Joker Imperial 1 Ring spanner set

- Imperial
- 8-piece set

9642 Magnetic rail 6003 Joker Imperial 1 Ring spanner set



Code	EAN 4013288			
05**020235**001	*229878*			1
			6003 Joker Imperial 1x 5/16"x115; 1x 3/8"x125; 1x 7/16"x135; 1x 1/2"x160; 1x 9/16"x167; 1x 5/8"x182; 1x 11/16"x210; 1x 3/4"x230,0	
			9610 1x 30,0x370,0	

6004 Joker self-setting spanner

Many users wish to have a universal screwdriving tool with the widest possible range of applications. It should be a single tool for multiple metric and imperial dimensions.

It should automatically adjust to the different screw sizes. It should be safe to grab without damaging anything and allow for a high working speed. The continuous and parallel jaws replace several single spanner dimensions.

The required size is automatically and continuously set when attaching the tool to the hexagon bolt or screw. The integrated lever mechanism securely clamps the hexagon screw or bolt between the jaws, which significantly reduces the risk of slipping or damage.

The ratchet function ensures fast and consistent screwdriving without removing the tool. Thanks to the corner-width rectangular prisms, a back-pivoting angle of only 30° can be realized.

The single-arm design in conjunction with the ratchet function and the corner-width prism make it possible to work even in confined spaces.

The adjustable Joker 6004 is the universal screwdriving tool. Self-setting. Gripping. Spanning.

- The adjustable Joker 6004 covers all metric and imperial dimensions in the respective field of application
- Automatic and continuous grip of hexagon screws and bolts
- Lever mechanism when gripping avoids slipping and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- Back-pivoting angle of only 30° through placement in the corner-width rectangular prisms in the mouth

6004 Joker XS self-setting spanner



	EAN							
Code	4013288	mm		mm	mm			
05**020099**001	*216892*	7-10	1/4"-3/8"	117	7,7			3

6004 Joker S self-setting spanner



	EAN							
Code	4013288	mm		mm	mm			
05**020100**001	*211729*	10-13	7/16"-1/2"	154	10			3

6004 Joker M self-setting spanner



	EAN							
Code	4013288	mm		mm	mm			
05**020103**001	*216908*	13-16	1/2"-5/8"	188	12,4			3

6004 Joker L self-setting spanner



	EAN							
Code	4013288	mm		mm	mm			
05**020101**001	*214706*	16-19	5/8"-3/4"	224	14			3

6004 Joker XL self-setting spanner



	EAN							
Code	4013288	mm		mm	mm			
05**020104**001	*216915*	19-24	3/4"-15/16"	256	16			2

6004 Joker XXL self-setting spanner



	EAN							
Code	4013288	mm		mm	mm			
05**020102**001	*214713*	24-32	15/16"-1 1/4"	322	20			3

6004 Joker 4 set 1 self-setting spanner set

- The compact folding pouch with four adjustable Joker 6004 spanners covers all metric and imperial dimensions in applications from 7 to 19 mm or ¼" to ¾"

6004 Joker 4 set 1 self-setting spanner set



	EAN			
Code	4013288			
05**020110**001	*217516*			1
			6004 Joker XS 1x 7-10 (1/4"-3/8")x117	
			6004 Joker S 1x 10-13 (7/16"-1/2")x154	
			6004 Joker M 1x 13-16 (1/2"-5/8")x188	
			6004 Joker L 1x 16-19 (5/8"-3/4")x224	

6005 Joker Double open-ended wrenches

- Double open-ended wrench
- Especially suitable for tight spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- With Take it easy tool finder: colour coding by size

6005 Joker Double open-ended wrenches



	EAN							
Code	4013288		mm	mm	mm	mm	mm	
05**020310**001	*224873*		6	16	7	17,7	4	3
05**020311**001	*224880*		8	19	9	21	4,5	3
05**020312**001	*224897*		10	23	11	25	5	3
05**020313**001	*224903*		12	26	13	27	5,5	3

6005 Joker 4 Set 1 Double open-ended wrench set

- Joker open-ended and combination wrenches and in a new clip for space-saving storage in the tool bag

6005 Joker 4 Set 1 Double open-ended wrench set



Code	EAN 4013288			
05**020314**001	*224750*			1
			6005 Joker Double 1x 6x7x111,8; 1x 8x9x122,2; 1x 10x11x137,3; 1x 12x13x166	

6006 Joker 2 Set 1 Self-setting double spanner

2-piece set. Self-setting double spanners for hexagon screw heads and bolts with wrench sizes 7-10, 10-13 (metric) or 1/4"-3/8", 7/16"-8/16" (imperial) and 13-16, 16-19 (metric) or 1/2"-5/8" and 5/8"-3/4" (imperial). With its continuous and parallel jaws, the tool replaces several single spanner sizes. The required size is automatically and continuously set when attaching the tool to the hexagon bolt or screw. The integrated lever mechanism securely clamps the hexagon screw or bolt between the jaws, which significantly reduces the risk of slippage or damage. The ratchet feature ensures fast and consistent screwdriving without removing the tool. By using the corner-width rectangular prisms, a return angle of only 30° can be achieved.

Ratchet feature and corner-width prism make it possible to work even in confined spaces.

The adjustable Joker 6006 double spanner with ratchet functionality is the universal screwdriving tool. Self-setting. Gripping. Spanning. In a robust pouch.

- Self-setting double spanners
- The self-setting Joker 6006 double spanners cover all metric and imperial dimensions in the respective field of application
- Automatically and continuously gripping hexagon screws and bolts
- Lever mechanism upon gripping prevents slipping and damage
- With mechanical ratchet functionality for fast and consistent screwdriving without removing the spanner
- Return angle of only 30° when using the corner-width rectangular prisms in the jaw
- In a robust folding pouch with Wera 2go compatibility

6006 Joker 2 Set 1 Self-setting double spanner



Code	EAN 4013288			
05**020340**001	*233301*			1
			6006 Joker XS/S 1x 7-10 (1/4"-3/8") / 10-13 (7/16"-1/2") x 161.0	
			6006 Joker M/L 1x 13-16 (1/2"-5/8") / 16-19 (5/8"-3/4") x 239.4	

6006 Joker XS/S Self-setting double spanner





	EAN							
Code	4013288	mm		mm		mm	mm	
05**020330**001	*233288*	7-10	1/4"-3/8"	10-13	7/16"-1/2"	8,0	10,0	1

6006 Joker M/L Self-setting double spanner





	EAN							
Code	4013288	mm	mm	mm		mm	mm	
05**020331**001	*233295*	13-16	1/2"-5/8"	16-19	5/8"-3/4"	12,4	14,0	1

6007 Joker 5 Set 1 Ring ratchet spanner set

5-piece ring ratchet spanner set. Unique combination of jaw and ring ratchet mechanism in a long design. For hexagon screw heads and bolts.

The long lever allows for higher power transmission. The long design also improves accessibility at low-lying couplings. With holding function enabled by a metal plate in the mouth, which reduces the risk of losing screws and sockets.

With its extra hard teeth, the exchangeable metal plate in the mouth secures screws and sockets and reduces the risk of slipping. The integrated end stop can prevent the screw head from slipping down and allows application of high torques. The double hexagon geometry ensures a positive connection with the screw or bolt and thus reduces the risk of slipping.

A return angle of only 30° at the jaw end avoids time-consuming rotating of the tool whilst screwdriving. Ratchet mechanism at the ring side with exceptionally high fine toothing of 80 teeth for flexibility even in confined spaces.

The specially engineered geometry allows high torque transmission and high bending stiffness. Made of high-performance chromium molybdenum steel with nickel-chromium coating for high corrosion protection.

With Take it easy tool finder: colour coding by size and extra laser-engraved size indication. In a robust roll pouch for easy transport and clean storage.

- Unique combination of open end and ring ratchet mechanism in a long design
- Long lever allows for higher power transmission
- Better accessibility at low-lying couplings
- Limit stop prevents any slipping
- With practical holding function by a metal plate in the mouth
- Return angle of only 30° in the open end
- Extremely robust ring ratchet
- Take it easy tool finder: colour coding by size and extra laser-engraved size indication
- In a robust folding pouch with Wera 2go compatibility

6007 Joker 5 Set 1 Ring ratchet spanner set



Code	EAN 4013288			
05**020380**001	*233370*			1
			6007 Joker 1x 8x180; 1x 10x209; 1x 13x245; 1x 17x304,5; 1x 19x334	

6007 Joker Ring ratchet spanner, long design

- Unique combination of open end and ring ratchet mechanism in a long design
- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- The double-hex geometry reduces the risk of slipping
- Return angle of only 30°
- With Take it easy tool finder: colour coding by size

6007 Joker SB Ring ratchet spanner, long design






Code	EAN 4013288		mm	mm	mm	mm	mm	
05**020350**001	*233318*		8	180	21	6	18	3
05**020351**001	*233325*		10	209	24,2	6,3	21	3
05**020352**001	*233349*		13	245	29,4	8	26	3
05**020353**001	*233356*		17	304,5	39	9	33,5	3
05**020354**001	*233332*		19	334	43	14	36	3

9610 Joker Magnetic rail, for up to 11 spanners, empty

- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall
- The clips hold the tools perfectly

9610 Joker Magnetic rail, for up to 11 spanners, empty



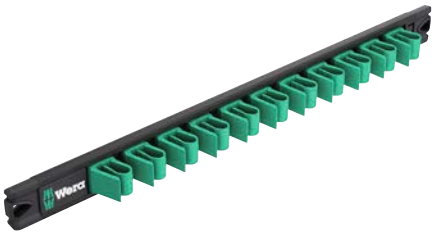


Code	EAN 4013288	mm	mm					
05**136413**001	*228956*	30,0	370,0					1




L-Keys



Hex-Plus - lets hexagon socket screws last longer

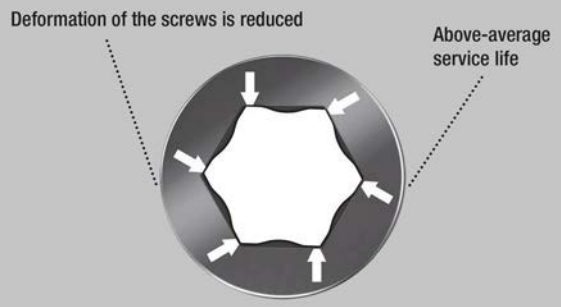

Kraftform Stainless - stainless steel to prevent rust

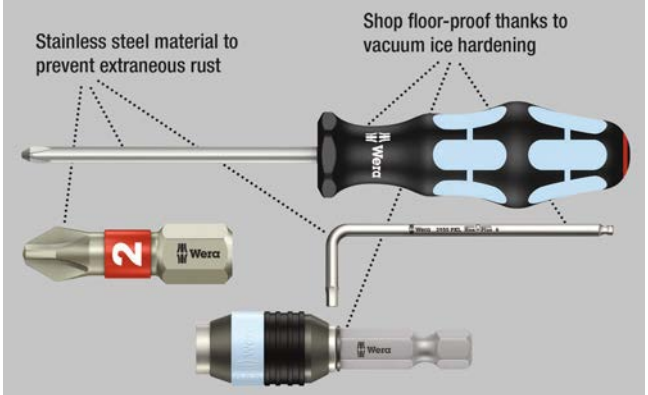

High quality L-key set out of stainless steel for hexagon socket screws by Wera. Stainless steel prevents the transfer of extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. Come with hex ballpoint on the long arm: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling “round the corner” screwdriving.
Take it easy Tool Finder: colour coding according to size. In an almost wear-free L-key clip fastener.

- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Hex-Plus allows socket head screws to live longer
- Take it easy tool finder with colour coding according to sizes
- Wear-resistant clip material for enhanced durability
- Colour coded, easy-to-grip plastic sleeve, even at low temperatures

3950/9 Hex-Plus Multicolour HF Stainless 1 L-key set, metric, stainless steel, with holding function

- From size 3.0, the holding function on the long arm will hold screws securely on the tool

3950/9 Hex-Plus Multicolour HF Stainless 1 L-key set, metric, stainless steel, with holding function




Code	EAN 4013288			
05**022699**001	*224477*			1
		○	**3950 SPKL Multicolour** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112	
		○	**3950 SPKL Multicolour HF** 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224	

3950/9 Hex-Plus Multicolour Stainless 1 L-key set, metric, stainless



Code	EAN 4013288			
05**022669**001	*185211*			1
		○	**3950 SPKL Renkli** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224	

3950/9 Hex-Plus Stainless 1 L-key set, metric, stainless

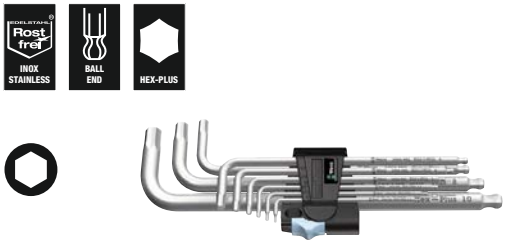

Code	EAN 4013288			
05**022720**001	*111364*			10
		○	**3950 PKL** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224	

3950/9 Hex-Plus Stainless 1 SB L-key set, metric, stainless



Code	EAN 4013288			
05**073544**001	*180377*	○	**3950 PKL** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224	1

3950/9 Hex-Plus Imperial Stainless 1 L-key set, Imperial, stainless

- In robust pouch

3950/9 Hex-Plus Imperial Stainless 1 L-key set, imperial, stainless



Code	EAN 4013288			
05**022721**001	*117281*			1
		○	**3950 PKL inch** 1x 3/32"x112; 1x 7/64"x119; 1x 1/8"x123; 1x 9/64"x130; 1x 5/32"x137; 1x 3/16"x154; 1x 1/4"x185; 1x 5/16"x195; 1x 3/8"x224	

950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function

- L-keys with retaining function for hexagon socket screws
- Hexagonal ballpoint on the long arm
- Colour coded, easy-to-grip plastic sleeve, even at low temperatures

950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function




Code	EAN 4013288			
05**022210**001	*188403*			1
		○	**950 SPKL Multicolour** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112	
		○	**950 SPKL HF Multicolour** 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224	

950/9 Hex-Plus Multicolour 1 L-key set, metric, BlackLaser



Code	EAN 4013288			
05**022089**001	*180841*			5
		○	**950 SPKL Multicolour** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224	


950/9 Hex-Plus Multicolour 1 SB L-key set, metric, BlackLaser






Code	EAN 4013288			
05**073593**001	*165688*	○	**950 SPKL Multicolour** 1x 1.5x90; 1x 2.0x101; 1x 2.5x112; 1x 3.0x123; 1x 4.0x137; 1x 5.0x154; 1x 6.0x172; 1x 8.0x195; 1x 10.0x224	1

L-keys in a two-component clip

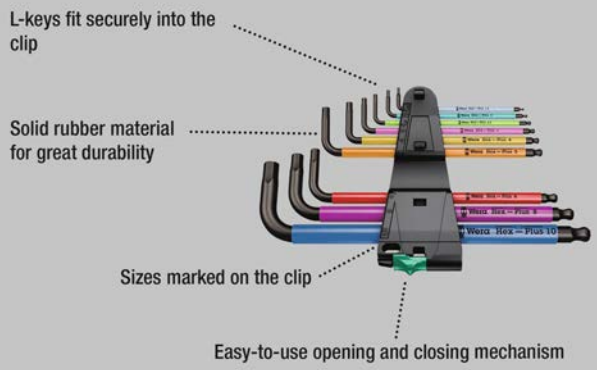

950/9 Hex-Plus Multicolour 2 L-key set, metric, BlackLaser





Code	EAN 4013288			
05**133164**001	*207517*			1
		○	**950 SPKS Multicolour** 1x 1,5x50; 1x 2,0x56; 1x 2,5x63; 1x 3,0x71; 1x 4,0x80; 1x 5,0x90; 1x 6,0x100; 1x 8,0x112; 1x 10,0x125	

950/9 Hex-Plus Multicolour 3 L-key set, metric, BlackLaser

9 L-keys with plastic sleeve (SPKL) made of circular, easy-grip material. The sleeve makes working comfortable even at low temperatures and is easy on the fingers.

All L-keys are easily accessible due to their colour coding and size markings. Convenient storage in the 9109 rack that can be set upright on the table or hung on the wall.

Clip 9539 integrated in the rack which can be removed for mobile use. On top of that, the rack includes a clever removable 9538 magnetiser that can be used to magnetise (and demagnetise) screws and tool tips; no more struggle to hold the screw with the second hand.

- Rack that can be set upright on the table or hung on the wall
- Integrated clip which can be removed for mobile use
- Removable magnet for magnetising and demagnetising tool tips
- L-keys for hexagonal socket screws
- Hex-Plus allows socket head screws to live longer
- Rubber sleeve for pleasant grip
- Hexagonal ballpoint on the long arm
- BlackLaser for high corrosion protection and long service life

950/9 Hex-Plus Multicolour 3 L-key set, metric, BlackLaser







Code	EAN 4013288			
05**133165**001	*230294*			1
		○	**950 SPKL Multicolour** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224	
			9539	
			9109	
			9538	

3950/9 Hex-Plus Multicolour Imperial Stainless 1, imperial, stainless steel

Premium L-key set made of stainless steel for imperial hexagonal socket screws by Wera. Stainless steel prevents transmission of extraneous rust.

The Hex-Plus profile offers larger contact surfaces in the screw head. The notch effect is reduced to a minimum and the destruction of the screw head is almost eliminated.

With hexagonal ball tip at the long arm: The ball-shaped tip profiles enable the tool shaft to be moved and pivoted relative to the screw axis which allows screwdriving “around the corner”.

Take it easy tool finder with colour coding by size. In an almost wear-free L-key clip.

3950/9 Hex-Plus Multicolour Imperial Stainless 1, imperial, stainless steel



Code	EAN 4013288			
05**022860**001	*221360*			1
		O	**3950 SPKL Multicolour Imperial** 1x 5/64"x101; 1x 3/32"x112; 1x 1/8"x123; 1x 5/32"x137; 1x 3/16"x154; 1x 7/32"x172; 1x 1/4"x185; 1x 5/16"x195; 1x 3/8"x224	

950/9 Hex-Plus Multicolour Imperial 1 L-key set, imperial, BlackLaser

- In robust pouch

950/9 Hex-Plus Multicolour Imperial 1 L-key set, imperial, BlackLaser



Code	EAN 4013288			
05**022639**001	*182593*			1
		O	**950 SPKL inch** 1x 5/64"x101; 1x 3/32"x112; 1x 1/8"x123; 1x 5/32"x137; 1x 3/16"x154; 1x 7/32"x172; 1x 1/4"x185; 1x 5/16"x195; 1x 3/8"x224	

950/9 Hex-Plus Multicolour imperial 2 L-key set, imperial, BlackLaser



Code	EAN 4013288			
05**022640**001	*219107*			1
		O	**950 SPKL inch** 1x 5/64"x101; 1x 3/32"x112; 1x 1/8"x123; 1x 5/32"x137; 1x 3/16"x154; 1x 7/32"x172; 1x 1/4"x185; 1x 5/16"x195; 1x 3/8"x224	

950/9 Hex-Plus Multicolour Imperial 3 L-key set, imperial, BlackLaser

- Imperial

950/9 Hex-Plus Multicolour Imperial 3 L-key set, imperial, BlackLaser



Code	EAN 4013288			
05**022641**001	*230188*			1
		O	**950 SPKS Multicolour, imperial** 1x 5/64"x50; 1x 3/32"x56; 1x 1/8"x63; 1x 5/32"x71; 1x 3/16"x80; 1x 7/32"x90; 1x 1/4"x100; 1x 5/16"x112; 1x 3/8"x125	

950/7 Hex-Plus Multicolour Magnet 1 L-key set, metric, BlackLaser

- For recessed screws, it's often advantageous for the screw to be held on the L-key by magnetic force. The Wera clips with magnetiser/demagnetiser enble a magnetisation/demagnetisation of L-keys in a flash

950/7 Hex-Plus Multicolour Magnet 1 L-key set, metric, BlackLaser





Code	EAN 4013288			
05**022534**001	*183750*			5
		○	**950 SPKL Multicolour** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172	

950/9 L Hex-Plus HF 1 L-key set, metric, chrome-plated, with holding function

- The holding function on the long arm keeps screws securely on the tool
- High corrosion protection thanks to chrome-plating

950/9 L Hex-Plus HF 1 L-key set, metric, chrome-plated, with holding function





Code	EAN 4013288			
05**022130**001	*207227*			1
		○	**950 L** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112	
		○	**950 L HF** 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219	

[1] Regular hexagon

950/9 Hex-Plus 1 L-key set, metric, chrome-plated





Code	EAN 4013288			
05**022087**001	*104816*			10
		○	**950 PKL** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219	

[1] Regular hexagon

950/9 Hex-Plus 1 SB L-key set, metric, chrome-plated





Code	EAN 4013288			
05**073391**001	*030160*	○	**950 PKL** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219	1

[1] Regular hexagon

950/9 Hex-Plus 2 L-key set, metric, chrome-plated





Code	EAN 4013288			
05**021909**001	*111937*			10
		○	**950 L** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219	

[1] Regular hexagon

950/9 Hex-Plus 3 L-key set, metric, chrome-plated

- Short version
- Hexagonal ballpoint on the long arm

950/9 Hex-Plus 3 L-key set, metric, chrome-plated



Code	EAN 4013288			
05**133163**001	*112255*			10
		○	**950 PKS** 1x 1,5x50 [1]; 1x 2,0x56; 1x 2,5x63; 1x 3,0x71; 1x 4,0x80; 1x 5,0x90; 1x 6,0x100; 1x 8,0x112; 1x 10,0x125	

[1] Regular hexagon

950/9 Hex-Plus 4 L-key set, metric, chrome-plated

- Extra-short arm for use on difficult-to-access screws
- Hexagonal ballpoint on the long arm

950/9 Hex-Plus 4 L-key set, metric, chrome-plated



Code	EAN 4013288			
05**073594**001	*139177*			1
		○	**950 PKLS** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219	

[1] Regular hexagon

950/9 Hex-Plus 5 L-key set, metric, chrome-plated



Code	EAN 4013288			
05**021406**001	*111890*			10
		○	**950** 1x 1,5x45 [1]; 1x 2,0x50; 1x 2,5x56; 1x 3,0x63; 1x 4,0x70; 1x 5,0x80; 1x 6,0x90; 1x 8,0x100; 1x 10,0x112	

[1] Regular hexagon.

950/9 Hex-Plus 6 L-key set, metric, BlackLaser

- BlackLaser for high corrosion protection and long service life

950/9 Hex-Plus 6 L-key set, metric, BlackLaser



Code	EAN 4013288			
05**022086**001	*104809*			10
		○	**950 PKL BM** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219	

[1] Regular hexagon

950/9 Hex-Plus 6 SB L-key set, metric, BlackLaser



Code	EAN 4013288			
05**073596**001	*106414*	○	**950 PKL BM** 1x 1.5x90 [1] ; 1x 2.0x100; 1x 2.5x112; 1x 3.0x126; 1x 4.0x140; 1x 5.0x160; 1x 6.0x180; 1x 8.0x200; 1x 10.0x219	1

[1] Regular hexagon

950/9 Hex-Plus 7 L-key set, metric, BlackLaser

- Short version

950/9 Hex-Plus 7 L-key set, metric, BlackLaser



Code	EAN 4013288			
05**021737**001	*112286*			10
		○	**950 BM** 1x 1,5x45 [1]; 1x 2,0x50; 1x 2,5x56; 1x 3,0x63; 1x 4,0x70; 1x 5,0x80; 1x 6,0x90; 1x 8,0x100; 1x 10,0x112	

[1] Regular hexagon

950/9 Hex-Plus 8 L-key set, metric, chrome-plated

9 chrome-plated L-keys with Hex-Plus advantage to prevent rounded screws - a strong tool set for hexagonal socket screws.

Convenient storage in a rack that can be set upright on the table or hung on the wall.

Integrated clip which can be removed for mobile use. On top of that, the rack includes a clever removable magnetiser that can be used to magnetise (and demagnetise) screws and tool tips; no more struggle to hold the screw with the second hand.

- Rack that can be set upright on the table or hung on the wall
- Integrated clip which can be removed for mobile use
- Removable magnet for magnetising and demagnetising tool tips

950/9 Hex-Plus 8 L-key set, metric, chrome-plated





Code	EAN 4013288			
05**022102**001	*230171*			1
		O	**950 PKL** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219	
			9109	
			9536	
			9538	

[1] Regular hexagon

950/7 Hex-Plus Magnet 1 Magnetic L-key set, metric, chrome-plated

- For recessed screws, it's often advantageous for the screw to be held on the L-key by magnetic force. The Wera clips with magnetiser/demagnetiser enable a magnetisation/demagnetisation of L-keys in a flash.

950/7 Hex-Plus Magnet 1 Magnetic L-key set, metric, chrome-plated



Code	EAN 4013288			
05**022101**001	*111968*			10
		O	**950 PKL** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180	

[1] Regular hexagon

950/7 Hex-Plus 1 L-key set, metric, chrome-plated

- Hexagonal ballpoint on the long arm

950/7 Hex-Plus 1 L-key set, metric, chrome-plated



Code	EAN 4013288			
05**022181**001	*111883*			10
		O	**950 PKL** 1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180	

[1] Regular hexagon

950/13 Hex-Plus Imperial 1 L-key set, imperial, BlackLaser

- BlackLaser for high corrosion protection and long service life
- Hexagonal ballpoint on the long arm

950/13 Hex-Plus Imperial 1 L-key set, imperial, BlackLaser



Code	EAN 4013288			
05**021728**001	*111982*			10
		○	**950 PKL inch** 1x 0,05"x83 [1]; 1x 1/16"x91 [1]; 1x 5/64"x100; 1x 3/32"x112; 1x 7/64"x119; 1x 1/8"x126; 1x 9/64"x132; 1x 5/32"x140; 1x 3/16"x160; 1x 7/32"x180; 1x 1/4"x190; 1x 5/16"x200; 1x 3/8"x212	

[1] Regular hexagon

950/13 Hex-Plus Imperial 1 SB L-key set, imperial, BlackLaser

Premium L-key set made of stainless steel for imperial hexagonal socket screws in convenient clip made of wear-free material for a permanently secure hold of the L-keys while also being easily accessible. L-keys with Hex-Plus profile which offers larger contact surfaces in the screw head.

The notch effect is reduced to a minimum and the destruction of the screw head is almost eliminated. The ball at the long arm allows safe working even in difficult installation positions.

The BlackLaser surface treatment makes for excellent surface protection, even from corrosion, and for long durability.

Lasered and therefore abrasion-proof size marking on the L-keys for quick access.

950/13 Hex-Plus Imperial 1 SB L-key set, imperial, BlackLaser



Code	EAN 4013288			
05**021721**001	*221315*	○	**950 PKL Emperyal** 1x 0.05"x83 [1]; 1x 1/16"x91 [1]; 1x 5/64"x100; 1x 3/32"x112; 1x 7/64"x119; 1x 1/8"x126; 1x 9/64"x132; 1x 5/32"x140; 1x 3/16"x160; 1x 7/32"x180; 1x 1/4"x190; 1x 5/16"x200; 1x 3/8"x212	1

[1] Regular hexagon

950/9 Hex-Plus Imperial 1 L-key set, imperial, BlackLaser





Code	EAN 4013288			
05**022171**001	*111975*			10
		○	**950 PKL inch** 1x 5/64"x100; 1x 3/32"x112; 1x 1/8"x126; 1x 5/32"x140; 1x 3/16"x160; 1x 7/32"x180; 1x 1/4"x190; 1x 5/16"x200; 1x 3/8"x212	

950/9 Hex-Plus Imperial 1 SB L-key set, imperial, BlackLaser





Code	EAN 4013288			
05**133180**001	*154118*	○	**950 PKL inch** 1x 5/64"x100; 1x 3/32"x112; 1x 1/8"x126; 1x 5/32"x140; 1x 3/16"x160; 1x 7/32"x180; 1x 1/4"x190; 1x 5/16"x200; 1x 3/8"x212	1

Bicycle Set 4

L-keys made from circular material with plastic sleeve for use on bicycles. The plastic sleeve makes working comfortable even at low temperatures and is easy on the fingers.

All L-keys are easily accessible due to their colour coding and size markings. For hexagonal socket screws and TORX® screws. In a robust and lightweight folding pouch.

- In a practical, lightweight folding pouch for easy carrying

Bicycle Set 4







Code	EAN 4013288			
05**004173**001	*211446*			1
		○	**950 SPKL Multicolour** 1x 2,0x101; 1x 2,5x112	
		○	**950 SPKL HF Multicolour** 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195	
		✪	**967 SXL TORX® HF Multicolour** 1x TX 10x112; 1x TX 25x154	
			Hook and loop fastener strip 70 1x 50,0x70,0	

3950 SPKL Multicolour HF L-key, metric, stainless steel, with holding function

High quality L-keys out of stainless steel for hexagonal socket screws by Wera. Stainless steel prevents the transfer of extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. Come with hex ballpoint on the long arm: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling “round the corner” screwdriving. Take it easy Tool Finder: colour coding according to size.

- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Stainless L-keys prevent extraneous rust on stainless screws
- Hex-Plus allows socket head screws to live longer
- With holding function (HF) on the long arm to securely hold the screw on the tool
- The ball head on the long arm also allows offset use
- With Take it easy tool finder: colour coding by size
- All L-keys have a colour-coded, easy-grip hose sleeve for ergonomic and comfortable operation even at low temperatures
- With Take it easy tool finder: colour coding by size

3950 SPKL Multicolour HF L-key, metric, stainless steel, with holding function





	EAN							
Code	4013288		mm	mm	mm			
05**022693**001	*224415*		3,0	123	21	4 7/8"	27/32"	10
05**022694**001	*224422*		4,0	137	24	5 3/8"	1"	10
05**022695**001	*224439*		5,0	154	27	6 1/16"	1 1/16"	10
05**022696**001	*224446*		6,0	172	31	6 3/4"	1 1/4"	10
05**022697**001	*224453*		8,0	195	37	7 11/16"	1 7/16"	10
05**022698**001	*224460*		10,0	224	42	9"	1 11/16"	10

3950 SPKL Multicolour L-key, metric, stainless

High quality L-keys out of stainless steel for hexagonal socket screws by Wera. Stainless steel prevents the transfer of extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw.


The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated.

Come with hex ballpoint on the long arm: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling “round the corner” screwdriving.

Take it easy Tool Finder: colour coding according to size. In an almost wear-free L-key clip fastener.

- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Hex-Plus allows socket head screws to live longer
- Stainless L-keys prevent extraneous rust on stainless screws
- Take it easy tool finder with colour coding according to sizes
- Wear-resistant clip material for enhanced durability

3950 SPKL Multicolour L-key, metric, stainless





	EAN							
Code	4013288		mm	mm	mm			
05**022660**001	*185792*		1,5	90	14	3 1/2"	9/16"	10
05**022661**001	*185808*		2,0	101	16	4"	5/8"	10
05**022662**001	*185815*		2,5	112	19	4 7/16"	3/4"	10
05**022663**001	*185822*		3,0	123	21	4 7/8"	27/32"	10
05**022664**001	*185839*		4,0	137	24	5 3/8"	1"	10
05**022665**001	*185846*		5,0	154	27	6 1/16"	1 1/16"	10
05**022666**001	*185860*		6,0	172	31	6 3/4"	1 1/4"	10
05**022667**001	*185877*		8,0	195	37	7 11/16"	1 7/16"	10
05**022668**001	*185884*		10,0	224	42	9"	1 11/16"	10

3950 SPKL Multicolour L-keys, imperial, stainless



Code	EAN							
	4013288			mm	mm			
05022850001	*221384*		5/64"	101	16	4"	5/8"	10
05022851001	*221469*		3/32"	112	19	4 7/16"	3/4"	10
05022852001	*221452*		1/8"	123	21	4 7/8"	53/64"	10
05022853001	*221445*		5/32"	137	24	5 3/8"	5/16"	10
05022854001	*221438*		3/16"	154	27	6 1/16"	1 1/16"	10
05022855001	*221377*		7/32"	172	31	6 3/4"	1 7/32"	10
05022856001	*221421*		1/4"	185	34	7 1/4"	1 11/32"	10
05022857001	*221414*		5/16"	195	37	7 11/16"	1 29/64"	10
05022858001	*221407*		3/8"	224	42	9"	1 21/32"	10

3950 PKL L-key, metric, stainless



Code	EAN							
	4013288	mm	mm	mm				
05022700001	*111265*	1,5	90	14	3 1/2"	9/16"		10
05022701001	*111272*	2,0	101	16	4"	5/8"		10
05022702001	*111289*	2,5	112	19	4 7/16"	3/4"		10
05022703001	*111296*	3,0	123	21	4 7/8"	27/32"		10
05022704001	*111302*	4,0	137	24	5 3/8"	1"		10
05022705001	*111319*	5,0	154	27	6 1/16"	1 1/16"		10
05022706001	*111326*	6,0	172	31	6 3/4"	1 1/4"		10
05022708001	*111340*	8,0	195	37	7 11/16"	1 7/16"		10
05022709001	*111357*	10,0	224	42	9"	1 11/16"		10

3950 PKL L-key, imperial, stainless



Code	EAN							
	4013288		mm	mm				
05022710001	*117151*	3/32"	112	19	4 7/16"	3/4"		10
05022711001	*117168*	7/64"	119	20	4 3/4"	25/32"		10
05022712001	*117175*	1/8"	123	21	4 7/8"	27/32"		10
05022713001	*117182*	9/64"	130	22	5 3/16"	29/32"		10
05022714001	*117199*	5/32"	137	24	5 3/8"	1"		10
05022715001	*117205*	3/16"	154	27	6 1/16"	1 1/16"		10
05022716001	*117212*	1/4"	185	34	7 1/4"	1 5/16"		10
05022717001	*117229*	5/16"	195	37	7 11/16"	1 7/16"		10
05022718001	*117236*	3/8"	224	42	9"	1 11/16"		5

950 SPKL HF L-key Multicolour, metric, with holding function

- The holding function holds screws securely on the tool

950 SPKL HF L-key Multicolour, metric, with holding function



Code	EAN							
	4013288		mm	mm	mm			
05022200001	*188342*		3,0	123	21	4 7/8"	27/32"	10
05022201001	*188359*		4,0	137	24	5 3/8"	1"	10
05022202001	*188366*		5,0	154	27	6 1/16"	1 1/16"	10
05022203001	*188373*		6,0	172	31	6 3/4"	1 1/4"	10
05022204001	*188380*		8,0	195	37	7 11/16"	1 7/16"	10
05022205001	*188397*		10,0	224	42	9"	1 11/16"	10

950 SPKL L-key Multicolour, metric



	EAN							
Code	4013288		mm	mm	mm			
05022600001	*167842*		1,5	90	14	3 1/2"	9/16"	10
05022602001	*167934*		2,0	101	16	4"	5/8"	10
05022604001	*167859*		2,5	112	19	4 7/16"	3/4"	10
05022606001	*167866*		3,0	123	21	4 7/8"	27/32"	10
05022608001	*167873*		4,0	137	24	5 3/8"	1"	10
05022610001	*167880*		5,0	154	27	6 1/16"	1 1/16"	10
05022612001	*167897*		6,0	172	31	6 3/4"	1 1/4"	10
05022614001	*167903*		8,0	195	37	7 11/16"	1 7/16"	10
05022616001	*167910*		10,0	224	42	9"	1 11/16"	10

950 SPKL L-key Multicolour, imperial




	EAN							
Code	4013288			mm	mm			
05022630001	*182500*		5/64"	101	16	4"	5/8"	10
05022631001	*182517*		3/32"	112	19	4 7/16"	3/4"	10
05022632001	*182524*		1/8"	123	21	4 7/8"	27/32"	10
05022633001	*182531*		5/32"	137	24	5 3/8"	1"	10
05022634001	*182548*		3/16"	154	27	6 1/16"	1 1/16"	10
05022635001	*182555*		7/32"	172	31	6 3/4"	1 1/4"	10
05022636001	*182562*		1/4"	185	34	7 1/4"	1 5/16"	10
05022637001	*182579*		5/16"	195	37	7 11/16"	1 7/16"	10
05022638001	*182586*		3/8"	224	42	9"	1 11/16"	10

950 SPKS L-key Multicolour, metric

- Short version

950 SPKS L-key Multicolour, metric

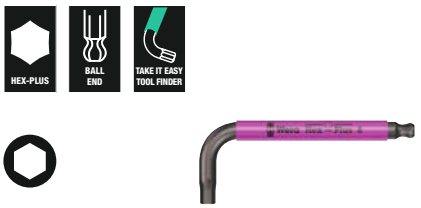

	EAN							
Code	4013288		mm	mm	mm			
05022678001	*211910*		1,5	50	14	2"	9/16"	10
05022670001	*211934*		2,0	56	16	2 7/32"	5/8"	10
05022671001	*211927*		2,5	63	19	2 1/2"	3/4"	10
05022672001	*211941*		3,0	71	21	2 3/4"	27/32"	10
05022673001	*211958*		4,0	80	24	3 1/8"	1"	10
05022674001	*211965*		5,0	90	27	3 1/2"	1 1/16"	10
05022675001	*211972*		6,0	100	31	4"	1 1/4"	10
05022676001	*211989*		8,0	112	37	4 7/16"	1 7/16"	10
05022677001	*211996*		10,0	125	42	5"	1 11/16"	10

950 SPKS L-key Multicolour, imperial, BlackLaser

- Short version
- Imperial

950 SPKS L-key Multicolour, imperial, BlackLaser



	EAN							
Code	4013288			mm	mm			
05022651001	*230201*		5/64"	50	14	2"	9/16"	10
05022652001	*230195*		3/32"	56	16	2 7/32"	5/8"	10
05022653001	*230218*		1/8"	63	19	2 1/2"	3/4"	10
05022654001	*230232*		5/32"	71	21	2 3/4"	27/32"	10
05022655001	*230249*		3/16"	80	24	3 1/8"	1"	10
05022656001	*230256*		7/32"	90	27	3 1/2"	1 1/16"	10
05022657001	*230263*		1/4"	100	31	4"	1 1/4"	10
05022658001	*230270*		5/16"	112	37	4 7/16"	1 7/16"	10
05022659001	*230287*		3/8"	125	42	5"	1 11/16"	10

950 PKL L-key, metric, chrome-plated

- High corrosion protection thanks to chrome-plating
- Hexagonal ballpoint on the long arm

950 PKL L-key, metric, chrome-plated





	EAN	⌀	L'	L	L'	L		
Code	4013288	mm	mm	mm				
05**022050**001 [1]	*018779*	1,5	90	14	3 1/2"	9/16"		10
05**022052**001	*018786*	2,0	100	16	4"	5/8"		10
05**022054**001	*018793*	2,5	112	18	4 7/16"	23/32"		10
05**022056**001	*018809*	3,0	126	20	5"	25/32"		10
05**022058**001	*018816*	4,0	140	25	5 1/2"	1"		10
05**022060**001	*018823*	5,0	160	28	6 5/16"	1 3/32"		10
05**022062**001	*018830*	6,0	180	32	7 1/16"	1 1/4"		10
05**022063**001	*037718*	7,0	190	34	7 1/2"	1 5/16"		10
05**022064**001	*018847*	8,0	200	36	8"	1 7/16"		10
05**022066**001	*018854*	10,0	219	40	8 11/16"	1 9/16"		10
05**022067**001	*038708*	12,0	248	45	10"	1 3/4"		5

[1] Regular hexagon

950 PKL BM L-key, metric, BlackLaser

- BlackLaser for high corrosion protection and long service life
- Hexagonal ballpoint on the long arm

950 PKL BM L-key, metric, BlackLaser





	EAN	⌀	L'	L	L'	L		
Code	4013288	mm	mm	mm				
05**027101**001 [1]	*094988*	1,5	90	14	3 1/2"	9/16"		10
05**027102**001	*094995*	2,0	100	16	4"	5/8"		10
05**027103**001	*095008*	2,5	112	18	4 7/16"	23/32"		10
05**027104**001	*095015*	3,0	126	19	5"	3/4"		10
05**027105**001	*095022*	4,0	140	25	5 1/2"	1"		10
05**027106**001	*095039*	5,0	160	28	6 5/16"	1 3/32"		10
05**027107**001	*095046*	6,0	180	32	7 1/16"	1 1/4"		10
05**027110**001	*095053*	7,0	190	34	7 1/2"	1 5/16"		10
05**027108**001	*095060*	8,0	200	36	8"	1 7/16"		10
05**027109**001	*095077*	10,0	219	40	8 11/16"	1 9/16"		10
05**027111**001	*095084*	12,0	248	45	10"	1 3/4"		5

[1] Regular hexagon

950 PKL L-key, imperial, BlackLaser





	EAN	⌀	L'	L	L'	L		
Code	4013288		mm	mm				
05**022079**001 [1]	*041203*	0,05"	83	14	3 1/4"	9/16"		10
05**022081**001 [1]	*041210*	1/16"	91	15	3 1/2"	19/32"		10
05**022068**001	*018861*	5/64"	100	16	4"	5/8"		10
05**022070**001	*018878*	3/32"	112	18	4 7/16"	23/32"		10
05**022071**001	*041227*	7/64"	119	19	4 3/4"	3/4"		10
05**022072**001	*018885*	1/8"	126	20	5"	25/32"		10
05**022073**001	*041234*	9/64"	132	23	5 3/16"	29/32"		10
05**022074**001	*018892*	5/32"	140	25	5 1/2"	1"		10
05**022076**001	*018908*	3/16"	160	25	6 5/16"	1"		10
05**022078**001	*018915*	7/32"	180	27	7 1/16"	1 1/16"		10
05**022080**001	*018922*	1/4"	190	34	7 1/2"	1 5/16"		10
05**022082**001	*018939*	5/16"	200	36	8"	1 7/16"		10
05**022095**001	*038739*	3/8"	212	38	8 3/8"	1 1/2"		5
05**022096**001	*038746*	1/2"	224	40	9"	1 9/16"		5

[1] Regular hexagon

950 PKLS Long Arm Ballpoint Hex Key, metric, chrome plated

- Extra-short arm for use on difficult-to-access screws

950 PKLS Long Arm Ballpoint Hex Key, metric, chrome plated





	EAN	⌀	L'	L	L'	L		
Code	4013288	mm	mm	mm				
05**022040**001 [1]	*139429*	1,5	90	4,5	3 1/2"	11/64"		10
05**022041**001	*139283*	2,0	100	5,5	4"	7/32"		10
05**022042**001	*139290*	2,5	112	6,5	4 7/16"	1/4"		10
05**022043**001	*139306*	3,0	126	7,5	5"	19/64"		10
05**022044**001	*139313*	4,0	140	10,0	5 1/2"	25/64"		10
05**022045**001	*139320*	5,0	160	12	6 5/16"	15/32"		10
05**022046**001	*139337*	6,0	180	15	7 1/16"	19/32"		10
05**022047**001	*139344*	8,0	200	19	8"	3/4"		10
05**022048**001	*139351*	10,0	219	22	8 5/8"	7/8"		10

[1] Regular hexagon

950 PKS L-key, metric, chrome-plated

- Short design for particularly confined screwdriving situations

950 PKS L-key, metric, chrome-plated



	EAN							
Code	4013288	mm	mm	mm				
05**133150**001 [1]	*098047*	1,5	50	14	2"	9/16"		10
05**133151**001	*098054*	2,0	56	16	2 7/32"	5/8"		10
05**133152**001	*098061*	2,5	63	18	2 1/2"	23/32"		10
05**133153**001	*098078*	3,0	71	20	2 3/4"	25/32"		10
05**133154**001	*098085*	4,0	80	22	3"	29/32"		10
05**133155**001	*098092*	5,0	90	25	3 1/2"	1"		10
05**133156**001	*098108*	6,0	100	28	4"	1 3/32"		10
05**133157**001	*098115*	8,0	112	32	4 7/16"	1 1/4"		10
05**133158**001	*098122*	10,0	125	36	5"	1 5/16"		10

[1] Regular hexagon

950 L HF L-key, metric, chrome-plated, with holding function

- The holding function on the long arm keeps screws securely on the tool

950 L HF L-key, metric, chrome-plated, with holding function



	EAN							
Code	4013288	mm	mm	mm				
05**022120**001	*207258*	3,0	126	20	5"	25/32"		10
05**022121**001	*207265*	4,0	140	25	5 1/2"	1"		10
05**022122**001	*207319*	5,0	160	28	6 5/16"	1 3/32"		10
05**022123**001	*207326*	6,0	180	32	7 1/16"	1 1/4"		10
05**022124**001	*207340*	8,0	200	36	8"	1 7/16"		10
05**022125**001	*207333*	10,0	219	40	8 11/16"	1 9/16"		5

950 L-key, metric, chrome-plated



	EAN							
Code	4013288	mm	mm	mm				
05**021600**001 [1]	*038722*	1,5	90	14	3 1/2"	9/16"		10
05**021605**001	*018656*	2,0	100	16	4"	5/8"		10
05**021610**001	*018663*	2,5	112	18	4 7/16"	23/32"		10
05**021615**001	*018670*	3,0	126	20	5"	25/32"		10
05**021620**001	*018687*	4,0	140	25	5 1/2"	1"		10
05**021625**001	*018694*	5,0	160	28	6 5/16"	1 3/32"		10
05**021630**001	*018700*	6,0	180	32	7 1/16"	1 1/4"		10
05**021632**001	*037701*	7,0	190	30	7 1/2"	1 1/4"		10
05**021635**001	*018717*	8,0	200	36	8"	1 7/16"		10
05**021640**001	*018724*	10,0	219	40	8 11/16"	1 9/16"		5
05**021645**001	*018731*	12,0	250	45	10"	1 3/4"		5

[1] Regular hexagon.

950 L-key, metric, chrome-plated



	EAN							
Code	4013288	mm	mm	mm				
05**021005**001 [1]	*018267*	1,5	45	14	1 3/4"	9/16"		10
05**021010**001	*018274*	2,0	50	16	2"	5/8"		10
05**021015**001	*018281*	2,5	56	18	2 7/32"	23/32"		10
05**021020**001	*018298*	3,0	63	20	2 1/2"	25/32"		10
05**021025**001	*018304*	3,5	66	23	2 5/8"	29/32"		10
05**021030**001	*018311*	4,0	70	25	2 3/4"	1"		10
05**021035**001	*018328*	4,5	75	26	3"	1 1/32"		10
05**021040**001	*018335*	5,0	80	28	3 1/8"	1 3/32"		10
05**021045**001	*018342*	6,0	90	32	3 1/2"	1 1/4"		10
05**021050**001	*018359*	7,0	95	34	3 3/4"	1 5/16"		10
05**021055**001	*018366*	8,0	100	36	4"	1 7/16"		10
05**021060**001	*018373*	9,0	106	38	4 3/16"	1 1/2"		10
05**021065**001	*018380*	10,0	112	40	4 7/16"	1 9/16"		10
05**021070**001	*018397*	11,0	120	43	4 3/4"	1 11/16"		10
05**021075**001	*018403*	12,0	125	45	5"	1 3/4"		10
05**021080**001	*018410*	13,0	132	50	5 3/16"	2"		10
05**021085**001 [1]	*018427*	14,0	140	56	5 1/2"	2 7/32"		10
05**021090**001 [1]	*018434*	17,0	160	63	6 5/16"	2 1/2"		5
05**021095**001 [1]	*018441*	19,0	180	70	7 1/16"	2 3/4"		5

[1] Regular hexagon.


950 BM L-key, metric, BlackLaser



	EAN							
Code	4013288	mm	mm	mm				
05**027201**001 [1]	*095381*	1,5	45	14	1 3/4"	9/16"		10
05**027202**001	*095398*	2,0	50	16	2"	5/8"		10
05**027203**001	*095541*	2,5	56	18	2 7/32"	23/32"		10
05**027204**001	*095404*	3,0	63	20	2 1/2"	25/32"		10
05**027205**001	*095411*	3,5	66	23	2 5/8"	29/32"		10
05**027206**001	*095428*	4,0	70	25	2 3/4"	1"		10
05**027207**001	*095435*	4,5	75	26	3"	1 1/32"		10
05**027208**001	*095442*	5,0	80	28	3 1/8"	1 3/32"		10
05**027209**001	*095459*	6,0	90	32	3 1/2"	1 1/4"		10
05**027210**001	*095466*	7,0	95	34	3 3/4"	1 5/16"		10
05**027211**001	*095473*	8,0	100	36	4"	1 7/16"		10
05**027213**001	*095480*	9,0	106	38	4 11/64"	1 1/2"		10
05**027212**001	*095497*	10,0	112	40	4 7/16"	1 9/16"		10
05**027214**001	*095503*	11,0	120	43	4 23/32"	1 11/16"		10
05**027215**001	*095510*	12,0	125	45	5"	1 49/64"		10

[1] Regular hexagon

Kraftform Stainless - stainless steel to prevent rust

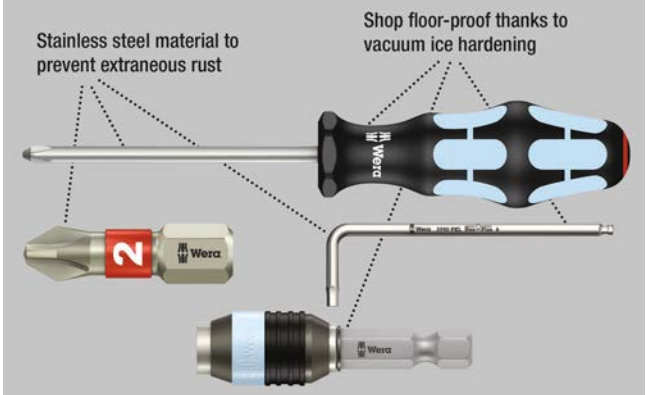

Set of high quality stainless steel L-keys for internal TORX® screws. Very corrosion-resistant due to ice-hardened stainless steel material of the L-key, avoiding the transmission of extraneous rust in stainless steel screw connections.

With holding function on the long arm: The clamping force resulting from the surface pressure between the output tip and the screw profile holds the screws securely on the tool.

With extra long arm for working in a low position.

The grip-friendly hose jacket facilitates screwdriving even at low temperatures. Take it easy tool finder with colour coding by size.

With a practical clip made of durable material for secure holding of the L-key while at the same time allowing easy removal.

- The holding function on the long arm keeps screws securely on the tool
- Extremely high corrosion protection thanks to ice-hardened stainless steel design
- Compact and easy to remove - stored in a 2-component plastic clip
- Handle-friendly hose jacket with tool finder Take it easy: Colour coding according to size

TORX® Tools with holding function



3967/9 TX SXL Multicolour HF Stainless 1 L-key set with holding function, stainless



Code	EAN 4013288			
050**22689**001	*207128*			1
			3967 SXL HF TORX® Multicolour 1x TX 8x90; 1x TX 9x101; 1x TX 10x112; 1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224	

967/9 TX XL Multicolour HF 1 L-key set with holding function, long

- With holding function (HF) on the long arm to securely hold the screw on the tool
- Long version
- Take it easy tool finder with colour coding according to sizes

967/9 TX XL Multicolour HF 1 L-key set with holding function, long



Code	EAN 4013288			
050**24470**001	*193537*			1
			967 SXL TORX® HF Multicolour 1x TX 8x90; 1x TX 9x101; 1x TX 10x112; 1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224	

967/9 TX Multicolour HF 1 L-key set with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool
- Take it easy tool finder with colour coding according to sizes

967/9 TX Multicolour HF 1 L-key set with holding function



Code	EAN 4013288			
050**24179**001	*185228*			1
			967 SL TORX® HF 1x TX 8x76; 1x TX 9x79; 1x TX 10x85; 1x TX 15x90; 1x TX 20x96; 1x TX 25x104; 1x TX 27x112; 1x TX 30x122; 1x TX 40x132	

967/9 TX XL HF 1 L-key set with holding function, long

- With holding function (HF) on the long arm to securely hold the screw on the tool
- Long version

967/9 TX XL HF 1 L-key set with holding function, long



Code	EAN 4013288			
050**24450**001	*193513*			1
			967 XL HF TORX® 1x TX 8x90; 1x TX 9x101; 1x TX 10x112; 1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224	

967/9 TX HF 1 L-key set with holding function, BlackLaser

- With holding function (HF) on the long arm to securely hold the screw on the tool

967/9 TX HF 1 L-key set with holding function, BlackLaser



Code	EAN 4013288			
050**24244**001	*104953*			10
			967 L TORX® HF 1x TX 8x76; 1x TX 9x79; 1x TX 10x85; 1x TX 15x90; 1x TX 20x96; 1x TX 25x104; 1x TX 27x112; 1x TX 30x122; 1x TX 40x132	

967/9 TX XL Multicolour 1 Multicolour L-key set for TORX® screws, long



Code	EAN 4013288			
050**24480**001	*193544*			1
			967 SXL TORX® Multicolour 1x TX 8x90; 1x TX 9x101; 1x TX 10x112	
			967 SPKXL TORX® Multicolour 1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224	

967/9 TX BO Multicolour 1 L-key set for tamper-proof TORX® screws, BlackLaser

- L-keys for TORX® BO screws to loosen safety connections

967/9 TX BO Multicolour 1 L-key set for tamper-proof TORX® screws, BlackLaser



Code	EAN 4013288			
05**024335**001	*180858*			10
			967 SPKL TORX® BO Multicolour 1x TX 8x76 [1]; 1x TX 9x79 [1]; 1x TX 10x85 [2]; 1x TX 15x90; 1x TX 20x96; 1x TX 25x104; 1x TX 27x112; 1x TX 30x122; 1x TX 40x132	

[1] Product without bore hole at the short and without ball-end at the long arm.
[2] Product without ball-end at the long arm.

967/9 TX BO Multicolour 1 SB L-key set for tamper-proof TORX® screws, BlackLaser



Code	EAN 4013288			
05**073599**001	*170125*		**967 SPKL TORX® BO Multicolour** 1x TX 8x76 [1]; 1x TX 9x79 [1]; 1x TX 10x85 [2]; 1x TX 15x90; 1x TX 20x96; 1x TX 25x104; 1x TX 27x112; 1x TX 30x122; 1x TX 40x132;	1

[1] Product without bore hole at the short and without ball-end at the long arm.
[2] Product without ball-end at the long arm.

967/9 TX XL 1 TORX® L-key set, long

- Long version

967/9 TX XL 1 TORX® L-key set, long



Code	EAN 4013288			
05**024460**001	*193520*			1
			967 XL TORX® 1x TX 8x90; 1x TX 9x101; 1x TX 10x112	
			967 PKXL TORX® 1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224	

967/9 TX 1 L-key set, BlackLaser



Code	EAN 4013288			
05**024242**001	*104946*			10
			967 PKL TORX® 1x TX 8x76 [1]; 1x TX 9x79 [1]; 1x TX 10x85 [1]; 1x TX 15x90; 1x TX 20x96; 1x TX 25x104; 1x TX 27x112; 1x TX 30x122; 1x TX 40x132	

[1] Product without ball-end at the long arm.


967/9 TX 1 SB L-key set, BlackLaser



Code	EAN 4013288			
05**073598**001	*106438*		**967 PKL TORX®** 1x TX 8x76 [1]; 1x TX 9x79 [1]; 1x TX 10x85 [1]; 1x TX 15x90; 1x TX 20x96; 1x TX 25x104; 1x TX 27x112; 1x TX 30x122; 1x TX 40x132	1

[1] Product without ball-end at the long arm.

Kraftform Stainless - stainless steel to prevent rust

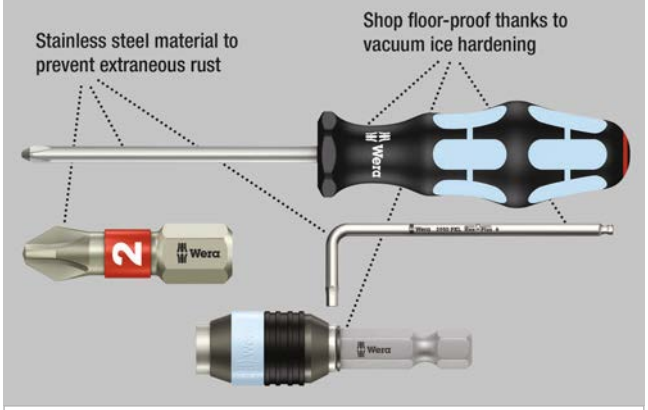

3967 SXL HF TORX® L-key Multicolour with holding function, long, stainless



	EAN							
Code	4013288			mm	mm			
05**022680**001	*207135*		TX 8	90	16	3 1/2"	5/8"	10
05**022681**001	*207142*		TX 9	101	16	4"	5/8"	10
05**022682**001	*207159*		TX 10	112	19	4 7/16"	3/4"	10
05**022683**001	*207166*		TX 15	123	21	4 7/8"	27/32"	10
05**022684**001	*207173*		TX 20	137	24	5 3/8"	1"	10
05**022685**001	*207180*		TX 25	154	27	6 1/16"	1 1/16"	10
05**022686**001	*207197*		TX 27	172	31	6 3/4"	1 1/4"	10
05**022687**001	*207203*		TX 30	195	37	7 11/16"	1 7/16"	10
05**022688**001	*207210*		TX 40	224	42	9"	1 11/16"	10

967 SXL HF TORX® L-key Multicolour with holding function, long

- With holding function (HF) on the long arm to securely hold the screw on the tool

967 SXL HF TORX® L-key Multicolour with holding function, long



	EAN							
Code	4013288			mm	mm			
05**024471**001	*194145*		TX 8	90	16	3 1/2"	5/8"	10
05**024472**001	*194152*		TX 9	101	16	4"	5/8"	10
05**024473**001	*194169*		TX 10	112	19	4 7/16"	3/4"	10
05**024474**001	*194176*		TX 15	123	21	4 7/8"	27/32"	10
05**024475**001	*194183*		TX 20	137	24	5 3/8"	1"	10
05**024476**001	*194190*		TX 25	154	27	6 1/16"	1 1/16"	10
05**024477**001	*194206*		TX 27	172	31	6 3/4"	1 1/4"	10
05**024478**001	*194213*		TX 30	195	37	7 11/16"	1 7/16"	10
05**024479**001	*194220*		TX 40	224	42	9"	1 11/16"	10

967 SPKXL TORX® L-key Multicolour, long

- Long design

967 SPKXL TORX® L-key Multicolour, long



	EAN							
Code	4013288			mm	mm			
05**024484**001	*194305*		TX 15	123	21	4 7/8"	27/32"	10
05**024485**001	*194312*		TX 20	137	24	5 3/8"	1"	10
05**024486**001	*194329*		TX 25	154	27	6 1/16"	1 1/16"	10
05**024487**001	*194336*		TX 27	172	31	6 3/4"	1 1/4"	10
05**024488**001	*194343*		TX 30	195	37	7 11/16"	1 7/16"	10
05**024489**001	*194350*		TX 40	224	42	9"	1 11/16"	10

967 SL TORX® HF L-key Multicolour with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool

967 SL TORX® HF L-key Multicolour with holding function



	EAN							
Code	4013288			mm	mm			
05**024170**001	*185235*		TX 8	76	16	3"	5/8"	5
05**024171**001	*185242*		TX 9	79	16	3 1/8"	5/8"	5
05**024172**001	*185259*		TX 10	85	17	3 1/4"	21/32"	5
05**024173**001	*185266*		TX 15	90	18	3 1/2"	23/32"	5
05**024174**001	*185273*		TX 20	96	19	3 3/4"	3/4"	5
05**024175**001	*185280*		TX 25	104	21	4 1/8"	27/32"	5
05**024176**001	*185297*		TX 27	112	22	4 7/16"	29/32"	5
05**024177**001	*185303*		TX 30	122	24	4 13/16"	1"	5
05**024178**001	*185310*		TX 40	132	27	5 3/16"	1 1/16"	5

967 SPKL TORX® BO L-key Multicolour

- L-key for TORX® socket screws with safety pin

967 SPKL TORX® BO L-key Multicolour



	EAN			L'	L	L'	L	
Code	4013288			mm	mm			
050**24350**001 [1]	*172679*		TX 8	76	16	3"	5/8"	10
050**24351**001 [1]	*172686*		TX 9	79	16	3 1/8"	5/8"	10
050**24352**001 [2]	*172693*		TX 10	85	17	3 3/8"	21/32"	10
050**24353**001	*172709*		TX 15	90	18	3 1/2"	23/32"	10
050**24354**001	*172716*		TX 20	96	19	3 3/4"	3/4"	10
050**24355**001	*172723*		TX 25	104	21	4 1/8"	27/32"	10
050**24356**001	*172730*		TX 27	112	22	4 7/16"	29/32"	10
050**24357**001	*172747*		TX 30	122	24	4 13/16"	1"	10
050**24358**001	*172754*		TX 40	132	27	5 3/16"	1 1/16"	10

[1] Product without bore hole at the short and without ball-end at the long arm.
[2] Product without ball-end at the long arm.

967 SXL TORX® L-key Multicolour, long

- Long version

967 SXL TORX® L-key Multicolour, long



	EAN			L'	L	L'	L	
Code	4013288			mm	mm			
050**24481**001	*194275*		TX 8	90	16	3 1/2"	5/8"	10
050**24482**001	*194282*		TX 9	101	16	4"	5/8"	10
050**24483**001	*194299*		TX 10	112	19	4 7/16"	3/4"	10

967 XL HF TORX® L-key with holding function, long

- With holding function (HF) on the long arm to securely hold the screw on the tool

967 XL HF TORX® L-key with holding function, long



	EAN		L'	L	L'	L		
Code	4013288		mm	mm				
050**24451**001	*193674*	TX 8	90	16	3 1/2"	5/8"		10
050**24452**001	*193681*	TX 9	101	16	4"	5/8"		10
050**24453**001	*193698*	TX 10	112	19	4 7/16"	3/4"		10
050**24454**001	*193704*	TX 15	123	21	4 7/8"	27/32"		10
050**24455**001	*193711*	TX 20	137	24	5 3/8"	1"		10
050**24456**001	*193728*	TX 25	154	27	6 1/16"	1 1/16"		10
050**24457**001	*193735*	TX 27	172	31	6 3/4"	1 1/4"		10
050**24458**001	*193742*	TX 30	195	37	7 11/16"	1 7/16"		10
050**24459**001	*193759*	TX 40	224	42	9"	1 11/16"		10

967 PKXL TORX® L-key, long

- TORX® ballpoint on the long arm

967 PKXL TORX® L-key, long



	EAN		L'	L	L'	L		
Code	4013288		mm	mm				
050**24464**001	*194084*	TX 15	123	21	4 7/8"	27/32"		10
050**24465**001	*194091*	TX 20	137	24	5 3/8"	1"		10
050**24466**001	*194107*	TX 25	154	27	6 1/16"	1 1/16"		10
050**24467**001	*194114*	TX 27	172	31	6 3/4"	1 1/4"		10
050**24468**001	*194121*	TX 30	195	37	7 11/16"	1 7/16"		10
050**24469**001	*194138*	TX 40	224	42	9"	1 21/32"		10

967 XL TORX® L-key, long

- Long design

967 XL TORX® L-key, long



	EAN							
Code	4013288		mm	mm				
05**024461**001	*194053*	TX 8	90	16	3 1/2"	5/8"		10
05**024462**001	*194060*	TX 9	101	16	4"	5/8"		10
05**024463**001	*194077*	TX 10	112	19	4 7/16"	3/4"		10

967 PKL TORX® L-key, BlackLaser

- TORX® ballpoint on the long arm

967 PKL TORX® L-key, BlackLaser



	EAN							
Code	4013288		mm	mm				
05**024199**001 [1]	*104939*	TX 8	76	16	3"	5/8"		5
05**024100**001 [1]	*035035*	TX 9	79	16	3 1/8"	5/8"		5
05**024105**001 [1]	*019431*	TX 10	85	17	3 3/8"	21/32"		5
05**024200**001	*019547*	TX 15	90	18	3 1/2"	23/32"		5
05**024202**001	*019554*	TX 20	96	19	3 3/4"	3/4"		5
05**024204**001	*019561*	TX 25	104	21	4 1/8"	27/32"		5
05**024206**001	*019578*	TX 27	112	22	4 7/16"	29/32"		5
05**024208**001	*019585*	TX 30	122	24	4 13/16"	1"		5
05**024210**001	*019592*	TX 40	132	27	5 3/16"	1 1/16"		5

[1] Product without ball-end at the long arm.

967 L TORX® HF L-key with holding function, BlackLaser

- With holding function (HF) on the long arm to securely hold the screw on the tool

967 L TORX® HF L-key with holding function, BlackLaser



	EAN							
Code	4013288		mm	mm				
05**024160**001	*104847*	TX 8	76	16	3"	5/8"		5
05**024161**001	*104922*	TX 9	79	16	3 1/8"	5/8"		5
05**024162**001	*104854*	TX 10	85	17	3 1/4"	21/32"		5
05**024163**001	*104861*	TX 15	90	18	3 1/2"	23/32"		5
05**024164**001	*104878*	TX 20	96	19	3 3/4"	3/4"		5
05**024165**001	*104885*	TX 25	104	21	4 1/8"	27/32"		5
05**024166**001	*104892*	TX 27	112	22	4 7/16"	29/32"		5
05**024167**001	*104908*	TX 30	122	24	4 13/16"	1"		5
05**024168**001	*104915*	TX 40	132	27	5 3/16"	1 1/16"		5

967 TORX® L-key, BlackLaser



	EAN							
Code	4013288		mm	mm				
05**024001**001	*019257*	TX 6	42	16	1 5/8"	5/8"		5
05**024002**001	*019264*	TX 7	48	16	1 7/8"	5/8"		5
05**024003**001	*019271*	TX 8	48	16	1 7/8"	5/8"		5
05**024004**001	*019288*	TX 9	48	16	1 7/8"	5/8"		5
05**024005**001	*019295*	TX 10	51	17	2"	21/32"		5
05**024008**001	*019301*	TX 15	54	18	2 1/8"	23/32"		5
05**024010**001	*019318*	TX 20	57	19	2 1/4"	3/4"		5
05**024012**001	*019325*	TX 25	60	20	2 3/8"	25/32"		5
05**024013**001	*019332*	TX 27	64	21	2 1/2"	27/32"		5
05**024015**001	*019349*	TX 30	70	24	2 3/4"	1"		5
05**024020**001	*019356*	TX 40	76	26	3"	1 1/32"		5



Kraftform Kompakt



Kraftform Kompakt 20 RA-R

Kraftform handle with magazine for 6 bits integrated in the handle; with telescopic blade; for 1/4" hex drive bits.

The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

The telescopic blade with Rapidaptor quick-release chuck, which can be retracted into the handle, allows quick manual screwdriving even in confined working situations when the blade is retracted. The blade can be extended by simply pressing the locking sleeve. The tool can now be used as a fully-fledged screwdriver. The telescopic blade can be removed and used as a machine adapter, as well as returned to its original position.

The Rapidaptor technology of the bit holder makes for a quick bit change.

Includes 6 BiTorsion bits for long product life, tough, for universal use; stored in the bit magazine integrated in the handle.

The strong permanent magnet in the 1/4" bit mounting ensures a secure hold of the bit. The 2-component Kraftform handle with the combination of hard and soft zones allows for a firm grip and precise working. With a robust pouch.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Integrated bit magazine with 6x 25 mm bits
- BiTorsion Bits
- Take it easy tool finder: colour coding according to profile and size
- Innovative Rapidaptor technology for a quick bit change

Kraftform Kompakt 20 RA-R



Code	EAN 4013288			
05**051513**001	*233981*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 20x25; 1x TX 25x25	
			800/1 BTZ 1x 0,8x5,5x25	

Kraftform Kompakt 20 RA-R with pouch

- In practical and robust belt pouch

Kraftform Kompakt 20 RA-R with pouch



Code	EAN 4013288			
05**051514**001	*234001*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 20x25; 1x TX 25x25	
			800/1 BTZ 1x 1,0x5,5x25	

Kraftform Kompakt 25 RA-R with pouch

- In practical and robust belt pouch

Kraftform Kompakt 25 RA-R with pouch



Code	EAN 4013288			
05**051515**001	*234018*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			800/1 BTZ 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Kraftform Kompakt 26 RA-R with pouch

- In practical and robust belt pouch

Kraftform Kompakt 26 RA-R with pouch



Code	EAN 4013288			
05**051516**001	*234025*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			800/1 BTZ 1x 0,8x5,5x25; 1x 1,2x6,5x25	
			868/1 Z 1x # 1x25; 1x # 2x25	

Kraftform Kompakt 27 RA 1

Kraftform bitholding screwdriver for 1/4" hex drive bits.


The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

Includes 6 BiTorsion bits for a long product life, tough, for universal use; stored in the bit magazine integrated in the handle.

The strong permanent magnet in the 1/4" bit mounting ensures secure holding of the bit. The 2-component Kraftform handle with the combination of hard and soft zones allows for a firm grip and precise working.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Integrated bit magazine with 6x 25 mm bits
- BiTorsion Bits
- Take it easy tool finder: colour coding according to profile and size
- Universal holder with stainless sleeve and strong permanent magnet

Kraftform Kompakt 27 RA 1

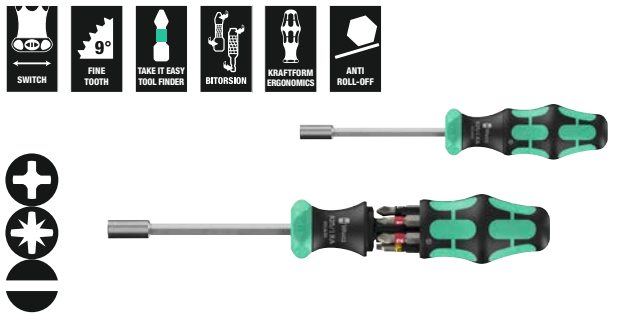

Code	EAN 4013288			
05**051517**001	*233974*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			800/1 BTZ 1x 1,0x5,5x25; 1x 1,2x6,5x25	


Kraftform Kompakt 27 RA 2

- Tough viscous bits for universal use

Kraftform Kompakt 27 RA 2





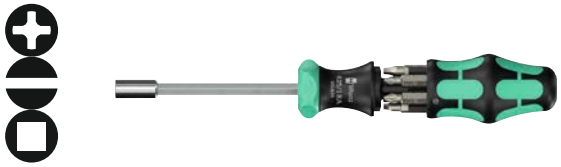

Code	EAN 4013288			
05**051518**001	*233967*			1
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			868/1 Z 1x # 1x25; 1x # 2x25	

Kraftform Kompakt 28 RA 1

- Universal holder with stainless sleeve and strong permanent magnet

Kraftform Kompakt 28 RA 1








Code	EAN 4013288			
05**051519**001	*234032*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 20x25; 1x TX 25x25	
			800/1 BTZ 1x 0,8x5,5x25	

Kraftform Kompakt 28 RA with pouch

- In practical and robust belt pouch

Kraftform Kompakt 28 RA with pouch







Code	EAN 4013288			
05**051520**001	*234049*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 20x25; 1x TX 25x25	
			800/1 BTZ 1x 0,8x5,5x25	

Kraftform Kompakt 60 RA-R 1

17-piece set with 89 mm long bits in a practical folding pouch.

Includes one 838 RA-R L bitholding screwdriver with ratchet functionality. The ratchet with fine toothing integrated in the handle allows fast working. The innovative ratchet mechanism allows “spinning” when the screw offers little resistance. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

The Rapidaptor quick-release chuck (suitable for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173)) allows for lightning-fast bit changes without any extra tools.

16 bits (89 mm), tough, for universal use.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Use position 0 to deactivate the ratchet mechanism for precise working
- In a robust folding pouch with Wera 2go compatibility

Kraftform Kompakt 60 RA-R 1



Code	EAN 4013288			
05**051530**001	*234056*			1
			838 RA-R L 1x 1/4"x140	
			851/4 Z 1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1]	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [1]	
			867/4 Z TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			840/4 Z 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1]	
			800/4 Z 1x 1,0x5,5x89	


[1] Hexagonal blade

Kraftform Kompakt 60 RA-R Imperial 1

- 16 bits, 89 mm long, for Phillips, TORX® BO, hexagonal socket, square head and slotted

Kraftform Kompakt 60 RA-R Imperial 1



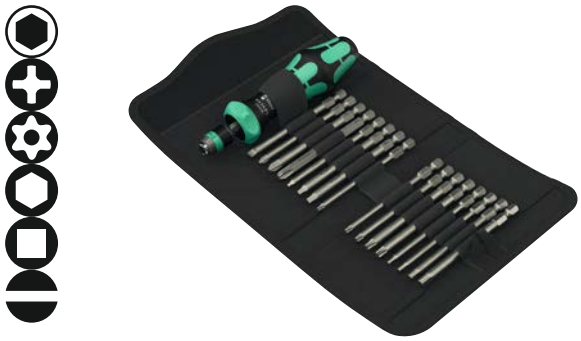

Code	EAN 4013288			
05**051531**001	*234063*			1
			838 RA-R L 1x 1/4"x140	
			851/4 Z 1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1]	
			867/4 Z TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			840/4 Z 1x 3/32"x89; 1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89	
			868/4 1x # 1x89; 1x # 2x89; 1x # 3x89	
			800/4 Z 1x 1,0x5,5x89	

[1] Hexagonal blade

Kraftform Kompakt 400 RA Set 1

17-piece set in a robust textile box. One 416 RA T-handle bitholding screwdriver with ratchet function and Rapidaptor quick-release chuck for ¼" bits. The integrated ratchet with fine toothing (80 teeth/return angle 4.5°) eases and accelerates screwdriving without having to reposition the tool. The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work.

With reversing lever for comfortable clockwise/counterclockwise direction change in one-hand operation. The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips. The whole hand comes into contact with the handle, friction loss between hand and handle is avoided.

Bit holder for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3. With Rapidaptor technology for lightning-fast bit changes. 16 tough bits, ¼", 89 mm long, for universal use.

- The integrated ratchet with fine toothing ensures fast and safe working
- Convenient working thanks to the ratchet mechanism fully embedded in the handle
- Rapidaptor bitholding screwdriver with fast-rotating sleeve for lightning-fast bit changes and high working speeds
- Fast-rotating sleeve for extremely high working speed
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3

Kraftform Kompakt 400 RA Set 1





Code	EAN 4013288			
05**023471**001	*222879*			1
			416 RA 1x 1/4"x45	
			851/4 Z 1x PH 2x89; 1x PH 3x89[1]	
			855/4 Z 1x PZ 2x89; 1x PZ 3x89[1]	
			867/4 Z TORX® 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89; 1x TX 40x89	
			840/4 Z 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1]; 1x 8,0x89[1]	
			800/4 Z 1x 1,0x5,5x89	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1] Hexagonal blade

Kraftform Kompakt 400 RA Imperial Set 1



Code	EAN 4013288			
05**057473**001	*222930*			1
			416 RA 1x 1/4"x45	
			851/4 Z 1x PH 2x89; 1x PH 3x89[1)]	
			867/4 Z TORX® 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89; 1x TX 40x89	
			840/4 Z 1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89; 1x 7/32"x89; 1x 1/4"x89	
			868/4 1x # 2x89; 1x # 3x89	
			800/4 Z 1x 1,0x5,5x89	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1)] Hexagonal blade

Kraftform Kompakt 400 RA Set 2

9-piece set in a robust textile box. One 411 A RA T-handle adapter screwdriver with ratchet function for 1/4" sockets.

The integrated ratchet with fine toothing (80 teeth/return angle 4.5°) eases and accelerates screwdriving without having to reposition the tool. The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work.

With reversing lever for comfortable clockwise/counterclockwise direction change in one-hand operation. The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips.

The whole hand comes into contact with the handle, friction loss between hand and handle is avoided. For 1/4" sockets as well as 1/4" connectors with square head drive, with ball lock. 8 Zyklop sockets with 1/4" drive.

Take it easy tool finder: With colour coding by size – for quick and easy identification of the required tool .

- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- The integrated ratchet with fine toothing ensures fast and safe working
- Reversing lever for comfortable clockwise/counterclockwise direction change
- Convenient working thanks to the ratchet mechanism fully embedded in the handle
- Fast-rotating sleeve for extremely high working speed
- 1/4" socket mounting with secure ball lock
- With Take it easy tool finder: colour coding by size

Kraftform Kompakt 400 RA Set 2



Code	EAN 4013288			
05**023470**001	*222862*			1
			411 A RA 1x 1/4"x45	
			8790 HMA 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Kraftform Kompakt 400 RA Imperial Set 2



Code	EAN 4013288			
05**057474**001	*223364*			1
			411 A RA 1x 1/4"x45	
			8790 HMA 1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Kraftform Kompakt 400 RA SHK Set 1

- Set especially for HVAC applications

Kraftform Kompakt 400 RA SHK Set 1



Code	EAN 4013288			
05**136072**001	*228369*			1
			416 RA 1x 1/4"x45	
			816 R 1x 1/4"x119	
			851/4 Z 1x PH 2x89	
			855/4 Z 1x PZ 2x89	
			855/4 PZ/S 1x # 1x70; 1x # 2x70	
			867/4 Z TORX® 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			840/4 Z 1x 2,0x89; 1x 2,5x89; 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1]	
			869/4 M 1x 8,0x50,0; 1x 10,0x50,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1] Hexagonal blade

Kraftform Kompakt 838 RA S Set 1

14-piece ratchet screwdriver set. Bitholding screwdriver with intuitive ratchet functionality. Turning the tool speeds up work. The ratchet mechanism completely embedded in the handle ensures very handy and effortless work. Ergonomic switching to clockwise/counterclockwise or position 0. Kraftform Plus handle for ergonomic screwdriving, avoiding blisters and calluses. Magnetic bitholding screwdriver for bits with 1/4" external hexagon drive.

13 tough bits for universal use (Phillips-head Phillips and Pozidriv, TORX®, hexagonal socket and slotted), 50 mm length; chemically nickel-plated, with Take it easy Tool finder: With size stamping and colour coding by output to help you find the required bit easily.

- Extremely small bitholding screwdriver for bits with 1/4" external hexagon drive
- Ratchet mechanism integrated in the handle
- The integrated ratchet with fine toothing ensures fast and safe working
- High working speed: The ratchet mechanism allows to “spin” when screwdriving
- Ergonomic intuitive switching to clockwise/counterclockwise or position 0
- Strong permanent magnet in the bit mounting holds the bits firmly
- Take it easy tool finder: colour coding according to profile and size
- Suitable for docking with the Wera 2go system

Kraftform Kompakt 838 RA S Set 1



Code	EAN 4013288			
05**051060**001	*229755*			1
			838 RA S 1x 1/4"x102	
			851/4 BTZ 1x PH 1x50; 1x PH 2x50	
			855/4 BTZ 1x PZ 1x50; 1x PZ 2x50	
			867/4 TORX® BTZ 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50	
			840/4 BTZ 1x 2,5x50; 1x 3,0x50; 1x 4,0x50; 1x 5,0x50	
			800/4 BTZ 1x 0,8x5,5x50	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 838 RA S Imperial Set 1



Code	EAN 4013288			
05**051065**001	*229816*			1
			838 RA S 1x 1/4"x102	
			851/4 BTZ 1x PH 1x50; 1x PH 2x50	
			867/4 TORX® BTZ 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50	
			840/4 Z 1x 9/64"x50; 1x 5/32"x50; 1x 3/16"x50; 1x 7/32"x50	
			800/4 BTZ 1x 0,8x5,5x50	
			868/4 1x # 1x50; 1x # 2x50	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 838 RA-R M Set 1

15-piece ratchet screwdriver set. Bitholding screwdriver with intuitive ratchet functionality. The ratchet mechanism with fine toothing integrated in the handle (36 teeth/return angle 10°) eases and accelerates screwdriving without having to reposition the tool. Spinning the tool is also possible. The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work. Ergonomic switching to clockwise/counter-clockwise or position 0.

Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Magnetic bitholding screwdriver for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

The Rapidaptor quick-release chuck allows lightning-fast bit changes without any extra tools. The strong permanent magnet holds the bits firmly. 13 tough bits for universal use (Phillips-head Phillips and Pozidriv, TORX®, slotted and hexagonal socket), 89 mm length; chemically nickel-plated.

- Bitholding screwdriver with Rapidaptor quick-release chuck for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4
- Rapidaptor holder for rapid bit change
- In robust folding pouch with Wera 2go compatibility

Kraftform Kompakt 838 RA-R M Set 1



Code	EAN 4013288			
05**051061**001	*229779*			1
		◉	**838 RA-R M** 1x 1/4"x123,5	
		✚	**851/4 Z** 1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1]	
		✪	**855/4 Z** 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [1]	
		✪	**867/4 Z TORX®** 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89	
		○	**840/4 Z** 1x 3,0x89; 1x 4,0x89; 1x 5,0x89	
		▬	**800/4 Z** 1x 1,0x5,5x89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[1] Hexagonal blade

Kraftform Kompakt 838 RA-R M Imperial Set 1



Code	EAN 4013288			
05**051066**001	*229823*			1
		◉	**838 RA-R M** 1x 1/4"x123,5	
		✚	**851/4 Z** 1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1]	
		✪	**867/4 Z TORX®** 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89	
		○	**840/4 Z** 1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89	
		▬	**800/4 Z** 1x 1,0x5,5x89	
		▢	**868/4** 1x # 1x89; 1x # 2x89; 1x # 3x89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[1] Hexagonal blade

Kraftform Kompakt Pistol RA-R 1

Kraftform pistol handle for 1/4" hex drive bits.

The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

The Rapidaptor technology of the bitholding screwdriver makes for a quick bit change.

Includes 6 BiTorsion bits for a long product life, tough, for universal use; stored in the bit magazine integrated in the handle.

The strong permanent magnet in the 1/4" bit mounting ensures secure holding of the bit. The 2-component Kraftform pistol handle allows for high leverage. The robust holster can be attached to the belt.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Integrated bit magazine with 6x 25 mm bits
- BiTorsion Bits
- Take it easy tool finder: colour coding according to profile and size
- Innovative Rapidaptor technology for a quick bit change
- The robust holster can be attached to the belt

Kraftform Kompakt Pistol RA-R 1





Code	EAN 4013288			
05**051535**001	*234087*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 20x25; 1x TX 25x25	
			814 RA-R 1x 1/4"	

Kraftform Kompakt Pistol RA-R 2

- 6x25mm bits with Take it easy tool finder: colour coding by profile and size stamping
- 6x89mm bits, tough viscous bits for universal use

Kraftform Kompakt Pistol RA-R 2



Code	EAN 4013288			
05**051536**001	*234094*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 20x25; 1x TX 25x25	
			851/4 Z 1x PH 1x89; 1x PH 2x89	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89	
			867/4 Z TORX® 1x TX 20x89; 1x TX 25x89	
			814 RA-R 1x 1/4"	

Kraftform Kompakt Stubby magazine RA 1

Particularly small bit holder with short bit mounting for hard-to-reach areas.


The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

Includes 6 BiTorsion bits for a long product life, tough, for universal use. With Take it easy tool finder: with size stamping and colour coding by output to help you find the required bit easily.

The strong permanent magnet in the bit mounting ensures secure holding of the bit. The 2-component Kraftform handle with the practical combination of hard and soft zones allows for a firm grip and precise working.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- With 6 BiTorsion bits in the magazine: Phillips, TORX® and slotted; tough
- Take it easy tool finder: colour coding according to profile and size

Kraftform Kompakt Stubby magazine RA 1

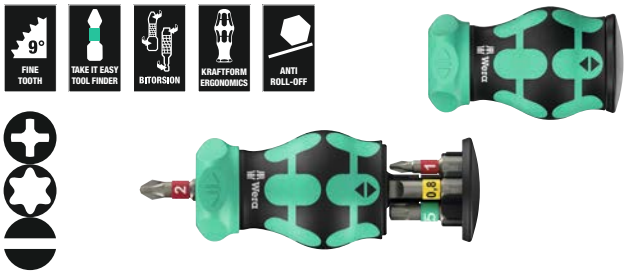

Code	EAN 4013288			
05**008891**001	*233936*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			867/1 TORX® BTZ 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			800/1 BTZ 1x 0,8x5,5x25	

Kraftform Kompakt Stubby magazine RA 2

- With 6 BiTorsion bits in the magazine: Phillips and Pozidriv, TORX® and slotted; tough

Kraftform Kompakt Stubby magazine RA 2



Code	EAN 4013288			
05**008892**001	*233943*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 25x25	
			800/1 BTZ 1x 0,8x5,5x25	

Kraftform Kompakt Stubby magazine RA 4

- With 6 bits in the magazine: cross recess Phillips, slotted and square head (Robertson); tough

Kraftform Kompakt Stubby magazine RA 4



Code	EAN 4013288			
05**008893**001	*233950*			1
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			868/1 Z 1x # 1x25; 1x # 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Bicycle Set 5

- Stainless Steel Bits
- Take it easy tool finder: colour coding according to profile and size
- Bicycle tool set

Bicycle Set 5



Code	EAN 4013288			
05**004186**001	*233929*			1
			3851/1 TS PH 1x PH 1x25	
			3867/1 TS TORX® 1x TX 10x25; 1x TX 25x25	
			3840/1 TS 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25	

Kraftform Kompakt Vario RA

7-piece blade set.

One Kraftform bitholding screwdriver with 6 mm hexagonal blade mounting for combination blades (double blades) from the Wera Vario range.

The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving.
Use position 0 to deactivate the ratchet mechanism for precise working.

The 2-component Kraftform handle with the combination of hard and soft zones allows for a firm grip and precise working.

6 Wera Vario double blades (= 12 different profiles), 175 mm long, 6 mm hexagonal.

In a robust folding pouch.

- Kraftform bitholding screwdriver with 6 mm hexagonal blade mounting for combination blades (double blades) from the Wera Vario range
- The ratchet with fine toothing integrated in the handle allows fast working
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Use position 0 to deactivate the ratchet mechanism for precise working
- Includes 6 Vario double-end blades
- In a robust folding pouch with Wera 2go compatibility

Kraftform Kompakt Vario RA



Code	EAN 4013288			
05**051540**001	*234070*			1
			80 RA 1x 6x113,5	
			85 1x PH 1xPH 2x175	
			86 1x PZ 1xPZ 2x175	
			84 1x 4x5x175 [1]	
			87 1x TX 10xTX 15x175; 1x TX 20xTX 25x175	
			81 1x 0,6x4,0x1,0x6,0x175	

[1] without ball-end

838 RA-R Bitholding screwdriver with ratchet functionality, 1/4"

Premium bitholding screwdriver. Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer.

Suitable for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3.

- Bitholding screwdriver with Rapidaptor quick-release chuck for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4
- Ratchet mechanism integrated in the handle
- The integrated ratchet with fine toothing ensures fast and safe working
- High working speed: The ratchet mechanism allows to “spin” when screwdriving
- Ergonomic intuitive switching to clockwise/counterclockwise or position 0
- Rapidaptor holder for rapid bit change
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Hexagonal anti-roll feature against rolling away
- Magnetic

838 RA-R L Bitholding screwdriver with ratchet functionality, 1/4"



Code	EAN 4013288		mm	mm				
05**051494**001	*233608*	1/4"	140	111				1

838 RA-R M Bitholding screwdriver with ratchet functionality, 1/4"



	EAN							
Code	4013288		mm	mm				
05**051493**001	*229748*	1/4"	123,5	98				1

838 RA S Bitholding screwdriver with ratchet functionality, 1/4"

- Extremely small bitholding screwdriver for bits with 1/4" external hexagon drive
- Strong permanent magnet in the bit mounting holds the bits firmly
- Universal holder for the take-up of bits with 1/4" hexagon head drive

838 RA S Bitholding screwdriver with ratchet functionality, 1/4"



	EAN							
Code	4013288		mm	mm				
05**051492**001	*229731*	1/4"	102	84				1

80 RA Vario blade holding handle with ratchet functionality

- Kraftform bitholding screwdriver with 6 mm hexagonal blade mounting for combination blades (double blades) from the Wera Vario range
- Not suitable for bits with 1/4" hex drive
- The ratchet with fine toothing integrated in the handle allows fast working
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Use position 0 to deactivate the ratchet mechanism for precise working
- Ergonomic Kraftform handle for low-fatigue working

80 RA Vario blade holding handle with ratchet functionality



	EAN							
Code	4013288	mm	mm					
05**051495**001	*233998*	6	113,5					1

Kraftform Kompakt Turbo 1

Many users would like to be able to carry out screwdriving processes faster without compromise. With a screwdriver that is precise, allows powerful screwdriving, and is much faster than a conventional screwdriver.

A part-time universal gear is the solution: Integrated in the screwdriver handle, it quadruples the working speed with smooth couplings - purely mechanically.

One hand holds the front part of the handle, the other hand turns the rear part of the handle. The turbo function can be switched on or off at the push of a button.

Turning it off is recommended for tightening and loosening with high torque, e.g. for screw connections in wood, as well as for fine adjustments. Robust, maintenance-free gear made of steel with a maximum torque of 14Nm when the turbo function is deactivated.

Thanks to the Rapidaptor bit holder, the Kraftform Turbo can be used with all conventional 1/4" hexagon bits for a wide variety of screw profiles.

With the Rapidaptor function the bits can be inserted directly and can be easily removed by pushing the sleeve forward.

- 4 times the screwdriving speed thanks to the turbo function (purely mechanical - without battery)
- Activate and deactivate the turbo function by a simple push of a button
- Turbo function especially for smooth couplings
- Can be used without the turbo function like a normal screwdriver, e.g. for timber couplings with steadily increasing torque
- Robust, maintenance-free gear made of steel

Kraftform Kompakt Turbo 1





Code	EAN 4013288			
05**057482**001	*214614*			1
		◉	**826 T Kraftform Turbo** 1x 1/4"x146	
		✪	**851/4 Z** 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
		✪	**855/4 Z** 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1)]	
		✪	**867/4 Z TORX®** 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
		○	**840/4 Z** 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1)]	
		⊖	**800/4 Z** 1x 0,8x4,0x89; 1x 1,0x5,5x89; 1x 1,2x6,5x89	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1)] Hexagonal blade

Kraftform Kompakt Turbo Imperial 1





Code	EAN 4013288			
05**057483**001	*214621*			1
		◉	**826 T Kraftform Turbo** 1x 1/4"x146	
		✪	**851/4 Z PH** 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
		✪	**867/4 Z TORX®** 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
		○	**840/4 Z Hex-Plus** 1x 3/32"x89; 1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89	
		▢	**868/4 Square-Plus** 1x # 1x89; 1x # 2x89; 1x # 3x89	
		⊖	**800/4 Z** 1x 0,8x4,0x89; 1x 1,0x5,5x89; 1x 1,2x6,5x89	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1)] Hexagonal blade

826 T Kraftform Turbo bits handholder with Rapidaptor quick-release chuck

- 4 times the screwdriving speed thanks to the turbo function (purely mechanical - without battery)
- Activate and deactivate the turbo function by a simple push of a button
- Turbo function especially for smooth couplings
- Can be used without the turbo function like a normal screwdriver, e.g. for timber couplings with steadily increasing torque
- Robust, maintenance-free gear made of steel

826 T Kraftform Turbo bits handholder with Rapidaptor quick-release chuck



Code	EAN							
	4013288		mm					
05**057480**001	*214591*	1/4"	146					1

Kraftform Kompakt 10, 12

9 tough viscous Wera bits for universal use. Torsion design to combat premature wear.

1 holder 813 R Kraftform with Rapidaptor quick-release chuck; multi-component for high working speeds and particularly ergonomic screwdriving.

- Kraftform holder with Rapidaptor quick-release chuck
- Torsion design of the bits against premature wear
- Tough viscous bits for universal use
- Convenient and robust storage

Kraftform Kompakt 10



Code	EAN		
	4013288		
05**056653**001	*041647*		1
		813 R 1x 1/4"x90	
		851/1 TZ PH 1x PH 1x25; 1x PH 2x25	
		855/1 TZ PZ 1x PZ 1x25; 1x PZ 2x25	
		867/1 TZ TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25	
		800/1 TZ 1x 0,5x4,0x25; 1x 1,0x5,5x25	

Kraftform Kompakt 12




Code	EAN		
	4013288		
05**135942**001	*155887*		1
		813 R 1x 1/4"x90	
		851/1 J 1x PH 00x25x2,0 [1]; 1x PH 0x25x2,5 [2]; 1x PH 1x25x3,0	
		851/1 TZ PH 1x PH 2x25	
		867/1 TZ TORX® 1x TX 5x25; 1x TX 6x25; 1x TX 7x25; 1x TX 8x25; 1x TX 9x25	

[1] Size 00 modificated according to JCIS 00 (Japanese Camera Industrial Standard)

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Kraftform Kompakt 20 - the right tool for machine or hand

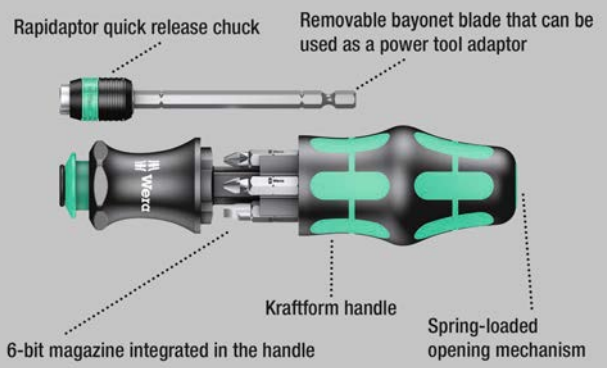

Wera compact tools enable the simultaneous use for the two types of fastening “manual” and “power tool”. The handle/interchangeable system in a compact design with various blade tips in a minimum of space make the user mobile and flexible.


Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 und E 6.3 (ISO 1173) and Wera connecting series 1 and 4. Comes with an extension, bayonet, Rapidaptor technology.

Kraftform handle with non-roll feature, multi-component for particularly ergonomic screwdriving. Integrated magazine for the storage of the bits. In this way, this set replaces a 6-piece screwdriver set and reduces the equipment required to a minimum.


The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

- Kraftform holder with bayonet blade and Rapidaptor quick-release chuck
- Kraftform handle with anti-roll feature, multi-component and integrated magazine
- Retractable bayonet blade
- Take it easy tool finder: colour coding according to profile and size
- In robust pouch

Take it easy tool finder with color markings - for quick tool identification

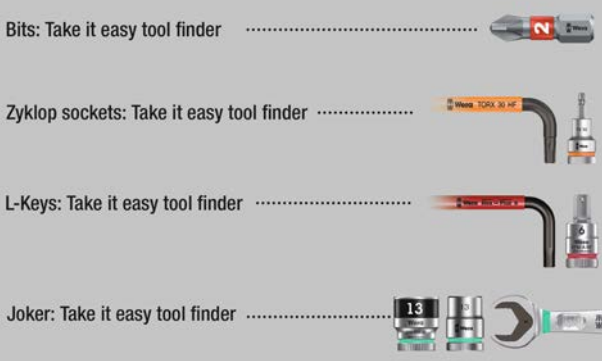

Kraftform Kompakt 20 Tool Finder 1 with pouch

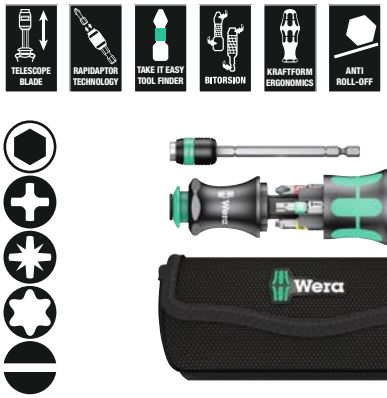

Code	EAN 4013288			
05**051016**001	*185327*			1
			889/4 R 1x 1/4"x100	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 25x25	
			800/1 BTZ 1x 0,8x5,5x25	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 20 Tool Finder 2 with pouch

13-piece Kraftform Kompakt set with 6x 25 mm long and 6x 89 mm long bits. Wera's compact tools allow the simultaneous use of both types of screw connections; "hand" or "machine".

The handle blade-change system in a compact design with different compact blade tips makes the user mobile and flexible. Suitable for bits with ¼" hexagonal drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173) and Wera connection series 1 and 4.

With connecting adapter, bayonet, Rapidaptor technology, Kraftform handle with anti-roll protection, multi-components allow for particularly ergonomic screwdriving. Integrated magazine for storing 25 mm long bits.

This set replaces a 12-piece screwdriver set and reduces the necessary equipment to a minimum.

Profile and size of the bits are easily recognizable due to the Wera Take it easy tool finder with its colour coding and easily visible labels.

- 6x25mm bits with Take it easy tool finder: colour coding by profile and size stamping and 6x89mm bits

Kraftform Kompakt 20 Tool Finder 2 with pouch



Code	EAN 4013288			
05**051017**001	*211224*			1
			889/4 R 1x ¼"x100	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 20x25; 1x TX 25x25	
			851/4 Z 1x PH 1x89; 1x PH 2x89	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89	
			867/4 Z TORX® 1x TX 20x89; 1x TX 25x89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 20 with pouch



Code	EAN 4013288			
05**051021**001	*098917*			1
			889/4 R 1x ¼"x100	
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			855/1 Z 1x PZ 1x25; 1x PZ 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 25 with pouch



Code	EAN 4013288			
05**051024**001	*098931*			1
			889/4 R 1x 1/4"x100	
			851/1 Z 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			800/1 Z 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 26 with pouch



Code	EAN 4013288			
05**051025**001	*098948*			1
			889/4 R 1x 1/4"x100	
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			868/1 Z 1x # 1x25; 1x # 2x25	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 27 XL Universal 1


Bit set for universal use. Bitholding screwdriver with 300 mm long blade and very slim, lockable bit mounting to reach areas which are difficult to access.

Thanks to the particularly slim design, even screws in very tight installation spaces can be operated. Multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving. Magazine integrated in the handle for bit storage.

6 tough, 25 mm length bits (Phillips-head Phillips and Pozidriv and TORX®). This set replaces a 6-piece screwdriver set and reduces the necessary equipment to a minimum. With hexagon anti-roll protection against rolling away.

- For universal use
- 300 mm long rigid blade
- Bit holder with very slim design for work in confined spaces
- Secure bit holding feature due to locking mechanism. With strong permanent magnet.
- Compact stainless steel holder for bits with 1/4"- external hexagon drive as per DIN 3126, ISO 1173 Form C 6.3 and E 6,3
- 6 tough bits, for universal use

Kraftform Kompakt 27 XL Universal 1

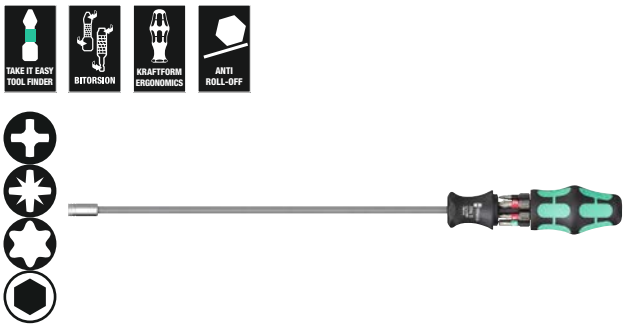


Code	EAN 4013288			
05**051028**001	*229588*			1
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			394 S 1x 1/4"x300	

Kraftform Kompakt 27 XL Universal Imperial Set 1

- With 6 bits in the magazine: Phillips-head Phillips, slotted and square head (Robertson); tough

Kraftform Kompakt 27 XL Universal Imperial Set 1

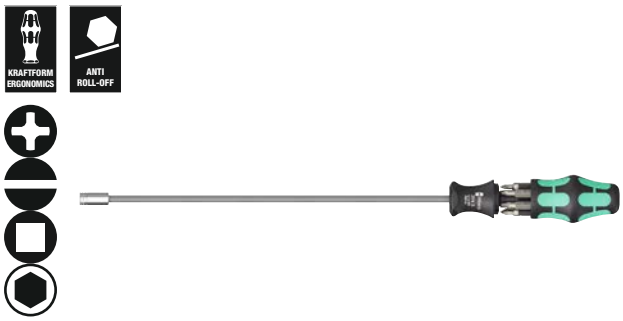

Code	EAN 4013288			
05**051032**001	*229724*			1
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			868/1 Z 1x # 1x25; 1x # 2x25	
			394 S 1x 1/4"x300	

Kraftform Kompakt 27 XL SHK 1

- Particularly suitable for applications in plumbing, heating and air conditioning

Kraftform Kompakt 27 XL SHK 1



Code	EAN 4013288			
05**136075**001	*228994*			1
			851/1 Z 1x PH 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 Z 1x 5,0x25; 1x 6,0x25	
			394 S 1x 1/4"x300	

Kraftform Kompakt 27 Set 1

Wera compact tools with multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving. Bit magazine integrated in the handle, 6 bits with Torsion zone to prevent the bit tip from twisting at high loads. This significantly increases product life.

With Take it easy tool finder: Colour coding by profile and size stamping. Bit holder with strong permanent magnet for secure seating of the bit.

- Bit-holding handle with bit magazine
- Bit holder with strong permanent magnet which holds bits firmly
- With 6 BiTorsion bits in the magazine: Phillips-head Phillips and Pozidriv, TORX® and slotted; tough
- Take it easy tool finder: colour coding according to profile and size

Kraftform Kompakt 27 Set 1



Code	EAN 4013288			
05**051510**001	*226556*			1
			828/1 1x 1/4"	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 20x25; 1x TX 25x25	
			800/1 BTZ 1x 0,8x5,5x25	

Kraftform Kompakt 27 Set 2

- With 6 bits in the magazine: Phillips-head Phillips and slotted; tough

Kraftform Kompakt 27 Set 2



Code	EAN 4013288			
05**051511**001	*226587*			1
			828/1 1x 1/4"	
			851/1 Z 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			800/1 Z 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Kraftform Kompakt 27 Imperial Set 1

- With 6 bits in the magazine: Phillips-head Phillips, slotted and square head (Robertson); tough

Kraftform Kompakt 27 Imperial Set 1



Code	EAN 4013288			
05**051512**001	*226594*			1
			828/1 1x 1/4"	
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			868/1 Z 1x # 1x25; 1x # 2x25	


Kraftform Kompakt 28 SB

Wera compact tool with multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving. Integrated bit magazine in the handle for the storage of 6 bits.

The bayonet blade can be lowered into the handle in confined screwdriving situations; it can be removed for insertion in a power tool. The retaining ring and the strong permanent magnet ensure a secure fit of the bit.

- Adaptor bayonet with stainless sleeve, retaining ring and strong permanent magnet
- Tough viscous bits for universal use

Kraftform Kompakt 28 SB

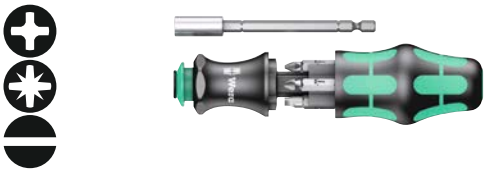

Code	EAN 4013288			
05**073240**001	*138927*			1
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Kraftform Kompakt 28 Imperial 1



Code	EAN 4013288			
05**073241**001	*214676*			1
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			868/1 Z 1x # 1x25; 1x # 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Kraftform Kompakt 28 with pouch





Code	EAN 4013288			
05**134491**001	*175373*			1
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			855/1 Z 1x PZ 1x25; 1x PZ 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 40 and 41

- Pouch with 89 mm-long bits
- Kraftform holder with Rapidaptor quick-release chuck
- Rapidaptor quick-release chuck allows rapid bit change
- Tough viscous bits for universal use
- Ergonomic Kraftform handle for low-fatigue working

Kraftform Kompakt 40





Code	EAN 4013288			
05**059298**001	*096319*			1
			816 R 1x 1/4"x119	
			851/4 Z 1x PH 1x89; 1x PH 2x89	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89	
			800/4 Z 1x 1,0x5,5x89; 1x 1,2x6,5x89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Kraftform Kompakt 41





Code	EAN 4013288			
05**059299**001	*096326*			1
			816 R 1x 1/4"x119	
			851/4 Z 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1)]	
			867/4 Z TORX® BO 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[1)] Hexagonal blade

Kraftform Kompakt 60 Torque 1.2 - 3.0 Nm

Pouch with bits in a length of 89 mm. Includes torque screwdriver 7441 with Rapidaptor quick-release chuck and multi-component Kraftform handle for low-fatigue working. Suitable for manual and power tool operations. 17-piece; compact handle/interchangeable blade system for torque-controlled tightening. Includes torque holder 7441, settings from 1.2 to 3.0 Nm. Adjustable in 0.10 Nm steps.

Simple setting of the required torque value without any special tools. Easy-to-read scale value. Rapidaptor quick-release technology for rapid bit change. Unlimited torque to loosen seized screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand. Includes 16 bits with a length of 89 mm and a practical pouch for tidy storage.

- Adjustable Kraftform torque screwdriver with Rapidaptor quick-release chuck
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Rapidaptor technology for rapid bit change
- Suitable for manual and power tool operations
- Practical pouch for tidy storage

Kraftform Kompakt 60 Torque 1.2 - 3.0 Nm


TORQUE TOOL · RAPIDAPTOR TECHNOLOGY · HEX-PLUS · KRAFTFORM ERGONOMICS · ANTI ROLL-OFF



Code	EAN 4013288			
05**059293**001	*169624*			1
		◉	**7400** 1x 7441, 1/4", 1,2-3,0 Nm	
		✪	**851/4 Z PH** 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
		✪	**855/4 Z PZ** 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1)]	
		✪	**867/4 Z TORX® BO** 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
		⊖	**800/4 Z** 1x 1,0x5,5x89	
		○	**840/4 Z Hex-Plus** 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1)]	

[1)] Hexagonal blade

Kraftform Stainless - stainless steel to prevent rust

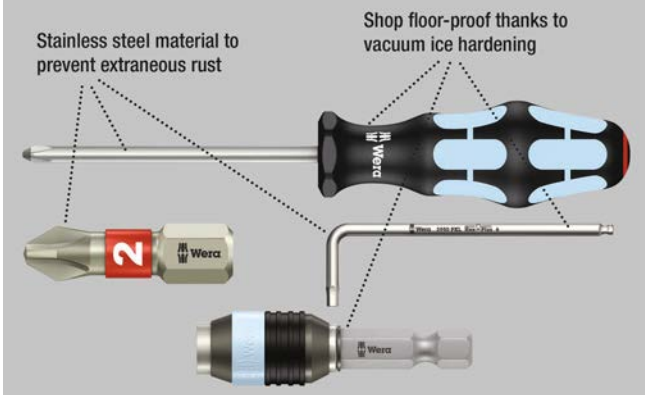

Pouch with bits in a length of 89 mm. Includes Kraftform holder 3816 R with Rapidaptor quick-release chuck and multi-component Kraftform handle for low-fatigue working. Stainless design to prevent the formation of extraneous rust.

Kraftform Kompakt 60, stainless

INOX STAINLESS · RAPIDAPTOR TECHNOLOGY · HEX-PLUS · KRAFTFORM ERGONOMICS · ANTI ROLL-OFF




Code	EAN 4013288			
05**071116**001	*115713*			1
		◉	**3816 R** 1x 1/4"x119	
		✪	**3851/4** 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
		✪	**3855/4** 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1)]	
		✪	**3867/4 TORX® BO** 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
		⊖	**3800/4** 1x 1,0x5,5x89	
		○	**3840/4 Hex-Plus** 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89	

[1)] Hexagonal blade

Kraftform Kompakt 60, imperial, stainless



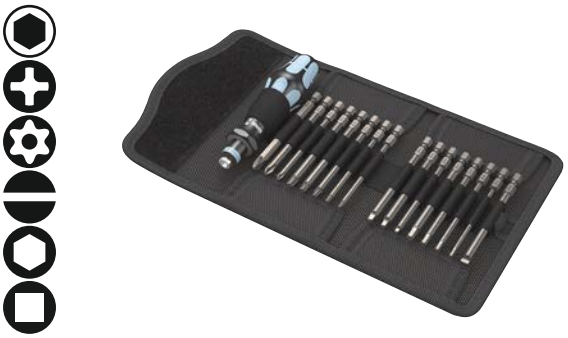

Code	EAN 4013288			
05**071117**001	*115720*			1
			3816 R 1x 1/4"x119	
			3851/4 PH 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
			3867/4 TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			3800/4 1x 1,0x5,5x89	
			3840/4 Hex-Plus 1x 3/32"x89; 1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89	
			3868/4 Square-Plus 1x # 1x89; 1x # 2x89; 1x # 3x89	

[1)] Hexagonal blade

Kraftform Kompakt 60

Pouch with 89-mm long bits. Includes 816 R Kraftform holder with Rapidaptor quick-release chuck and multi-component Kraftform handle for low-fatigue working.

Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Suitable for manual and power tool operations; 17-piece.

Kraftform Kompakt 60





Code	EAN 4013288			
05**059295**001	*096289*			1
			816 R 1x 1/4"x119	
			851/4 Z 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1)]	
			867/4 Z TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			800/4 Z 1x 1,0x5,5x89	
			840/4 Z 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1)]	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[1)] Hexagonal blade

Kraftform Kompakt 60 imperial





Code	EAN 4013288			
05**051042**001	*156037*			1
		◉	**816 R** 1x 1/4"x119	
		✚	**851/4 Z** 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
		✿	**867/4 Z TORX® BO** 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
		⊖	**800/4 Z** 1x 1,0x5,5x89	
		○	**840/4 Z** 1x 3/32"x89; 1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89	
		▢	**868/4** 1x # 1x89; 1x # 2x89; 1x # 3x89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[1)] Hexagonal blade

Kraftform Kompakt 60 KK

- Ballpoint bits allow a swivelling of the tool axis

Kraftform Kompakt 60 KK





Code	EAN 4013288			
05**059294**001	*165503*			1
		◉	**816 R** 1x 1/4"x119	
		✚	**851/4 Z** 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1)]	
		✱	**855/4 Z** 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1)]	
		✿	**867/4 TORX® KK** 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89; 1x TX 40x89[1)]	
		○	**842/4** 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[1)] Hexagonal blade

Kraftform Kompakt 62




Code	EAN 4013288			
05**059297**001	*096302*			1
			816 R 1x 1/4"x119	
			851/4 Z 1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1]	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1]	
			867/4 Z TORX® BO 1x TX 8x89; 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 27x89; 1x TX 30x89; 1x TX 40x89	
			840/4 Z BO 1x 2,0x89; 1x 2,5x89; 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89	
			800/4 Z 1x 1,2x6,5x89	
			871/4 TORQ-SET® Mplus 1x 6x89; 1x 8x89; 1x 10x89	
			875/4 TRI-WING® 1x 1x89; 1x 2x89; 1x 3x89; 1x 4x89	
			857/4 Z 1x 4x89; 1x 6x89; 1x 8x89; 1x 10x89	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[1] Hexagonal blade

Bicycle Set 2

Bicycle tool set in practical pouch with 89 mm long bits. Including 816 R Kraftform bit hand-holder with Rapidaptor quick-release chuck and multi-component Kraftform handle for fatigue-free working.

Bicycle Set 2

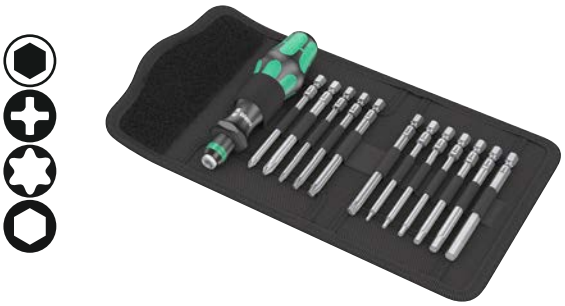

Code	EAN 4013288			
05**004171**001	*211439*			1
			816 R 1x 1/4"x119	
			851/4 Z 1x PH 1x89; 1x PH 2x89	
			867/4 Z TORX® 1x TX 10x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			840/4 Z 1x 2,0x89; 1x 2,5x89; 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1]	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

[1] Hexagonal blade

Kraftform Kompakt 70 Universal

32-piece set with 816 R Kraftform bitholding screwdriver with Rapidaptor quick-release chuck and multi-component Kraftform handle for fatigue-free working.

Rapidaptor universal holder with strong permanent magnet, which even holds big and heavy screws. Throw in the 30 bits and the user is equipped for almost every application. In a robust textile box; suitable for Wera 2go.

- Assortment in robust textile box with low weight for easy transport
- Suitable for docking with the Wera 2go system

Kraftform Kompakt 70 Universal



Code	EAN 4013288			
05**057113**001	*228345*			1
			816 R 1x 1/4"x119	
			889/4/1 K 1x 1/4"x50	
			851/1 TZ 3x PH 1x25; 3x PH 2x25; 3x PH 3x25	
			855/1 TZ 3x PZ 1x25; 3x PZ 2x25; 3x PZ 3x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			800/1 TZ 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			9478 1x 160,0x95,0x65,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Kraftform Kompakt 71 Security

- Assortment in robust textile box with low weight for easy transport
- Suitable for docking with the Wera 2go system

Kraftform Kompakt 71 Security



Code	EAN 4013288			
05**057114**001	*228352*			1
			816 R 1x 1/4"x119	
			889/4/1 K 1x 1/4"x50	
			867/1 Z TORX® BO 1x TX 7x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			840/1 Z BO 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			868/1 Z 1x # 0x25; 1x # 1x25; 1x # 2x25; 1x # 3x25	
			871/1 TORQ-SET® Mplus 25 mm 1x 6x25; 1x 8x25; 1x 10x25; 1x 1/4"x25	
			875/1 TRI-WING® 25 mm 1x 1x25; 1x 2x25; 1x 3x25	
			857/1 Z 1x 4x25; 1x 6x25; 1x 8x25; 1x 10x25	
			9478 1x 160,0x95,0x65,0	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	


Kraftform Kompakt 100

52-piece; in surface-protecting, compact textile box which is extremely robust. Low volume and weight for simplified mobility. Compact tool set with 52 screwdriving tools.

1 bit holder Rapidaptor with quick-release chuck; 1 B bit holder Rapidaptor with quick-release chuck for take-up in the power screwdriver or use in the chuck of the power drill; 30 BiTorsion bits with a length of 25 mm for long service life, tough-absorbing (BTZ), for universal use, extra hard (BTH), 12 Impaktor bits with a length of 50 mm for particularly demanding jobs, 8 L-keys with Hex-Plus profile (prevents the rounding of socket head screws) and hexagonal ballpoint on the long arm for working at angles; textile box that is very robust and durable; can be positioned upright for tidy storage on the workshop shelf; additional surface protection thanks to the outer textile material.

- Robust surface-protecting, compact, textile box
- Rapidaptor technology for rapid bit change
- BiTorsion bits in a length of 25 mm for long service life
- Impaktor bits in a length of 50 mm for particularly demanding jobs
- L-keys with Hex-Plus profile (prevents the rounding of hexagon socket screws)

Hex-Plus - lets hexagon socket screws last longer

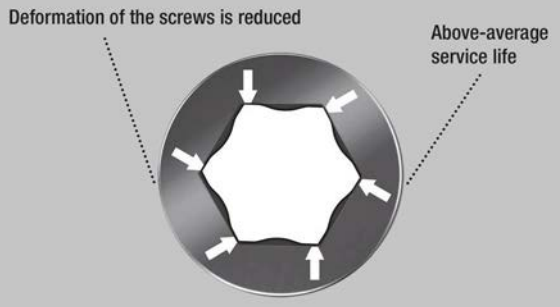

Kraftform Kompakt 100

RAPIDAPTOR TECHNOLOGY · RAPIDAPTOR TECHNOLOGY · BITORSION · HEX-PLUS · ULTRA COMPACT · WERA 2GO COMPATIBLE



Code	EAN 4013288			
05**057460**001	*179968*			1
			813 R 1x 1/4"x90	
			889/4/1 K 1x 1/4"x50	
			851/1 BTZ 2x PH 1x25; 4x PH 2x25; 2x PH 3x25	
			851/4 Impaktor DC 2x PH 2x50; 1x PH 3x50	
			855/1 BTH 2x PZ 1x25; 4x PZ 2x25; 2x PZ 3x25	
			855/4 Impaktor DC 2x PZ 2x50; 1x PZ 3x50	
			867/1 TORX® BTZ 2x TX 10x25; 2x TX 15x25; 3x TX 20x25; 2x TX 25x25; 2x TX 30x25; 1x TX 40x25	
			867/4 TORX® Impaktor DC 1x TX 25x50; 1x TX 30x50; 1x TX 40x50	
			800/1 BTZ 1x 0,8x5,5x25; 1x 1,0x5,5x25	
			840/4 Impaktor DC 1x 4,0x50; 1x 5,0x50; 1x 6,0x50	
			950 PKS 1x 1,5x50 [1]; 1x 2,0x56; 1x 2,5x63; 1x 3,0x71; 1x 4,0x80; 1x 5,0x90; 1x 6,0x100; 1x 8,0x112	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1] Regular hexagon


Kraftform Kompakt 400

T-handle screwdriver: The ideal handle shape to allow high torque transmission in difficult tightening and loosening situations. The ergonomic shape of the handle fills the palm of the hand well, the fingers lie safely in the soft rounded handle recesses.

The whole hand makes contact with the handle and friction losses between the hand and the handle are avoided. Special surface treatment of the blades for high corrosion protection and an optimum fit in the screw head.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working.
- With Rapidaptor technology for lightning-fast bit changes
- Bitholders, magnetic, for easier application of the screw
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3

Kraftform Kompakt 400

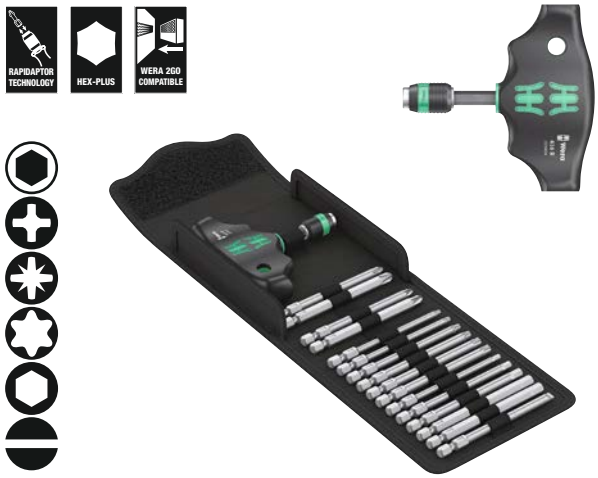

Code	EAN 4013288			
05**057470**001	*214546*			1
			416 R 1x 1/4"x45	
			851/4 Z 1x PH 2x89; 1x PH 3x89[1)]	
			855/4 Z 1x PZ 2x89; 1x PZ 3x89[1)]	
			867/4 Z TORX® 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89; 1x TX 40x89	
			840/4 Z 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89; 1x 8,0x89[1)]	
			800/4 Z 1x 1,0x5,5x89	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1)] Hexagonal blade

Kraftform Kompakt Stubby magazine

Particularly small bitholding screwdriver with short bit mounting for hard to reach areas. Includes 6 bits, which are located in a magazine in the handle.

With only 65mm total length, the Kraftform Kompakt Stubby is a real mini screwdriving workshop. The strong permanent magnet in the bit mounting ensures secure holding of the bit.

The 2-component handle with the practical combination of hard and soft zones allows for a firm grip and precise working. Take it easy tool finder: With size stamping and colour coding by output to find the required bit easily.

- Short, compact Stubby shape for working in tight installation spaces, with 6 bits in the integrated magazine
- Ergonomic 2-component Kraftform handle for precise work
- 1/4" bit mounting with strong permanent magnet
- Captive and swiveling bit magazine for easy removal and safe storage of bits
- Take it easy tool finder: colour coding according to profile and size

Kraftform Kompakt Stubby magazine 1



Code	EAN 4013288			
05**008873**001	*217769*			1
			851/1 BTZ PH 1x PH 1x25; 1x PH 2x25	
			867/1 TORX® BTZ 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			800/1 BTZ 1x 0,8x5,5x25	

Kraftform Kompakt Stubby magazine 2



Code	EAN 4013288			
05**008874**001	*217776*			1
			800/1 BTZ 1x 0,8x5,5x25; 1x 1,2x6,5x25	
			851/1 BTZ PH 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ PZ 1x PZ 1x25; 1x PZ 2x25	

Kraftform Kompakt Stubby magazine 3







Code	EAN 4013288			
05**008875**001	*217783*			1
			867/1 TORX® BTZ 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	
			840/1 BTZ Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25	

Kraftform Kompakt Stubby magazine 4







Code	EAN 4013288			
05**008877**001	*219800*			1
			851/1 Z PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			800/1 Z 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Kraftform Kompakt Stubby magazine 5







Code	EAN 4013288			
05**008878**001	*219817*			1
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			868/1 Z 1x # 1x25; 1x # 2x25	

Kraftform Kompakt Stubby 1

Handle/interchangeable blade system for lightning fast replacement of the required blade. Especially small bit-holding Stubby screwdriver handle with short blade for hard to reach areas. Suitable for the mounting of bits with ¼" hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1.

With strong permanent magnet, which also holds large and heavy screws. The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working.

High-quality BiTorsion bits with BiTorsion zone to prevent twisting of the bit tip under high loads. This significantly increases product life. Compact, textile box with high robustness, low weight and volume. Suitable for docking with the Wera 2go system.

- Handle/Interchangeable blade system for rapid exchange of the blade
- Stubby bit hand holder: short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Bits with BiTorsion zone to cushion load peaks
- Take it easy tool finder: colour coding according to profile and size

Kraftform Kompakt Stubby 1







Code	EAN 4013288			
05**057471**001	*214553*			1
			811/1 Stubby 1x ¼"	
			851/1 BTZ 1x PH 1x25; 1x PH 2x25	
			855/1 BTZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			840/1 BTZ 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 5,5x25	
			800/1 BTZ 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Bicycle set 11


Stubby magazine for quick operations on the bike. Particularly small bit hand-holder with short bit mounting for hard to reach areas. Includes 7 stainless steel bits, 6 of which are located in a magazine in the handle and one in the bit holder.

The 2-component Kraftform handle with the practical combination of hard and soft zones allows for a firm grip and precise working.

Take it easy tool finder: With size stamping and colour coding by output to help you find the required bit easily.

- Short compact Stubby shape for working in tight installation spaces with 7 included bits
- Ergonomic 2-component Kraftform handle for precise work
- Stainless Steel Bits
- Captive and swiveling bit magazine for easy removal and safe storage of bits
- Take it easy tool finder: colour coding according to profile and size

Bicycle set 11

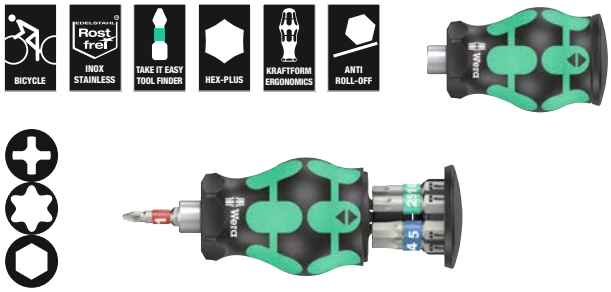

Code	EAN 4013288			
05**004179**001	*220714*			1
			3851/1 TS PH 1x PH 1x25	
			3867/1 TS TORX® 1x TX 10x25; 1x TX 25x25	
			3840/1 TS 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25	

88/1 Vario set

11-piece Vario set with handle and blades. In a practical belt pouch, enabling the tools to be safely and securely stored and to always be at hand. The Kraftform grip on the handle stands for pleasant, ergonomic working and makes blisters and calluses a thing of the past.

Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. The hexagonal non-roll feature prevents any annoying rolling away at the workplace. The integrated hex bolster allows higher torque to be applied with an open-end or ring spanner.

The double blades are out of high quality bit material and are therefore particularly durable. The Wera Black Point tip on the blade offers a perfect fit and optimised corrosion protection.

- Vario set with handle and 10 combination blades
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Chrome-plated hexagonal blade material, 6 mm
- Black Point tip offers a perfect fit with optimised corrosion protection
- In a robust belt pouch

88/1 Vario set



Code	EAN 4013288			
05**002990**001	*000675*			1
			80 1x 6x98	
			85 1x PH 1xPH 2x175	
			86 1x PZ 1xPZ 2x175	
			87 1x TX 10xTX 15x175; 1x TX 20xTX 25x175; 1x TX 30xTX 40x175	
			81 1x 0,6x4,0x1,0x6,0x175; 1x 0,8x5,0x1,2x7,0x175	
			84 1x 4x4x175; 1x 5x5x175; 1x 6x6x175	

80 Vario handle

- Kraftform handle with 10 mm hex bolster
- Suitable for insertion of 6 mm Vario blades or a Vario adaptor

80 Vario handle





	EAN							
Code	4013288	mm	mm	mm				
05**002900**001	*000460*	6	10	98				5

95 Vario T-handle hand holder for Vario blades

T-handle screwdriver: The ideal handle shape to allow high torque transmission in difficult tightening and loosening situations. The ergonomic shape of the handle fills the palm of the hand well, the fingers lie safely in the soft rounded handle recesses.

The whole hand makes contact with the handle and friction losses between the hand and the handle are avoided. Bit holder for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 in magnetic design for easier placement of the screws.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working.
- Vario T-handle for 6 mm Vario blades and adaptor

95 Vario T-handle hand holder for Vario blades



	EAN							
Code	4013288	mm	mm	mm	mm			
05**023400**001	*208446*	6	60	44	100	2 23/64"		2

830 Vario bit holder adaptor

- Vario adaptor blade with quick-release chuck for Vario holder
- Suitable for take-up of bits with 1/4" hexagon head drive
- 1/4" quick-release chuck with strong permanent magnet

830 Vario bit holder adaptor



	EAN							
Code	4013288	mm	mm	mm				
05**051835**001	*012425*	1/4"	6	165	6 9/16"			2

91 Vario extension

- Vario extension for Vario blades and adaptor
- Chrome-plated hexagonal material, 6 mm

91 Vario extension



	EAN							
Code	4013288	mm	mm	mm				
05**003210**001	*000804*	6	6	175	7"			2

712 Vario socket adaptor

- For sockets

712 Vario socket adaptor



	EAN							
Code	4013288		mm	mm				
05**040001**001	*006165*	1/4"	6	175	7"			2

Combination blades

Combination blade for Vario handles. The double-ended blades are made out of high quality bit material and are therefore particularly durable. The Wera Black Point tip offers a perfect fit and optimised corrosion protection.

81 Combination blade for slotted screws



	EAN							
Code	4013288	mm	mm	mm	mm	mm	mm	
05**002910**001	*000477*	0,6	4,0	1,0	6,0	6	175	5
05**002913**001	*000484*	0,8	5,0	1,2	7,0	6	175	5

82 Combination blade for slotted/Phillips screws



	EAN							
Code	4013288		mm	mm	mm	mm		
05**002920**001	*000491*	PH 1	0,6	4,0	6	175	7"	5
05**002923**001	*000507*	PH 2	1,0	6,0	6	175	7"	5
05**002926**001	*000514*	PH 3	1,2	7,0	6	175	7"	5

83 Combination blade for Phillips/Pozidriv screws



	EAN							
Code	4013288			mm	mm			
05**002930**001	*000521*	PH 1	PZ 1	6	175	7"		5
05**002933**001	*000538*	PH 2	PZ 2	6	175	7"		5

84 Combination blade for hexagon socket screws



	EAN							
Code	4013288			mm	mm			
05**002936**001	*000545*	2,5	2,5	6	175	7"		5
05**002938**001	*000552*	3	3	6	175	7"		5
05**002940**001	*000569*	4	4	6	175	7"		5
05**002943**001	*000576*	5	5	6	175	7"		5
05**002948**001 [1]	*155436*	4	5	6	175	7"		5
05**002946**001	*000583*	6	6	6	175	7"		5

[1] without ball-end

85 Combination blade for Phillips screws



	EAN							
Code	4013288			mm	mm			
05**002950**001	*000590*	PH 1	PH 2	6	175	7"		5

86 Combination blade for Pozidriv screws



	EAN							
Code	4013288			mm	mm			
05**002960**001	*000606*	PZ 1	PZ 2	6	175	7"		5
05**140310**001	*000613*	PZ 2	PZ 3	6	175	7"		5

87 Combination blade for TORX® screws



	EAN							
Code	4013288			mm	mm			
05**002966**001	*000620*	TX 6	TX 8	6	175	7"		5
05**002968**001	*000637*	TX 7	TX 9	6	175	7"		5
05**002970**001	*000644*	TX 10	TX 15	6	175	7"		5
05**002973**001	*000651*	TX 20	TX 25	6	175	7"		5
05**002976**001	*000668*	TX 30	TX 40	6	175	7"		5

68 Combination blade for square socket head screws



	EAN							
Code	4013288			mm	mm			
05**002980**001	*100061*	#1	#2	6	175	7"		5

Kraftform Kompakt 900 Set 1

The impact screwdriver 921 combines the advantages of manual impact wrenches, compact tools and screwdrivers with pound-thru blade. The impact wrench function offers a loosening moment of up to 25 Nm.

The robust bit holder allows the mounting of different specialised bits for various screw profiles. The pound-thru blade ensures complete power transmission (zero loss). The impact wrench function and screwdriver function can be switched as required.

- Compact and robust blade screwdriver set with manually activatable impact wrench function
- For loosening stubborn screw connections
- Hammer blow impulse is converted into a rotary movement with a loosening torque of approx. 25 Nm – without loss via a pound-thru blade
- Reversible functions: impact wrench and screwdriver
- Specially hardened and extra tough bits with 1/4" external hexagon drive
- Combines the advantages of manual impact wrenches, compact tools and screwdrivers with pound-thru blade

Kraftform Kompakt 900 Set 1



Code	EAN 4013288			
05**0181110**01	*222176*			1
			921 1x 1/4"x163,5	
			851 S 1x PH 1x70; 1x PH 2x70; 1x PH 3x70	
			855 S 1x PZ 1x70; 1x PZ 2x70; 1x PZ 3x70	
			867 S TORX® 1x TX 15x70; 1x TX 20x70; 1x TX 25x70; 1x TX 30x70; 1x TX 40x70	
			840 S Hex-Plus 1x 3,0x70; 1x 4,0x70; 1x 5,0x70; 1x 6,0x70	
			800 S 1x 0,8x4,0x70; 1x 1,0x5,5x70; 1x 1,2x6,5x70	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Kraftform Kompakt 900 Imperial Set 1



Code	EAN 4013288			
05**0181111**001	*222312*			1
			921 1x 1/4"x163,5	
			851 S 1x PH 1x70; 1x PH 2x70; 1x PH 3x70	
			867 S TORX® 1x TX 15x70; 1x TX 20x70; 1x TX 25x70; 1x TX 30x70; 1x TX 40x70	
			840 S Hex-Plus 1x 1/8"x70; 1x 5/32"x70; 1x 3/16"x70; 1x 1/4"x70	
			868 S 1x # 1x70; 1x # 2x70; 1x # 3x70	
			800 S 1x 0,8x4,0x70; 1x 1,0x5,5x70; 1x 1,2x6,5x70	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

921 Kraftform Plus impact screwdriver - series 900

The impact screwdriver 921 combines the advantages of manual impact wrenches, compact tools and screwdrivers with pound-thru blade. The impact wrench function offers a loosening moment of up to 25 Nm.

The robust bit holder allows the mounting of different specialised bits for various screw profiles. The pound-thru blade ensures complete power transmission (zero loss). The impact wrench function and screwdriver function can be switched as required.

- For loosening stubborn screw connections
- Manual impact wrench function can be switched on and off
- Hammer blow impulse is converted into a rotary movement with a loosening torque of approx. 25 Nm – without loss via a pound-thru blade
- Reversible functions: impact wrench and screwdriver

921 Kraftform Plus impact screwdriver - series 900



	EAN							
Code	4013288		mm					
05**018100**001	*221698*	1/4"	163,5	6 7/16"				1

851 S Phillips bits for impact screwdrivers

Extra tough bit for Phillips-head screws Phillips-Recess. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- For Phillips screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

851 S Phillips bits for impact screwdrivers



	EAN							
Code	4013288		mm					
05**018160**001	*222510*	PH 1	70	2 3/4"				5
05**018161**001	*222527*	PH 2	70	2 3/4"				5
05**018162**001	*222534*	PH 3	70	2 3/4"				5

855 S Pozidriv bits for impact screwdrivers

Extra tough bit suitable for Pozidriv screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- Suitable for Pozidriv screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

855 S Pozidriv bits for impact screwdrivers



	EAN							
Code	4013288		mm					
05**018163**001	*222541*	PZ 1	70	2 3/4"				5
05**018164**001	*222558*	PZ 2	70	2 3/4"				5
05**018165**001	*222565*	PZ 3	70	2 3/4"				5

867 S TORX® bits for impact screwdrivers

Extra tough bit for TORX® socket screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.


- For recessed TORX® screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

867 S TORX® bits for impact screwdrivers



	EAN							
Code	4013288		mm					
05**018166**001	*222572*	TX 15	70	2 3/4"				5
05**018167**001	*222589*	TX 20	70	2 3/4"				5
05**018168**001	*222596*	TX 25	70	2 3/4"				5
05**018169**001	*222602*	TX 30	70	2 3/4"				5
05**018170**001	*222619*	TX 40	70	2 3/4"				5

Hex-Plus - lets hexagon socket screws last longer

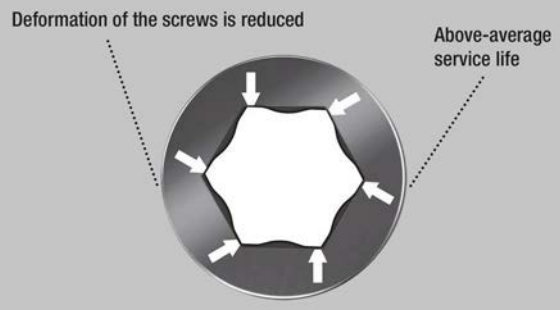


Extra tough bit for hexagonal socket screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdrivers 921.
With 1/4" hexagonal drive.

- For socket head screws
- Extra tough for long durability
- Hex-Plus allows socket head screws to live longer
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

840 S Hex-Plus bits for impact screwdrivers

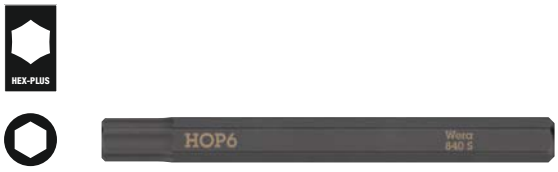

	EAN							
Code	4013288	mm		mm				
05**018150**001	*222428*	3,0		70	2 3/4"			5
05**018151**001	*222435*	4,0		70	2 3/4"			5
05**018152**001	*222442*	5,0		70	2 3/4"			5
05**018153**001	*222459*	6,0		70	2 3/4"			5
05**018154**001	*222466*		1/8"	70	2 3/4"			5
05**018155**001	*222473*		5/32"	70	2 3/4"			5
05**018156**001	*222480*		3/16"	70	2 3/4"			5
05**018157**001	*222497*		1/4"	70	2 3/4"			5

800 S Slotted bits for impact screwdrivers

Extra tough bit for slotted screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- For slotted screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

800 S Slotted bits for impact screwdrivers



	EAN							
Code	4013288	mm	mm	mm				
05**018140**001	*222398*	0,8	4,0	70	2 3/4"			5
05**018141**001	*222404*	1,0	5,5	70	2 3/4"			5
05**018142**001	*222411*	1,2	6,5	70	2 3/4"			5

868 S Square head socket bits for impact screwdrivers

Extra tough bit for square head socket screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- Suitable for square head socket screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

868 S Square head socket bits for impact screwdrivers



	EAN							
Code	4013288		mm					
05**018171**001	*222626*	# 1	70	2 3/4"				5
05**018172**001	*222633*	# 2	70	2 3/4"				5
05**018173**001	*222640*	# 3	70	2 3/4"				5

Kraftform Kompakt W 1 Maintenance

Compact tool set with the 35 most important screwdriving tools for maintenance work both indoors as well as outdoors.

Includes VDE holder with 12 VDE blades; 1 Jioker double open-end wrench with holding function, limit stop, small return angle and extremely gripping teeth; the incredibly fast 1/4" Zyklop Speed ratchet and accessories; 8 manual and power tool sockets, sizes 5.5-13,
1 universal bit holder; 7 bits in a length of 25 mm; 1 screw gripper for firmly holding screws; 1 single-pole phase tester 247; textile box, very robust and durable; can be positioned upright in the workshop shelf for convenient storage; additional surface protection thanks to the textile outer material; low weight and volume for simplified mobility.

- Incredibly fast 1/4" Zyklop Speed ratchet with pivoting ratchet head and 5 predefined locking positions
- Manual and power tool sockets (non-impact) with ball-stop groove and knurling at lower end for more grip
- Joker double open-end wrench with holding function, limit stop, small return angle and extremely gripping teeth
- VDE-insulated Kraftform holder and interchangeable blades
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication
- Set in robust textile box

Kraftform Kompakt W 1 Maintenance







Code	EAN 4013288			
05**135926**001	*178336*			1
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 67 i TORX® Take it easy 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS TORX® Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			1440 1x 4,5-6,0x41,0	
			247 1x 0,5x3,0x70	
			6002 Joker Double 1x 10x13x167	
			8000 A 1x 1/4"x152,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			8794 SA 1x 1/4"x75,0	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			893/4/1 K 1x 1/4"x50	
			855/1 Z 1x PZ 1x25; 1x PZ 2x25	
			840/1 Z 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			867/1 TORX® 1x TX 25x25	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

**)Product not available in the USA and Canada.

Kraftform Kompakt W 2 Maintenance



Code	EAN 4013288			
051**35870**001	*209542*			1
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 67 i TORX® **Take it easy** 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS TORX® **Take it easy** 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			1440 1x 4,5-6,0x41,0	
			335 1x 0,4x2,5x60 [1]	
			6002 Joker Double 1x 10x13x167	
			8000 A 1x 1/4"x152,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			8794 SA 1x 1/4"x75,0	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			893/4/1 K 1x 1/4"x50	
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			840/1 Z 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	
			867/1 TORX® 1x TX 25x25	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

[1] without Lasertip

Kraftform Kompakt W Imperial 1 Maintenance



Code	EAN 4013288			
051**35871**001	*209559*			1
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 67 i TORX® **Take it easy** 1x TX 10x157	
			Kraftform Kompakt VDE 67 iS TORX® **Take it easy** 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 68 iS Take it easy 1x # 1x157; 1x # 2x157	
			335 1x 0,4x2,5x60 [1]	
			1440 1x 4,5-6,0x41,0	
			6000 Joker Imperial 1x 1/2"x177	
			8000 A 1x 1/4"x152,0	
			8790 HMA 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0; 1x 9/16"x23,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			8794 SA 1x 1/4"x75,0	
			893/4/1 K 1x 1/4"x50	
			851/1 Z 1x PH 1x25; 1x PH 2x25	
			840/1 Z 1x 1/8"x25; 1x 5/32"x25; 1x 7/32"x25; 1x 1/4"x25	
			867/1 TORX® 1x TX 25x25	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

[1] without Lasertip

Kraftform Kompakt H 1 Woodcraft

Compact tool set with the 41 most important screwdriving tools for applications involving wood. Includes the bit ratchet Zyklop Mini with extension and socket adaptor; 8 manual and power tool sockets, sizes 5.5-13, 1 ratchet holder 816 RA with ratcheting function, fine-pitched teeth for small return angle, switchover ring (right, fixed, left), maximum torque 50 Nm and bit take-up with the Rapidaptor technology; 1 universal bit holder; 6 bits in a length of 25 mm; 16 bits of a length of 89 mm; 5 wood twist drill bits with a diameter of 3-8 mm; 1 screw gripper for firmly holding screws; 1 single-pole phase tester 247; textile box, very robust and durable; can be positioned upright in the workshop shelf for convenient storage; additional surface protection thanks to the textile outer material; low weight and volume for simplified mobility.

- Robust Zyklop Mini ratchet suitable for take-up of bits and sockets
- Torque of over 65 Nm thanks to fine-pitched ratchet mechanism and small return angle of 6°
- Ratcheting screwdriver with Rapidaptor technology for rapid bit change
- High quality wood twist drill bits for drilling soft wood, hard wood and laminated panel material
- Set in robust textile box

Kraftform Kompakt H 1 Woodcraft

TAKE IT EASY TOOL FINDER | HEX-PLUS | ULTRA COMPACT | WERA 2GO COMPATIBLE



Code	EAN 4013288			
05**135939**001	*178350*			1
			816 RA 1x 1/4"x142,0	
			8001 A 1x 1/4"x87,0	
			870/1 1x 1/4"x25 [1]	
			8794 SA 1x 1/4"x75,0	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			893/4/1 K 1x 1/4"x50	
			851/4 Z PH 1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [2]	
			855/4 Z PZ 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [2]	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	
			867/4 Z TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			867/1 TORX® 1x TX 20x25; 1x TX 25x25	
			840/4 Z Hex-Plus 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [2]	
			800/4 Z 1x 1,0x5,5x89	
			800/1 Z 1x 1,0x5,5x25	
			849 HSS 1x 3,0x70,0; 1x 4,0x74,0; 1x 5,0x85,0; 1x 6,0x95,0; 1x 8,0x110,0	
			247 1x 0,5x3,0x70	
			1441 1x 4,5 - 6,0x41,0	

[1] With friction ball; for manual nut spinner sockets
[2] Hexagonal blade
[*] Product not available in the USA and Canada.

Kraftform Kompakt M 1 Metal

Compact tool set with the 39 most important screwdriving tools for jobs on metal. Includes the incredibly fast 1/4" Zyklop Speed ratchet and accessories; 7 manual and power tool sockets, sizes 5.5-13, 1 universal bit holder;

13 bits in a length of 89 mm; 6 metal twist drill bits with diameter of 3-10 mm; 1 screw gripper for firmly holding screws;
1 single-pole phase tester 247; textile box, very robust and durable; can be positioned upright in the workshop shelf for convenient storage; additional surface protection thanks to the textile outer material; low weight and volume for simplified mobility.

Kraftform Kompakt M 1 Metal

TAKE IT EASY TOOL FINDER | HEX-PLUS | ULTRA COMPACT



Code	EAN 4013288			
05**135928**001	*178367*			1
			8000 A 1x 1/4"x152,0	
			8794 LA 1x 1/4"x150,0	
			8794 A 1x 1/4"x56,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			816 R 1x 1/4"x119	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			851/4 Z PH 1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1]	
			840/4 Z Hex-Plus 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1]	
			867/4 Z TORX® 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			800/4 Z 1x 1,0x5,5x89	
			847 HSS 1x 2,5x36,0; 1x 3,3x39,0; 1x 4,2x41,0; 1x 5,0x44,0; 1x 6,8x51,0; 1x 8,5x59,0	
			848 HSS 1x 3,0x38,0; 1x 4,0x44,0; 1x 5,0x50,0; 1x 6,0x50,0; 1x 8,0x51,0; 1x 10,0x54,0	
			1441 1x 4,5 - 6,0x41,0	
			247 1x 0,5x3,0x70	

[1] Hexagonal blade
[*] Product not available in the USA and Canada.

Kraftform Kompakt SH 1 PlumbKit

Compact tool set with the 25 most important screwdriving tools for plumbing and heating applications. Includes 2 Joker open-end wrenches, the 1/4" Zyklop ratchet and accessories, 6 x 89 mm bits, 5 multi-component Kraftform Plus screwdrivers and single-pole phase tester. Two Joker combination ratcheting wrenches with special holding plate against slipping/loss of the screw and more torque transfer; 1 Zyklop ratchet 8000 A (1/4") for fast, powerful working; 3 Zyklop sockets 8790 HMA for manual and power tools usage; 1 Zyklop adaptor 8784 A1 for bits; 6 TORX® HF bits 867/4 with holding function for TORX® screws for secure carry without any loss of the screws;

1 single-pole phase tester 247; 2 Kraftform series 100 slotted screwdrivers 160 i and 160 iS for safe work up to 1,000 volts (160 iS with reduced shaft diameter and integrated insulation protection for reaching and actuating low-lying screws and spring elements);

1 Kraftform Chiseldriver 932 A (slotted) with hex blade extending right through the handle and integrated impact cap for screwdriving and simpler chiselling work; 2 nutsetters 395 HO with hollow shaft for the tightening or loosening of screws on long bolts as well as seized screws.

Take it easy tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.

- Joker combination ratcheting wrench with special holding plate against slipping/loss of the screw
- Zyklop Speed ratchet for fast and powerful working
- Insulated Kraftform VDE slotted screwdriver for safe work at 1,000 volts
- Kraftform Chiseldriver with hex blade extending through handle and integrated impact cap
- Hollow shaft nutspinner for nuts on protruding threaded rods

Kraftform Kompakt SH 1 PlumbKit







Code	EAN 4013288			
05**135927**001	*170132*			1
			6000 Joker 1x 10x159; 1x 13x177	
			8000 A 1x 1/4"x152,0	
			8790 HMA 1x 7,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0	
			8784 A1 1x 1/4"x1/4"x37,0	
			867/4 TORX® HF 2x TX 20x50; 2x TX 25x50; 1x TX 30x50; 1x TX 40x50[1)]	
			851/4 Z PH 1x PH 1x89; 1x PH 2x89	
			840/4 Z Hex-Plus 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[2)]	
			247 1x 0,5x3,0x70	
			160 iS 1x 0,6x3,5x100	
			160 i VDE 1x 1,0x5,5x125	
			932 A 1x 1,2x7,0x125	
			395 HO 1x 10,0x90; 1x 13,0x90	

[*)] Product not available in the USA and Canada.

[1)] Pound-thru hexagonal; no Take it easy.

[2)] Hexagonal blade

Kraftform Kompakt SH 2 PlumbKit

- 15 screwdriving tools for sanitary or heating applications in compact and robust Wera textile box
- Joker combination ratcheting wrench with special holding plate against slipping/loss of the screw
- Insulated Kraftform VDE slotted screwdriver for safe work at 1,000 volts
- Kraftform Chiseldriver with hex blade extending through handle and integrated impact cap
- Hollow shaft nutspinner for nuts on protruding threaded rods
- VDE-insulated Kraftform holder and interchangeable blades
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

Kraftform Kompakt SH 2 PlumbKit





Code	EAN 4013288			
05**136026**001	*204387*			1
			395 HO 1x 10,0x90; 1x 13,0x90	
			932 A 1x 1,2x7,0x125	
			6001 Joker Switch 1x 10x159; 1x 13x179	
			950 SPKL HF Multicolour 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172	
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 1,0x5,5x157	
			247 1x 0,5x3,0x70	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

[*] Product not available in the USA and Canada.

Kraftform Kompakt F 1 screwdriving tool set for window installation

Compact Wera screwdriving tool set with the 36 most important tools for window construction

- Premium 36-piece universal tool set for the professional window builder
- 393 S extra slim bit hand holder with flexible shaft for applications in hard-to-reach work spaces
- Socket wrench and bit assortment in premium Wera quality, attuned to universal window construction applications
- Compact and solid textile tool box with Wera 2go compatibility

Kraftform Kompakt F 1 screwdriving tool set for window installation





Code	EAN 4013288			
05**134013**001	*217721*			1
			393 S 1x 1/4"x173,5	
			813 1x 1/4"x78	
			8001 A 1x 1/4"x87,0	
			870/1 1x 1/4"x25 [1]	
			8794 SA 1x 1/4"x75,0	
			8790 HMA 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0	
			851/4 TZ PH 1x PH 1x50; 1x PH 2x50; 1x PH 3x50	
			867/4 Z TORX® 1x TX 8x50; 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 30x50	
			840/4 Z Hex-Plus 1x 2,0x50; 1x 2,5x50; 1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x89 [2]	
			950 SPKL Multicolour 1x 2,0x101; 1x 2,5x112	
			950 SPKL HF Multicolour 1x 3,0x123; 1x 4,0x137; 1x 5,0x154	
			967 SXL HF TORX® Multicolour 1x TX 8x90; 1x TX 10x112; 1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 30x195	
			6004 Joker S 1x 10-13 (7/16"-1/2")x154	

[1] With friction ball; for manual nut spinner sockets
[2] Hexagonal blade

9532 Chain riveter set for workshops

18-piece tool set for the bike workshop. With the Zyklop Mini bit ratchet and the bitholding screwdriver and the 89 mm and 25 mm length bits, hexagonal socket, TORX® and Phillips-head Phillips screws can be operated.

With the included chain riveter and chain fastener with exchangeable rivet pin, bicycle chains can be opened and closed (suitable for single-speed chains, up to 12-speed). The chain lock tool makes it easier to open and close chains with a chain lock.

- Tool set for the bike workshop
- With Wera Zyklop Mini 1 bit ratchet, 816 R bitholding screwdriver, one chain riveter, one chain fastener, spare parts set chain riveter pin, one chain lock tool, 10 bits with 89 mm length, 2 bits with 25 mm length
- With chain riveter and chain fastener with exchangeable rivet pin for opening and closing bicycle chains. Suitable for single-speed chains, up to 12-speed
- Quick-release bike chain tool for opening and closing chains with a chain lock
- In robust pouch

9532 Chain riveter set for workshops



Code	EAN 4013288			
05**136042**001	*229571*			1
		◉	**8001 A** 1x 1/4"x87,0	
		◉	**816 R** 1x 1/4"x119	
		✚	**851/4 Z** 1x PH 1x89; 1x PH 2x89	
		✪	**867/4 Z TORX®** 1x TX 10x89; 1x TX 25x89	
		○	**840/4 Z** 1x 2,0x89; 1x 2,5x89; 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1]	
		○	**840/1 Z** 1x 5,0x25; 1x 8,0x25	
			9512 Chain-Hook	
			9513 Chain Tool	
			9533 Quick-release bike chain tool 1x 167,5	
			9534 3x 15,0	

[1] Hexagonal blade

9100 guitar tool set

Guitar tool set: The set contains all the tools necessary for adjustment and maintenance repair work. Wera stainless steel angle wrench with Hex-Plus profile (sizes: 1.5, 2.0, 2.5, 5.0 and in the inch sizes 1/8", 5/32", 3/16").

Wera 89 mm long stainless steel bits for hexagon socket screws (sizes: 1.5, 2.0, 2.5), Kraftform handle for 1/4" bits, 1/4" stainless steel bits for slot (sizes: 1.8x 12x41 mm, 0.6x3.5x89 mm, 1.2x8.0x89 mm), Phillips screws (sizes: PH 1x89 mm, PH 2x89 mm) and hexagon socket screws (size: 0.05"x25 mm), Wera adapter for handle (1/4" hex socket of the handle on 1/4" square of sockets), Wera Zyklop sockets (sizes 10 and 1/2"), string crank with 1/4" hex for use in the handle, Knipex® string cutter, feeler gauge, input jacker, 2 picks.

9100 guitar tool set



Code	EAN 4013288			
05**134015**001	*211675*			1
		◉	**815 R** 1x 1/4"x119	
		✚	**3851/4** 1x PH 1x89; 1x PH 2x89	
		⊖	**3800/1 TS** 1x 1,8x12,0x41	
		⊖	**3800/4** 1x 0,6x3,5x89; 1x 1,2x8,0x89	
		○	**3840/1 TS** 1x 0,05"x25	
		○	**3950 PKL** 1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154	
		○	**3950 PKL Imperial** 1x 1/8"x123; 1x 5/32"x137; 1x 3/16"x154	
		▢○	**870/1** 1x 1/4"x25 [1]	
		◉	**8790 HMA** 1x 10,0x23,0; 1x 7/16"x23,0	
		◉	**8790 HMA Deep** 1x 1/2"x50,0	
			9103 stringer	
			9105 slip gauge 0,05 - 1,00mm, 13 blades	
			9104 Input-Jacker	
			9101 plectrum Wera	
			9102 plectrum Tool Rebel	
			9110 box with lid Wera	
			KNIPEX® 74 01 140	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

[1] With friction ball; for manual nut spinner sockets

Radidaptor - the amazing compact multifunction tool



High quality holder for stainless steel bits so as to avoid the formation of extraneous rust. The Rapidaptor quick-release chuck enables rapid bit change without needing any special tools.

Kraftform Plus handle for pleasant, ergonomic working that makes blisters and calluses a thing of the past. Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Bit handholder with Rapidaptor quick-release chuck, stainless
- Secure clamping of bits
- Fast bit change
- Free-turning sleeve for guiding the power tool

Kraftform Stainless - stainless steel to prevent rust



3816 R Bit-holding screwdriver with Rapidaptor quick-release chuck, stainless



	EAN							
Code	4013288		mm					
05**051465**001	*127570*	1/4"	119					5


817 R Bitholding screwdriver with Rapidaptor quick-release chuck

High quality bit holder. The telescopic bayonet blade, which can be lowered into the handle, together with the quick-release chuck allows fast manual work even in confined installation situations. The Rapidaptor quick-release chuck enables rapid bit change without needing any special tools.

The strong permanent magnet holds the bits absolutely securely. Kraftform Plus handle for pleasant, ergonomic working that makes blisters and calluses a thing of the past. Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

- Retractable bayonet blade


817 R Bitholding screwdriver with Rapidaptor quick-release chuck





	EAN							
Code	4013288		mm					
05**051482**001	*103130*	1/4"	133					2

817 R SB Bitholding screwdriver with Rapidaptor quick-release chuck





Code	EAN		
	4013288		
05**073541**001	*106025*		**817 R** 1x 1/4"x133

816 R Bitholding screwdriver with Rapidaptor quick-release chuck



	EAN							
Code	4013288		mm					
05**051462**001	*099617*	1/4"	119					5

816 R SB Bitholding screwdriver with Rapidaptor quick-release chuck



Code	EAN 4013288			
05**073540**001	*106032*		**816 R** 1x 1/4"x119	1

813 R Bitholding screwdriver with Rapidaptor quick-release chuck



	EAN							
Code	4013288		mm					
05**051272**001	*103123*	1/4"	90					2

393 S Bitholding screwdriver extra slim with flexible shaft

Screwdriver with bendable shaft to reach hard-to-reach areas. Thanks to the construction with a particularly slim bit holder, different screw profiles can be operated, even in very narrow work spaces. Multi-component Kraftform handle for high work speed and especially ergonomic screwdriving. With hexagon anti-roll protection to avoid rolling away.

- Flexible, bendable shaft
- Secure bit holding feature due to locking mechanism. With strong permanent magnet.
- Compact stainless steel holder for bits with 1/4"- external hexagon drive as per DIN 3126, ISO 1173 Form C 6.3 and E 6,3
- Multi-component Kraftform handle for fast and ergonomic screwdriving

393 S Bitholding screwdriver extra slim with flexible shaft



	EAN							
Code	4013288		mm	mm				
05**028161**001	*217660*	1/4"	173,5	98	6 53/64"			5

392 Bitholding screwdriver with flexible shaft

High quality bit holder with flexible shaft by Wera. Multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving.

Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Comes with quick-release chuck for rapid bit change and hexagonal anti-roll feature that prevents any rolling away. Suitable for the insertion of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3.

- Bit holder with flexible shaft and quick-release chuck
- Flexible, circular blade

392 Bitholding screwdriver with flexible shaft



	EAN							
Code	4013288		mm	mm				
05**028160**001	*041418*	1/4"	177	98	7"			5

815/1 Bitholding screwdriver, 1/4"

- For 1/4" hex drive bits
- Magnetic

815/1 Bitholding screwdriver, 1/4"



	EAN							
Code	4013288		mm	mm				
05**145100**001	*234308*	1/4"	78	68				3

813 Bitholding screwdriver

- Bit holder for bits with 1/4" hexagon drive
- Magnetic

813 Bitholding screwdriver



	EAN							
Code	4013288		mm	mm				
05**051274**001	*175656*	1/4"	78	68				3

812/1 Bitholding screwdriver with strong permanent magnet

- Hexagonal blade, chrome-plated
- Stainless sleeve with strong permanent magnet for secure fit of the bit

812/1 Bitholding screwdriver with strong permanent magnet



	EAN							
Code	4013288		mm	mm	mm			
05**051205**001	*012272*	1/4"	120	112	10,5	4 3/4"		2

811/1 Stubby bits hand holder, magnetic

Especially small bit-holding Stubby screwdriver handle with short blade for hard to reach areas. Suitable for the mounting of bits with 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1. With strong permanent magnet, which also holds large and heavy screws.

The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working.

The hexagon anti-roll protection prevents annoying rolling away of bits in the workplace.

- Short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Hexagonal anti-roll feature against rolling away
- Magnetic bits hand holder for easier placement of the screws
- For 1/4" bits as per DIN ISO 1173-C 6.3

811/1 Stubby bits hand holder, magnetic



	EAN							
Code	4013288		mm	mm				
05**008880**001	*212375*	1/4"	10	54	3/8"			2

810/1 Bitholding screwdriver with retaining ring

- Bit holder with retaining ring for bits with 1/4" hexagon drive

810/1 Bitholding screwdriver with retaining ring



	EAN							
Code	4013288		mm	mm	mm			
05**051005**001	*012258*	1/4"	120	112	10,5	4 3/4"		2


Wera
Wera
TOOL
REBELS
BE A TOOL REBEL
Wera

Roller cabinet and foam inserts



9700 Tool Rebel Roller Cabinet 1

Exclusive roller cabinet in the Tool Rebel design. Five flat and two high drawers ensure efficient, mobile organization of tools and materials.

Extremely robust thanks to a double-walled design and the completely welded construction of the entire body. For daily hard work in the workshop.

Equipped with four Wera foam inserts: 9710 foam insert screwdriver set 1, 9720 foam insert 8000 A Zyklop ratchet set 1, 9731 foam insert 6003 Joker ring spanner set 1, 9740 foam insert L-key set 1.

- Exclusive roller cabinet in the Tool Rebel design
- Extremely robust design thanks to a double-walled design
- With 7 drawers (5 flat, 2 high) – of which 2 flat drawers are equipped with foam inserts and tools (e.g. with Zyklop Speed ratchet and accessories, Joker spanners, Kraftform screwdrivers, L-keys)
- Dimensions flat drawers (width x height x depth): 522 x 81 x 398 mm
- Dimensions high drawers (width x height x depth): 522 x 166 x 398 mm
- 100 % drawer pull-out with ball bearing telescopic slides, self-closing
- All drawers are elaborately and individually layered
- Minimum risk of tilting over thanks to the drawer stop – only one drawer can be opened, no simultaneous pull-out of multiple drawers
- Both sides with square head boring
- High-quality, durable foam inserts without chemical vapours
- Optimum fit for the best possible removal of the tools from the foam inserts

9700 Tool Rebel Roller Cabinet 1





Code	EAN 4013288			
05**150130**001	*225085*			1
			1x 9710 **Foam insert screwdriver set 1**	
			932 A 1x 1,0x5,5x100; 1x 1,2x7,0x125	
			350 1x PH 1x80; 1x PH 2x100; 1x PH 3x150	
			350 PH Stubby/carburetor screwdriver 1x PH 2x25	
			355 1x PZ 1x80; 1x PZ 2x100	
			335 1x 0,8x4,0x100; 1x 1,0x5,5x125	
			334 1x 1,2x6,5x150	
			335 Stubby/carburetor screwdriver 1x 1,0x5,5x24,5	
			2050 Micro 1x PH 0x40 [1]	
			2035 Micro 1x 0,40x2,5x80	
			160 i VDE 1x 0,4x2,5x80 [2]; 1x 0,6x3,5x100 [2]	
			1441 1x 4,5-6,0x41,0	
			1442 1x 6,0-8,5x41,0	
			9810 1x 344,0x30,0x392,0 [3]	

			1x 9720 **Foam insert 8000 A Zyklop 1/4“ ratchet set 1**		
			8000 A 1x 1/4"x152,0		
			8794 LA 1x 1/4"x150,0		
			8794 SA 1x 1/4"x75,0		
			8795 A 1x 1/4"x35,5		
			8794 A 1x 1/4"x56,0		
			8790 HMA 1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0; 1x 14,0x23,0; 1x 15,0x23,0		
			8767 A HF 1x TX 8x28,0; 1x TX 9x28,0; 1x TX 10x28,0; 1x TX 15x28,0; 1x TX 20x28,0; 1x TX 25x28,0; 1x TX 27x28,0; 1x TX 30x28,0; 1x TX 40x28,0		
			8740 A HF 1x 3,0x28,0; 1x 4,0x28,0; 1x 4,0x100,0; 1x 5,0x28,0; 1x 5,0x100,0; 1x 6,0x28,0; 1x 6,0x100,0; 1x 8,0x28,0; 1x 8,0x100,0		
			9820 1x 172,0x30,0x392,0 [3]		
			1x 9731 **Foam insert 6003 Joker set 1**		
			6003 Joker 1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230; 1x 20x230; 1x 21x260; 1x 22x260; 1x 24x280		
			Bottle opener 1x 145		
			9831 1x 344,0x30,0x392,0 [3]		
			1x 9740 **Foam insert L-key set 1**		
			1x 950/9 Hex-Plus Multicolour 1		
			950 SPKL Multicolour 1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224		
			1x 967/9 TX XL Multicolour 1		
			967 SXL TORX® Multicolour 1x TX 8x90; 1x TX 9x101; 1x TX 10x112		
			967 SPKXL TORX® Multicolour 1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224		
			1x 9500 Magnetiser SB 1x 64,6		
			1x STABILA® BM 100 Pocket tape, metric scale, 3 m, item 19570		
			1x 9840 1x 172,0x30,0x392,0 [3]		

[1] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

[2] without Lasertip

[3] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9710 Foam insert screwdriver set 1

Durable foam insert; two-coloured for quick identification of missing parts; suitable for the Tool Rebel roller cabinet, equipped with 16 Wera Kraftform screwdrivers (workshop, VDE, chiseldriver, Micro) as well as 2 screw grippers.

- Durable foam insert, each tool has its own place; two-coloured, missing tools will quickly be noticed
- High-quality, durable foam insert without chemical vapours
- Optimum fit for the best possible removal of the tools from the foam insert
- Water- and oil-repellent, low maintenance and easy to clean
- Protection of the tool from dirt and impact
- 8 Kraftform Plus screwdrivers with hard zones for high working speeds and soft handle zones for a high torque transfer
- 2 Kraftform Plus VDE screwdrivers with insulated blades for safe working up to 1,000 volt
- 2 Kraftform Micro screwdrivers with a rotating cap for fast turning
- 2 Stubby screwdrivers with short blade for hard-to-reach areas
- Two screw grippers (attachment tools with gripping function for screws)
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 47 x 392 mm

9710 Foam insert screwdriver set 1







Code	EAN 4013288			
05**150101**001	*225122*			1
			932 A 1x 1,0x5,5x100**;** 1x 1,2x7,0x125	
			350 1x PH 1x80**;** 1x PH 2x100**;** 1x PH 3x150	
			350 PH Stubby/carburetor screwdriver 1x PH 2x25	
			355 1x PZ 1x80**;** 1x PZ 2x100	
			335 1x 0,8x4,0x100**;** 1x 1,0x5,5x125	
			334 1x 1,2x6,5x150	
			335 Stubby/carburetor screwdriver 1x 1,0x5,5x24,5	
			2050 Micro 1x PH 0x40 [1]	
			2035 Micro 1x 0,40x2,5x80	
			160 i VDE 1x 0,4x2,5x80 [2]**;** 1x 0,6x3,5x100 [2]	
			1441 1x 4,5-6,0x41,0	
			1442 1x 6,0-8,5x41,0	
			9810 1x 344,0x30,0x392,0 [3]	

[1] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

[2] without Lasertip

[3] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9711 Foam insert VDE screwdriver set 1

- Screwdriver with insulated blades for safe working up to 1,000 volt, five of which with reduced blade diameter for lower-lying screws
- Two screw grippers (attachment tools with gripping function for screws)
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 46 x 392 mm

9711 Foam insert VDE screwdriver set 1







Code	EAN 4013288			
05**150102**001	*225320*			1
			162 iS PH VDE 1x PH 1x80; 1x PH 2x100	
			165 iS PZ VDE 1x PZ 1x80; 1x PZ 2x100	
			165 i PZ/S VDE 1x # 2x100	
			160 i VDE 1x 0,4x2,5x80 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125	
			160 iS VDE 1x 0,6x3,5x100	
			167 i TORX® VDE 1x TX 10x80; 1x TX 15x80; 1x TX 20x80; 1x TX 25x100; 1x TX 30x100	
			1440 1x 4,5-6,0x41,0	
			1442 1x 6,0-8,5x41,0	
			9811 1x 344,0x30,0x392,0 [2]	


[1] without Lasertip

[2] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9712 Foam insert TORX® HF screwdriver set 1

- 6 Kraftform Plus screwdrivers with hard zones for high working speeds and soft handle zones for a high torque transfer
- 4 Kraftform Micro screwdrivers with a rotating cap for fast turning
- 4 T-handle screwdrivers for the transmission of particularly high tightening and loosening moments
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 45 x 392 mm

9712 Foam insert TORX® HF screwdriver set 1








Code	EAN 4013288			
05**150103**001	*225283*			1
			367 TORX® HF 1x TX 8x60; 1x TX 9x60; 1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100	
			2067 TORX® HF Micro 1x TX 4x40; 1x TX 5x40; 1x TX 6x40; 1x TX 7x60	
			467 TORX® HF 1x TX 20x100; 1x TX 25x100; 1x TX 30x200; 1x TX 40x200	
			9812 1x 344,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9713 Foam insert Hex screwdriver set 1

- 4 Kraftform Plus screwdrivers with hard zones for high working speeds and soft handle zones for a high torque transfer, two of which with hollow shaft for protruding thread rods
- 3 Kraftform Micro screwdrivers with a rotating cap for fast turning
- 5 T-handle screwdrivers for the transmission of particularly high tightening and loosening moments, with holding function for hexagonal socket screws
- With Hex-Plus profile (prevents hexagonal socket screws from cylindrical turning)
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 45 x 392 mm

9713 Foam insert Hex screwdriver set 1







Code	EAN 4013288			
05**150104**001	*225290*			1
			354 1x 3,0x75; 1x 4,0x75	
			2054 Micro 1x 1,5x60; 1x 2x60; 1x 2,5x60	
			454 HF 1x 4x100; 1x 5x100; 1x 6x150; 1x 8x200; 1x 10x200	
			395 HO 1x 10,0x90; 1x 13,0x90	
			9813 1x 344,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9714 Foam insert The Chiseldriver screwdriver set 1

- 13 chiseldrivers for screwdriving, chiseling, mortising
- Hexagonal blade extending through the handle
- Impact cap and bolster for the transfer of higher torque
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 46 x 392 mm

9714 Foam insert The Chiseldriver screwdriver set 1







Code	EAN 4013288			
05**150105**001	*232540*			1
			917 SPH 1x PH 1x80; 1x PH 2x100; 1x PH 3x150	
			918 SPZ 1x PZ 1x80; 1x PZ 2x100; 1x PZ 3x150	
			932 A 1x 0,6x3,5x80 [1]; 1x 0,8x4,5x90; 1x 1,0x5,5x100; 1x 1,2x7,0x125; 1x 1,6x9,0x150	
			977 TORX® 1x TX 20x90; 1x TX 25x100	
			9814 1x 344,0x30,0x392,0	

[1] No throughout blade, no impact cap and no hexagon bolster


[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9715 Foam insert Kraftform Micro screwdriver set 1

- Kraftform Micro screwdriver
- Multi-component Kraftform Micro handle for fast and ergonomic screwdriving
- Anti-roll feature and swivel cap for rapid twisting
- The Wera Black Point tip offers an exact fit and optimum corrosion protection
- “Take it easy” tool finder: colour coding according to profile and size
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 38 x 392 mm

9715 Foam insert Kraftform Micro screwdriver set 1







Code	EAN 4013288			
05**150106**001	*232557*			1
			2050 Micro 1x PH 000x40 [1) 2)]; 1x PH 00x40 [1) 2)]; 1x PH 0x40 [3)]	
			2067 TORX® HF 1x TX 5x40; 1x TX 6x40; 1x TX 7x60; 1x TX 8x60; 1x TX 10x60	
			2067 TORX PLUS® IPR Micro 1x 1 IPRx40 [4)]	
			2072 Micro 1x mx40	
			2054 Micro 1x 0,7x40; 1x 0,9x40; 1x 1,3x40; 1x 1,5x60; 1x 2x60	
			2035 Micro 1x 0,23x1,5x40; 1x 0,30x1,8x60; 1x 0,35x2,5x40; 1x 0,40x2,0x60; 1x 0,40x2,5x80; 1x 0,50x3,0x80	
			2069 Micro 1x 4,0x60; 1x 5,5x60	
			1429 1x 1,0x3,5x50	
			9815 1x 344,0x30,0x392,0	

[1)] Optimised for Asian PH screws

[2)] On the output side, the blade is turned to a nominal length of 10 mm

[3)] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

[4)] Without bore hole

[**)] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9720 Foam insert 8000 A Zyklop 1/4" ratchet set 1

- The Zyklop Speed ratchet combines five ratchet types in one
- With flywheel design and slip-proof fast-rotating sleeve for extremely high working speed
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver
- Set including sockets, bit sockets, extensions and universal joint
- 14 sockets, 9 bit sockets with holding function for TORX® screws, 9 bit sockets with holding function for hexagonal socket screws
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 40 x 392 mm

9720 Foam insert 8000 A Zyklop 1/4" ratchet set 1







Code	EAN 4013288			
05**150110**001	*225139*			1
			8000 A 1x 1/4"x152,0	
			8794 LA 1x 1/4"x150,0	
			8794 SA 1x 1/4"x75,0	
			8795 A 1x 1/4"x35,5	
			8794 A 1x 1/4"x56,0	
			8790 HMA 1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0; 1x 14,0x23,0; 1x 15,0x23,0	
			8767 A HF 1x TX 8x28,0; 1x TX 9x28,0; 1x TX 10x28,0; 1x TX 15x28,0; 1x TX 20x28,0; 1x TX 25x28,0; 1x TX 27x28,0; 1x TX 30x28,0; 1x TX 40x28,0	
			8740 A HF 1x 3,0x28,0; 1x 4,0x28,0; 1x 4,0x100,0; 1x 5,0x28,0; 1x 5,0x100,0; 1x 6,0x28,0; 1x 6,0x100,0; 1x 8,0x28,0; 1x 8,0x100,0	
			9820 1x 172,0x30,0x392,0 [1)]	

[1)] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9721 Foam insert 8000 B Zyklop 3/8" ratchet set 1

- The Zyklop Speed ratchet combines five ratchet types in one
- With flywheel design and slip-proof fast-rotating sleeve for extremely high working speed
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver
- Set including sockets, extensions and universal joint
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 45 x 392 mm

9721 Foam insert 8000 B Zyklop 3/8" ratchet set 1





Code	EAN 4013288			
051**50111**001	*225306*			1
			8000 B 1x 3/8"x199,0	
			8794 SB 1x 3/8"x125,0	
			8794 LB 1x 3/8"x200,0	
			8795 B 1x 3/8"x50,0	
			8794 B 1x 3/8"x76,0	
			8790 HMB 1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 20,0x30,0; 1x 21,0x30,0; 1x 22,0x30,0; 1x 24,0x32,0	
			9821 1x 172,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9722 Foam insert 8000 C Zyklop 1/2" ratchet set 1

- The Zyklop Speed ratchet combines five ratchet types in one
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Set including sockets, extensions and universal joint
- 17 sockets, 9 bit sockets with holding function for hexagonal socket screws
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 51 x 392 mm

9722 Foam insert 8000 C Zyklop 1/2" ratchet set 1







Code	EAN 4013288			
051**50112**001	*225207*			1
			8000 C 1x 1/2"x277,0	
			8794 LC 1x 1/2"x250,0	
			8794 SC 1x 1/2"x125,0	
			8795 C 1x 1/2"x69,0	
			8794 C 1x 1/2"x52,0	
			8790 HMC 1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0; 1x 20,0x37,0; 1x 21,0x37,0; 1x 22,0x37,0; 1x 24,0x37,0; 1x 27,0x40,0; 1x 30,0x42,0; 1x 32,0x42,0	
			8740 C HF 1x 4,0x60,0; 1x 4,0x140,0; 1x 5,0x60,0; 1x 5,0x140,0; 1x 6,0x60,0; 1x 6,0x140,0; 1x 7,0x60,0; 1x 8,0x60,0; 1x 10,0x60,0	
			9822 1x 344,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9723 Foam insert Zyklop B 3/8" bit socket set 1

- Bit socket (non-impact) for manual or power tool operations
- 10 bit sockets with holding function for TORX® screws, 11 bit sockets with holding function for hexagonal socket screws, one Zyklop connector with quick-release chuck for 1/4" bits
- With Take it easy tool finder: colour coding by size
- Knurling on lower end for more grip when used manually
- Chrome-vanadium makes for hardness and strength
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 39 x 392 mm

9723 Foam insert Zyklop B 3/8" bit socket set 1



Code	EAN 4013288			
05**150113**001	*225313*			1
			8784 B1 1x 1/4"x3/8"x44,0	
			8767 B HF 1x TX 15x35,0; 1x TX 20x35,0; 1x TX 25x35,0; 1x TX 25x107,0; 1x TX 27x35,0; 1x TX 27x107,0; 1x TX 30x35,0; 1x TX 30x107,0; 1x TX 40x35,0; 1x TX 40x107,0	
			8740 B HF 1x 4,0x35,0; 1x 4,0x107,0; 1x 5,0x35,0; 1x 5,0x107,0; 1x 6,0x35,0; 1x 6,0x107,0; 1x 7,0x38,5; 1x 8,0x38,5; 1x 8,0x100,0; 1x 10,0x38,5; 1x 10,0x100,0	
			9823 1x 172,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9724 Foam insert 8010 B Zyklop Comfort ratchet set 1, 3/8"

- One Zyklop Comfort ratchet, 14x 8790 B Impaktor sockets, one 8798 B Zyklop extension; 3/8"
- Zyklop Comfort ratchet with pleasant feel thanks to the plastic sleeve
- Plastic coating protects surfaces from damage
- Fine toothing with 80 teeth for a short return angle of only 4.5°
- Extremely slim design with a soft, ergonomic grip zone for easy work even in very confined spaces
- Safe socket lock via push button, convenient direction change thanks to the reversing lever
- 8790 B Impaktor sockets also for use with electric or pneumatic wrenches, 3/8"
- Sockets with Impaktor technology for higher-than-average service life
- Sockets with "Take it easy" tool finder: Colour coding by size
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 48 x 392 mm

9724 Foam insert 8010 B Zyklop Comfort ratchet set 1, 3/8"





Code	EAN 4013288			
05**150114**001	*232564*			1
			8010 B 1x 3/8"x230,0	
			8790 B Impaktor 1x 8,0x30,0; 1x 10,0x30,0; 1x 11,0x30,0; 1x 12,0x30,0; 1x 13,0x30,0; 1x 14,0x30,0; 1x 15,0x30,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 21,0x32,0; 1x 22,0x32,0; 1x 24,0x32,0	
			8798 B 1x 3/8"x152,4	
			9824 1x 172,0x30,0x392,0	

[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9725 Foam insert Zyklop C, 1/2", Impaktor Deep socket set 1

- Robust Impaktor socket wrench inserts for extremely high stress; for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive
- Long socket wrenches for low-lying couplings, also suitable for fitting, protruding thread rods in confined spaces
- Hexagon profile for precise and profile-friendly screwdriving at a high power transmission
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 48 x 392 mm

9725 Foam insert Zyklop C, 1/2", Impaktor Deep socket set 1



Code	EAN 4013288			
051**501150**01	*232571*			1
		⬢	**8790 C Impaktor Deep** 1x 13,0x83,0; 1x 14,0x83,0; 1x 15,0x83,0; 1x 16,0x83,0; 1x 17,0x83,0; 1x 18,0x83,0; 1x 19,0x83,0; 1x 21,0x83,0; 1x 22,0x83,0; 1x 24,0x83,0; 1x 27,0x83,0	
			9825 1x 172,0x30,0x392,0	

*) Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9726 Foam insert 8007 B VDE Zyklop VDE ratchet set 1, 3/8"

- Insulated and 100% individually tested Zyklop 8007 B ratchet for safe working up to 1,000 volt
- Fine-toothed ratchet with 80 teeth for a return angle of only 4.5°
- Extremely slim design with a soft, ergonomic grip zone for easy work even in very confined spaces
- Plastic coating protects surfaces from damage
- Sockets, bit sockets and extensions with increased safety thanks to a 2-component insulation with yellow insulation core under red outer insulation layer
- 8767 B VDE HF bit sockets with holding function for TORX® screws as per the specification Acument Intellectual Properties
- 8740 B VDE HF bit sockets with holding function for hexagonal socket screws
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 45 x 392 mm

9726 Foam insert 8007 B VDE Zyklop VDE ratchet set 1, 3/8"




Code	EAN 4013288			
051**501160**01	*232519*			1
		▢	**8007 B VDE** 1x 3/8"x222,0	
		▢	**410 i VDE B** 1x 3/8"x130	
		⬢	**8790 B VDE** 1x 6,0x46,0; 1x 7,0x46,0; 1x 8,0x46,0; 1x 9,0x46,0; 1x 10,0x46,0; 1x 11,0x46,0; 1x 12,0x46,0; 1x 13,0x46,0; 1x 14,0x46,0; 1x 15,0x46,0; 1x 16,0x46,0; 1x 17,0x46,0; 1x 18,0x46,0; 1x 19,0x46,0	
		✪	**8767 B VDE HF** 1x TX 20x55,0; 1x TX 25x55,0; 1x TX 27x55,0; 1x TX 30x55,0; 1x TX 40x55,0; 1x TX 45x59,0	
		○	**8740 B VDE HF** 1x 4,0x55,0; 1x 5,0x55,0; 1x 6,0x55,0; 1x 8,0x59,0	
		▣▢	**8794 SB VDE** 1x 3/8"x91,0	
		▣▢	**8794 LB VDE** 1x 3/8"x166,0	
			9826 1x 344,0x30,0x392,0	

*) Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9730 Foam insert 6000 Joker set 1

- Ring ratchet spanner with useful holding function by a metal plate in the mouth
- No slipping down thanks to the end stop
- Double hexagon geometry reduces the risk of slipping to the side
- Return angle of only 30°
- With Take it easy tool finder: colour coding by size
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 47 x 392 mm

9730 Foam insert 6000 Joker set 1







Code	EAN 4013288			
05**150120**001	*225214*			1
			6000 Joker 1x 8x144; 1x 10x159; 1x 11x165; 1x 12x170,7; 1x 13x177; 1x 14x188; 1x 15x200; 1x 16x212; 1x 17x224; 1x 18x235; 1x 19x246	
			9830 1x 172,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9731 Foam insert 6003 Joker set 1

- Ring spanner, perfect for small spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side with 15° crank
- With Take it easy tool finder: colour coding by size
- Iconic bottle opener with original Kraftform Plus handle
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 58 x 392 mm

9731 Foam insert 6003 Joker set 1







Code	EAN 4013288			
05**150121**001	*225115*			1
			6003 Joker 1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230; 1x 20x230; 1x 21x260; 1x 22x260; 1x 24x280	
			Bottle opener 1x 145	
			9831 1x 344,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9732 Foam insert 6004 Joker set 1

- The adjustable Joker 6004 covers all metric and imperial dimensions in the respective field of application
- Automatic and continuous gripping of the hexagon screw or bolt
- Lever mechanism when gripping avoids slippage and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- Return angle of only 30° through placement in the corner-width rectangular prisms in the mouth
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 35 x 392 mm

9732 Foam insert 6004 Joker set 1



Code	EAN 4013288			
051**50122**001	*225337*			1
			6004 Joker XS 1x 7-10 ($^{1}/_{4}$"-$^{3}/_{8}$")x117	
			6004 Joker S 1x 10-13 ($^{7}/_{16}$"-$^{1}/_{2}$")x154	
			6004 Joker M 1x 13-16 ($^{1}/_{2}$"-$^{5}/_{8}$")x188	
			6004 Joker L 1x 16-19 ($^{5}/_{8}$"-$^{3}/_{4}$")x224	
			6004 Joker XL 1x 19-24 ($^{3}/_{4}$"-$^{15}/_{16}$")x256	
			9832 1x 172,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9733 Foam insert 6001 Joker Switch set 1

- Reversible 6001 Joker Switch ratcheting combination wrench
- Ratchet end tilted by 15°
- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- Very fine toothing and robust locking element
- With Take it easy tool finder: colour coding by size
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 48 x 392 mm

9733 Foam insert 6001 Joker Switch set 1



Code	EAN 4013288			
051**50123**001	*232496*			1
			6001 Joker Switch 1x 8x144; 1x 10x159; 1x 11x165; 1x 12x171; 1x 13x179; 1x 14x187; 1x 15x199; 1x 16x213; 1x 17x225; 1x 18x234; 1x 19x246	
			9833 1x 172,0x30,0x392,0	

[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9734 Foam insert 6004 Joker VDE set 1

- 6004 Joker VDE XS for wrench size 7-10 (metric) or 1/4"-3/8" (imperial); 6004 Joker VDE S for wrench size 10-13 (metric) or 7/16"-1/2" (imperial); 6004 Joker VDE M for wrench size 13-16 (metric) or 1/2"- 5/8" (imperial); 6004 Joker VDE L for wrench size 16-19 (metric) or 5/8"-3/4" (imperial)
- Individually tested tools with insulated handles for safe working up to 1,000 volt, with anti-slip protection and sliding function for contactless and safe opening of the non-insulated jaws
- Automatic and continuous grip of hexagon screws and bolts
- Lever mechanism when gripping avoids slippage and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet functionality
- Return angle of only 30° through placement in the corner-width rectangular prisms in the open end
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 40 x 392 mm

9734 Foam insert 6004 Joker VDE set 1



Code	EAN 4013288			
05**150124**001	*232502*			1
			6004 Joker VDE XS 1x 7-10 (1/4"-3/8")x119	
			6004 Joker VDE S 1x 10-13 (7/16"-1/2")x155	
			6004 Joker VDE M 1x 13-16 (1/2"-5/8")x190	
			6004 Joker VDE L 1x 16-19 (5/8"-3/4")x226	
			9834 1x 172,0x30,0x392,0	

1) Attention: The foam insert does not fit in the previous model 05501051**001 of the roller cabinet.

9740 Foam insert L-key set 1

- Thanks to their Hex-Plus profile, the 950 L-keys let hexagonal socket screws live longer
- All L-keys with Take it easy tool finder: Colour coding by size
- All L-keys have a colour-coded, easy-grip hose sleeve for ergonomic and comfortable operation even at low temperatures
- Magnetiser 9500 for magnetising and demagnetising tool tips so that screws can be held on the tool by magnetic force
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 44 x 392 mm

9740 Foam insert L-key set 1



Code	EAN 4013288			
05**150140**001	*225108*			1
			1x 950/9 Hex-Plus Multicolour 1	
			950 SPKL Multicolour 1x 1.5x90; 1x 2.0x101; 1x 2.5x112; 1x 3.0x123; 1x 4.0x137; 1x 5.0x154; 1x 6.0x172; 1x 8.0x195; 1x 10.0x224	
			1x 967/9 TX XL Multicolour 1	
			967 SXL TORX® Multicolour 1x TX 8x90; 1x TX 9x101; 1x TX 10x112	
			967 SPKXL TORX® Multicolour 1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224	
			1x 9500	
			1x 48.0	
			1x STABILA®	
			1x STABILA® BM 100 Pocket tape, metric scale, 3 m, item 19570	
			1x 9840	
			1x 172,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.


9750 Foam insert Kraftform Kompakt and Tool-Check PLUS set 1

- Kraftform Kompakt 60: Folding pouch with 89 mm long bits and 816 R bitholding screwdriver with Rapidaptor quick-release chuck and multi-component Kraftform handle for fatigue-free working
- Tool-Check PLUS: 39-piece tool combination of ratchet, sockets and one bitholding screwdriver
- Bitholding screwdriver extra slim with flexible shaft and very slim design for working in confined spaces
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 59 x 392 mm

9750 Foam insert Kraftform Kompakt and Tool-Check PLUS set 1





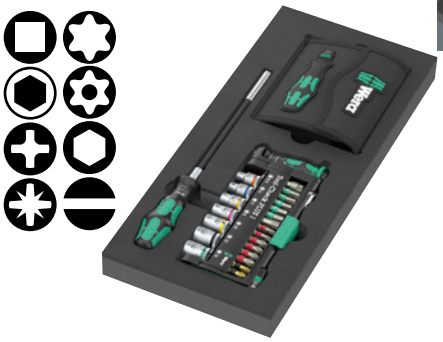

Code	EAN 4013288			
05**150150**001	*225344*			1
			1x Tool-Check PLUS	
			8001 A 1x 1/4"x87.0	
			813 1x 1/4"x78	
			889/4/1 K 1x 1/4"x50	
			870/1 1x 1/4"x25 [1]	
			8790 HMA 1x 5.5x23.0; 1x 6.0x23.0; 1x 7.0x23.0; 1x 8.0x23.0; 1x 10.0x23.0; 1x 12.0x23.0; 1x 13.0x23.0	
			851/1 TZ 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			855/1 TH 1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	
			867/1 TZ TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			840/1 Z 1x 3.0x25; 1x 4.0x25; 1x 5.0x25; 1x 6.0x25; 1x 8.0x25	
			800/1 TZ 1x 1.0x5.5x25	
			1x Kraftform Kompakt 60	
			816 R 1x 1/4"x119	
			851/4 Z 1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [2]	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [2]	
			867/4 Z TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			800/4 Z 1x 1.0x5.5x89	
			840/4 Z 1x 3.0x89; 1x 4.0x89; 1x 5.0x89; 1x 6.0x89 [2]	
			Hook and Loop Fastener Strip 70 1x 50.0x70.0	
			1x 393 S Bitholding screwdriver extra slim with flexible shaft	
			1x 1/4"x173,5	
			1x 9850	
			1x 172,0x30,0x392,0 [3]	

[1] With friction ball; for manual nut spinner sockets

[2] Hexagonal blade

[3] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.



9751 Foam insert Kraftform Kompakt VDE set 1

- 837 i RA VDE handle with ratchet functionality; for Kraftform Kompakt
- 817 VDE handle for Kraftform Kompakt interchangeable blades
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and “Take it easy” Tool finder: Colour coding by profile and laser-engraved size indication
- 14 interchangeable blades with reduced blade diameter and integrated protective insulation (iS)
- interchangeable blades with “Take it easy” Tool finder: Colour coding by profile and laser-engraved size indication
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 46 x 392 mm

9751 Foam insert Kraftform Kompakt VDE set 1









Code	EAN 4013288			
05**150151**001	*232526*			1
			837 i RA 1x 9x115	
			817 VDE 1x 9x98	
			Kraftform Kompakt VDE 62 iS Take it easy 1x PH 1x157; 1x PH 2x157	
			Kraftform Kompakt VDE 65 iS Take it easy 1x PZ 1x157; 1x PZ 2x157	
			Kraftform Kompakt VDE 62 iS PH/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 65 iS PZ/S Take it easy 1x # 1x157; 1x # 2x157	
			Kraftform Kompakt VDE 67 i Take it easy 1x TX 8x157; 1x TX 9x157; 1x TX 10x157; 1x TX 27x157; 1x TX 30x157	
			Kraftform Kompakt VDE 67 iS Take it easy 1x TX 15x157; 1x TX 20x157; 1x TX 25x157	
			Kraftform Kompakt VDE 64 i Take it easy 1x 2,5x157; 1x 3,0x157; 1x 4,0x157; 1x 5,0x157; 1x 6,0x157	
			Kraftform Kompakt VDE 60 iS Take it easy 1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157	
			Kraftform Kompakt VDE 60 i Take it easy 1x 0,4x2,5x157; 1x 1,2x6,5x157	
			9851 1x 344,0x30,0x392,0	

*) Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9752 Foam insert Kraftform Kompakt with ratchet functionality set 1

- 838 RA-R M bitholding screwdriver with integrated ratchet functionality (fine toothing, 36 teeth, return angle 10°) for 1/4" bits
- 416 RA T-handle bitholding screwdriver with integrated ratchet (fine toothing, 80 teeth, return angle 4,5°) for 1/4" bits
- Ergonomic 2-component T-handle
- 816 R bitholding screwdriver with ergonomic Kraftform handle and Rapidaptor quick-release chuck for 1/4" bits
- Rapidaptor quick-release chuck for lightning-fast bit changes; with strong permanent magnet
- Zyklop 8001 A Mini bit ratchet (60 teeth, return angle 6°), drop-forged solid steel design; for 1/4" bits and with adapter for 1/4" sockets
- 870/1 connection part for manually operated sockets; adapts from 1/4" external hexagon to 1/4" external square head
- Magnetiser 9500 for magnetising and demagnetising tool tips
- Tough bits for universal use
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 42 x 392 mm

9752 Foam insert Kraftform Kompakt with ratchet functionality set 1









Code	EAN 4013288			
05**150152**001	*232533*			1
			838 RA-R M 1x 1/4"x123,5	
			416 RA 1x 1/4"x45	
			816 R 1x 1/4"x119	
			8001 A 1x 1/4"x87,0	
			851/4 Z 1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1]	
			855/4 Z 1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [1]	
			867/4 Z TORX® 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 27x89; 1x TX 30x89; 1x TX 40x89	
			840/4 Z 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1]	
			800/4 Z 1x 1,0x5,5x89	
			870/1 1x 1/4"x25 [2]	
			9500 1x 64,6	
			9852 1x 172,0x30,0x392,0	

[1] Hexagonal blade

[2] With friction ball; for manual nut spinner sockets

[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.



9780 Foam insert KNIPEX pliers set 1

- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 38 x 392 mm

9780 Foam insert KNIPEX pliers set 1





Code	EAN 4013288			
05**150180**001	*225153*			1
			KNIPEX Combination Pliers 03 05 180 1x 180	
			KNIPEX Cobra® High-Tech Water Pump Pliers 87 05 250 1x 250	
			KNIPEX High Leverage Diagonal Cutter 74 05 160 1x 160	
			9880 1x 172,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9781 Foam insert KNIPEX pliers set 2

- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 38 x 392 mm

9781 Foam insert KNIPEX pliers set 2





Code	EAN 4013288			
05**150181**001	*225177*			1
			KNIPEX Snipe Nose Cutting Pliers (Stork Beak Pliers) 26 15 200 1x 200	
			KNIPEX Mechanics' Pliers 38 25 200 1x 200	
			KNIPEX Electricians' Shears 95 05 155 1x 155	
			9881 1x 172,0x30,0x392,0 [1]	


[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9782 Foam insert hammer set 1

- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 35 x 392 mm

9782 Foam insert hammer set 1





Code	EAN 4013288			
05**150182**001	*225191*			1
			PICARD® riveting hammer 500 g, 0000101-500 1x 500,0	
		◯	**RENNSTEIG Parallel pin punches Exclusive** 1x 452 003 6 RC, 3,0x150; 1x 452 004 6 RC, 4,0x150; 1x 452 006 6 RC, 6,0x150; 1x 452 008 6 RC, 8,0x150	
		◓	**RENNSTEIG Flat cold chisel 310 250 1** 1x 25,0x13,0x23,0	
			9882 1x 172,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9783 Foam insert PFERD file set 1

- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 42 x 392 mm

9783 Foam insert PFERD file set 1





Code	EAN 4013288			
05**150183**001	*225368*			1
			PFERD machinist's file square PF1142 250 H2 1x 250	
			PFERD machinist's file half-round pointed 1152SP 250 H2 1x 250	
			PFERD machinist's file round 1162 250 H2 1x 250	
			PFERD machinist's file hand 1112 250 H2 1x 250	
			PFERD machinist's file three square 1132 250 H2 1x 250	
			PFERD scratch brush HBF steel wire Ø 0.15 1x 232	
			9883 1x 344,0x30,0x392,0 [1]	

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

9784 Foam insert KNIPEX pliers set VDE 1

- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 38 x 392 mm

9784 Foam insert KNIPEX pliers set VDE 1





Code	EAN 4013288			
05**150184**001	*232489*			1
			KNIPEX Diagonal stripper 70 06 160	
			KNIPEX Snipe nose pliers with blade (stork beak pliers) 26 16 200	
			KNIPEX Needle-nose combination pliers 08 26 185	
			9884 1x 172,0x30,0x392,0	

[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.




Wera
Wera

Wera 2go



Wera 2go 1 Tool Carrier

The Wera 2go 1 is the super lightweight and mobile tool carrier for all Wera pouches and textile boxes equipped with hook and loop zone on their reverse sides.

The pouches and boxes are easily and securely attached individually to the tool carrier. The hands remain free during transport thanks to the shoulder strap that is included.

- Wera 2go Tool Carrier with hook and loop fastener system
- For the docking of the Wera textile boxes and pouches with hook and loop fastener zones
- Individually configurable for greater mobility
- Hands remain free during Transport
- Includes an adjustable, detachable Shoulder Strap with a wide padded section

Wera 2go 1 Tool Carrier



Code	EAN 4013288			
05**004350**001	*187352*			1
			Wera 2go 5 1x 135,0x300,0x270,0	
			Wera 2go 6 1x 38,0x1470,0	

Wera 2go 2 Tool Container

The Wera 2go tool container is the ideal solution for individual and convenient tool transport thanks to its hook and loop fastener system and its compactness. The inner and outer hook and loop fastener zones ensure a maximum in terms of space utilisation. This means that an incredible number of tools can fit in and on the container.

Wera 2go 2 ensures a low weight since only the tools really needed for the job are taken along. The robust and dimensionally stable material protects the tools carried against damage and moisture and enhances the service life of the tool container.

The padded and width-adjustable shoulder strap and the snug fit of the container on the body mean that the container is easy and convenient to carry.

The hands remain free during transport. It comes with a quiver with an individually adjustable hook and loop fastener partition for screwdrivers and other tools.

- Wera 2go tool container with inner and outer hook and loop fastener zones
- Individually configurable for greater mobility
- Ideal also for the docking of Wera textile boxes and pouches equipped with hook and loop fastener zones

Wera 2go 2 Tool Container



Code	EAN 4013288			
05**004351**001	*187840*			1
			Wera 2go Container 1x 355,0x330,0x115,0	
			Wera 2go 6 1x 38,0x1470,0	
			Wera 2go 4 1x 165,0x165,0x105,0	

Wera 2go 2 XL Tool Container

The Wera 2go 2 XL Tool Container with extra low-profile compartments, with its hook and loop fastener system and its compactness, is the ideal solution for individual and convenient tool transport. The inner and outer hook and loop fastener zones provide extremely high flexibility and space utilization.

This fits an incredible amount of tools in and on the container. Wera 2go 2 makes for light luggage, because only the essential tools are taken.

The robust and sturdy material protects the enclosed tools from damage and moisture, and increases the service life of the tool container.

The padded and adjustable wide belt and the close-fitting position of the container provide a comfortable fit.

The hands remain free during transport. Including one Wera 2go 4 holder with individually adjustable hook and loop fastener divider for screwdrivers and other tools. Four of these holders can be stowed effortlessly.

- Wera 2go 2 XL Tool Container with extra low-profile compartments for e.g. the Wera 2go 4 Tool Quivers

Wera 2go 2 XL Tool Container



Code	EAN 4013288			
05**004357**001	*211491*			1
			Wera 2go XL Container 1x 455,0x330,0x170,0	
			Wera 2go 6 1x 38,0x1470,0	
			Wera 2go 4 1x 165,0x165,0x105,0	

Wera 2go 3 Tool Box

- Suitable for docking with the Wera 2go system
- Permanently dimensionally stable thanks to the fabric-lined plastic panels
- High resistance against cuts and stabs
- High protection for transported tools against damage and moisture
- Can be individually equipped

Wera 2go 3 Tool Box



	EAN							
Code	4013288	mm	mm	mm				
05**004352**001	*187369*	130,0	325,0	80,0				1

Wera 2go 4 Tool Quiver

- Suitable for docking with the Wera 2go system
- Dimensionally stable Wera 2go tool quiver
- High resistance against cuts and stabs
- Variable hook and loop fastener partition for a division into as many as 5 inner sections
- Large set-down area; handle for carrying and hanging up

Wera 2go 4 Tool Quiver



	EAN							
Code	4013288	mm	mm	mm				
05**004353**001	*187857*	165,0	165,0	105,0				1

Wera 2go 5 Tool Carrier

The Wera 2go 5 is the super lightweight and mobile tool carrier for all Wera pouches and textile boxes equipped with Velcro on their reverse sides. The pouches and boxes are easily and securely attached individually to the Wera 2go 5 article.

Wera 2go 5 Tool Carrier



	EAN							
Code	4013288	mm	mm	mm				
05**004354**001	*187383*	135,0	300,0	270,0				1

Wera 2go 6 Shoulder Strap

Shoulder strap for the Wera 2go tool transport system. It comes with extra wide, comfortable padding sections and adjustable strap length and is suitable for use with the Wera 2go 1 and 5 articles.

Wera 2go 6 Shoulder Strap



	EAN							
Code	4013288	mm	mm					
05**004355**001	*187390*	38,0	1470,0					1

Wera 2go 7 High Tool Box

- Transport box even for long tools such as spirit levels

Wera 2go 7 High Tool Box



	EAN							
Code	4013288	mm	mm	mm				
05**004356**001	*204370*	295,0	100,0	100,0				1


Wera 2go H 1 tool set for wood applications

Compact tool set with the 134 most important tools for woodwork with products by Wera, BESSEY®, “KIRSCHEN“®, KNIPEX, Lyra®, PICARD® and Stabila®.

Mobility is made considerably easy thanks to the compact tool container from the Wera 2go system.

- Extensive 134-piece tool set in compact Wera 2go tool container for carpenters on the go
- Premium brand tools by Wera, BESSEY®, “KIRSCHEN“®, KNIPEX, Lyra®, PICARD® and Stabila®
- Wera Kraftform Kompakt H 1 Wood (41-piece set) and Wera Bit-Safe 61 Wood 1 (61-piece set)
- 393 S extra slim bit hand holder with flexible shaft for applications in hard-to-reach work spaces
- Wera L-key with holding function: 967/9 TX XL Multicolour HF 1 (9-piece set) and 950/9 Hex-Plus Multicolour HF 1 (9-piece set)

Wera 2go H 1 tool set for wood applications







Code	EAN 4013288		
05**134011**001	*217677*		1
		1x Wera 2go 2 Tool Container	
		1x Bit-Safe 61 Wood 1	
		1x Kraftform Kompakt H 1 Woodcraft	
		1x 967/9 TX XL Multicolour HF 1 L-key set with holding function, long	
		1x 950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function	
		1x 393 S bits hand holder extra slim with flexible shaft	
		1x KNIPEX multigrip pliers COBRA® 250 mm 87 11 250	
		1x KNIPEX combination pliers 160 mm 03 01 160	
		1x KNIPEX carpenters' pincers 210 mm 50 00 210	
		1x Stabila® spirit level type 81 25 cm 02500 Torpedo	
		1x Carpenters' mallet 105 mm 52-1 P	
		1x “KIRSCHEN“® bevelled-edge chisel 10 mm 1001010	
		1x “KIRSCHEN“® bevelled-edge chisel 16 mm 1001016	
		1x “KIRSCHEN“® bevelled-edge chisel 20 mm 1001020	
		1x “KIRSCHEN“® bevelled-edge chisel 26 mm 1001026	
		1x BESSEY® Folding utility knife DBKPH-EU	
		1x Lyra® deep hole marker 4494202	

Product not available in the USA and Canada.

Wera 2go E 1 Tool set for electricians

Compact tool set with the 73 most important tools for electricians with products by Wera, Jung, KNIPEX, Lyra®, PICARD®, PUK® and Stabila®.

Mobility is made considerably easier thanks to the compact tool container from the Wera 2go system.

- Extensive 73-piece tool set in the compact Wera 2go 2 tool container for electricians in mobile operations
- Premium brand tools by Wera, Jung, KNIPEX, Lyra®, PICARD®, PUK® and Stabila®
- Wera Kraftform Kompakt Turbo i 1 Tool Finder (16-piece handle/interchangeable blades VDE set) for four times the screwdriving speed and Wera 8100 SA 6 Zyklop Speed ratchet set (1/4", 28-piece set)
- Joker 6004 S self-setting spanner for bolts and screws of 10-13mm (metric) and 7/16"-1/2" (imperial)
- With chiseldriver for screwdriving, chiselling, mortising as well as 4 VDE screwdrivers - 2 of which with stainless steel blade to prevent extraneous rust

Wera 2go E 1 Tool set for electricians







Code	EAN 4013288	
05**134025**001	*221278*	1 x Wera 2go 2 Tool Container 1
		1 x 8100 SA 6 Zyklop Speed Ratchet Set, 1/4" drive, metric
		1 x 950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function
		1 x Kraftform Kompakt Turbo i 1 Tool Finder
		1x 932 A Screwdriver for slotted screws 1.2x7.0x125
		1x 3162 i PH VDE Insulated screwdriver for Phillips screws, stainless PH 2x100
		1x 3165 i PZ VDE Insulated screwdriver for Pozidriv screws, stainless PZ 2x100
		1x 160 i VDE Insulated screwdriver for slotted screws 1.2x6.5x150
		1x 160 iS VDE Insulated screwdriver with reduced blade diameter for slotted screws 0.6x3.5x100
		1x 6004 Joker S self-setting spanner 10-13x7/16"-1/2"x154
		1 x KNIPEX Combination pliers 160mm 01 06 160
		1 x KNIPEX Diagonal insulation stripper 14 26 160
		1 x KNIPEX Snipe nose pliers with blade (stork beak pliers) 26 16 200
		1 x KNIPEX Cobra® VDE Hightech water pump pliers, insulated, 87 26 250
		1 x KNIPEX Cable knife 98 52
		1 x KNIPEX ErgoStrip® Universal dismantling tool 16 95 01
		1 x PUK® 2200 Hand saw frame
		1 x Lyra® Construction marker DRY PROFI 4494202
		1 x STABILA® Spirit level Pocket Electric 17775
		1 x STABILA® Spirit level type 70, 30 cm, 02281
		1 x STABILA® Wooden folding rule type 607, 2 m, yellow, 01104
		1 x PICARD® Fitter's hammer 400 g, German shape, 000101-0400
		1 x Jung Plastering cup 127mm, 946 127 00
		1 x Jung Scraping knife with natural wood handle, 922 050 00



Wera 2go SHK 1 Tool set for plumbing, heating and air conditioning

Compact tool set with the most important tools for HVAC services with products by Wera, BESSEY®, KNIPEX, Lyra®, PICARD®, PUK® and Stabila®. Mobility is made considerably easier thanks to the compact tool container from the Wera 2go system.

- Extensive 30-piece tool set in the compact Wera 2go 2 tool container for mobile HVAC applications
- Premium brand tools by Wera, BESSEY®, KNIPEX, Lyra®, PICARD®, PUK® and Stabila®
- Joker 6002 double spanner with practical holding function by a metal plate in the open end
- With chiseldriver for screwdriving, chiselling, mortising as well as 4 VDE screwdrivers - 2 of which with stainless steel blade to prevent extraneous rust
- 1/2" Zyklop Metal 8004 C ratchet (72 teeth, 5° low return angle) with reversing lever; slim design for very narrow spaces
- L-key set for hexagonal socket screws; the Hex-Plus profile reduces the cylindrical turning of hexagonal socket screws

Wera 2go SHK 1 Tool set for plumbing, heating and air conditioning



Code	EAN 4013288	
05**136071**001	*230300*	1
		1x Wera 2go Container
		1x Wera 2go 6 Shoulder Strap
		1x Wera 2go 4 Tool Quiver
		1x 932 A Screwdriver for slotted screws 1,2x7,0x125
		1x 395 HO Nutdriver 10,0x90
		1x 395 HO Nutdriver 13,0x90
		1x 1060 i VDE-insulated Kraftform slotted screwdriver 0,6x3,5x100
		1x 1060 i VDE-insulated Kraftform slotted screwdriver 1,0x5,5x125
		1x 1062 i PH VDE-insulated Kraftform Phillips-head screwdriver PH 1x80
		1x 1062 i PH VDE-insulated Kraftform Phillips-head screwdriver PH 2x100
		1x 8004 C Zyklop Metal Ratchet with switch lever and 1/2" drive 1/2"x281
		1x 8790 HMC Zyklop socket with 1/2" drive 10,0x37,0
		1x 8790 HMC Zyklop socket with 1/2" drive 13,0x37,0
		1x 8790 HMC Zyklop socket with 1/2" drive 17,0x37,0
		1x 8790 HMC Zyklop socket with 1/2" drive 19,0x37,0
		1x Belt C (textile belt), 6 location, unloaded 45,0x275,0
		1x 6002 Joker Double open-ended wrenches 10x13x167
		1x 6002 Joker Double open-ended wrenches 17x19x235
		1x 6002 Joker Double open-ended wrenches 24x27x280
		1x 6002 Joker Double open-ended wrenches 30x32x305
		1x 950/9 Hex-Plus 2
		1x 9529 C SB 1/2" Step wrench 10,0x88,0
		1x KNIPEX Water pump pliers COBRA® 250mm 87 11 250
		1x KNIPEX Combination pliers 160mm 03 01 160
		1x KNIPEX Diagonal insulation stripper 14 26 160
		1x KNIPEX 001104 Pro wrench for standard shut-off systems
		1x STABILA® Spirit level type 70, 30 cm, 02281
		1x STABILA® Wooden folding rule type 607, 2 m, yellow, 01104
		1x PICARD® Fitter's hammer 400 g, German shape, 000101-0400
		1x PUK® 2200 Hand saw frame
		1x BESSEY® blades DBKPH-EU flick knife
		1x Lyra® Construction marker DRY PROFI 4494202

Hook and Loop Fastener Strip 1



Code	EAN 4013288			
05**670446**001	*189448*			1
			Hook and Loop Fastener Strip 70 1x 50,0x70,0	

Hook and Loop Fastener Strip 2



Code	EAN 4013288			
05**670447**001	*189455*			1
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Hook and Loop Fastener Strip 3



Code	EAN 4013288			
05**670448**001	*189462*			1
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	





Wera
Be a Tool Rebel

Bits



Impaktor system - For an above-average service life

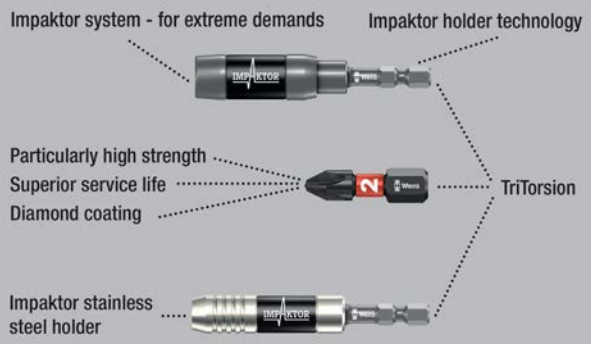

The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 IMP DC PH DIY Impaktor PH bits



Code	EAN 4013288			
05**057615**001	*178695*	✚	**851/1 IMP DC** 10x PH 1x25	1
05**057616**001	*157638*	✚	**851/1 IMP DC** 10x PH 2x25	1
05**057617**001	*157645*	✚	**851/1 IMP DC** 10x PH 3x25	1

851/1 IMP DC SB Impaktor bits




Code	EAN 4013288			
05**073916**001	*158369*	✚	**851/1 IMP DC** 1x PH 2x25	5
05**073917**001	*158376*	✚	**851/1 IMP DC** 1x PH 3x25	5

Bit-Box 15 Impaktor PH



Code	EAN 4013288			
05**057752**001	*187918*	✚	**851/1 IMP DC** 15x PH 2x25	10

Kraftform Stainless - stainless steel to prevent rust

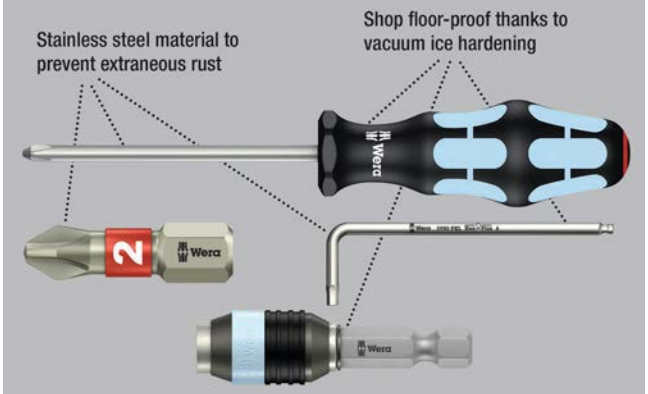

High quality bits out of stainless steel for cross-recess screws. Wera stainless are made out of stainless steel which prevents the formation of unsightly extraneous rust.
Come with Torsion zone: Torsion bits take-up torque peaks and absorb them in the Torsion zone. This prevents premature wear and extends the service life of the bit. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

3851/1 TS bits, stainless




Code	EAN 4013288	✚	mm	1"				
05**071010**001	*110985*	PH 1	25	1"				10
05**071011**001	*110992*	PH 2	25	1"				10
05**071012**001	*111005*	PH 3	25	1"				10

3851/1 TS SB bits, stainless



Code	EAN 4013288			
05**073610**001	*112132*	⊕	**3851/1 TS PH** 1x PH 1x25	5
05**073611**001	*112149*	⊕	**3851/1 TS PH** 1x PH 2x25	5

BiTorsion system - for longer service life

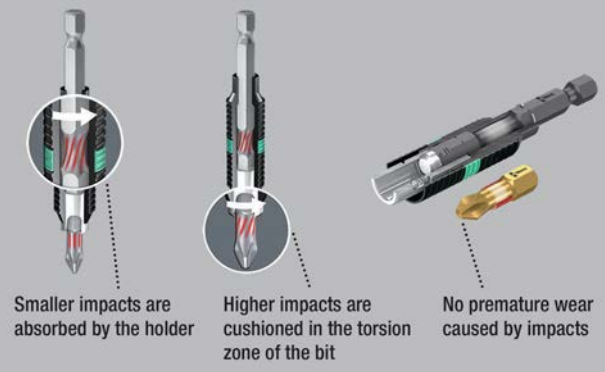

851/1 BDC bits

Bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 BDC bits



Code	EAN 4013288	⊕	mm					
05**056400**001	*033970*	PH 1	25	1"				10
05**056402**001	*033987*	PH 2	25	1"				10
05**056404**001	*033994*	PH 3	25	1"				10

851/1 BDC SB bits



Code	EAN 4013288			
05**073332**001	*029324*	⊕	**851/1 BDC PH** 1x PH 1x25	5
05**073333**001	*029331*	⊕	**851/1 BDC PH** 1x PH 2x25	5
05**073334**001	*029348*	⊕	**851/1 BDC PH** 1x PH 3x25	5
05**073335**001	*029355*	⊕	**851/1 BDC PH** 2x PH 2x25	5

851/1 BTH bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads – and BiTorsion zone to prevent the bit tip from twisting under peak loads.

This greatly extends the product service life. Extra-hard design, 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 BTH bits



Code	EAN 4013288	⊕	mm					
05**056410**001	*034243*	PH 1	25	1"				10
05**056412**001	*034250*	PH 2	25	1"				10
05**056414**001	*034267*	PH 3	25	1"				10

851/1 BTZ bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads – and BiTorsion zone to prevent the bit tip from twisting under peak loads.

This greatly extends the product service life. Tough viscous, 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 BTZ bits




	EAN							
Code	4013288		mm					
05**056420**001	*034458*	PH 1	25	1"				10
05**056422**001	*034465*	PH 2	25	1"				10
05**056424**001	*034472*	PH 3	25	1"				10

Bit-Box 20 BTZ PH



Code	EAN 4013288			
05**057751**001	*187956*		**851/1 BTZ PH** 20x PH 2x25	10

Diamond-coated bits

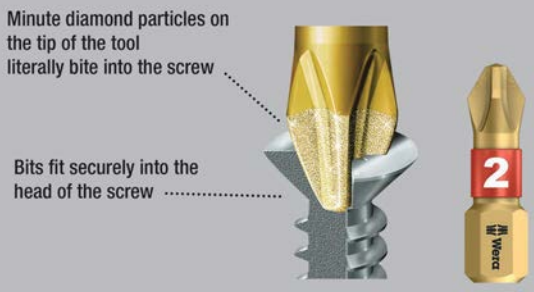

The diamond coating of the bits ensures a secure fit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Profiled version with especially sharp edges which break away the paint when e.g. screw profiles are covered in it and this ensures a dependable transfer of power between the bit and screw.

1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 A bits

Extra-hard design. Profiled version. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 A bits




	EAN				∅			
Code	4013288		mm		mm			
05**134919**001	*099976*	PH 1	25	1"	4,5			10
05**134920**001	*099983*	PH 2	25	1"	6,0			10
05**134921**001	*099990*	PH 3	25	1"	-			10

851/1 RDC bits

High quality bits for drywall screws. Reduced shaft diameter for low-lying screw connections. Countersinking of screws without any surface damage.

Especially for drywall construction. The diamond coating of the bits ensures a secure fit in the screw, reduces the contact pressure required and lowers the risk of slipping. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 RDC bits

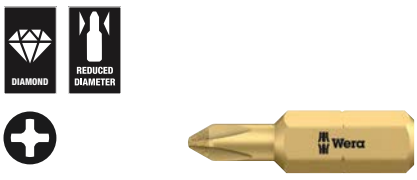

	EAN				∅			
Code	4013288		mm		mm			
05**135008**001	*032904*	PH 2	25	1"	4,2			10

851/1 RH bits

Bits with reduced shaft diameter for low-lying screw connections. Countersinking of screws without any surface damage. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 RH bits



	EAN							
Code	4013288		mm		mm			
053**462810**01	*107176*	PH 2	25	1"	4,2			10

851/1 RZ bits

Bits for drywall screws. Reduced shaft diameter for low-lying screw connections. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 RZ bits



	EAN							
Code	4013288		mm		mm			
051**350090**01	*032799*	PH 2	25	1"	4,2			10

851/1 RZ SB bits



	EAN 4013288		
Code			
051**350050**01	*038456*		**851/1 RZ PH** 2x PH 2x25	5

851/1 TH bits

The Torsion design means that torque peaks can be absorbed. This prevents premature wear and enhances the service life. Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 TH bits



	EAN							
Code	4013288		mm					
050**566050**01	*013545*	PH 1	25	1"				10
050**566100**01	*013552*	PH 2	25	1"				10
050**566250**01	*013569*	PH 3	25	1"				10

851/1 TiN bits

Extra-hard titanium nitride (TiN) coating for withstanding permanent loads such as e.g. in industrial applications. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

851/1 TiN bits



	EAN							
Code	4013288		mm					
054**801720**01	*040992*	PH 2	25	1"				10

851/1 TZ bits

- Ductile and tough for hard materials
- Torsion design against premature wear

851/1 TZ bits



Code	EAN 4013288		mm					
05**056505**001	*013606*	PH 1	25	1"				10
05**056510**001	*013613*	PH 2	25	1"				10
05**056525**001	*013620*	PH 3	25	1"				10

851/1 TZ SB bits



Code	EAN 4013288		
05**073323**001	*029249*		**851/1 TZ PH** 2x PH 1x25	5
05**073324**001	*029256*		**851/1 TZ PH** 2x PH 2x25	5
05**073325**001	*029263*		**851/1 TZ PH** 2x PH 3x25	5
05**073326**001	*029270*		**851/1 TZ PH** 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	5

853/1 TZ ACR® bits

Bits with Torsion zone: where kinetic energy is diverted from peak loads. This greatly extends the product service life. Come with rough ribs (anti cam-out feature, ACR).

Tough viscous, for universal use; ¼" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

853/1 TZ ACR® bits



Code	EAN 4013288		mm					
05**056662**001	*014405*	PH 2	25	1"				10

851/1 Z bits

- Ductile and tough for hard materials

851/1 Z bits



Code	EAN 4013288		mm					
05**056500**001	*013323*	PH 0	25	1"				10
05**072070**001	*013453*	PH 1	25	1"				10
05**056507**001	*013330*	PH 1	50	2"				10
05**072072**001	*013460*	PH 2	25	1"				10
05**056515**001	*013347*	PH 2	32	1 ¼"				10
05**056520**001	*013354*	PH 2	50	2"				10
05**072074**001	*013477*	PH 3	25	1"				10
05**134905**001	*094858*	PH 3	50	2"				10
05**056535**001	*013378*	PH 4	32	1 ¼"				10

851/1 Z SB bits



Code	EAN 4013288		
05**073304**001	*029058*		**851/1 Z PH** 2x PH 1x25	5
05**073305**001	*029065*		**851/1 Z PH** 2x PH 2x25	5
05**073306**001	*029072*		**851/1 Z PH** 2x PH 3x25	5
05**073307**001	*029089*		**851/1 Z PH** 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	5

851/1 Z DIY bits



Code	EAN 4013288		
05**072400**001	*115737*		**851/1 Z PH** 10x PH 1x25	1
05**072401**001	*115744*		**851/1 Z PH** 10x PH 2x25	1
05**072402**001	*115751*		**851/1 Z PH** 10x PH 3x25	1

851/1 Z DIY 100 bits



Code	EAN 4013288			
05**072441**001	*138477*		**851/1 Z PH** 100x PH 2x25	1

Bit-Box 20 PH



Code	EAN 4013288			
05**057750**001	*188014*		**851/1 Z PH** 20x PH 2x25	20

851/1 J bits

Bits optimised for Asian PH screws. Similar to Camera screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.


851/1 J bits



Code	EAN 4013288		mm		mm			
05**135040**001 [1]	*112569*	PH 00	25	1"	2,0			10
05**135041**001 [2]	*112576*	PH 0	25	1"	2,5			10

[1] Size 00 modificated according to JCIS 00 (Japanese Camera Industrial Standard)
[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Impaktor system - For an above-average service life

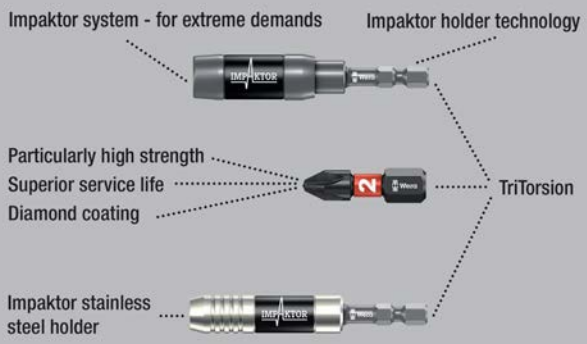

The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 IMP DC PH DIY Impaktor PH bits




Code	EAN 4013288		
05**057656**001	*157652*	**851/4 IMP DC** 5x PH 2x50	1
05**057657**001	*157669*	**851/4 IMP DC** 5x PH 3x50	1

851/4 IMP DC SB Impaktor bits



Code	EAN 4013288			
05**073956**001	*158482*	✚	**851/4 IMP DC** 1x PH 2x50	5
05**073957**001	*158499*	✚	**851/4 IMP DC** 1x PH 3x50	5

Kraftform Stainless - stainless steel to prevent rust

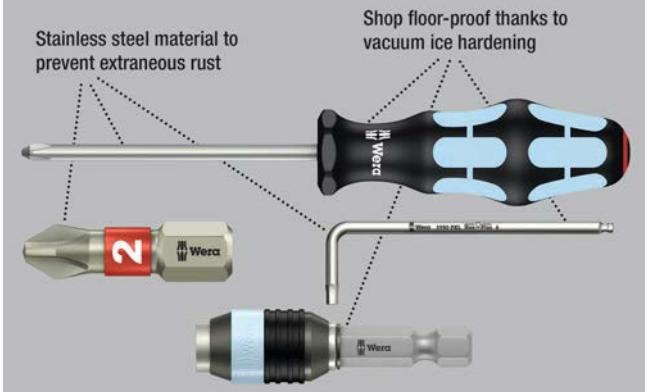


High quality bits out of stainless steel for cross-recess screws. Wera stainless are made out of stainless steel which prevents the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

3851/4 Bits, stainless



Code	EAN 4013288	✚	mm					
05**071081**001	*115485*	PH 1	89	3 1/2"				10
05**071082**001	*115492*	PH 2	89	3 1/2"				10
05**071083**001	*115508*	PH 3	89	3 1/2"				10

BiTorsion system - for longer service life

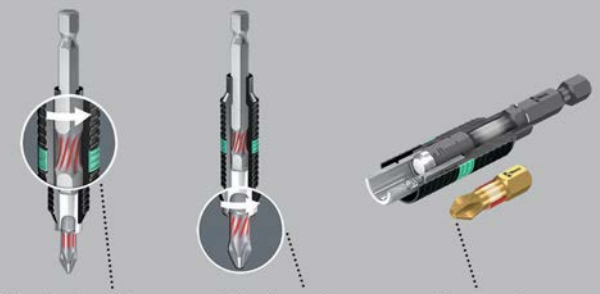

851/4 BDC bits

BiTorsion bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 BDC bits



Code	EAN 4013288	✚	mm					
05**059530**001	*034090*	PH 1	50	2"				10
05**059532**001	*034106*	PH 2	50	2"				10
05**059534**001	*034113*	PH 3	50	2"				10

851/4 BTH bits

BiTorsion bits with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 BTH bits



	EAN							
Code	4013288		mm					
05**059540**001	*034304*	PH 1	50	2"				10
05**059542**001	*034311*	PH 2	50	2"				10
05**059544**001	*034328*	PH 3	50	2"				10

851/4 BTZ bits

BiTorsion with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life. Tough viscous for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 BTZ bits



	EAN							
Code	4013288		mm					
05**059550**001	*034571*	PH 1	50	2"				10
05**059552**001	*034588*	PH 2	50	2"				10
05**059554**001	*034595*	PH 3	50	2"				10

851/4 RH Reduced tip bits

Bits with reduced shaft diameter for low-lying screw connections, enabling countersinking of screws without any surface damage. Profiled version. Extra-hard. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 RH Reduced tip bits



	EAN							
Code	4013288		mm		mm			
05**380161**001	*157065*	PH 2	50	2"	4,2			10

851/4 A bits

The sharp-edged profile ensures a dependable transfer of power between the bit and screw by breaking off the paint e.g. when screw profiles are covered in it.

Extra-hard design: 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 A bits



	EAN							
Code	4013288		mm		mm			
05**134929**001	*105165*	PH 0	50	2"	3			10
05**134906**001	*105141*	PH 0	70	2 3/4"	3			10
05**134907**001	*105172*	PH 0	89	3 1/2"	3			10
05**134930**001	*100009*	PH 1	50	2"	4,5			10
05**134370**001	*037831*	PH 1	70	2 3/4"	4,5			10
05**134372**001	*037855*	PH 1	89	3 1/2"	4,5			10
05**134931**001	*100016*	PH 2	50	2"	6			10
05**134371**001	*037848*	PH 2	70	2 3/4"	6			10
05**134373**001	*037862*	PH 2	89	3 1/2"	6			10
05**134910**001 [1]	*105202*	PH 2	152	6"	6			10
05**134911**001 [2]	*105219*	PH 2	152	6"	6			10
05**134932**001	*100023*	PH 3	50	2"	-			10
05**134913**001	*105233*	PH 3	70	2 3/4"	8			10
05**134914**001	*105240*	PH 3	89	3 1/2"	8			10
05**134915**001	*105257*	PH 3	152	6"	8			10
05**160983**001	*106575*	PH 4	50	2"	10			10

[1] Length of drive 100 mm
[2] Length of drive 20 mm

851/4 R Reduced tip bits

High quality bits with reduced shaft diameter for low-lying screw connections, enabling countersinking of screws without any surface damage. Profiled version. Extra-hard. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 R Reduced tip bits



	EAN							
Code	4013288		mm		mm			
05**160899**001	*105547*	PH 2	50	2"	3,0			10
05**160896**001	*105554*	PH 2	152	6"	3,0			10

851/4 TH bits

High quality bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 TH bits



	EAN							
Code	4013288		mm					
05**059855**001	*013897*	PH 1	50	2"				10
05**059860**001	*013903*	PH 2	50	2"				10
05**059865**001	*013910*	PH 3	50	2"				10

851/4 TZ bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Tough viscous, for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 TZ bits



	EAN							
Code	4013288		mm					
05**059805**001	*013927*	PH 1	50	2"				10
05**059810**001	*013934*	PH 2	50	2"				10
05**059815**001	*013941*	PH 3	50	2"				10

851/4 TZ SB bits



Code	EAN 4013288			
05**134380**001	*037947*		**851/4 TZ PH** 2x PH 1x50	3
05**134381**001	*037954*		**851/4 TZ PH** 2x PH 2x50	3
05**134382**001	*037961*		**851/4 TZ PH** 2x PH 3x50	3

851/4 Z bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 Z bits



	EAN							
Code	4013288		mm		mm			
05**059755**001	*013781*	PH 1	70	2 3/4"	4,5			10
05**059760**001	*013798*	PH 1	89	3 1/2"	4,5			10
05**059765**001	*031044*	PH 1	127	5"	4,5			10
05**059766**001	*031051*	PH 1	152	6"	4,5			10
05**059770**001	*013804*	PH 2	70	2 3/4"	6,0			10
05**059775**001	*013811*	PH 2	89	3 1/2"	6,0			10
05**059780**001	*013828*	PH 2	110	4 3/8"	6,0			10
05**059785**001	*030474*	PH 2	127	5"	6,0			10
05**059786**001	*031068*	PH 2	152	6"	6,0			10
05**059790**001	*013835*	PH 3	70	2 3/4"	-			10
05**059795**001	*013842*	PH 3	89	3 1/2"	-			10
05**059800**001	*013859*	PH 3	110	4 3/8"	-			10
05**059802**001	*031075*	PH 3	152	6"	-			10

851/4 J bits

Bits optimised for Asian PH screws. In particular, for applications with very small dimensions pursuant to the Japanese Camera Industrial Standard.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 J bits



Code	EAN 4013288		mm		mm			
05**135530**001 [1]	*113252*	PH 00	50	2"	2,0			10
05**380200**001 [1]	*156204*	PH 00	89	3 1/2"	2,0			10
05**135531**001 [2]	*113269*	PH 0	50	2"	2,5			10
05**380201**001 [2]	*156211*	PH 0	89	3 1/2"	2,5			10
05**135532**001	*113276*	PH 1	50	2"	4,5			10
05**380202**001	*156228*	PH 1	89	3 1/2"	4,5			10

[1] Optimised for Asian PH screws
[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

851/4 Z SB bits



Code	EAN 4013288		
05**073520**001	*105875*		**851/4 Z PH** 1x PH 1x89	5
05**136305**001	*213839*		**851/4 Z PH** 1x PH 1x152	3
05**073521**001	*105882*		**851/4 Z PH** 1x PH 2x89	5
05**136306**001	*213846*		**851/4 Z PH** 1x PH 2x152	3
05**073522**001	*105899*		**851/4 Z PH** 1x PH 3x89	5
05**136307**001	*213853*		**851/4 Z PH** 1x PH 3x152	3

853/4 ACR® SL bits with sleeve, magnetized

Bits with rough ribs (anti cam-out feature, ACR) to prevent any slipping out of the screw head, permanently magnetized, thus screws can be held securely on the tip of the bit; with plastic sleeve, protects components from being damaged when screwdriving.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

853/4 ACR® SL bits with sleeve, magnetized





Code	EAN 4013288		mm		mm			
05**323780**001	*165190*	PH 2	50	2"	5,2			40
05**323781**001	*165206*	PH 2	90	3 1/2"	5,2			40
05**203913**001	*163189*	PH 2	150	6"	5,2			40
05**203914**001	*163196*	PH 2	200	8"	5,2			60

853/4 ACR® bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Come with rough ribs (anti cam-out feature, ACR) to prevent any slipping out of the screw head.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

853/4 ACR® bits



Code	EAN 4013288		mm		mm			
05**346286**001	*105578*	PH 2	50	2"	5,2			10

853/4 Harpoon ACR® bits

Bits with reduced shaft diameter for low-lying screw connections. Countersinking of screws without any surface damage. Come with rough ribs (anti cam-out feature, ACR) to prevent any slipping out of the screw head.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

853/4 Harpoon ACR® bits



	EAN							
Code	4013288		mm		mm			
05**160901**001	*105592*	PH 2	50	2"	3,3			10
05**160895**001	*105608*	PH 2	70	2 3/4"	3,3			10
05**160908**001	*105615*	PH 2	152	6"	3,3			10

851/0 Micro bits for Phillips screws

- 4 mm hexagonal drive

851/0 Micro bits for Phillips screws



	EAN							
Code	4013288		mm		mm			
05**058119**001	*234568*	PH 000	30	1 3/16"	1,5			10
05**058120**001	*188687*	PH 00	30	1 3/16"	2,5			10
05**058121**001 [1]	*188694*	PH 0	30	1 3/16"	2,5			10
05**058122**001	*234575*	PH 1	30	1 3/16"	2,5			10

[1] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

851/2 Z bits

For universal use. 5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

851/2 Z bits



	EAN							
Code	4013288		mm		mm			
05**057705**001	*013668*	PH 1	32	1 1/4"	4,5			10
05**057710**001	*013675*	PH 2	32	1 1/4"	6,0			10
05**057715**001	*013682*	PH 3	32	1 1/4"	7,6			10
05**057720**001	*013699*	PH 4	32	1 1/4"	-			10

851/11 Bits

With thread drive M 4.

851/11 Bits



	EAN							
Code	4013288		mm		mm			
05**065081**001	*014245*	PH 2	33	1 1/4"	6,0			5

851/12 Bits

Tough viscous for universal use. Thread drive M 5.

851/12 Bits



	EAN							
Code	4013288		mm		mm			
05**065110**001	*014252*	PH 2	33	1 1/4"	7,0			5
05**065112**001	*014269*	PH 2	35	1 3/8"	7,0			5
05**065114**001	*014276*	PH 2	44,5	1 3/4"	6,0			5

851/16 bits

Thread drive #10-32 UNF.

851/16 bits



	EAN							
Code	4013288		mm		mm			
05**065197**001	*014351*	PH 2	44,5	1 3/4"	6,0			5

851/9 C J PH bits, halfmoon

With 4 mm halfmoon drive. Optimised for Japanese PH screws. Hard design.

851/9 C J PH bits, halfmoon



	EAN								
Code	4013288		mm		mm	mm			
05**134605**001 [1]	*190444*	PH 000	44	1 47/64"	1,5	20	25/32"		10
05**135270**001 [1]	*112729*	PH 00	44	1 47/64"	1,8	20	25/32"		10
05**135271**001 [1]	*112736*	PH 00	64	2 33/64"	1,8	20	25/32"		10
05**135272**001 [2]	*112743*	PH 0	44	1 47/64"	1,8	20	25/32"		10
05**135273**001 [2]	*112750*	PH 0	64	2 33/64"	1,8	20	25/32"		10
05**135276**001 [1]	*112781*	PH 1	44	1 47/64"	3,0	20	25/32"		10
05**135277**001 [1]	*112798*	PH 1	64	2 33/64"	3,0	20	25/32"		10

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

851/21 J bits

With HIOS 4 mm drive. Optimised for Japanese PH screws. Hard design.


851/21 J bits



Code	EAN 4013288		mm		mm			
05**135280**001 [1]	*112804*	PH 00	40	1 9/16"	1,8			10
05**135281**001 [1]	*112811*	PH 00	60	2 3/8"	1,8			10
05**135284**001 [2]	*112828*	PH 0	40	1 9/16"	1,8			10
05**135285**001 [2]	*112835*	PH 0	60	2 3/8"	1,8			10

[1] Size 00 modificated according to JCIS 00 (Japanese Camera Industrial Standard)
[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Impaktor system - For an above-average service life

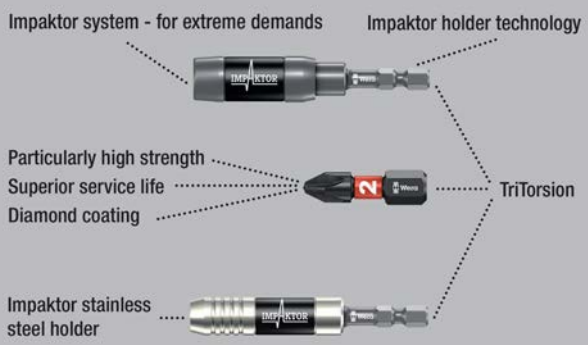

High quality bits for Pozidriv screws. The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head. Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

855/1 IMP DC PZ DIY Impaktor bits





Code	EAN 4013288			
05**057620**001	*178718*		**855/1 IMP DC** 10x PZ 1x25	1
05**057621**001	*157676*		**855/1 IMP DC** 10x PZ 2x25	1
05**057622**001	*157683*		**855/1 IMP DC** 10x PZ 3x25	1

855/1 IMP DC SB Impaktor bits




Code	EAN 4013288			
05**073921**001	*158383*		**855/1 IMP DC** 1x PZ 2x25	5
05**073922**001	*158390*		**855/1 IMP DC** 1x PZ 3x25	5

Bit-Box 15 Impaktor PZ




Code	EAN 4013288			
05**057763**001	*187901*		**855/1 IMP DC** 15x PZ 2x25	10

Kraftform Stainless - stainless steel to prevent rust

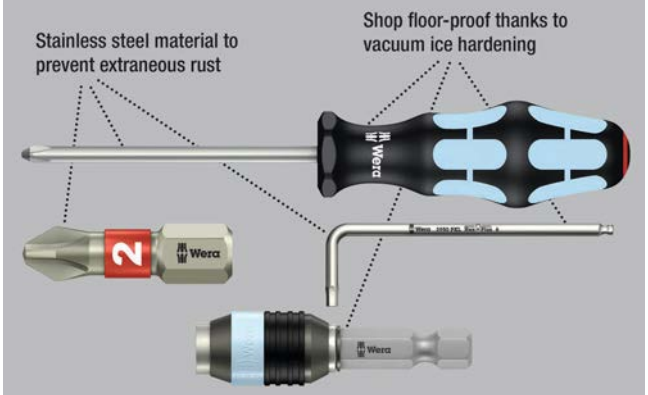

High quality bits out of stainless steel for Pozidriv screws. Wera stainless are made out of stainless steel which prevents the formation of unsightly extraneous rust.
Come with Torsion zone: Torsion bits take-up torque peaks and absorb them in the Torsion zone. This prevents premature wear and extends the service life of the bit. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

BiTorsion system - for longer service life

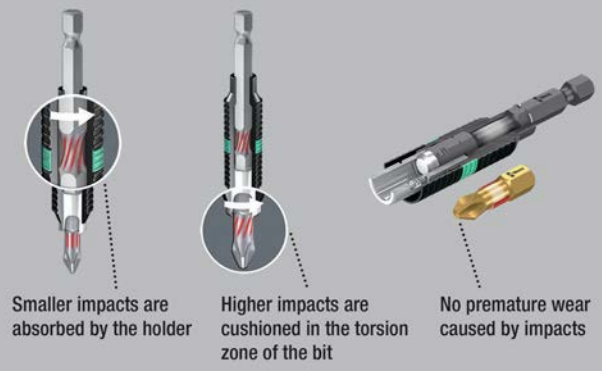

855/1 BDC bits

BiTorsion bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

3855/1 TS bits, stainless



	EAN							
Code	4013288		mm					
05**071020**001	*111012*	PZ 1	25	1"				10
05**071021**001	*111029*	PZ 2	25	1"				10
05**071022**001	*111036*	PZ 3	25	1"				10

3855/1 TS SB bits, stainless



Code	EAN 4013288		
05**073613**001	*112101*		**3855/1 TS PZ** 1x PZ 1x25	5
05**073614**001	*112118*		**3855/1 TS PZ** 1x PZ 2x25	5
05**073615**001	*112125*		**3855/1 TS PZ** 1x PZ 3x25	5

855/1 BDC bits



	EAN							
Code	4013288		mm					
05**056700**001	*034007*	PZ 1	25	1"				10
05**056702**001	*034014*	PZ 2	25	1"				10
05**056704**001	*034021*	PZ 3	25	1"				10

855/1 BDC SB bits





Code	EAN 4013288			
05**073336**001	*029362*		**855/1 BDC PZ** 1x PZ 1x25	5
05**073337**001	*029379*		**855/1 BDC PZ** 1x PZ 2x25	5
05**073338**001	*029386*		**855/1 BDC PZ** 1x PZ 3x25	5
05**073339**001	*029393*		**855/1 BDC PZ** 2x PZ 2x25	5

855/1 BTH bits

BiTorsion bits with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life. This provides the best possible durability together with the matching holder.

Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

855/1 BTH bits



Code	EAN 4013288		mm					
05**056710**001	*034274*	PZ 1	25	1"				10
05**056712**001	*034281*	PZ 2	25	1"				10
05**056714**001	*034298*	PZ 3	25	1"				10

Bit-Box 20 BTH PZ



Code	EAN 4013288		
05**057762**001	*187963*	**855/1 BTH PZ** 20x PZ 2x25	10

855/1 BTZ bits

BiTorsion bits with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life.

Tough, for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

855/1 BTZ bits



Code	EAN 4013288		mm					
05**056720**001	*034489*	PZ 1	25	1"				10
05**056722**001	*034496*	PZ 2	25	1"				10
05**056724**001	*034502*	PZ 3	25	1"				10

Bit-Box 20 BTZ PZ



Code	EAN 4013288		
05**057761**001	*187970*	**855/1 BTZ PZ** 20x PZ 2x25	10

855/1 RZ bits

Reduced shaft diameter for low-lying screw connections. Countersinking of screws without any surface damage. Especially for drywall construction and suitable for drywall screws.

855/1 RZ bits



Code	EAN 4013288		mm		mm			
05**135017**001	*175311*	PZ 1	25	1"	4,2			10
05**135003**001	*096739*	PZ 2	25	1"	4,2			10

855/1 TH bits

With Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

855/1 TH bits



Code	EAN 4013288		mm					
05**056910**001	*014740*	PZ 1	25	1"				10
05**056915**001	*014757*	PZ 2	25	1"				10
05**056925**001	*014764*	PZ 3	25	1"				10

855/1 TH SB bits



Code	EAN 4013288		
05**073370**001	*029638*		**855/1 TH PZ** 2x PZ 1x25	5
05**073371**001	*029645*		**855/1 TH PZ** 2x PZ 2x25	5
05**073372**001	*029652*		**855/1 TH PZ** 2x PZ 3x25	5
05**073373**001	*029669*		**855/1 TH PZ** 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	5

855/1 TiN bits

With extra-hard titanium nitride (TiN) coating for withstanding permanent loads such as e.g. in industrial applications.

1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

855/1 TiN bits



Code	EAN 4013288		mm					
05**480222**001	*041029*	PZ 2	25	1"				10

855/1 TZ bits

With Torsion zone to combat premature wear.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

855/1 TZ bits



Code	EAN 4013288		mm					
05**056810**001	*014801*	PZ 1	25	1"				10
05**056815**001	*014818*	PZ 2	25	1"				10
05**056825**001	*014825*	PZ 3	25	1"				10

855/1 Z bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

855/1 Z bits



Code	EAN 4013288		mm					
05**056805**001	*014535*	PZ 0	25	1"				10
05**072080**001	*014658*	PZ 1	25	1"				10
05**056812**001	*014542*	PZ 1	50	2"				10
05**072082**001	*014665*	PZ 2	25	1"				10
05**056820**001	*014559*	PZ 2	50	2"				10
05**072084**001	*014672*	PZ 3	25	1"				10
05**056835**001	*014573*	PZ 4	32	1 1/4"				10

855/1 Z SB bits



Code	EAN 4013288			
05**073308**001	*029096*		**855/1 Z PZ** 2x PZ 1x25	5
05**073309**001	*029102*		**855/1 Z PZ** 2x PZ 2x25	5
05**073310**001	*029119*		**855/1 Z PZ** 2x PZ 3x25	5
05**073380**001	*029621*		**855/1 Z PZ** 1x PZ 4x32	5
05**073311**001	*029126*		**855/1 Z PZ** 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	5

855/1 Z DIY bits



Code	EAN 4013288			
05**072403**001	*115768*		**855/1 Z PZ** 10x PZ 1x25	1
05**072404**001	*115775*		**855/1 Z PZ** 10x PZ 2x25	1
05**072405**001	*115782*		**855/1 Z PZ** 10x PZ 3x25	1

855/1 Z DIY 100 bits




Code	EAN 4013288			
05**072443**001	*138484*		**855/1 Z PZ** 100x PZ 1x25	1
05**072444**001	*138491*		**855/1 Z PZ** 100x PZ 2x25	1

Bit-Box 20 PZ



Code	EAN 4013288			
05**057760**001	*188052*		**855/1 Z PZ** 20x PZ 2x25	20

Impaktor system - For an above-average service life

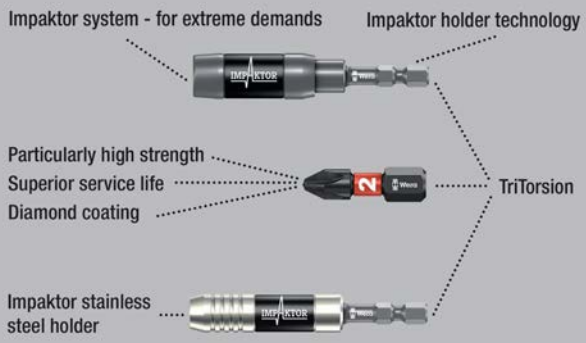

The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

855/4 IMP DC PZ DIY Impaktor bits




Code	EAN 4013288			
05**057661**001	*157690*		**855/4 IMP DC** 5x PZ 2x50	1
05**057662**001	*157706*		**855/4 IMP DC** 5x PZ 3x50	1

855/4 IMP DC Impaktor bits SB



Code	EAN 4013288			
05**073961**001	*158505*		**855/4 IMP DC** 1x PZ 2x50	5
05**073962**001	*158512*		**855/4 IMP DC** 1x PZ 3x50	5

Kraftform Stainless - stainless steel to prevent rust

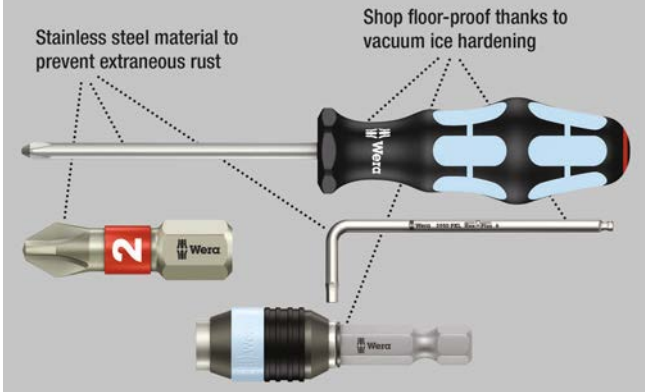


High quality bits out of stainless steel which prevents the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

3855/4 bits, stainless



Code	EAN 4013288		mm					
05**071084**001	*115515*	PZ 1	89	3 1/2"				10
05**071085**001	*115522*	PZ 2	89	3 1/2"				10
05**071086**001	*115539*	PZ 3	89	3 1/2"				10

BiTorsion system - for longer service life

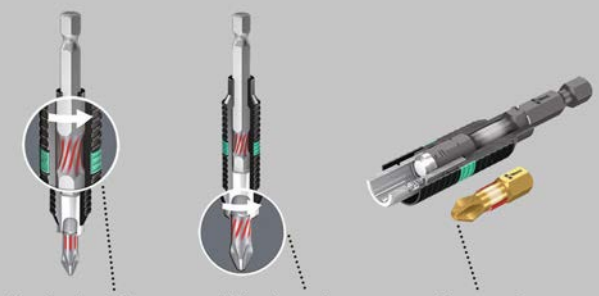

855/4 BDC bits

Bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

855/4 BDC bits



Code	EAN 4013288		mm					
05**059900**001	*034120*	PZ 1	50	2"				10
05**059902**001	*034137*	PZ 2	50	2"				10
05**059904**001	*034144*	PZ 3	50	2"				10

855/4 BTH bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. This provides the best possible durability together with the matching holder.

Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

855/4 BTH bits



Code	EAN 4013288		mm					
05**059910**001	*034335*	PZ 1	50	2"				10
05**059912**001	*034342*	PZ 2	50	2"				10
05**059914**001	*034359*	PZ 3	50	2"				10

855/4 BTZ bits

BiTorsion bits fwith Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life.

Tough viscous for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

855/4 BTZ bits





Code	EAN							
	4013288		mm					
05**059920**001	*034601*	PZ 1	50	2"				10
05**059922**001	*034618*	PZ 2	50	2"				10
05**059924**001	*034625*	PZ 3	50	2"				10

855/4 TH bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

855/4 TH bits





Code	EAN							
	4013288		mm					
05**060055**001	*015068*	PZ 1	50	2"				10
05**060060**001	*015075*	PZ 2	50	2"				10
05**060065**001	*015082*	PZ 3	50	2"				10

855/4 TZ bits

High quality bits with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life. Tough viscous, for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

855/4 TZ bits





Code	EAN							
	4013288		mm					
05**060005**001	*015099*	PZ 1	50	2"				10
05**060010**001	*015105*	PZ 2	50	2"				10
05**060015**001	*015112*	PZ 3	50	2"				10

855/4 TZ SB bits





Code	EAN 4013288		
05**134384**001	*037985*	**855/4 TZ PZ** 2x PZ 1x50	3
05**134385**001	*037992*	**855/4 TZ PZ** 2x PZ 2x50	3
05**134386**001	*038005*	**855/4 TZ PZ** 2x PZ 3x50	3

855/4 Z bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

855/4 Z bits



Code	EAN				∅			
	4013288		mm		mm			
05**060027**001	*014955*	PZ 1	70	2 3/4"	4,5			10
05**060029**001	*014962*	PZ 1	89	3 1/2"	4,5			10
05**060031**001	*031426*	PZ 1	127	5"	4,5			10
05**060030**001	*031259*	PZ 1	152	6"	4,5			10
05**060033**001	*014979*	PZ 2	70	2 3/4"	6,0			10
05**060035**001	*014986*	PZ 2	89	3 1/2"	6,0			10
05**060037**001	*014993*	PZ 2	110	4 3/8"	6,0			10
05**060036**001	*031440*	PZ 2	127	5"	6,0			10
05**060038**001	*031297*	PZ 2	152	6"	6,0			10
05**060041**001	*015006*	PZ 3	70	2 3/4"	-			10
05**060043**001	*015013*	PZ 3	89	3 1/2"	-			10
05**060045**001	*015020*	PZ 3	110	4 3/8"	-			10
05**060047**001	*031433*	PZ 3	152	6"	-			10

855/4 Z SB bits



Code	EAN 4013288			
05**073523**001	*105905*		**855/4 Z PZ** 1x PZ 1x89	5
05**073524**001	*106452*		**855/4 Z PZ** 1x PZ 2x89	5
05**073525**001	*105912*		**855/4 Z PZ** 1x PZ 3x89	5
05**136308**001	*213860*		**855/4 Z PZ** 1x PZ 1x152	3
05**136309**001	*213877*		**855/4 Z PZ** 1x PZ 2x152	3
05**136310**001	*213884*		**855/4 Z PZ** 1x PZ 3x152	3

855/0 Micro bits suitable for Pozidriv screws

- 4 mm hexagonal drive

855/0 Micro bits suitable for Pozidriv screws



	EAN							
Code	4013288		mm		mm			
05**058140**001	*234605*	PZ 0	30	1 3/16"	3,0			10
05**058141**001	*234612*	PZ 1	30	1 3/16"	3,5			10

855/2 Z bits

5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

855/2 Z bits



	EAN							
Code	4013288		mm		mm			
05**058005**001	*014863*	PZ 1	32	1 1/4"	4,5			10
05**058010**001	*014870*	PZ 2	32	1 1/4"	6,0			10
05**058015**001	*014887*	PZ 3	32	1 1/4"	7,6			10
05**058020**001	*014894*	PZ 4	32	1 1/4"	-			10

855/11 bits

With thread drive M 4.

855/11 bits



	EAN							
Code	4013288		mm		mm			
05**065096**001	*015426*	PZ 2	33	1 1/4"	6,0			5

855/12 bits

With thread drive M 5.

855/12 bits



	EAN							
Code	4013288		mm		mm			
05**065129**001	*015457*	PZ 2	44,5	1 3/4"	6,0			5

851/4 PH/S PlusMinus bits

Bits with combination profile Phillips/slotted. In electrical applications screws with mixed geometry (slotted and Phillips cross-recess) are quite common.

Bits having a PlusMinus profile are optimum for addressing these screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

851/4 PH/S PlusMinus bits



	EAN							
Code	4013288		mm		mm			
05**059720**001	*102577*	# 1	70	2 3/4"	4,5			10
05**059721**001	*102584*	# 2	70	2 3/4"	6			10

855/4 PZ/S PlusMinus bits

Bits with combination profile slotted and Pozidriv, particularly for jobs on terminal blocks, fuse boxes, switches and relays.


Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

855/4 PZ/S PlusMinus bits



	EAN							
Code	4013288		mm		mm			
05**059896**001	*102591*	# 1	70	2 3/4"	4,5			10
05**059897**001	*102607*	# 2	70	2 3/4"	6			10

Impaktor system - For an above-average service life

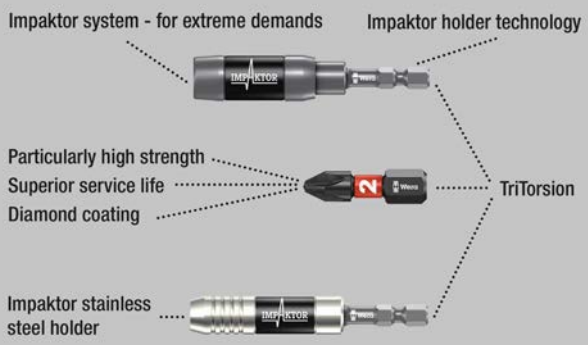

High quality bits for recessed TORX® screws. The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

867/1 IMP DC TORX® DIY Impaktor bits



Code	EAN 4013288			
05**057628**001	*178688*		**867/1 IMP DC** 10x TX 10x25	1
05**057623**001	*169242*		**867/1 IMP DC** 10x TX 15x25	1
05**057624**001	*163165*		**867/1 IMP DC** 10x TX 20x25	1
05**057625**001	*157447*		**867/1 IMP DC** 10x TX 25x25	1
05**057626**001	*157454*		**867/1 IMP DC** 10x TX 30x25	1
05**057627**001	*157461*		**867/1 IMP DC** 10x TX 40x25	1

867/1 IMP DC SB Impaktor bits




Code	EAN 4013288			
05**073924**001	*163240*		**867/1 IMP DC** 1x TX 20x25	5
05**073925**001	*158406*		**867/1 IMP DC** 1x TX 25x25	5
05**073926**001	*158413*		**867/1 IMP DC** 1x TX 30x25	5
05**073927**001	*158420*		**867/1 IMP DC** 1x TX 40x25	5

Bit-Box 15 Impaktor TX



Code	EAN 4013288			
05**057772**001	*187871*		**867/1 IMP DC** 15x TX 20x25	10
05**057775**001	*187888*		**867/1 IMP DC** 15x TX 25x25	10
05**057776**001	*187895*		**867/1 IMP DC** 15x TX 30x25	10

Kraftform Stainless - stainless steel to prevent rust

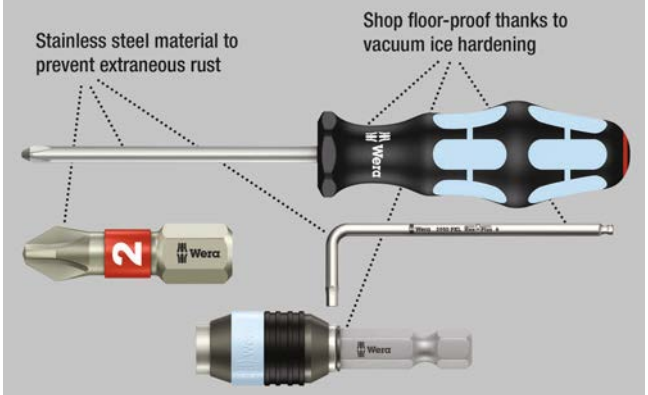

High quality bits out of stainless steel for recessed TORX® screws. Prevent the formation of unsightly extraneous rust.

Come with Torsion zone: Torsion bits take-up torque peaks and absorb them in the Torsion zone. This prevents premature wear and extends the service life of the bit. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

3867/1 TS TORX® bits, stainless




Code	EAN 4013288		mm					
05**071030**001	*111043*	TX 8	25	1"				10
05**071032**001	*111067*	TX 10	25	1"				10
05**071033**001	*111074*	TX 15	25	1"				10
05**071034**001	*111081*	TX 20	25	1"				10
05**071035**001	*111098*	TX 25	25	1"				10
05**071037**001	*111111*	TX 30	25	1"				10
05**071038**001	*111128*	TX 40	25	1"				10

3867/1 TS SB TORX® bits, stainless



Code	EAN 4013288			
05**073620**001	*117670*		**3867/1 TS TORX®** 1x TX 10x25	5
05**073621**001	*117687*		**3867/1 TS TORX®** 1x TX 15x25	5
05**073622**001	*117694*		**3867/1 TS TORX®** 1x TX 20x25	5
05**073623**001	*117700*		**3867/1 TS TORX®** 1x TX 25x25	5
05**073625**001	*117724*		**3867/1 TS TORX®** 1x TX 30x25	5

BiTorsion system - for longer service life

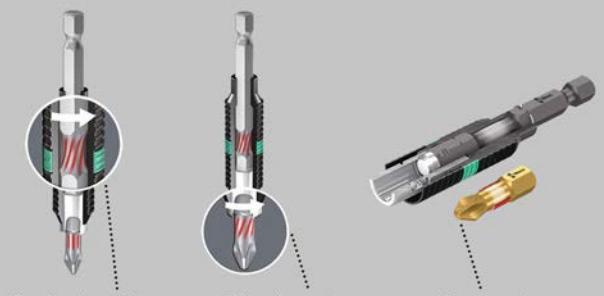

867/1 BDC TORX® bits

Bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Come with a Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

867/1 BDC TORX® bits



	EAN							
Code	4013288		mm					
05**066100**001	*034038*	TX 10	25	1"				10
05**066102**001	*034045*	TX 15	25	1"				10
05**066104**001	*034052*	TX 20	25	1"				10
05**066106**001	*034069*	TX 25	25	1"				10
05**066108**001	*034076*	TX 30	25	1"				10
05**066110**001	*034083*	TX 40	25	1"				10

867/1 BDC SB TORX® bits



Code	EAN 4013288			
05**134374**001	*099778*		**867/1 TORX® BDC** 1x TX 10x25	5
05**134375**001	*099785*		**867/1 TORX® BDC** 1x TX 15x25	5
05**134376**001	*099792*		**867/1 TORX® BDC** 1x TX 20x25	5
05**134377**001	*099808*		**867/1 TORX® BDC** 1x TX 25x25	5
05**134378**001	*099822*		**867/1 TORX® BDC** 1x TX 30x25	5
05**134379**001	*099815*		**867/1 TORX® BDC** 1x TX 40x25	5

867/1 BTZ TORX® bits

BiTorsion bits with an Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. This provides the best possible durability together with the matching holder.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

867/1 BTZ TORX® bits



	EAN							
Code	4013288		mm					
05**066120**001	*034519*	TX 10	25	1"				10
05**066122**001	*034526*	TX 15	25	1"				10
05**066124**001	*034533*	TX 20	25	1"				10
05**066126**001	*034540*	TX 25	25	1"				10
05**066128**001	*034557*	TX 30	25	1"				10
05**066130**001	*034564*	TX 40	25	1"				10

867/1 TORX® HF bits with holding function

- For TORX® socket screws
- Holding function for recessed TORX® screws
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws
- 1/4" hexagon drive (Wera connecting series 1)
- With Take it easy tool finder: colour coding by size

867/1 TORX® HF bits with holding function



	EAN							
Code	4013288		mm					
05**066140**001	*226334*	TX 10	25	1"				10
05**066141**001	*226341*	TX 15	25	1"				10
05**066142**001	*226365*	TX 20	25	1"				10
05**066143**001	*226358*	TX 25	25	1"				10
05**066144**001	*226389*	TX 30	25	1"				10
05**066145**001 [1)]	*226655*	TX 40	25	1"				10

[1)] Pound-thru hexagonal; no Take it easy.

Bit-Box 20 TX HF



Code	EAN 4013288			
05**057777**001	*226013*	✪	**867/1 TORX® HF** 20x TX 20x25	20
05**057778**001	*226020*	✪	**867/1 TORX® HF** 20x TX 25x25	20

867/1 TZ TORX® bits

With a Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

867/1 TZ TORX® bits



Code	EAN 4013288	✪	mm		mm			
05**066300**001	*015709*	TX 5	25	1"	4,2			10
05**066301**001	*015716*	TX 6	25	1"	4,2			10
05**066302**001	*015723*	TX 7	25	1"	4,2			10
05**066303**001	*015730*	TX 8	25	1"	4,2			10
05**066304**001	*015747*	TX 9	25	1"	4,2			10
05**066305**001	*015754*	TX 10	25	1"	4,2			10
05**066308**001	*015761*	TX 15	25	1"	4,2			10
05**066310**001	*015778*	TX 20	25	1"	4,8			10
05**066312**001	*015785*	TX 25	25	1"	5,5			10
05**066313**001	*015792*	TX 27	25	1"	5,5			10
05**066315**001	*015808*	TX 30	25	1"	6,0			10
05**066320**001	*015815*	TX 40	25	1"	-			10

867/1 TORX® bits



Code	EAN 4013288	✪	mm		mm			
05**135140**001	*107114*	TX 1	25	1"	1,5			10
05**135141**001	*107121*	TX 2	25	1"	1,5			10
05**135142**001	*111456*	TX 3	25	1"	2,0			10
05**135143**001	*111463*	TX 4	25	1"	2,0			10
05**066492**001	*030405*	TX 5	25	1"	3,0			10
05**066493**001	*030412*	TX 6	25	1"	3,0			10
05**066494**001	*030429*	TX 7	25	1"	3,0			10
05**066495**001	*030436*	TX 8	25	1"	3,0			10
05**066496**001	*030443*	TX 9	25	1"	3,0			10
05**066485**001	*030320*	TX 10	25	1"	4,0			10
05**066486**001	*030337*	TX 15	25	1"	4,0			10
05**066487**001	*030344*	TX 20	25	1"	5,0			10
05**066488**001	*030351*	TX 25	25	1"	5,0			10
05**066489**001	*030368*	TX 27	25	1"	6,0			10
05**066490**001	*030375*	TX 30	25	1"	6,0			10
05**066491**001	*030382*	TX 40	25	1"	-			10
05**066325**001	*031174*	TX 45	35	1 3/8"	8,0			10
05**066330**001	*031181*	TX 50	35	1 3/8"	9,0			10
05**066335**001	*031167*	TX 55	35	1 3/8"	12,0			10

867/1 SB TORX® bits



Code	EAN 4013288			
05**073313**001	*029140*	✪	**867/1 TORX®** 2x TX 10x25	5
05**073340**001	*029591*	✪	**867/1 TORX®** 2x TX 15x25	5
05**073314**001	*029157*	✪	**867/1 TORX®** 2x TX 20x25	5
05**073315**001	*029164*	✪	**867/1 TORX®** 2x TX 25x25	5
05**073316**001	*029171*	✪	**867/1 TORX®** 2x TX 30x25	5
05**073317**001	*029188*	✪	**867/1 TORX®** 2x TX 40x25	5
05**073346**001	*125859*	✪	**867/1 TORX®** 1x TX 50x35	5
05**073375**001	*037503*	✪	**867/1 TORX®** 1x TX 10x251x TX 15x251x TX 20x25	5
05**073376**001	*037510*	✪	**867/1 TORX®** 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	5

867/1 DIY TORX® bits



Code	EAN 4013288			
05**072406**001	*115799*	✪	**867/1 TORX®** 10x TX 10x25	1
05**072407**001	*115805*	✪	**867/1 TORX®** 10x TX 15x25	1
05**072408**001	*115812*	✪	**867/1 TORX®** 10x TX 20x25	1
05**072409**001	*115829*	✪	**867/1 TORX®** 10x TX 25x25	1
05**072411**001	*115843*	✪	**867/1 TORX®** 10x TX 30x25	1
05**072412**001	*115850*	✪	**867/1 TORX®** 10x TX 40x25	1

867/1 TORX® DIY 100



Code	EAN 4013288			
05**072446**001	*138507*	✪	**867/1 TORX®** 100x TX 10x25	1
05**072447**001	*138514*	✪	**867/1 TORX®** 100x TX 15x25	1
05**072448**001	*138521*	✪	**867/1 TORX®** 100x TX 20x25	1
05**072449**001	*138538*	✪	**867/1 TORX®** 100x TX 25x25	1
05**072451**001	*138552*	✪	**867/1 TORX®** 100x TX 30x25	1
05**072452**001	*138569*	✪	**867/1 TORX®** 100x TX 40x25	1

Bit-Box 20 TX



Code	EAN 4013288			
05**057770**001	*187994*	✪	**867/1 TORX®** 20x TX 20x25	20
05**057773**001	*188007*	✪	**867/1 TORX®** 20x TX 25x25	20

867/1 Z TORX® Wedge bits

The conical design of the profile means that a wedging effect is generated that holds the TORX® screw securely on the bit.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

867/1 Z TORX® Wedge bits



Code	EAN 4013288	✪	mm	1"				
05**066455**001	*016034*	TX 15	25	1"				10
05**066460**001	*016041*	TX 20	25	1"				10
05**066465**001	*016058*	TX 25	25	1"				10

867/1 ZA TORX® bits with central pin

Come with a pin which, together with the bore hole within the screw, makes it easier to centre the tool.


Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

867/1 ZA TORX® bits with central pin



Code	EAN 4013288		mm		mm			
05**066081**001	*107190*	TX 15	25	1"	4,0			10
05**066082**001	*107206*	TX 20	25	1"	5,0			10
05**066083**001	*107213*	TX 25	25	1"	5,0			10

Impaktor system - For an above-average service life

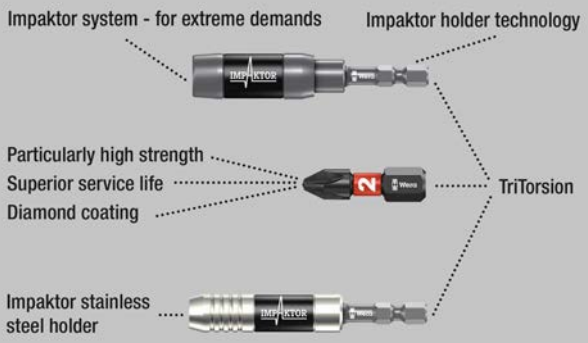

The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

867/4 IMP DC TORX® DIY Impaktor bits



Code	EAN 4013288			
05**057664**001	*163172*		**867/4 IMP DC** 5x TX 20x50	1
05**057665**001	*157515*		**867/4 IMP DC** 5x TX 25x50	1
05**057666**001	*157522*		**867/4 IMP DC** 5x TX 30x50	1
05**057667**001	*157539*		**867/4 IMP DC** 5x TX 40x50	1

867/4 IMP DC SB Impaktor bits



Code	EAN 4013288			
05**073964**001	*163257*		**867/4 IMP DC** 1x TX 20x50	5
05**073965**001	*158529*		**867/4 IMP DC** 1x TX 25x50	5
05**073966**001	*158536*		**867/4 IMP DC** 1x TX 30x50	5
05**073967**001	*158543*		**867/4 IMP DC** 1x TX 40x50	5

TORX® Tools with holding function



The TORX® HF (HF = holding function) specially developed by Wera distinguishes itself through the geometric optimisation of the original TORX® profile.

The wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool! 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

867/4 TORX® HF bits with holding function

- For TORX® socket screws
- Holding function for recessed TORX® screws
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws
- 1/4" hexagon drive (Wera connecting series 4)
- With Take it easy tool finder: colour coding by size

867/4 TORX® HF bits with holding function



	EAN							
Code	4013288		mm		mm			
05**060505**001	*226747*	TX 8	50	2"	3,0			10
05**060506**001	*226754*	TX 10	50	2"	4,0			10
05**060507**001	*226761*	TX 15	50	2"	4,0			10
05**060508**001	*226778*	TX 20	50	2"	4,5			10
05**060509**001	*226785*	TX 25	50	2"	6,0			10
05**060510**001	*226792*	TX 30	50	2"	6,0			10
05**060511**001 [1]	*226808*	TX 40	50	2"	-			10

[1] Pound-thru hexagonal; no Take it easy.

867/4 KK TORX® bits

Ballpoint: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling “round the corner” screwdriving. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

- 1/4" hexagon drive (Wera connecting series 4)

867/4 KK TORX® bits



	EAN							
Code	4013288		mm					
05**059700**001	*155979*	TX 10	89	3 1/2"				5
05**059701**001	*155986*	TX 15	89	3 1/2"				5
05**059702**001	*155993*	TX 20	89	3 1/2"				5
05**059703**001	*156006*	TX 25	89	3 1/2"				5
05**059704**001	*156013*	TX 30	89	3 1/2"				5
05**059705**001	*156020*	TX 40	89	3 1/2"				5

867/4 Z TORX® bits

Premium bits for TORX® socket screws. Tough, for universal use. 1/4" hexagonal, suitable for holders as per DIN ISO 1173-F 6.3.

867/4 Z TORX® bits



Code	EAN 4013288		mm		mm			
05**135200**001	*107138*	TX 1	50	2"	2,0			10
05**135201**001	*107145*	TX 2	50	2"	2,0			10
05**135202**001	*112620*	TX 3	50	2"	2,0			10
05**135204**001	*041333*	TX 4	50	2"	3,0			10
05**135205**001	*031808*	TX 5	50	2"	3,0			10
05**308428**001	*041340*	TX 6	50	2"	3,0			10
05**134740**001	*035905*	TX 6	70	2 3/4"	3,0			10
05**332600**001	*033895*	TX 6	89	3 1/2"	3,0			10
05**328448**001	*038432*	TX 6	152	6"	3,0			10
05**160830**001	*113283*	TX 7	50	2"	3,0			10
05**345047**001	*128423*	TX 7	70	2 3/4"	3,0			10
05**060131**001	*030498*	TX 8	50	2"	3,0			10
05**060098**001	*030504*	TX 8	70	2 3/4"	3,0			10
05**060185**001	*030511*	TX 8	89	3 1/2"	3,0			10
05**060195**001	*030528*	TX 8	152	6"	3,0			10
05**319835**001	*128430*	TX 9	70	2 3/4"	3,0			10
05**060193**001	*155566*	TX 9	89	3 1/2"	3,0			10
05**060194**001	*156945*	TX 9	152	6"	3,0			10
05**060132**001	*030535*	TX 10	50	2"	4,0			10
05**060100**001	*016171*	TX 10	70	2 3/4"	4,0			10
05**060186**001	*030481*	TX 10	89	3 1/2"	4,0			10
05**060196**001	*030542*	TX 10	152	6"	4,0			10
05**060133**001	*030559*	TX 15	50	2"	4,0			10
05**060105**001	*016188*	TX 15	70	2 3/4"	4,0			10
05**060187**001	*030566*	TX 15	89	3 1/2"	4,0			10
05**060197**001	*030573*	TX 15	152	6"	4,0			10
05**060134**001	*030580*	TX 20	50	2"	4,5			10
05**060110**001	*016195*	TX 20	70	2 3/4"	4,5			10
05**060188**001	*030597*	TX 20	89	3 1/2"	4,5			10
05**060198**001	*030603*	TX 20	152	6"	4,5			10
05**060135**001	*030610*	TX 25	50	2"	6,0			10
05**060115**001	*016201*	TX 25	70	2 3/4"	6,0			10
05**060189**001	*030627*	TX 25	89	3 1/2"	6,0			10
05**060199**001	*030634*	TX 25	152	6"	6,0			10
05**060136**001	*030641*	TX 27	50	2"	6,0			10
05**060120**001	*016218*	TX 27	70	2 3/4"	6,0			10
05**060190**001	*030658*	TX 27	89	3 1/2"	6,0			10
05**060200**001	*030665*	TX 27	152	6"	6,0			10
05**060137**001	*030672*	TX 30	50	2"	6,0			10
05**060125**001	*016225*	TX 30	70	2 3/4"	6,0			10
05**060191**001	*030689*	TX 30	89	3 1/2"	6,0			10
05**060201**001	*030696*	TX 30	152	6"	6,0			10
05**060138**001[1)]	*030702*	TX 40	50	2"	-			10
05**060130**001[1)]	*016232*	TX 40	70	2 3/4"	-			10
05**060192**001[1)]	*030719*	TX 40	89	3 1/2"	-			10
05**060202**001[1)]	*030726*	TX 40	152	6"	-			10

[1)] Pound-thru hexagonal

867/4 Z TORX® SB bits



Code	EAN 4013288			
05**073720**001	*132789*		**867/4 Z TORX®** 2x TX 10x50	3
05**073526**001	*105929*		**867/4 Z TORX®** 1x TX 10x89	5
05**073470**001	*226273*		**867/4 Z TORX®** 3x TX 10x89	1
05**136311**001	*213891*		**867/4 Z TORX®** 1x TX 10x152	3
05**073721**001	*132796*		**867/4 Z TORX®** 2x TX 15x50	3
05**073527**001	*105936*		**867/4 Z TORX®** 1x TX 15x89	5
05**073471**001	*226228*		**867/4 Z TORX®** 3x TX 15x89	1
05**136312**001	*213907*		**867/4 Z TORX®** 1x TX 15x152	3
05**073722**001	*132802*		**867/4 Z TORX®** 2x TX 20x50	3
05**073528**001	*105943*		**867/4 Z TORX®** 1x TX 20x89	5
05**073472**001	*226235*		**867/4 Z TORX®** 3x TX 20x89	1
05**136313**001	*213914*		**867/4 Z TORX®** 1x TX 20x152	3
05**073723**001	*132826*		**867/4 Z TORX®** 2x TX 25x50	3
05**073529**001	*105950*		**867/4 Z TORX®** 1x TX 25x89	5
05**073473**001	*226242*		**867/4 Z TORX®** 3x TX 25x89	1
05**136314**001	*213921*		**867/4 Z TORX®** 1x TX 25x152	3
05**073724**001	*132833*		**867/4 Z TORX®** 2x TX 30x50	3
05**073530**001	*105967*		**867/4 Z TORX®** 1x TX 30x89	5
05**073474**001	*226259*		**867/4 Z TORX®** 3x TX 30x89	1
05**136315**001	*213938*		**867/4 Z TORX®** 1x TX 30x152	3
05**073531**001	*105974*		**867/4 Z TORX®** 1x TX 40x89	5
05**136316**001	*213945*		**867/4 Z TORX®** 1x TX 40x152	3

867/0 Micro bits for TORX® socket screws

- 4 mm hexagonal drive

867/0 Micro bits for TORX® socket screws



	EAN							
Code	4013288		mm		mm			
05**058129**001	*234629*	TX 3	30	1 3/16"	2,2			10
05**058102**001	*209603*	TX 4	30	1 3/16"	2,2			10
05**058130**001	*189585*	TX 5	30	1 3/16"	2,2			10
05**058131**001	*189592*	TX 6	30	1 3/16"	2,2			10
05**058132**001	*234636*	TX 8	30	1 3/16"	3,0			10
05**058133**001	*234643*	TX 10	30	1 3/16"	3,5			10

867/2 Z TORX® bits

5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

867/2 Z TORX® bits



	EAN							
Code	4013288		mm		mm			
05**066901**001	*016096*	TX 20	35	1 3/8"	4,5			10
05**066900**001	*016102*	TX 25	35	1 3/8"	5,8			10
05**066902**001	*016119*	TX 27	35	1 3/8"	5,8			10
05**066905**001	*016126*	TX 30	35	1 3/8"	6,0			10
05**066910**001	*016133*	TX 40	35	1 3/8"	7,0			10
05**066915**001	*016140*	TX 45	35	1 3/8"	-			10
05**066920**001	*016157*	TX 50	35	1 3/8"	-			10
05**066941**001	*104007*	TX 50	50	2"	-			10
05**066950**001	*104526*	TX 50	70	2 3/4"	-			10
05**066925**001	*016164*	TX 55	35	1 3/8"	12,0			10

867/12 TORX® bits

Thread drive M 5.

867/12 TORX® bits



	EAN							
Code	4013288		mm		mm			
05**064155**001	*026484*	TX 20	45	1 3/4"	6,0			10

867/15 TORX® bits

Thread drive M 6.

867/15 TORX® bits



	EAN							
Code	4013288		mm		mm			
05**064170**001	*032607*	TX 20	45	1 3/4"	8,0			10
05**064175**001	*032980*	TX 25	45	1 3/4"	8,0			10

867/9 C TORX® bits, halfmoon

Drive: 4 mm halfmoon for direct power tool connection.

867/9 C TORX® bits, halfmoon



	EAN							
Code	4013288		mm		mm			
05**135220**001	*112637*	TX 1	44	1 47/64"	1,5			10
05**135221**001	*112644*	TX 2	44	1 47/64"	1,5			10
05**135222**001	*112651*	TX 3	44	1 47/64"	1,7			10
05**345352**001	*113597*	TX 4	44	1 47/64"	1,8			10
05**345018**001	*113504*	TX 4	64	2 33/64"	2,0			10
05**200496**001	*214881*	TX 5	44	1 47/64"	1,6			10
05**345351**001	*113580*	TX 5	44	1 47/64"	3,0			10
05**345032**001	*113542*	TX 5	64	2 33/64"	2,0			10
05**345350**001	*113573*	TX 6	44	1 47/64"	3,0			10
05**345056**001	*113566*	TX 6	64	2 33/64"	2,0			10
05**332610**001	*035868*	TX 6	70	2 3/4"	3,0			10
05**345035**001	*113559*	TX 7	64	2 33/64"	2,3			10
05**345026**001	*113528*	TX 8	44	1 47/64"	3,0			10
05**345028**001	*113535*	TX 8	64	2 33/64"	3,0			10
05**332609**001	*035714*	TX 8	70	2 3/4"	3,0			10
05**332607**001	*037107*	TX 10	70	2 3/4"	3,0			10

867/1 Z TORX® BO bits with bore hole

The bore hole in the bit and the pin in the TORX® BO screw prevent any unauthorised loosening – secure fastening.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

867/1 Z TORX® BO bits with bore hole



	EAN							
Code	4013288		mm					
05**066497**001	*015822*	TX 7	25	1"				10
05**066498**001	*015839*	TX 8	25	1"				10
05**066499**001	*015846*	TX 9	25	1"				10
05**066500**001	*015853*	TX 10	25	1"				10
05**066505**001	*015860*	TX 15	25	1"				10
05**066510**001	*015877*	TX 20	25	1"				10
05**066515**001	*015884*	TX 25	25	1"				10
05**066520**001	*015891*	TX 27	25	1"				10
05**066525**001	*015907*	TX 30	25	1"				10
05**066530**001	*015914*	TX 40	25	1"				10

867/1 Z TORX® BO SB bits with bore hole



Code	EAN 4013288			
05**073064**001	*202666*		**867/1 Z TORX® BO** 2x TX 20x25	5
05**073065**001	*202673*		**867/1 Z TORX® BO** 2x TX 25x25	5
05**073066**001	*202680*		**867/1 Z TORX® BO** 2x TX 30x25	5

3867/4 TORX® BO bits with bore hole, stainless

Wera stainless steel bits prevent the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

3867/4 TORX® BO bits with bore hole, stainless



Code	EAN 4013288		mm		mm			
05**071089**001	*115546*	TX 10	89	3 1/2"	4,0			10
05**071090**001	*115553*	TX 15	89	3 1/2"	4,0			10
05**071091**001	*115560*	TX 20	89	3 1/2"	4,5			10
05**071092**001	*115577*	TX 25	89	3 1/2"	5,5			10
05**071094**001	*115584*	TX 30	89	3 1/2"	6,0			10

867/4 Z TORX® BO bits with bore hole

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D F.3.

867/4 Z TORX® BO bits with bore hole



Code	EAN 4013288		mm		mm			
05**060139**001	*030733*	TX 8	70	2 3/4"	3,0			10
05**060048**001	*094513*	TX 8	89	3 1/2"	3,0			5
05**060049**001	*094520*	TX 9	89	3 1/2"	3,0			5
05**060140**001	*026897*	TX 10	70	2 3/4"	4,0			10
05**060050**001	*094537*	TX 10	89	3 1/2"	4,0			5
05**060141**001	*030740*	TX 15	70	2 3/4"	4,0			10
05**060051**001	*094544*	TX 15	89	3 1/2"	4,0			5
05**060142**001	*026903*	TX 20	70	2 3/4"	4,5			10
05**060052**001	*094551*	TX 20	89	3 1/2"	4,5			5
05**060143**001	*026910*	TX 25	70	2 3/4"	6,0			10
05**060053**001	*094568*	TX 25	89	3 1/2"	6,0			5
05**060144**001	*026927*	TX 27	70	2 3/4"	6,0			10
05**060057**001	*094643*	TX 27	89	3 1/2"	6,0			5
05**060145**001	*026934*	TX 30	70	2 3/4"	6,0			10
05**060054**001	*094575*	TX 30	89	3 1/2"	6,0			5
05**060146**001	*026941*	TX 40	70	2 3/4"	-			10
05**060056**001	*094582*	TX 40	89	3 1/2"	-			5

867/4 Z TORX® BO SB bits with bore hole



Code	EAN 4013288			
05**073070**001	*202604*		**867/4 Z TORX® BO** 2x TX 20x70	5
05**073071**001	*202611*		**867/4 Z TORX® BO** 2x TX 25x70	5
05**073072**001	*202628*		**867/4 Z TORX® BO** 2x TX 30x70	5
05**073073**001	*202574*		**867/4 Z TORX® BO** 2x TX 40x70	5

867/1 IP TORX PLUS® bits

High quality bits for recessed TORX PLUS® screws. TORX PLUS® profile: in comparison to normal TORX® profiles, the enlargement of the 6 torque-transferring flanks between the tool and the screw is effected by means of an ellipse-shaped profile design and not a circular one.

This means that the power applied when screwdriving is spread over a larger area. Higher torque is transferred and the service life of the screw and tool is also enhanced. Tough viscous. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

867/1 IP TORX PLUS® bits



Code	EAN 4013288		mm					
05**135120**001	*112606*	1 IP	25	1"				10
05**135121**001	*112613*	2 IP	25	1"				10
05**160956**001	*113313*	3 IP	25	1"				10
05**134695**001	*103109*	4 IP	25	1"				10
05**066272**001	*035684*	5 IP	25	1"				10
05**066274**001	*031556*	6 IP	25	1"				10
05**066276**001	*031563*	7 IP	25	1"				10
05**066278**001	*031570*	8 IP	25	1"				10
05**066279**001	*033635*	9 IP	25	1"				10
05**066280**001	*031549*	10 IP	25	1"				10
05**066282**001	*031587*	15 IP	25	1"				10
05**066284**001	*031594*	20 IP	25	1"				10
05**066286**001	*031600*	25 IP	25	1"				10
05**066287**001	*031617*	27 IP	25	1"				10
05**066288**001	*031624*	30 IP	25	1"				10
05**066290**001	*031631*	40 IP	25	1"				10

867/4 IP TORX PLUS® bits



Code	EAN 4013288		mm		mm			
05**134664**001	*112514*	1 IP	50	2"	2,0			10
05**134665**001	*112521*	2 IP	50	2"	2,0			10
05**134668**001	*106568*	3 IP	50	2"	2,0			10
05**134691**001	*103093*	4 IP	50	2"	3,0			10
05**134678**001	*098030*	5 IP	50	2"	3,0			10
05**134680**001	*037220*	6 IP	50	2"	3,0			10
05**134667**001	*095596*	6 IP	89	3 1/2"	3,0			10
05**134690**001	*095602*	6 IP	152	6"	3,0			10
05**134681**001	*037237*	7 IP	50	2"	3,0			10
05**134679**001	*037190*	8 IP	50	2"	3,0			10
05**134670**001	*032812*	8 IP	89	3 1/2"	3,0			10
05**134682**001	*037244*	8 IP	152	6"	3,0			10
05**160917**001	*038951*	9 IP	50	2"	3,0			10
05**134669**001	*033871*	9 IP	89	3 1/2"	3,0			10
05**134683**001	*037251*	10 IP	50	2"	4,0			10
05**134684**001	*037268*	10 IP	70	2 3/4"	4,0			10
05**134671**001	*032829*	10 IP	89	3 1/2"	4,0			10
05**134685**001	*037275*	15 IP	50	2"	4,0			10
05**134686**001	*037282*	15 IP	70	2 3/4"	4,0			10
05**134672**001	*032836*	15 IP	89	3 1/2"	4,0			10
05**134687**001	*037299*	20 IP	50	2"	4,5			10
05**134688**001	*037305*	20 IP	70	2 3/4"	4,5			10
05**134673**001	*032843*	20 IP	89	3 1/2"	4,5			10
05**134609**001	*224767*	25 IP	50	2"	6,0			10
05**134674**001	*032850*	25 IP	89	3 1/2"	6,0			10
05**134675**001	*032867*	27 IP	89	3 1/2"	6,0			10
05**320430**001	*113382*	30 IP	50	2"	6,0			10
05**134676**001	*032874*	30 IP	89	3 1/2"	6,0			10
05**134677**001	*032881*	40 IP	89	3 1/2"	-			10

867/9 C IP TORX PLUS® bits, halfmoon

Drive: 4 mm halfmoon for direct power tool connection.

867/9 C IP TORX PLUS® bits, halfmoon



Code	EAN 4013288		mm		mm	mm		
05**135230**001	*112668*	1 IP	44	1 47/64"	1,5	20	25/32"	10
05**135231**001	*112675*	2 IP	44	1 47/64"	1,5	20	25/32"	10
05**135232**001	*112682*	3 IP	44	1 47/64"	1,7	20	25/32"	10
05**326310**001	*113399*	4 IP	44	1 47/64"	2,0	20	25/32"	10
05**345019**001	*113511*	4 IP	64	2 33/64"	2,0	20	25/32"	10
05**135233**001	*112699*	5 IP	44	1 47/64"	2,0	20	25/32"	10
05**344900**001	*113498*	6 IP	44	1 47/64"	2,25	20	25/32"	10
05**135234**001	*112705*	8 IP	44	1 47/64"	3,0	20	25/32"	10
05**332606**001	*037091*	8 IP	70	2 3/4"	3,0	20	25/32"	10
05**135235**001	*112712*	10 IP	44	1 47/64"	3,0	20	25/32"	10

IPR TORX PLUS®

A 5-flank TORX PLUS® profile with a borehole.

This drive geometry has only five flanks instead of the usual six and a borehole to protect safety screws against unauthorised unfastening. The screws cannot be turned with conventional, widely available tools.

867/1 IPR TORX PLUS® bits with bore hole



	EAN							
Code	4013288		mm					
05**134699**001	*034878*	8 IPR	25	1"				10
05**134698**001	*037817*	9 IPR	25	1"				10
05**134700**001	*034823*	10 IPR	25	1"				10
05**134701**001	*034724*	15 IPR	25	1"				10
05**134702**001	*034731*	20 IPR	25	1"				10
05**134703**001	*034748*	25 IPR	25	1"				10
05**134704**001	*034847*	27 IPR	25	1"				10
05**134705**001	*034830*	30 IPR	25	1"				10
05**134706**001	*034854*	40 IPR	35	1 3/8"				10
05**134707**001	*034861*	45 IPR	35	1 3/8"				10

867/4 IPR TORX PLUS® bits with bore hole


High quality bits for recessed TORX PLUS® screws. A 5-flank TORX PLUS® profile. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

867/4 IPR TORX PLUS® bits with bore hole



	EAN							
Code	4013288		mm		mm			
05**160821**001	*160867*	10 IPR	50	2"	4,0			10
05**134657**001	*155665*	10 IPR	89	3 1/2"	4,0			10
05**134654**001	*155641*	15 IPR	50	2"	4,0			10
05**134720**001	*037206*	15 IPR	89	3 1/2"	4,0			10
05**204126**001	*160874*	20 IPR	50	2"	4,5			10
05**259135**001	*160881*	20 IPR	89	3 1/2"	4,5			10
05**134655**001	*155658*	25 IPR	50	2"	6,0			10
05**134722**001	*160904*	25 IPR	89	3 1/2"	6,0			10
05**134656**001	*156952*	27 IPR	50	2"	6,0			10
05**134658**001	*155672*	27 IPR	89	3 1/2"	6,0			10
05**134732**001	*160911*	30 IPR	50	2"	6,0			10
05**134723**001	*160935*	30 IPR	89	3 1/2"	6,0			10

BiTorsion system - for longer service life

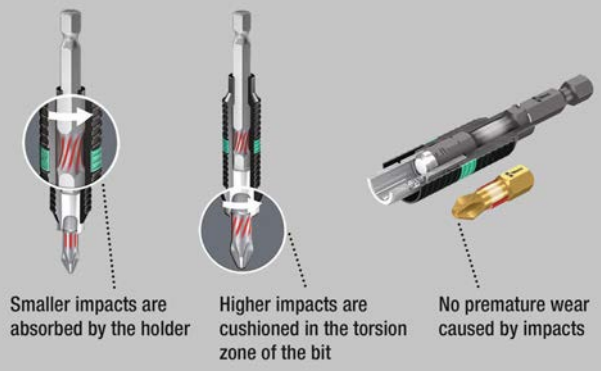

800/1 BDC bits

Bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

800/1 BDC bits





	EAN							
Code	4013288	mm	mm	mm				
05**056172**001	*033949*	0,8	5,5	25	1"			10
05**056174**001	*033956*	1,0	5,5	25	1"			10
05**056176**001	*033963*	1,2	6,5	25	1"			10

800/1 BTZ bits

Comes with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life. Tough viscous, for universal use; 1/4" inch hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

800/1 BTZ bits







	EAN							
Code	4013288	mm	mm	mm				
05**056064**001	*034427*	0,8	5,5	25	1"			10
05**056066**001	*034434*	1,0	5,5	25	1"			10
05**056068**001	*034441*	1,2	6,5	25	1"			10

800/1 TZ bits

Bits with Torsion zone to combat premature wear.

Tough viscous for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

800/1 TZ bits





	EAN					∅		
Code	4013288	mm	mm	mm		mm		
05**056203**001	*011145*	0,5	4,0	25	1"	4,0		10
05**056210**001	*011152*	0,6	4,5	25	1"	4,5		10
05**056220**001	*011169*	0,8	5,5	25	1"	5,5		10
05**056225**001	*011176*	1,0	5,5	25	1"	5,5		10
05**056233**001	*011183*	1,2	6,5	25	1"	6,2		10
05**056240**001	*011190*	1,6	8,0	25	1"	8,0		10

800/1 Z bits


Tough viscous Wera bits for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

800/1 Z bits



	EAN					∅		
Code	4013288	mm	mm	mm		mm		
05**056200**001	*040831*	0,5	3,0	25	1"	3,0		10
05**072050**001	*030467*	0,5	4,0	25	1"	4,0		10
05**072055**001	*010933*	0,6	4,5	25	1"	4,5		10
05**072057**001	*010940*	0,8	5,5	25	1"	5,5		10
05**072059**001	*010957*	1,0	5,5	25	1"	5,5		10
05**072061**001	*010964*	1,2	6,5	25	1"	6,2		10
05**072063**001	*030450*	1,2	8,0	25	1"	8,0		10
05**072065**001	*010971*	1,6	8,0	25	1"	8,0		10

Kraftform Stainless - stainless steel to prevent rust

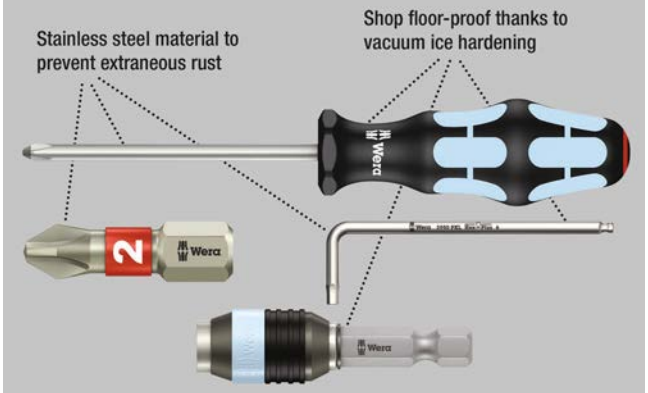

High quality stainless steel bits for slotted screws. Made out of stainless steel which prevents the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

3800/4 bits, stainless





	EAN							
Code	4013288	mm	mm	mm				
05**071080**001	*115669*	1,0	5,5	89	3 1/2"			10

800/4 Z bits

Tough viscous Wera bits for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

800/4 Z bits



	EAN					∅		
Code	4013288	mm	mm	mm		mm		
05**059305**001	*011480*	0,5	3,0	50	2"	3,0		10
05**059466**001	*011497*	0,5	3,0	70	2 3/4"	3,0		10
05**059307**001	*011503*	0,5	4,0	50	2"	4,0		10
05**059310**001	*011510*	0,6	3,5	50	2"	3,5		10
05**059472**001	*011527*	0,6	3,5	70	2 3/4"	3,5		10
05**059450**001	*031471*	0,6	3,5	152	6"	3,5		10
05**059315**001	*011534*	0,6	4,5	50	2"	4,5		10
05**059489**001	*094230*	0,6	4,5	89	3 1/2"	4,5		10
05**059320**001	*011541*	0,8	4,0	50	2"	4,0		10
05**059478**001	*011558*	0,8	4,0	70	2 3/4"	4,0		10
05**059480**001	*011565*	0,8	4,0	89	3 1/2"	4,0		10
05**059451**001	*031389*	0,8	4,0	152	6"	4,0		10
05**059325**001	*011572*	0,8	5,5	50	2"	5,5		10
05**059330**001	*011589*	1,0	5,5	50	2"	5,5		10
05**059486**001	*011596*	1,0	5,5	70	2 3/4"	5,5		10
05**059488**001	*011602*	1,0	5,5	89	3 1/2"	5,5		10
05**059452**001	*031235*	1,0	5,5	152	6"	5,5		10
05**059335**001	*035004*	1,0	6,0	50	2"	6,0		10
05**059337**001	*011619*	1,2	6,5	50	2"	6,2		10
05**059492**001	*011626*	1,2	6,5	70	2 3/4"	6,2		10
05**059490**001	*094247*	1,2	6,5	89	3 1/2"	6,2		10
05**059453**001	*031488*	1,2	6,5	152	6"	6,2		10
05**059340**001	*011633*	1,2	8,0	50	2"	8,0		10
05**059496**001	*011640*	1,2	8,0	89	3 1/2"	8,0		10
05**059345**001	*011657*	1,6	8,0	50	2"	8,0		10
05**059500**001	*011664*	1,6	8,0	89	3 1/2"	8,0		10

800/0 Micro bits for slotted screws

- 4 mm hexagonal drive

800/0 Micro bits for slotted screws



	EAN					∅		
Code	4013288	mm	mm	mm		mm		
05**058104**001	*234513*	0,3	1,5	30	1 3/16"	1,5		10
05**058101**001	*189608*	0,40	2,5	30	1 3/16"	2,5		10
05**058105**001	*234520*	0,50	3,0	30	1 3/16"	3,0		10

800/2 Z bits

5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

800/2 Z bits



	EAN					∅		
Code	4013288	mm	mm	mm		mm		
05**057225**001	*011275*	1,2	8,0	41	1 19/32"	7,8		10
05**057235**001	*011299*	1,6	10,0	41	1 19/32"	7,8		10
05**057240**001	*011305*	2,0	12,0	41	1 19/32"	12,0		10

800/9 C bits


Hard bits against premature breakage.
Drive: halfmoon, 4 mm.

800/9 C bits



	EAN					∅		
Code	4013288	mm	mm	mm		mm		
05**135265**001	*168276*	0,23	1,5	44	1 47/64"	1,5		10
05**135264**001	*194770*	0,35	2,5	44	1 47/64"	2,5		10
05**135266**001	*168283*	0,40	2,0	44	1 47/64"	2,0		10
05**135267**001	*168290*	0,50	3,0	44	1 47/64"	3,0		10

Impaktor system - For an above-average service life

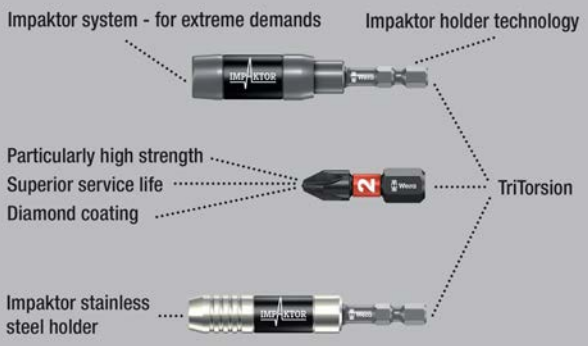


High quality Impaktor bits for hexagon socket screws. The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head. Hex-Plus ensures a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

840/1 IMP DC Hex-Plus DIY Impaktor bits

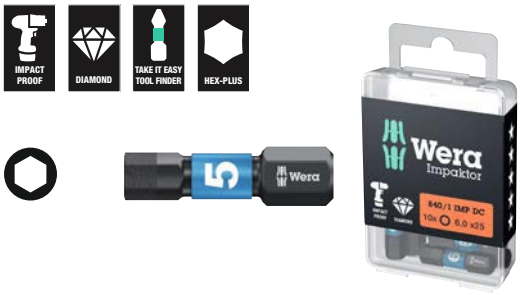


Code	EAN 4013288			
05**057603**001	*178701*	○	**840/1 IMP DC** 10x 3.0x25	1
05**057604**001	*157560*	○	**840/1 IMP DC** 10x 4.0x25	1
05**057605**001	*157423*	○	**840/1 IMP DC** 10x 5.0x25	1
05**057606**001	*157430*	○	**840/4 IMP DC** 10x 6.0x25	1

840/1 IMP DC SB Impaktor bits



Code	EAN 4013288			
05**073904**001	*158338*	○	**840/1 IMP DC** 1x 4.0x25	5
05**073905**001	*158345*	○	**840/1 IMP DC** 1x 5.0x25	5
05**073906**001	*158352*	○	**840/1 IMP DC** 1x 6.0x25	5

Kraftform Stainless - stainless steel to prevent rust

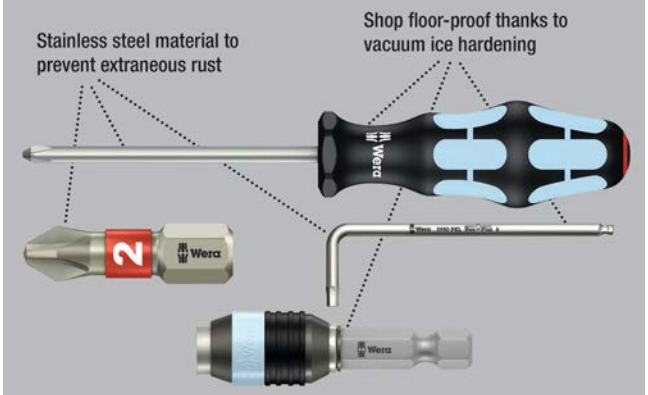

High quality bits out of stainless steel for hexagon socket screws. Prevents the formation of unsightly extraneous rust.

The Hex-Plus profile offers a greater contact surface in the head of the screw. The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated.


Come with Torsion zone: Torsion bits take-up torque peaks and absorb them in the Torsion zone. This prevents premature wear and extends the service life of the bit. $^1/_4$" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

3840/1 TS bits, stainless



Code	EAN 4013288	○ mm	○	□ mm	□			
05**071070**001	*111197*	1,5		25	1"			10
05**071071**001	*111203*	2,0		25	1"			10
05**071072**001	*111210*	2,5		25	1"			10
05**071073**001	*111227*	3,0		25	1"			10
05**071074**001	*111234*	4,0		25	1"			10
05**071075**001	*111241*	5,0		25	1"			10
05**071077**001	*115478*	5,5		25	1"			10
05**071076**001	*111258*	6,0		25	1"			10

BiTorsion system - for longer service life

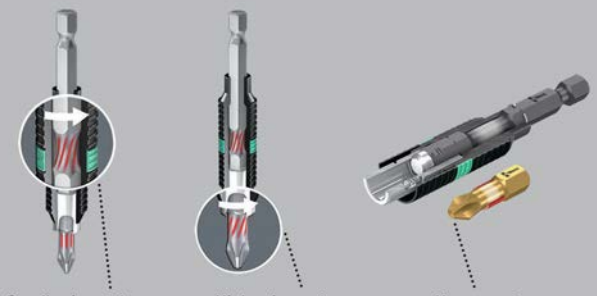

BiTorsion with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life.


Tough viscous; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

840/1 BTZ bits



	EAN							
Code	4013288	mm	mm					
05**056680**001	*182418*	1,5	25	1"				10
05**056681**001	*182425*	2,0	25	1"				10
05**056682**001	*182432*	2,5	25	1"				10
05**056683**001	*182449*	3,0	25	1"				10
05**056684**001	*182456*	4,0	25	1"				10
05**056685**001	*182463*	5,0	25	1"				10
05**056686**001	*182470*	5,5	25	1"				10
05**056687**001	*182487*	6,0	25	1"				10


Hex-Plus - lets hexagon socket screws last longer

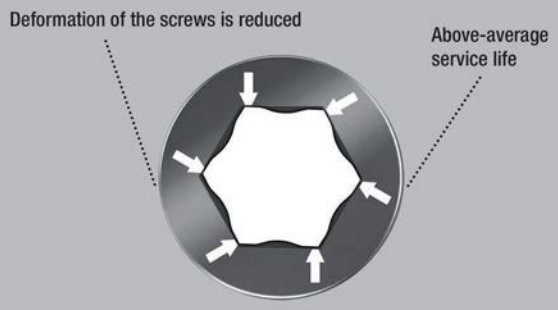

Tough viscous Wera bits for universal use. Hex-Plus offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

840/1 Z bits

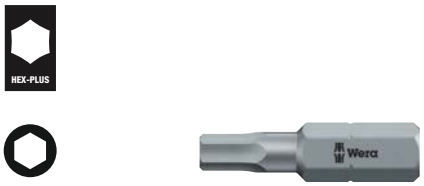

	EAN							
Code	4013288	mm		mm				
05**056303**001	*012623*	1,5		25	1"			10
05**056305**001	*012630*	2,0		25	1"			10
05**056310**001	*012647*	2,5		25	1"			10
05**056315**001	*012654*	3,0		25	1"			10
05**056320**001	*012661*	4,0		25	1"			10
05**056325**001	*012678*	5,0		25	1"			10
05**056330**001	*012685*	6,0		25	1"			10
05**056332**001	*038173*	7,0		25	1"			10
05**056335**001	*012692*	8,0		25	1"			10
05**056340**001	*012708*	10,0		25	1"			10
05**135060**001	*106636*		0,05"	25	1"			10
05**135070**001	*040862*		1/16"	25	1"			10
05**135071**001	*040879*		5/64"	25	1"			10
05**135072**001	*037725*		3/32"	25	1"			10
05**135078**001	*036599*		7/64"	25	1"			10
05**135073**001	*038067*		1/8"	25	1"			10
05**135069**001	*040855*		9/64"	25	1"			10
05**135074**001	*036506*		5/32"	25	1"			10
05**135075**001	*037930*		3/16"	25	1"			10
05**135079**001	*040893*		7/32"	25	1"			10
05**135076**001	*040886*		1/4"	25	1"			10
05**135077**001	*036360*		5/16"	25	1"			10
05**135068**001	*040848*		3/8"	25	1"			10

840/1 Z Sets SB



Code	EAN 4013288			
05**073050**001	*202567*	○	**840/1 Z Hex-Plus** 2x 2.0x25	5
05**073051**001	*202550*	○	**840/1 Z Hex-Plus** 2x 2.5x25	5
05**073052**001	*202512*	○	**840/1 Z Hex-Plus** 2x 3.0x25	5
05**073053**001	*202529*	○	**840/1 Z Hex-Plus** 2x 4.0x25	5
05**073054**001	*202536*	○	**840/1 Z Hex-Plus** 2x 5.0x25	5
05**073055**001	*202543*	○	**840/1 Z Hex-Plus** 2x 6.0x25	5
05**073342**001	*029607*	○	**840/1 Z Hex-Plus** 1x 2.0x25; 1x 2.5x25; 1x 3.0x25	5
05**073344**001	*029614*	○	**840/1 Z Hex-Plus** 1x 4.0x25; 1x 5.0x25; 1x 6.0x25	5

842/1 Z bits


The ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling „round the corner“ screwdriving.
1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

842/1 Z bits



Code	EAN 4013288	○ mm	mm				
05**056350**001	*013156*	2,5	25	1"			10
05**056352**001	*013163*	3,0	25	1"			10
05**056354**001	*013170*	4,0	25	1"			10
05**056356**001	*013187*	5,0	25	1"			10
05**056358**001	*013194*	6,0	25	1"			10

Impaktor system - For an above-average service life

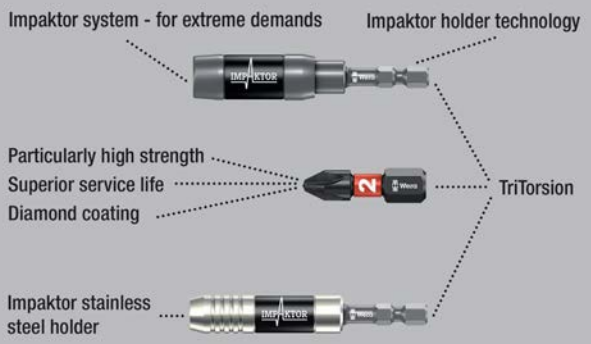

High quality Impaktor bits for hexagonal socket screws.
The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Hex-Plus ensures a greater contact surface in the head of the screw. The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated.
1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

840/4 IMP DC Hex-Plus DIY Impaktor bits




Code	EAN 4013288		
05**057644**001	*157577*	○	**840/4 IMP DC** 5x 4.0x50	1
05**057645**001	*157492*	○	**840/4 IMP DC** 5x 5.0x50	1
05**057646**001	*157508*	○	**840/4 IMP DC** 5x 6.0x50	1

840/4 IMP DC Impaktor bits SB



Code	EAN 4013288			
05**073944**001	*158451*	○	**840/4 IMP DC** 1x 4.0x50	5
05**073945**001	*158468*	○	**840/4 IMP DC** 1x 5.0x50	5
05**073946**001	*158475*	○	**840/4 IMP DC** 1x 6.0x50	5

Kraftform Stainless - stainless steel to prevent rust

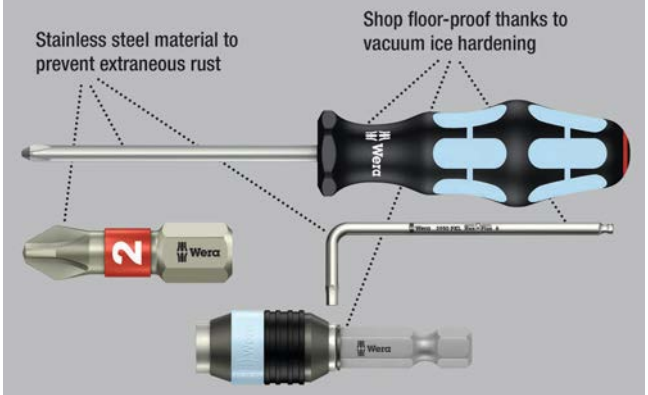

Wera stainless steel bits prevent the formation of unsightly extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.


3840/4 Bits, stainless





Code	EAN 4013288	○ mm	○	mm				
05**071101**001	*115621*	3,0		89	3 1/2"			10
05**071102**001	*115638*	4,0		89	3 1/2"			10
05**071103**001	*115645*	5,0		89	3 1/2"			10
05**071104**001	*115652*	6,0		89	3 1/2"			10
05**071105**001	*115676*		3/32"	89	3 1/2"			10
05**071106**001	*115683*		1/8"	89	3 1/2"			10
05**071107**001	*115690*		5/32"	89	3 1/2"			10
05**071108**001	*115706*		3/16"	89	3 1/2"			10

Hex-Plus - lets hexagon socket screws last longer

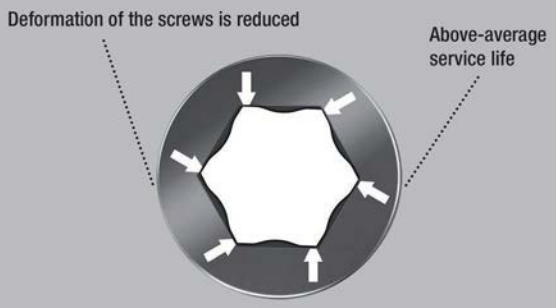

840/4 Z Take it easy bits

- Take it easy tool finder: colour coding according to profile and size

840/4 Z bits



Code	EAN 4013288							
		mm		mm		mm		
05**160885**001	*200976*	0,9		50	2"	2,6		10
05**059602**001	*112408*	1,5		50	2"	2,0		10
05**059603**001	*034694*	2,0		50	2"	4,0		10
05**059628**001	*155450*	2,0		89	3 1/2"	4,0		5
05**059604**001	*034700*	2,5		50	2"	4,0		10
05**059629**001	*155467*	2,5		89	3 1/2"	4,0		5
05**059605**001	*012906*	3,0		50	2"	4,0		10
05**059630**001	*094254*	3,0		89	3 1/2"	4,0		5
05**380033**001	*156433*	3,0		152	6"	4,0		5
05**059610**001	*012913*	4,0		50	2"	5,0		10
05**059631**001	*094261*	4,0		89	3 1/2"	5,0		5
05**059634**001	*122964*	4,0		152	6"	5,0		5
05**059615**001	*012920*	5,0		50	2"	6,0		10
05**059632**001	*094278*	5,0		89	3 1/2"	6,0		5
05**059635**001	*122971*	5,0		152	6"	6,0		5
05**059620**001	*012937*	6,0		50	2"	5,0		10
05**059633**001	*094285*	6,0		89	3 1/2"	-		5
05**059636**001	*122988*	6,0		152	6"	-		5
05**059625**001	*012944*	8,0		50	2"	-		10
05**059637**001	*215031*	8,0		89	3 1/2"	-		5
05**350430**001	*161406*		0,05"	50	2"	2,5		10
05**135090**001	*107053*		1/16"	50	2"	2,5		10
05**380045**001	*156730*		1/8"	152	6"	4,0		5
05**135091**001	*036414*		5/64"	50	2"	3,0		10
05**059660**001	*155474*		5/64"	89	3 1/2"	3,0		5
05**135092**001	*036421*		3/32"	50	2"	3,0		10
05**059661**001	*155481*		3/32"	89	3 1/2"	3,5		5
05**135093**001	*036438*		7/64"	50	2"	3,5		10
05**059662**001	*155498*		7/64"	89	3 1/2"	4,0		5
05**135094**001	*036445*		1/8"	50	2"	4,0		10
05**059663**001	*155504*		1/8"	89	3 1/2"	4,0		5
05**135095**001	*036377*		9/64"	50	2"	4,5		10
05**059664**001	*155511*		9/64"	89	3 1/2"	4,5		5
05**380046**001	*156822*		9/64"	152	6"	4,5		5
05**135096**001	*036384*		5/32"	50	2"	5,0		10
05**059665**001	*155528*		5/32"	89	3 1/2"	5,0		5
05**380047**001	*156839*		5/32"	152	6"	5,0		5
05**135097**001	*036391*		3/16"	50	2"	6,0		10
05**059666**001	*155535*		3/16"	89	3 1/2"	6,0		5
05**380048**001	*156846*		3/16"	152	6"	6,0		5
05**135098**001	*036407*		7/32"	50	2"	-		10
05**059667**001	*155542*		7/32"	89	3 1/2"	-		5
05**380049**001	*156853*		7/32"	152	6"	-		5
05**135099**001	*095589*		1/4"	50	2"	-		10
05**059668**001	*155559*		1/4"	89	3 1/2"	-		5
05**380050**001	*156860*		1/4"	152	6"	-		5
05**346288**001	*103895*		5/16"	50	2"	-		10

840/4 Z SB bits



Code	EAN 4013288			
05**073056**001	*202468*		**840/4 Z Hex-Plus** 2x 2.0x50	3
05**073057**001	*202475*		**840/4 Z Hex-Plus** 2x 2.5x50	3
05**073058**001	*202482*		**840/4 Z Hex-Plus** 2x 3.0x50	3
05**136301**001	*213792*		**840/4 Z Hex-Plus** 1x 3.0x152	3
05**073059**001	*202499*		**840/4 Z Hex-Plus** 2x 4.0x50	3
05**136302**001	*213808*		**840/4 Z Hex-Plus** 1x 4.0x152	3
05**073060**001	*202505*		**840/4 Z Hex-Plus** 2x 5.0x50	3
05**136303**001	*213815*		**840/4 Z Hex-Plus** 1x 5.0x152	3
05**073061**001	*202444*		**840/4 Z Hex-Plus** 2x 6.0x50	3
05**136304**001	*213822*		**840/4 Z Hex-Plus** 1x 6.0x152	3

842/4 Bits

The ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling „round the corner“ screwdriving. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

842/4 Bits





	EAN							
Code	4013288	mm		mm				
05**059680**001	*155931*	3,0		89	3 1/2"			5
05**059681**001	*155948*	4,0		89	3 1/2"			5
05**059682**001	*155955*	5,0		89	3 1/2"			5
05**059683**001	*155962*	6,0		89	3 1/2"			5
05**380124**001	*156587*		3/32"	89	3 1/2"			5
05**380125**001	*156594*		7/64"	89	3 1/2"			5
05**380126**001	*156600*		1/8"	89	3 1/2"			5
05**380127**001	*156617*		9/64"	89	3 1/2"			5
05**380128**001	*156624*		5/32"	89	3 1/2"			5
05**380129**001	*156631*		3/16"	89	3 1/2"			5
05**380130**001	*156648*		7/32"	89	3 1/2"			5
05**380131**001	*156655*		1/4"	89	3 1/2"			5

840/0 Hex-Plus Micro bits for hexagonal socket head screws

- 4 mm hexagonal drive

840/0 Hex-Plus Micro bits for hexagonal socket head screws





	EAN							
Code	4013288	mm	mm		mm			
05**058108**001	*234537*	0,9	30	1 3/16"	2,0			10
05**058109**001	*234544*	1,3	30	1 3/16"	2,6			10
05**058110**001	*189578*	1,5	30	1 3/16"	2,6			10
05**058111**001	*189615*	2,0	30	1 3/16"	2,6			10
05**058112**001	*234551*	2,5	30	1 3/16"	2,6			10

840/2 Z Bits

Tough viscous Wera bits for hexagon socket screws for universal use. Hex-Plus offers a greater contact surface in the head of the screw. The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. 5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

840/2 Z Bits





	EAN							
Code	4013288	mm		mm				
05**057505**001	*012753*	3		30	1 3/16"			10
05**057510**001	*012760*	4		30	1 3/16"			10
05**057515**001	*012777*	5		30	1 3/16"			10
05**057520**001	*012784*	6		30	1 3/16"			10
05**057525**001	*012791*	8		30	1 3/16"			10
05**057530**001	*012807*	10		30	1 3/16"			10

840/9 C Bits

Drive: 4 mm halfmoon for direct power tool connection.

840/9 C Bits





	EAN							
Code	4013288	mm	mm		mm			
05**135268**001	*168306*	1,5	44	1 47/64"	2,6			10
05**135269**001	*168313*	2,0	44	1 47/64"	2,6			10

840/1 Z Tamper-proof Hex-Plus BO bits

Hexagon socket BO screws have a protruding pin in their drive profile.

This prevents any unauthorised loosening since the “normal” hex tools cannot move these screws. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

840/1 Z Tamper-proof Hex-Plus BO bits



Code	EAN							
	4013288	mm	mm					
05**056341**001	*038548*	2,0	25	1"				10
05**056342**001	*038555*	2,5	25	1"				10
05**056343**001	*038562*	3,0	25	1"				10
05**056344**001	*038593*	4,0	25	1"				10
05**056345**001	*038579*	5,0	25	1"				10
05**056346**001	*038586*	6,0	25	1"				10

840/4 Z Tamper-proof Hex-Plus BO bits

1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

840/4 Z Tamper-proof Hex-Plus BO bits



Code	EAN							
	4013288	mm	mm		mm			
05**059640**001	*094292*	2,0	89	3 1/2"	4,0			5
05**059641**001	*094308*	2,5	89	3 1/2"	4,0			5
05**059642**001	*094315*	3,0	89	3 1/2"	4,0			5
05**059643**001	*094322*	4,0	89	3 1/2"	5,0			5
05**059644**001	*094339*	5,0	89	3 1/2"	6,0			5
05**059645**001	*094346*	6,0	89	3 1/2"	-			5

9506 SB 4-in-1 Bit 1

Four different screw profiles (hexagonal socket screws sizes 3.0; 4.0; 5.0; 6.0) can be operated with only one bit. Significant weight savings of over 50 %.

The operability of the large profiles is made possible by the spring compression of the small tips.

The bit has a 1/4" hexagon drive (Wera connection series 1) and can therefore also be used with e.g. bit ratchets and bitholding screwdrivers with Rapidaptor.

- Innovative, extremely compact quadruple bit – only one bit for four different screw sizes
- Suitable for hexagonal socket screws sizes 3.0; 4.0; 5.0 and 6.0
- Tough for hard materials
- 1/4" hexagon drive (Wera connecting series 1)

9506 SB 4-in-1 Bit 1





Code	EAN		
	4013288		
05**073201**001	*225269*		1
		9506 1x 3,0; 4,0; 5,0; 6,0x37	

9507 SB 4-in-1 Bit 2

Four different screw profiles (hexagonal socket screws sizes 2.5; 5.0; 6.0 and TORX® screws size TX 25) can be operated with just one bit.

The enormous space savings make the bit perfect for mobile use. Significant weight savings of over 50 %. The operability of the large profiles is made possible by the spring compression of the small tips.

The bit with a 1/4" hexagon drive (Wera connection series 1) can also be used with e.g. bit ratchets and bitholding screwdrivers with Rapidaptor.

- Innovative, extremely compact quadruple bit – only one bit for four different screw sizes
- Suitable for hexagonal socket screws sizes 2.5; 5.0; 6.0 and TORX® screws TX 25
- Tough for hard materials
- 1/4" hexagon drive (Wera connecting series 1)


9507 SB 4-in-1 Bit 2





Code	EAN 4013288			
05**073202**001	*225276*			1
			9507 1x 2,5; 5,0; 6,0; TX 25x37	

Impaktor system - For an above-average service life

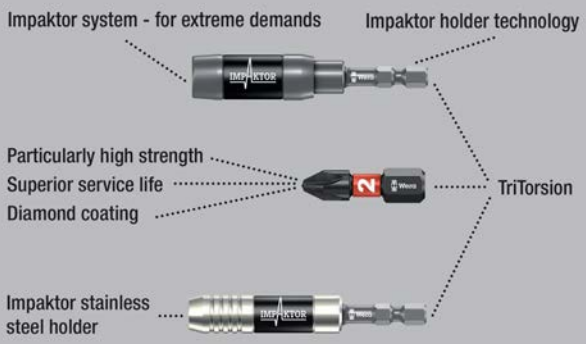

High quality bits for square socket screws. The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head. Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

868/1 IMP DC DIY Impaktor square head socket bits





Code	EAN 4013288			
05**057631**001	*157478*		**868/1 IMP DC** 10x # 2x25	1
05**057632**001	*157485*		**868/1 IMP DC** 10x # 3x25	1

868/1 IMP DC SB Impaktor Square-Plus bits



Code	EAN 4013288			
05**073931**001	*158437*		**868/1 IMP DC** 1x # 2x25	5
05**073932**001	*158444*		**868/1 IMP DC** 1x # 3x25	5

868/1 V Square-Plus bits

High quality bits for square socket screws with wedging function.

The wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

868/1 V Square-Plus bits



Code	EAN 4013288							
			mm		mm			
05**340245**001	*118202*	# 1	25	1"	6,1			10
05**066394**001	*113603*	# 2	25	1"	6,1			10
05**066396**001	*169228*	# 3	25	1"	6,1			10

Bit-Box 20 V Robertson



Code	EAN 4013288			
05**057790**001	*188083*		**868/1 V** 20x # 2x25	20

868/1 Z Square-Plus bits

High quality bits for square socket screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

868/1 Z Square-Plus bits




Code	EAN 4013288							
			mm		mm			
05**066395**001	*030214*	# 00	25	1"	3,5			10
05**066400**001	*030221*	# 0	25	1"	3,5			10
05**066405**001	*030207*	# 1	25	1"	4,5			10
05**066410**001	*030238*	# 2	25	1"	6,0			10
05**066415**001	*030245*	# 3	25	1"	6,0			10
05**066420**001	*030252*	# 4	25	1"	8,0			10

868/1 Z SB Square-Plus bits



Code	EAN 4013288			
05**073074**001	*202727*		**868/1 Z** 2x # 1x25	5
05**073075**001	*202710*		**868/1 Z** 2x # 2x25	5

Impaktor system - For an above-average service life

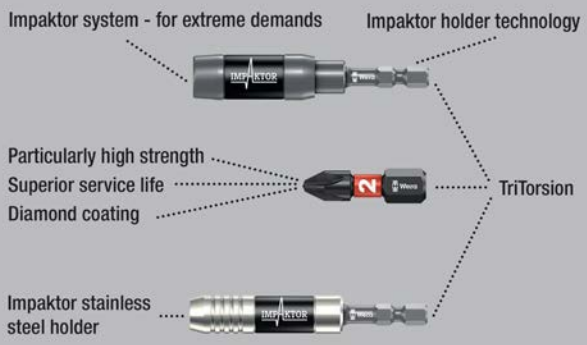

High quality bits for square socket screws.
The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head. Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

868/4 IMP DC DIY Impaktor square head socket bits




Code	EAN 4013288			
05**057671**001	*157546*		**868/4 IMP DC** 5x # 2x50	1
05**057672**001	*157553*		**868/4 IMP DC** 5x # 3x50	1

868/4 IMP DC SB Impaktor square head socket bits



Code	EAN 4013288			
05**073971**001	*158550*	▢	**868/4 IMP DC** 1x # 2x50	5
05**073972**001	*158567*	▢	**868/4 IMP DC** 1x # 3x50	5

Kraftform Stainless - stainless steel to prevent rust

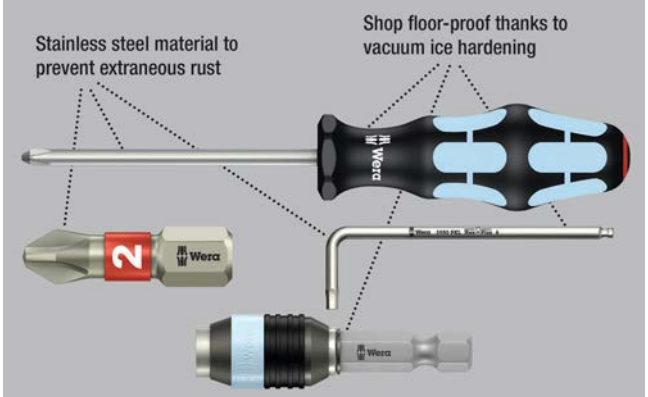

High quality bits out of stainless steel for square socket screws prevent the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

3868/4 Square-Plus bits, stainless



Code	EAN 4013288	▢	mm		mm			
05**071097**001	*115591*	# 1	89	3 1/2"	4,5			10
05**071098**001	*115607*	# 2	89	3 1/2"	5,0			10
05**071099**001	*115614*	# 3	89	3 1/2"	5,5			10

868/4 BTZ Square-Plus bits



Code	EAN 4013288	▢	mm		mm			
05**060147**001	*041272*	#1	50	2"	4,2			10
05**060148**001	*041289*	#2	50	2"	4,2			10
05**060149**001	*041296*	#3	50	2"	5,5			10

868/4 Square-Plus bits



Code	EAN 4013288	▢	mm		mm			
05**060150**001	*030269*	# 00	50	2"	3,5			10
05**060155**001	*030276*	# 0	50	2"	3,5			10
05**060160**001	*030283*	# 1	50	2"	4,5			10
05**060180**001	*041043*	# 1	70	2 3/4"	4,5			10
05**134800**001	*040930*	# 1	89	3 1/2"	4,5			10
05**134805**001	*040923*	# 1	152	6"	4,5			10
05**060165**001	*030290*	# 2	50	2"	6,0			10
05**060182**001	*041050*	# 2	70	2 3/4"	6,0			10
05**134801**001	*040947*	# 2	89	3 1/2"	6,0			10
05**134806**001	*040954*	# 2	152	6"	6,0			10
05**060170**001	*030306*	# 3	50	2"	6,0			10
05**060184**001	*032805*	# 3	70	2 3/4"	6,0			10
05**134802**001	*040961*	# 3	89	3 1/2"	6,0			10
05**134807**001	*040978*	# 3	152	6"	6,0			10
05**060175**001	*030313*	# 4	50	2"	8,0			10

868/4 Z SB Square-Plus bits



Code	EAN 4013288		
05**073076**001	*202703*	▢	**868/4 Square-Plus** 2x # 1x50	5
05**073077**001	*202697*	▢	**868/4 Square-Plus** 2x # 2x50	5

868/4 V Square-Plus bits


With wedging function.

868/4 V Square-Plus bits



	EAN							
Code	4013288		mm		mm			
05**060300**001	*169211*	# 1	50	2"	4,5			10
05**060297**001	*169198*	# 1	89	3 1/2"	4,5			10
05**060301**001	*113610*	# 2	50	2"	6,0			10
05**060302**001	*113627*	# 2	70	2 3/4"	6,0			10
05**060303**001	*113634*	# 2	89	3 1/2"	6,0			10
05**060304**001	*113641*	# 2	152	6"	6,0			10
05**060296**001	*169181*	# 3	50	2"	6,0			10
05**060298**001	*169204*	# 3	89	3 1/2"	6,0			10

Diamond-coated bits

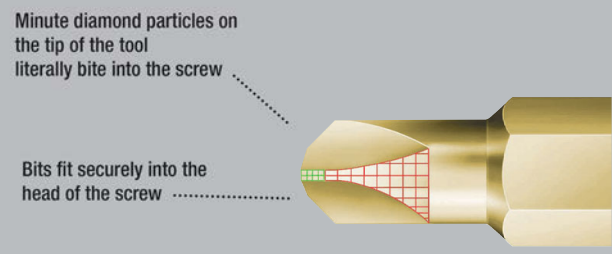

High quality bits with Mplus advantage for more breaking torque and thereby enhanced durability; diamond coating for a secure fit in the screw head.

871/1 DC TORQ-SET® Mplus bits



	EAN							
Code	4013288	mm		mm		mm		
05**066638**001	*099525*	4		25	1"	4,7		10
05**066640**001	*033161*	6		25	1"	4,7		10
05**066642**001	*033178*	8		25	1"	6,0		10
05**066644**001	*033185*	10		25	1"	6,0		10
05**066646**001	*033192*	--	1/4"	32	1 1/4"	11,0		10

871/1 TORQ-SET® Mplus bits

TORQ-SET® Mplus: The stronger flanks – when compared with the conventional TORQ-SET® profile – result in 70% more breaking torque and thereby enhanced durability whilst at the same time providing a perfect fit in the screw head.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

871/1 TORQ-SET® Mplus bits, 25 mm



	EAN							
Code	4013288	mm		mm		mm		
05**066618**001	*093073*	0		25	1"	4,7		10
05**066619**001	*041562*	1		25	1"	4,7		10
05**066620**001	*033086*	2		25	1"	4,7		10
05**066622**001	*033093*	3		25	1"	4,7		10
05**066624**001	*033109*	4		25	1"	4,7		10
05**066626**001	*033116*	5		25	1"	4,7		10
05**066628**001	*033123*	6		25	1"	4,7		10
05**066630**001	*033130*	8		25	1"	6,0		10
05**066632**001	*033147*	10		25	1"	6,0		10
05**066633**001	*037558*	--	1/4"	25	1"	6,0		10

871/1 TORQ-SET® Mplus bits, 32 mm



	EAN							
Code	4013288		mm		mm			
05**066634**001	*033154*	1/4"	32	1 1/4"	11,0			10
05**066635**001	*093011*	5/16"	32	1 1/4"	11,0			10

871/4 DC TORQ-SET® Mplus bits

High quality bits with Mplus advantage for more breaking torque and thereby enhanced durability; diamond coating for a secure fit in the screw head.

1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

871/4 DC TORQ-SET® Mplus bits



	EAN							
Code	4013288			mm				
05**324901**001	*162984*	2		50	2"			10
05**066688**001	*099532*	4		50	2"			10
05**066690**001	*033345*	6		50	2"			10
05**066692**001	*033352*	8		50	2"			10
05**066694**001	*033369*	10		50	2"			10
05**066696**001	*033376*	--	1/4"	50	2"			10

871/4 TORQ-SET® Mplus bits



	EAN							
Code	4013288			mm				
05**066660**001	*033239*	2		50	2"			10
05**066683**001	*094469*	2		89	3 1/2"			5
05**066662**001	*033246*	3		50	2"			10
05**066684**001	*094476*	3		89	3 1/2"			5
05**066664**001	*033253*	4		50	2"			10
05**066685**001	*094483*	4		89	3 1/2"			5
05**066666**001	*033260*	5		50	2"			10
05**066668**001	*033277*	6		50	2"			10
05**066676**001	*033307*	6		70	2 3/4"			5
05**066686**001	*094490*	6		89	3 1/2"			10
05**066670**001	*033055*	8		50	2"			10
05**066678**001	*033314*	8		70	2 3/4"			5
05**066687**001	*094506*	8		89	3 1/2"			10
05**066672**001	*033284*	10		50	2"			10
05**066680**001	*033321*	10		70	2 3/4"			5
05**066682**001	*033338*	10		89	3 1/2"			5
05**066674**001	*033291*	--	1/4"	50	2"			10
05**221110**001	*035851*	--	5/16"	50	2"			10

871/2 TORQ-SET® Mplus bits

5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

871/2 TORQ-SET® Mplus bits



	EAN							
Code	4013288		mm					
05**066654**001	*033208*	1/4"	32	1 1/4"				5
05**066656**001	*033215*	5/16"	32	1 1/4"				5

875/1 TRI-WING® bits, 25 mm

High quality bits for TRI-WING® screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

875/1 TRI-WING® bits, 25 mm



	EAN							
Code	4013288		mm		mm			
05**066758**001	*093059*	0	25	1"	4,7			10
05**066760**001	*033482*	1	25	1"	4,7			10
05**066762**001	*033499*	2	25	1"	4,7			10
05**066764**001	*033505*	3	25	1"	4,7			10
05**066766**001	*033512*	4	25	1"	6,2			10
05**066768**001	*033529*	5	25	1"	6,2			10

875/4 TRI-WING® bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

875/4 TRI-WING® bits



	EAN							
Code	4013288		mm					
05**066785**001	*094605*	1	89	3 1/2"				5
05**066786**001	*094612*	2	89	3 1/2"				5
05**066787**001	*094629*	3	89	3 1/2"				5
05**066788**001	*094636*	4	89	3 1/2"				5

860/1 XZN Multi-point bits

High quality bits for recessed multi-point screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

860/1 XZN Multi-point bits



	EAN				∅			
Code	4013288		mm		mm			
05**066150**001	*034953*	M 4	25	1"	4,17			10
05**066155**001	*034960*	M 5	25	1"	5,14			10
05**066160**001	*034977*	M 6	25	1"	-			10
05**066165**001	*034984*	M 8	25	1"	8,0			5
05**066170**001	*034991*	M 10	25	1"	10,0			5

872/9 bits for Microstix® screws

With 4 mm halfmoon drive for direct insertion in the power tool.

872/9 bits for Microstix® screws



	EAN			∅				
Code	4013288		mm	mm				
05**066850**001	*179272*	m	44	2,0	1 47/64"			10
05**066851**001	*179296*	00	44	2,0	1 47/64"			10
05**066852**001	*179302*	F	44	2,0	1 47/64"			10
05**066853**001	*179319*	0	44	2,0	1 47/64"			10
05**066854**001	*179326*	1	44	2,0	1 47/64"			10

857/1 Z Spanner bits

Bits for spanner screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

857/1 Z Spanner bits



	EAN							
Code	4013288		mm		mm			
05**057150**001	*038609*	4	25	1"	3,18			10
05**057151**001	*038616*	6	25	1"	4,32			10
05**057152**001	*038623*	8	25	1"	5,21			10
05**057153**001	*038630*	10	25	1"	6,10			10

857/4 Z Spanner bits


Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

857/4 Z Spanner bits



	EAN							
Code	4013288		mm		mm			
05**057160**001	*094810*	4	89	3 1/2"	3,18			5
05**057161**001	*094827*	6	89	3 1/2"	4,32			5
05**057162**001	*094834*	8	89	3 1/2"	5,21			5
05**057163**001	*094841*	10	89	3 1/2"	6,10			5

Kraftform Stainless - stainless steel to prevent rust

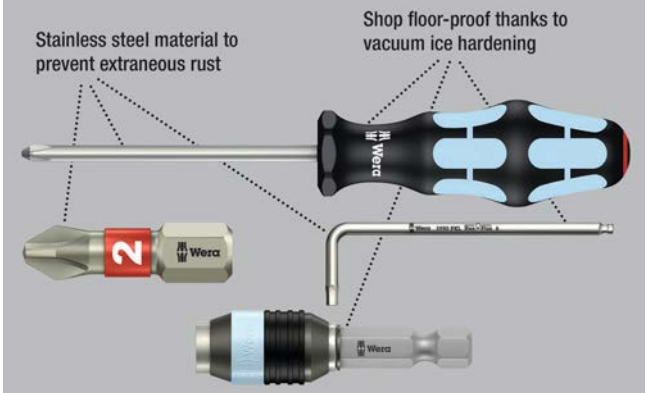

High quality nutsetter out of stainless steel for hexagon head screws. Stainless to prevent the risk of extraneous rust. Non-magnetic design with retaining spring. 1/4" hexagon, suitable for holders as per, DIN ISO 1173-F 6.3.

3869/4 Nutsetters, stainless



	EAN							
Code	4013288	mm		mm	mm			
05**071222**001	*118127*	7,0		50,0	12,5			5
05**071223**001	*118257*	8,0		50,0	14,0			5
05**071224**001	*118141*	10,0		50,0	16,0			5
05**071225**001	*118158*	13,0		50,0	19,5			5
05**071228**001	*118189*		3/8"	50,0	16,0			5

869/4 Nutsetters

Non-magnetic design. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

869/4 Nutsetters



	EAN							
Code	4013288	mm		mm	mm			
05**060400**001	*100948*	5,5		50,0	11,0			5
05**060272**001	*016546*	5,5		65,0	9,0			5
05**060401**001	*100955*	6,0		50,0	11,0			5
05**060274**001	*016553*	6,0		65,0	11,0			5
05**060402**001	*100962*	7,0		50,0	11,0			5
05**060276**001	*016560*	7,0		65,0	11,0			5
05**060403**001	*100979*	8,0		50,0	12,5			5
05**060278**001	*016577*	8,0		65,0	12,5			5
05**060404**001	*100986*	9,0		50,0	14,0			5
05**060280**001	*016584*	9,0		65,0	14,0			5
05**060405**001	*100993*	10,0		50,0	14,0			5
05**060282**001	*016591*	10,0		65,0	14,0			5
05**060406**001	*101006*	11,0		50,0	16,0			5
05**060281**001	*031327*	11,0		65,0	16,0			5
05**060407**001	*101013*	12,0		50,0	18,0			5
05**060283**001	*031334*	12,0		65,0	18,0			5
05**060408**001	*101020*	13,0		50,0	18,0			5
05**060284**001	*016607*	13,0		65,0	19,0			5
05**060409**001	*101037*		1/4"	50,0	11,0			5
05**060286**001	*016614*		1/4"	65,0	11,0			5
05**060410**001	*101044*		5/16"	50,0	12,5			5
05**060290**001	*016638*		5/16"	65,0	12,5			5
05**060411**001	*101051*		3/8"	50,0	14,0			5
05**060288**001	*016621*		3/8"	65,0	14,0			5
05**060412**001	*101068*		7/16"	50,0	16,0			5

869/4 M Nutsetters, magnetic



	EAN							
Code	4013288	mm		mm	mm			
05**060420**001	*101075*	5,5		50,0	11,0			5
05**060210**001	*016652*	5,5		65,0	11,0			5
05**060421**001	*101082*	6,0		50,0	11,0			5
05**060215**001	*016669*	6,0		65,0	11,0			5
05**060422**001	*101099*	7,0		50,0	11,0			5
05**060220**001	*016676*	7,0		65,0	11,0			5
05**060423**001	*101105*	8,0		50,0	12,5			5
05**060225**001	*016683*	8,0		65,0	12,5			5
05**060424**001	*101112*	9,0		50,0	14,0			5
05**060230**001	*016690*	9,0		65,0	14,0			5
05**060425**001	*101129*	10,0		50,0	14,0			5
05**060235**001	*016706*	10,0		65,0	14,0			5
05**060426**001	*101136*	11,0		50,0	16,0			5
05**060237**001	*031501*	11,0		65,0	16,0			5
05**060427**001	*101143*	12,0		50,0	18,0			5
05**060238**001	*031495*	12,0		65,0	17,0			5
05**060428**001	*101150*	13,0		50,0	18,0			5
05**060240**001	*016713*	13,0		65,0	19,0			5
05**060429**001	*101167*		1/4"	50,0	11,0			5
05**060255**001	*016720*		1/4"	65,0	11,0			5
05**060430**001	*101174*		5/16"	50,0	12,5			5
05**060260**001	*016737*		5/16"	65,0	12,5			5
05**060431**001	*101181*		3/8"	50,0	14,0			5
05**060265**001	*016744*		3/8"	65,0	14,0			5
05**060432**001	*101198*		7/16"	50,0	16,0			5

869/4 M SB Nutsetters, magnetic



Code	EAN 4013288			
05**073500**001	*105691*	◉	**869/4 M** 1x 5.5x50.0	3
05**073501**001	*105707*	◉	**869/4 M** 1x 6.0x50.0	3
05**073502**001	*106506*	◉	**869/4 M** 1x 7.0x50.0	3
05**073503**001	*105714*	◉	**869/4 M** 1x 8.0x50.0	3
05**073504**001	*105721*	◉	**869/4 M** 1x 9.0x50.0	3
05**073505**001	*105738*	◉	**869/4 M** 1x 10.0x50.0	3
05**073506**001	*105745*	◉	**869/4 M** 1x 11.0x50.0	3
05**073507**001	*105752*	◉	**869/4 M** 1x 12.0x50.0	3
05**073508**001	*105769*	◉	**869/4 M** 1x 13.0x50.0	3
05**073509**001	*105776*	◉	**869/4 M** 1x 1/4"x50.0	3
05**073510**001	*105783*	◉	**869/4 M** 1x 3/8"x50.0	3

869/4 M Set A SB



Code	EAN 4013288			
050**73495**001	*144584*		**869/4 M** 1x 7.0x50.0; 1x 8.0x50.0; 1x 10.0x50.0; 1x 12.0x50.0; 1x 13.0x50.0; 1x 1/4"x50.0; 1x 5/16"x50.0; 1x 3/8"x50.0	1

869/9 Nutsetters

Metric nutsetter for hexagon head screws. Non-magnetic design. With 4 mm halfmoon drive for direct insertion in the power tool.

869/9 Nutsetters



Code	EAN 4013288	mm	mm	mm				
051**35224**001	*190505*	2,5	44,0	5,0				10
051**35225**001	*190499*	3,0	44,0	5,0				10

879/4 Internal thread insertion tool

Insertion tool with internal thread for hanger bolts and threaded rods. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

879/4 Internal thread insertion tool




Code	EAN 4013288		mm		mm			
051**35903**001	*035059*	M8	50,0	2"	12,0			5
051**35904**001	*035066*	M10	50,0	2"	12,0			5


Wera
Wera
Wera
Wera

Holders and Adaptors



Impaktor system - For an above-average service life

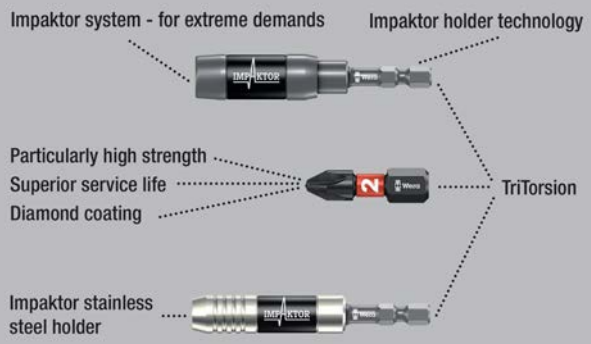

Wera Impaktor holder for the absorption of impulse peaks. Particular torsion effect thanks to the double-torsion spring.

The retaining ring ensures an optimum fit of the tool in the holder. The magnet provides for additional fixing of the bit and screw.

The Impaktor stainless holder with retaining ring and magnet meets the extremely dynamic demands by doing without any small, mechanical parts that are often susceptible.

Used mostly for industrial assembly applications such as e.g. with screwdriving robots. Output: suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. Drive: 1/4" hexagon, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

897/4 IMP Impaktor holder with retaining ring and magnet

IMPACT PROOF



	EAN							
Code	4013288		mm					
05**057675**001	*157805*	1/4"	75	3"	1/4"			5

897/4 IMP R Impaktor holder with retaining ring and ring magnet

The Impaktor holder additionally holds long and heavy screws extremely securely with its ring magnet. This enables rapid and dependable positioning of the screw.

Should, situation-related, the magnet not be desired e.g. when working with metal, it can be removed from the screwdriving zone and thereby be neutralised.

Used mostly for manual power tool applications. Output: suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. Drive: 1/4" hexagon, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

897/4 IMP R Impaktor holder with retaining ring and ring magnet

IMPACT PROOF



	EAN							
Code	4013288		mm					
05**057676**001	*157812*	1/4"	75	3"	1/4"			5


897/4 IMP R SB Impaktor holder with retaining ring and ring magnet

IMPACT PROOF



Code	EAN 4013288		
05**073990**001	*157836*		**897/4 Impaktor R** 1x 1/4"x75	3

Radidaptor - the amazing compact multifunction tool

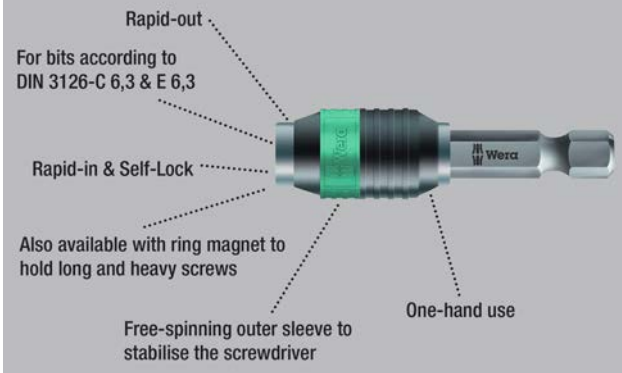

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 (ISO 1173). Stainless design to prevent extraneous rust.

Comes with Rapidaptor technology, which allows bits to be attached without any need to actuate the sleeve. The removal of the bit is simple, just by pushing the sleeve forward – for rapid bit change with just one hand. 1/4" hexagon, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

3888/4/1 K Rapidaptor Universal Bit Holder, stainless




	EAN							
Code	4013288		mm			mm		
05**071100**001	*111487*	1/4"	50	2"	1/4"	15,0		5

3888/4/1 K SB Rapidaptor Universal Bit Holder, stainless



	EAN		
Code	4013288		
05**073616**001	*112170*		**3888/4/1 K** 1x 1/4"x50	3

BiTorsion system - for longer service life

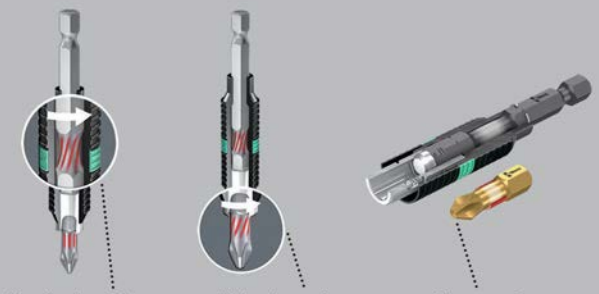

Universal holder for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173). BiTorsion holders by Wera have a torsion spring that absorbs low peak loads during screwdriving jobs.

The combined use with BiTorsion bits and their torsion zones extends the service life of the tool considerably. BiTorsion holders by Wera can, however, also be used with conventional bits. The Rapidaptor technology allows bits to be attached without any need to actuate the sleeve.

The removal of the bit is simple, just by pushing the sleeve forward. This enables rapid bit change with just one hand. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

897/4 R Rapidaptor BiTorsion Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**053923**001	*095633*	1/4"	75	3"	1/4"	15,0		5

897/4 R SB Rapidaptor BiTorsion Universal Bit Holder



	EAN		
Code	4013288		
05**073420**001	*099464*		**897/4 R** 1x 1/4"x75	3

889/4/1 K Rapidaptor Universal Bit Holder

Rapidaptor universal holder for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173). The Rapidaptor allows bits to be attached without any need to actuate the sleeve.

The removal of the bit is simple, just by pushing the sleeve forward. This enables rapid bit change with just one hand. The strong permanent magnet holds the bits absolutely securely. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

889/4/1 K Rapidaptor Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**052502**001	*095626*	1/4"	50	2"	1/4"	15,0		5

889/4/1 K SB Rapidaptor Universal Bit Holder



Code	EAN 4013288			
05**073421**001	*099440*		**889/4/1 K** 1x 1/4"x50	3

889/4/1 Rapidaptor Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**052503**001	*098016*	1/4"	75	3"	1/4"	15,0		5

889/4 R Rapidaptor Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**052504**001	*101242*	1/4"	100	4"	1/4"	15,0		2

888/4/1 K Rapidaptor Universal Bit holder

- Non-magnetic design

888/4/1 K Rapidaptor Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**052500**001	*095619*	1/4"	50	2"	1/4"	15,0		5

887/4 RR Rapidaptor Universal Bit Holder with ring magnet

Rapidaptor universal holder for bits with hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173). The floating, free-turning magnetic sleeve securely holds even large and heavy screws. The Rapidaptor allows bits to be attached without any need to actuate the sleeve.

The removal of the bit is simple, just by pushing the sleeve forward. This enables rapid bit change with just one hand. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

887/4 RR Rapidaptor Universal Bit Holder with ring magnet



	EAN							
Code	4013288		mm			mm		
05**052490**001	*104045*	1/4"	57	2 1/4"	1/4"	16		5

887/4 RR SB Rapidaptor Universal Bit Holder with ring magnet



Code	EAN 4013288			
05**073511**001	*105790*		**887/4 RR** 1x 1/4"x57	3

889/4/1 F Rapidaptor free-running bit holder for torque screwdrivers with pistol handle

The free-running feature allows for a particularly quick return movement without having to remove the screwdriver when tightening screws.

Especially for application with Wera torque screwdrivers with pistol handle for fast and ergonomic working.

The Rapidaptor technology allows mounting bits without activating the sleeve. Remove the bits by simply pushing the sleeve forward - for rapid bit change, all with one hand.

- Avoids annoying re-positioning when tightening screws with Wera torque screwdrivers with pistol handle
- Fast and fatigue-free work due to precise free-running mechanism
- Maintenance-free construcion with especially slim and solid bearing by leading free-running manufacturer
- Maximum transmissable tightening moment 10,0 Nm
- Bit mounting with Rapidaptor technology for rapid bit change, suitable for bits with 1/4"- external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connection series 1 and 4

889/4/1 F Rapidaptor free-running bit holder for torque screwdrivers with pistol handle



	EAN							
Code	4013288		mm			mm		
05**052501**001	*217585*	1/4"	64	2 33/64"	1/4"	16,5		5

894/4/1 K Universal Bit Holder

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3.

Quick-release chuck for rapid bit change. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

894/4/1 K Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**053522**001	*017512*	1/4"	51	2"	1/4"	14,3		5

894/4/1 Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**053520**001	*017505*	1/4"	75	3"	1/4"	14,3		5

895/4/1 K Universal Bit Holder

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. Quick-release chuck for rapid bit change.

The strong permanent magnet holds the bits absolutely securely. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

895/4/1 K Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**053872**001	*035158*	1/4"	52	2"	1/4"	14,3		5

895/4/1 K SB Universal Bit Holder



	EAN			
Code	4013288			
05**073318**001	*029195*		**895/4/1 K** 1x 1/4"x52	3

895/4/1 Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**053870**001	*017574*	1/4"	77	3"	1/4"	14,3		5

898/4 Combination Bit Holder

Combination holder for bits with 4 mm halfmoon drive (Wera series 9) and 4 mm HIOS drive (Wera series 21): quick-release chuck, 1/4" hexagonal drive, suitable for power screwdrivers with a take-up as per DIN ISO 1173-F 6.3.

898/4 Combination Bit Holder





	EAN							
Code	4013288	mm			mm			
05**051500**001	*184177*	50	2"	1/4"	10,0			5

898/9 Combination Bit Holder

Suitable for bits with 4 mm halfmoon drive (Wera series 9) and 4 mm HIOS drive (Wera series 21): with quick-release chuck, 4 mm halfmoon drive.

898/9 Combination Bit Holder





	EAN							
Code	4013288	mm		mm				
05**051501**001	*184184*	50	2"	10,0				5

898/21 Combination Bit Holder

Suitable for bits with 4 mm halfmoon drive (Wera series 9) and 4 mm HIOS drive (Wera series 21): with quick-release chuck, 4 mm HIOS drive.

898/21 Combination Bit Holder





	EAN							
Code	4013288	mm		mm				
05**051502**001	*184191*	50	2"	10,0				5

890/4/1 Universal Bit Holder

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. The retaining ring ensures an optimum fit of the tool in the holder.

1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

890/4/1 Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**052575**001	*017239*	1/4"	57	2 1/4"	1/4"	11,1		5

893/4/1 K Universal Bit Holder

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3.

Stainless sleeve for special corrosion protection. 1/4" hexagon, suitable for power screwdrivers with a take-up as per DIN ISO 1173-F 6.3.

893/4/1 K Universal Bit Holder



	EAN							
Code	4013288		mm			mm		
05**134480**001	*017468*	1/4"	50	2"	1/4"	10,5		5

893/4/1 K SB Universal Bit Holder



Code	EAN 4013288		
05**073401**001	*029133*		**893/4/1 K** 1x 1/4"x50	3

899/3/1 Universal Bit Holder

Stainless steel sleeve for very special corrosion protection. The strong permanent magnet holds the bits absolutely securely.

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. 5.5 mm, suitable for power screwdrivers with take-up as per DIN ISO 1173-B 5.5.

899/3/1 Universal Bit Holder



	EAN							
Code	4013288		mm		mm	mm		
05**053425**001	*017659*	1/4"	72	2 3/4"	5,5	10,5		5

899/4/1 Universal Bit Holder

Stainless steel sleeve for very special corrosion protection.
The retaining ring ensures an optimum fit of the tool in the holder.
The strong permanent magnet holds the bits absolutely securely.

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

899/4/1 Universal Bit Holder



	EAN							
Code	4013288	Art.No.		mm			mm	
05**053457**001	*017673*	899/4/1 K	1/4"	50	2"	1/4"	10,5	5
05**053455**001	*017666*	899/4/1 75	1/4"	75	3"	1/4"	10,5	5
05**053459**001	*036711*	899/4/1 100	1/4"	100	4"	1/4"	10,5	5
05**053458**001	*036728*	899/4/1 152	1/4"	152	6"	1/4"	10,5	5

899/4/1 SB Universal Bit Holder



Code	EAN 4013288		
05**347100**001	*095268*		**899/4/1** 1x 1/4"x50	3
05**073357**001	*029720*		**899/4/1** 1x 1/4"x75	3
05**134398**001	*099907*		**899/4/1** 1x 1/4"x152	3

899/4/1 S Universal Bit Holder with strong retaining ring

The particularly strong retaining ring ensures an optimum fixing of the tool in the holder. The especially strong permanent magnet makes sure that the bits are held absolutely securely.

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

899/4/1 S Universal Bit Holder with strong retaining ring



	EAN							
Code	4013288		mm			mm		
05**160976**001	*105271*	1/4"	50	2"	1/4"	10,5		5
05**160924**001	*105264*	1/4"	75	3"	1/4"	10,5		5
05**160977**001	*105288*	1/4"	100	4"	1/4"	10,5		5
05**160979**001	*105301*	1/4"	200	8"	1/4"	10,5		1
05**160981**001	*105325*	1/4"	300	12"	1/4"	10,5		1

899/14/1 Universal Bit Holder

Drive: SDS plus.

899/14/1 SB Universal Bit Holder



Code	EAN 4013288		
05**134397**001	*099891*		**899/14/1** 1x 1/4"x79	3

881/4/1 SB Bit holder with variable screw depth limitation

For patio construction, the screws should be countersunk to be evenly flush with the decking.

The 881/4/1 bit holder with variable screw depth limitation and felt ring allows for a uniform depth and protects the surface from brush marks. Two spare felt rings included.

- Bit holder for evenly flush countersunk screws in patio construction
- With adjustable screw depth limitation
- Felt ring (exchangeable) prevents brush marks on decking
- Included: 2 spare felt rings

881/4/1 SB Bit holder with variable screw depth limitation







Code	EAN 4013288			
05**130002**001	*219282*			1
			881/4/1 1x 1/4"x90 [1]	
			9201 2x 27,0	

[1] The spare part kit with 5x felt rings can be ordered with the code number 05130003001.

9200 Spare part kit felt rings for 881/4/1 bit holder

- Five spare felt rings for the 881/4/1 SB bit holder with variable screw depth limitation.
- Felt rings prevent brush marks on decking.

9200 Spare part kit felt rings for 881/4/1 bit holder



Code	EAN 4013288			
05**130003**001	*219299*			1
			9201 5x 27,0	

896/4/1 SB Bit Holder with adjustable depth-control stop

High quality spacer out of aluminium: the screwdriving depth can be infinitely adjusted and allows the flush-mounting of screws.

896/4/1 SB Bit Holder with adjustable depth-control stop



Code	EAN 4013288			
05**073210**001	*178725*		**896/4/1** 1x 1/4"x50	1

870/1 Adaptor

Tool shaft for nutsetters. Output: 1/4" square head; drive: 1/4" hexagon.

870/1 Adaptor



Code	EAN 4013288		mm					
05**136000**001 [1]	*016997*	1/4"	25	1"	1/4"			5

[1] With friction ball; for manual nut spinner sockets

870/4 Adaptor

Tool shaft for manual nutsetter inserts; with ball. Output: Square head; drive 1/4" hexagon.

870/4 Adaptor



Code	EAN 4013288		mm					
05**311517**001 [1]	*098214*	1/4"	50	2"	1/4"			10
05**138006**001 [1]	*233387*	1/4"	72	2"	2 53/64"			10

[1] With friction ball; for manual nut spinner sockets

870/4 SB



Code	EAN 4013288			
05**134399**001	*099914*		**870/4 A** 1x 1/4"x1/4"x50[1]	3
05**073985**001	*233271*		**870/4 A** 1x 1/4"x1/2"x72[1]	3

[1] With friction ball; for manual nut spinner sockets

870/2 Adaptor

Tool shaft for power tool nutsetter inserts with square head drive. 5/16" hexagon drive.

870/2 Adaptor



Code	EAN 4013288		mm					
05**136001**001 [1]	*184245*	3/8"	30	1 3/16"	5/16"			5
05**136002**001 [1]	*184269*	1/2"	35	1 3/8"	5/16"			5

[1] With friction ball; for manual nut spinner sockets

870/4 Adaptor

Tool shaft (adaptor) for power tool sockets with hexagon head drive by Wera.
Drive: 1/4" hexagon.

870/4 Adaptor



Code	EAN 4013288		mm					
05**050205**001 [1]	*017055*	1/4"	50	2"	1/4"			5
05**050210**001 [1]	*017062*	1/4"	100	4"	1/4"			5
05**050215**001 [1]	*017079*	3/8"	50	2"	1/4"			5
05**050220**001 [1]	*017086*	3/8"	100	4"	1/4"			5

[1] With locking pin; for machine-operated nut spinner sockets

870/4/7 Set A SB



Code	EAN 4013288		
05**073200**001	*139115*	**870/4** 1x 1/4"x50 [1]; 1x 3/8"x50 [1]	1
		870/7 1x 1/2"x75 [1]	

[1] With locking pin; for machine-operated nut spinner sockets

870/14 Adaptor

Tool shaft for power tool sockets with square head drive.
Drive: SDS plus.

870/14 Adaptor



Code	EAN 4013288		mm					
05**050650**001 [1]	*017208*	1/4"	70	2 3/4"				5

[1] With locking pin; for machine-operated nut spinner sockets

870/7 Adaptor

Tool shank for power tool sockets; square head output.
7/16" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 11.2.

870/7 Adaptor



Code	EAN 4013288		mm					
05**050510**001 [1]	*017178*	1/2"	75	3"	7/16"			5

[1] With locking pin; for machine-operated nut spinner sockets

781 A 1/4" Connection parts

Connection part 1/4" square head socket to 3/8" (1/2") external square head. For manual and machine-operated tools (non-impact), with ball stop groove to safely lock the socket, knurling at the rear end for manageability during manual use; chrome-vanadium, brushed chrome-plated finish.

- With 1/4" square head socket drive
- With secure socket fixing
- Made of chrome-vanadium for high load capacity

781 A 1/4" Connection parts



	EAN							
Code	4013288	Art.No.		mm				
05**042670**001	*221193*	781 A/B	3/8"	25,2	1"	1/4"		1
05**042671**001	*221209*	781 A/C	1/2"	36,0	1 27/64"	1/4"		1

781 B 3/8" Connection parts

Connection part 3/8" square head socket to 1/4" (1/2") external square head. For manual and machine-operated tools (non-impact), with ball stop groove to safely lock the socket, knurling at the rear end for manageability during manual use; chrome-vanadium, brushed chrome-plated finish.

- With 3/8" square head socket drive
- With secure socket fixing
- Made of chrome-vanadium for high load capacity

781 B 3/8" Connection parts



	EAN							
Code	4013288	Art.No.		mm				
05**042672**001	*221247*	781 B/A	1/4"	27,0	1 1/16"	3/8"		1
05**042673**001	*221056*	781 B/C	1/2"	36,0	1 27/64"	3/8"		1

781 C 1/2" Connection parts

Connection part 1/2" square head socket to 3/8" external square head. For manual and machine-operated tools (non-impact), with ball stop groove to safely lock the socket, knurling at the rear end for manageability during manual use; chrome-vanadium, brushed chrome-plated finish.

- With 1/2" square head socket drive
- With secure socket fixing
- Made of chrome-vanadium for high load capacity

781 C 1/2" Connection parts



	EAN							
Code	4013288	Art.No.		mm				
05**042674**001	*221216*	781 C/B	3/8"	35,5	1 25/64"	1/2"		1

781/5 Set 1

Robust textile belt with 5 connection parts: 781 A: 1/4" square head socket drive, for 3/8" and 1/2" square head socket wrench inserts with ball lock; 781 B: 3/8" square head socket drive, for 1/4" and 1/2" square head socket wrench inserts with ball lock; 781 C: 1/2" square head socket drive, for 3/8" square head socket wrench inserts with ball lock.

- Set with 5 connection parts (adapters) for square head socket wrench inserts
- With secure socket fixing
- With square head socket drive
- With external square head drive
- Made of chrome-vanadium for high load capacity

781/5 Set 1



Code	EAN 4013288		
05**042680**001	*221223*		1
		781 A 1x 781 A/B, 3/8"x25,2x1/4"; 1x 781 A/C, 1/2"x36,0x1/4"	
		781 B 1x 781 B/A, 1/4"x27,0x3/8"; 1x 781 B/C, 1/2"x36,0x3/8"	
		781 C 1x 781 C/B, 3/8"x35,5x1/2"	
		Belt 781 0/5 1x 45,0x210,0	

784 A 1/4" Adaptor with quick-release chuck

Adaptor from square to hexagonal. Comes with quick-release chuck for rapid bit change.

Suitable for the attachment of bits with 1/4" hexagon drive as per DIN ISO 1173-C 6.3. Drive: 1/4" square.

784 A 1/4" Adaptor with quick-release chuck



	EAN							
Code	4013288	Art.No.		mm				
05**042750**001	*008022*	784 A/1	1/4"	30	1 3/16"	1/4"		5

784 B 3/8" Adaptor with quick-release chuck



	EAN							
Code	4013288	Art.No.		mm				
05**042755**001	*008039*	784 B/1	1/4"	43	1 5/8"	3/8"		5
05**042765**001	*008046*	784 B/2	5/16"	50	2"	3/8"		5

784 C 1/2" Adaptor with quick-release chuck



	EAN							
Code	4013288	Art.No.		mm				
05**042760**001	*008053*	784 C/1	1/4"	50	2"	1/2"		5
05**042768**001	*008060*	784 C/2	5/16"	50	2"	1/2"		5

780 A 1/4" Adaptor

Adaptor from square to hexagonal. Suitable for bits with 1/4" hexagon drive as per DIN ISO 1173-C 6.3.
Drive: 1/4" square.

780 A 1/4" Adaptor



	EAN							
Code	4013288	Art.No.		mm				
05**042605**001	*007940*	780 A/1	1/4"	25	1"	1/4"		5

780 B 3/8" Adaptor



	EAN							
Code	4013288	Art.No.		mm				
05**042655**001	*007971*	780 B/1	1/4"	30	1 3/16"	3/8"		5
05**344511**001 [1]	*113450*	780 B/1-S	1/4"	30	1 3/16"	3/8"		5
05**042665**001	*007988*	780 B/2	5/16"	30	1 3/16"	3/8"		5
05**344512**001 [1]	*113467*	780 B/2-S	5/16"	30	1 3/16"	3/8"		5

[1] S = extra strong

780 C 1/2" Adaptor



	EAN							
Code	4013288	Art.No.		mm				
05**042705**001	*007995*	780 C/1	1/4"	35	1 3/8"	1/2"		5
05**344513**001	*113474*	780 C/1-S	1/4"	35	1 3/8"	1/2"		5
05**042715**001	*008008*	780 C/2	5/16"	35	1 3/8"	1/2"		5
05**344514**001 [1]	*113481*	780 C/2-S	5/16"	35	1 3/8"	1/2"		5


[1] S = extra strong


Wera

Bit Sets



Impaktor system - For an above-average service life

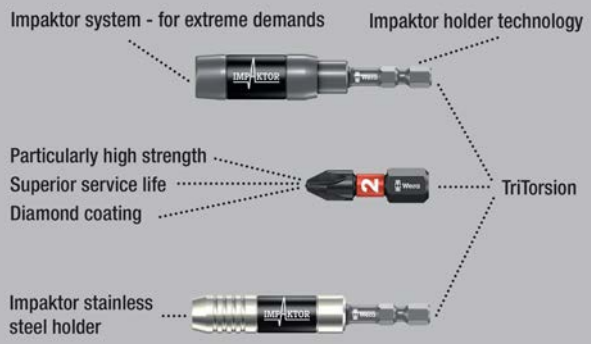

The Impaktor technology offers an above-average service life even under extreme circumstances thanks to the best possible utilisation of the material properties and the optimised geometry; particularly suitable for use with customary impact drivers.

The rough diamond-coating of the bits reduces the risk of a slipping out of the screw head thanks to the enhanced frictional resistance.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

The multi-component Bit-Check is convincing on account of its low weight and the maximum possible degree of compactness. In this respect, the soft material in the lower section of the Bit-Check ensures that the bits are securely held whilst being simple to remove at the same time.

Bit-Check 30 Impaktor 1

IMPACT PROOF · DIAMOND · TAKE IT EASY TOOL FINDER · HEX-PLUS





Code	EAN 4013288			
05**057690**001	*156778*			1
			897/4 Impaktor R 1x 1/4"x75	
			851/1 IMP DC 2x PH 1x25; 3x PH 2x25; 2x PH 3x25	
			855/1 IMP DC 2x PZ 1x25; 3x PZ 2x25; 2x PZ 3x25	
			867/1 IMP DC 1x TX 10x25; 1x TX 15x25; 2x TX 20x25; 3x TX 25x25; 2x TX 30x25; 2x TX 40x25	
			840/1 IMP DC 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

Bit-Check 30 Impaktor 2

IMPACT PROOF · DIAMOND · TAKE IT EASY TOOL FINDER · HEX-PLUS





Code	EAN 4013288			
05**057697**001	*203946*			1
			897/4 Impaktor 1x 1/4"x75	
			851/1 IMP DC 2x PH 1x25; 3x PH 2x25; 2x PH 3x25	
			855/1 IMP DC 2x PZ 1x25; 3x PZ 2x25; 2x PZ 3x25	
			867/1 IMP DC 1x TX 10x25; 1x TX 15x25; 2x TX 20x25; 3x TX 25x25; 2x TX 30x25; 2x TX 40x25	
			840/1 IMP DC 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

Bit-Check 10 Impaktor 1

IMPACT PROOF · DIAMOND · TAKE IT EASY TOOL FINDER · HEX-PLUS





Code	EAN 4013288			
05**057680**001	*156785*			10
			897/4 Impaktor R 1x 1/4"x75	
			851/1 IMP DC 1x PH 2x25; 1x PH 3x25	
			855/1 IMP DC 1x PZ 2x25; 1x PZ 3x25	
			867/1 IMP DC 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			840/1 IMP DC 1x 4,0x25; 1x 5,0x25	

Bit-Check 10 Impaktor 1 SB



Code	EAN 4013288			
05**073980**001	*158574*		**897/4 Impaktor R** 1x 1/4"x75	1
			851/1 IMP DC 1x PH 2x251x PH 3x25	
			855/1 IMP DC 1x PZ 2x251x PZ 3x25	
			867/1 IMP DC 1x TX 20x251x TX 25x251x TX 30x25	
			840/1 IMP DC 1x 4.0x251x 5.0x25	

Bit-Check 10 Impaktor 2



Code	EAN 4013288			
05**057682**001	*156792*			10
			897/4 Impaktor R 1x 1/4"x75	
			851/1 IMP DC 3x PH 2x25; 1x PH 3x25	
			867/1 IMP DC 3x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 10 Impaktor 3



Code	EAN 4013288			
05**057683**001	*156761*			10
			897/4 Impaktor R 1x 1/4"x75	
			855/1 IMP DC 3x PZ 2x25; 1x PZ 3x25	
			867/1 IMP DC 3x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 10 Impaktor 4



Code	EAN 4013288			
05**057417**001	*180148*			10
			897/4 Impaktor 1x 1/4"x75	
			855/1 IMP DC 3x PZ 2x25; 1x PZ 3x25	
			867/1 IMP DC 2x TX 20x25; 2x TX 25x25; 1x TX 30x25	

Bit-Check 10 PZ Impaktor 1



Code	EAN 4013288			
05**057684**001	*157829*			10
			897/4 Impaktor R 1x 1/4"x75	
			855/1 IMP DC 7x PZ 2x25; 2x PZ 3x25	

Bit-Check 10 TX Impaktor 1



Code	EAN 4013288			
05**057688**001	*163394*			10
			897/4 Impaktor R 1x 1/4"x75	
			867/1 IMP DC 3x TX 20x25; 3x TX 25x25; 2x TX 30x25; 1x TX 40x25	

Bit-Check 6 Impaktor 1



Code	EAN 4013288			
05**057695**001	*157751*			10
		✚	**851/4 IMP DC** 1x PH 2x50; 1x PH 3x50	
		✱	**855/4 IMP DC** 1x PZ 2x50; 1x PZ 3x50	
		✪	**867/4 IMP DC** 1x TX 25x50; 1x TX 30x50	

Bit-Check 6 Impaktor 1 SB



Code	EAN 4013288			
05**073890**001	*158635*	✚	**851/4 IMP DC** 1x PH 2x501x PH 3x50	1
		✱	**855/4 IMP DC** 1x PZ 2x501x PZ 3x50	
		✪	**867/4 IMP DC** 1x TX 25x501x TX 30x50	

Bit-Check 6 PH Impaktor 1



Code	EAN 4013288			
05**057691**001	*157713*			20
		✚	**851/4 IMP DC** 4x PH 2x50; 2x PH 3x50	

Bit-Check 6 PZ Impaktor 1




Code	EAN 4013288			
05**057692**001	*157737*			20
		✱	**855/4 IMP DC** 4x PZ 2x50; 2x PZ 3x50	

Bit-Check 6 TX Impaktor 1



Code	EAN 4013288		
05**057693**001	*157744*		20
		✪	**867/4 IMP DC** 2x TX 20x50; 2x TX 25x50; 1x TX 30x50; 1x TX 40x50

Kraftform Stainless - stainless steel to prevent rust

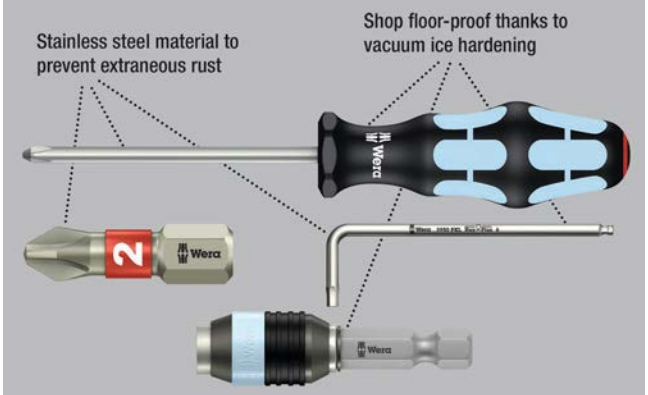

Bit-Check that can be positioned upright with high quality bits out of stainless steel. Wera stainless tools are manufactured out of stainless steel, thus preventing the formation of unsightly extraneous rust. The multi-component Bit-Check is convincing on account of its low weight and the maximum possible degree of compactness.

In this respect, the soft material in the lower section of the Bit-Check ensures that the bits are securely held whilst being simple to remove at the same time. The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

Bit-Check 30 Stainless 1





Code	EAN 4013288			
05**071109**001	*115126*			1
			3888/4/1 K 1x 1/4"x50	
			3851/1 TS PH 1x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			3855/1 TS PZ 2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	
			3867/1 TS TORX® 2x TX 10x25; 2x TX 15x25; 3x TX 20x25; 3x TX 25x25; 2x TX 30x25; 1x TX 40x25	
			3840/1 TS 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 5,5x25 [1]	

[1] Without Torsion zone

Bit-Check 10 Stainless 1





Code	EAN 4013288			
05**071110**001	*111494*			10
			3888/4/1 K 1x 1/4"x50	
			3851/1 TS PH 1x PH 2x25	
			3855/1 TS PZ 1x PZ 1x25; 2x PZ 2x25	
			3867/1 TS TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	

Bit-Check 10 Stainless 1 SB



Code	EAN 4013288			
05**073630**001	*112163*		**3888/4/1 K** 1x 1/4"x50	1
			3851/1 TS PH 1x PH 2x25	
			3855/1 TS PZ 1x PZ 1x252x PZ 2x25	
			3867/1 TS TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	


Bit-Check 6 Stainless 1 SB





Code	EAN 4013288			
05**073634**001	*164636*		**3855/4** 2x PZ 2x50	1
			3867/4 TORX® 1x TX 20x50; 2x TX 25x50	
			3840/4 Hex-Plus 1x 5.5x50	

BiTorsion system - for longer service life

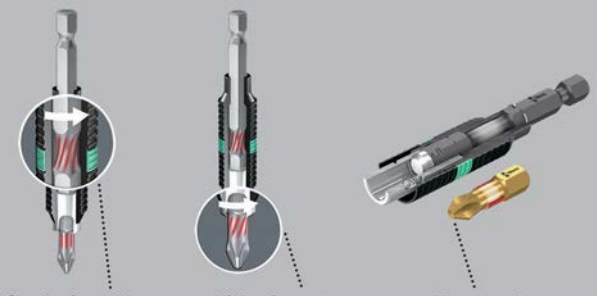

Smaller impacts are absorbed by the holder

Higher impacts are cushioned in the torsion zone of the bit

No premature wear caused by impacts

Bit-Safe 61 BiTorsion 1

Robust textile box with bits and holder, 61-piece. 49 BiTorsion bits for long service life, in diamond-coated design (BDC) for a secure fit in the screw head, tough-absorbing (BTZ), for universal use, extra hard (BTH); 11 bits, tough-absorbing (Z), for universal use. 1 universal holder 889/4/1 K with quick-release chuck for take-up in the power screwdriver or use in the chuck of the power drill.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint. The textile box allows users a high degree of mobility with a minimum space requirement.

The greatly reduced weight of a set makes carrying far more pleasant. Sensitive surfaces are protected when the box is set down – yet the textile box is still very robust. The box and the tools will even survive a fall unscathed.

Bit-Safe 61 BiTorsion 1



Code	EAN 4013288			
05**057441**001	*179937*			1
			889/4/1 K 1x 1/4"x50	
			851/1 BDC PH 1x PH 1x25; 2x PH 2x25; 1x PH 3x25	
			851/1 BTZ PH 2x PH 1x25; 8x PH 2x25; 1x PH 3x25	
			855/1 BDC PZ 1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25	
			855/1 BTH PZ 2x PZ 1x25; 8x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® BTZ 3x TX 10x25; 2x TX 15x25; 4x TX 20x25; 4x TX 25x25; 2x TX 30x25; 1x TX 40x25	
			800/1 BDC 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			840/1 BTZ Hex-Plus 3x 2,5x25; 3x 3,0x25; 3x 4,0x25; 2x 5,0x25	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Bit-Checks BiTorsion

BiTorsion bits with an torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Offer the best possible service life with the appropriate holder.

The multi-component Bit-Check is convincing on account of its low weight and the maximum possible degree of compactness.

In this respect, the soft material in the lower section of the Bit-Check ensures that the bits are securely held whilst being simple to remove at the same time.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

Bit-Check 30 BiTorsion 1



Code	EAN 4013288			
05**057430**001	*179821*			1
			889/4/1 K 1x 1/4"x50	
			851/1 BTZ PH 2x PH 1x25; 5x PH 2x25; 2x PH 3x25	
			855/1 BTZ PZ 2x PZ 1x25; 6x PZ 2x25; 2x PZ 3x25	
			867/1 TORX® BTZ 1x TX 10x25; 2x TX 15x25; 2x TX 20x25; 2x TX 25x25; 2x TX 30x25; 1x TX 40x25	

Bit-Check 12 BiTorsion 1



Code	EAN 4013288			
05**057420**001	*179869*			10
			889/4/1 K 1x 1/4"x50	
			851/1 BTZ PH 1x PH 1x25; 2x PH 2x25	
			855/1 BTZ PZ 1x PZ 1x25; 2x PZ 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	

Bit-Check 12 BiTorsion 1 SB



Code	EAN 4013288			
05**136385**001	*213969*		**889/4/1 K** 1x 1/4"x50	1
			851/1 BTZ PH 1x PH 1x252x PH 2x25	
			855/1 BTZ PZ 1x PZ 1x252x PZ 2x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	

Bit-Check 10 BiTorsion 1



Code	EAN 4013288			
05**056374**001	*095688*			10
			897/4 R 1x 1/4"x75	
			851/1 BTZ PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 BTZ PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	
			800/1 BTZ 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Bit-Check 10 BiTorsion 3 SB




Code	EAN 4013288			
05**073418**001	*128157*		**897/4 R** 1x 1/4"x75	1
			851/1 BTZ PH 1x PH 2x25	
			855/1 BTZ PZ 1x PZ 1x251x PZ 2x251x PZ 3x25	
			867/1 TORX® BTZ 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	

Bit-Check 10 PZ BiTorsion 2



Code	EAN 4013288			
05**347153**001	*107152*			10
			897/4 R 1x 1/4"x75	
			855/1 BTH PZ 1x PZ 1x25; 7x PZ 2x25; 1x PZ 3x25	

Diamond-coated bits

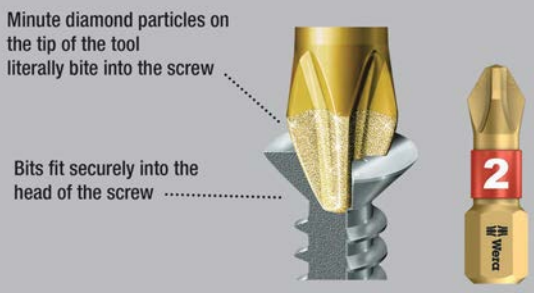

Bits with tiny diamond particles on the bit tip. This ensures a secure fit in the screw head, reduces the contact pressure required and lowers the risk of slipping.

BiTorsion bits with an torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life.

The multi-component Bit-Check is convincing on account of its low weight and the maximum possible degree of compactness. In this respect, the soft material in the lower section of the Bit-Check ensures that the bits are securely held whilst being simple to remove at the same time.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

Bit-Check 30 Diamond 1





Code	EAN 4013288			
050**57431**001	*179814*			1
			889/4/1 K 1x 1/4"x50	
			851/1 BDC PH 2x PH 1x25; 4x PH 2x25; 1x PH 3x25	
			855/1 BDC PZ 2x PZ 1x25; 4x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® BDC 2x TX 10x25; 2x TX 15x25; 3x TX 20x25; 3x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			800/1 BDC 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Bit-Check 12 Diamond 1





Code	EAN 4013288			
050**57421**001	*180025*			10
			889/4/1 K 1x 1/4"x50	
			851/1 BDC PH 1x PH 1x25; 2x PH 2x25	
			855/1 BDC PZ 1x PZ 1x25; 2x PZ 2x25	
			867/1 TORX® BDC 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	

Bit-Check 12 Diamond 1 SB





Code	EAN 4013288			
051**36392**001	*213976*		**889/4/1 K** 1x 1/4"x50	1
			851/1 BDC PH 1x PH 1x252x PH 2x25	
			855/1 BDC PZ 1x PZ 1x252x PZ 2x25	
			867/1 TORX® BDC 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	

Bit-Check 7 Diamond 1





Code	EAN 4013288			
050**57416**001	*179999*			10
			889/4/1 K 1x 1/4"x50	
			851/1 BDC PH 1x PH 1x25; 1x PH 2x25	
			855/1 BDC PZ 1x PZ 1x25; 1x PZ 2x25	
			800/1 BDC 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Bit-Check 7 Diamond 1 SB



Code	EAN 4013288			
05**073419**001	*183682*		**889/4/1 K** 1x 1/4"x50	1
			851/1 BDC PH 1x PH 1x25; 1x PH 2x25	
			855/1 BDC PZ 1x PZ 1x25; 1x PZ 2x25	
			800/1 BDC 1x 1.0x5.5x25; 1x 1.2x6.5x25	

Bit-Check 7 PZ Diamond 1



Code	EAN 4013288			
05**057412**001	*180001*			10
			889/4/1 K 1x 1/4"x50	
			855/1 BDC PZ 2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	

Bit-Check 7 TX Diamond 1



Code	EAN 4013288			
05**057415**001	*180018*			10
			889/4/1 K 1x 1/4"x50	
			867/1 TORX® BDC 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Textile boxes



Bit-Safe 61 Universal 1

Comprehensive 61-piece bit set in a robust Bit-Safe. Provides a quick overview of the tools available and bits not needed are simply reinserted into the set and do not get lost.

1 universal holder with Rapidaptor technology: allows bits to be attached without any need to actuate the sleeve. The removal of the bit is simple, just by pushing the sleeve forward – for rapid bit change with just one hand.

The strong permanent magnet holds the bits absolutely securely. Can be inserted in the power screwdriver or for use in the chuck of the electric drill.

Bit-Safe 61 Universal 1



Code	EAN 4013288			
050**57122**001	*100689*			1
			889/4/1 K 1x 1/4"x50	
			851/1 TZ 3x PH 1x25; 10x PH 2x25; 2x PH 3x25	
			855/1 TZ 3x PZ 1x25; 10x PZ 2x25; 2x PZ 3x25	
			867/1 TZ TORX® 2x TX 10x25; 3x TX 15x25; 3x TX 20x25; 3x TX 25x25; 3x TX 30x25; 2x TX 40x25	
			800/1 TZ 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			840/1 Z 3x 2,5x25; 3x 3,0x25; 3x 4,0x25; 2x 5,0x25	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Bit-Safe 43 Universal 1

43-piece; robust textile box with bits for universal applications.

1 universal holder 899/4/1 with stainless sleeve, retaining ring and strong permanent magnet for insertion in the power screwdriver or for use in the chuck of the electric drill.

Bit-Safe 43 Universal 1



Code	EAN 4013288			
050**57450**001	*179951*			1
			899/4/1 1x 1/4"x50	
			851/1 Z 1x PH 2x25	
			851/4 TZ 1x PH 1x50; 2x PH 2x50	
			855/1 Z 2x PZ 1x25; 5x PZ 2x25; 2x PZ 3x25	
			855/4 TZ 1x PZ 1x50; 2x PZ 2x50	
			867/1 TORX® 3x TX 10x25; 4x TX 15x25; 4x TX 20x25; 4x TX 25x25; 4x TX 30x25; 1x TX 40x25	
			867/4 Z TORX® 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 30x50; 1x TX 40x50	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

Bit-Check 30 Universal 1

29 bits in a minimum of space; simple removal and reinsertion of the bits. Rapidaptor holder ensures rapid bit change.

Universal bits fitted for diverse applications.

Bit-Check 30 Universal 1







Code	EAN 4013288			
05**056440**001	*115096*			1
			889/4/1 K 1x 1/4"x50	
			851/1 TZ PH 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			855/1 TH PZ 2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	
			867/1 TZ TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			800/1 TZ 1x 1,0x5,5x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25	

Bit-Check 30 TX Universal 1

30-piece. Tough-absorbing bits for universal use. 1 universal holder 899/4/1 K for take-up in the power screwdriver or use in the chuck of the power drill.

Comes with tough viscous TORX® bits for universal use.

Bit-Check 30 TX Universal 1





Code	EAN 4013288			
05**057908**001	*163820*			10
			899/4/1 1x 1/4"x50	
			867/1 TORX® 3x TX 10x25; 5x TX 15x25; 8x TX 20x25; 7x TX 25x25; 4x TX 30x25; 2x TX 40x25	

Bit-Check 30 TX Universal 1 SB



Code	EAN 4013288			
05**057900**001	*229618*		**899/4/1** 1x 1/4"x50	1
			867/1 TORX® 3x TX 10x25; 5x TX 15x25; 8x TX 20x25; 7x TX 25x25; 4x TX 30x25; 2x TX 40x25	

Bit-Check 10 Universal 1

- Tough viscous bits for universal use
- Universal holder with quick-release chuck for rapid bit change

Bit-Check 10 Universal 1



Code	EAN 4013288			
05**056161**001	*033772*			10
			895/4/1 K 1x 1/4"x52	
			851/1 TZ PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 TZ PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	
			800/1 TZ 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Bit-Check 10 Universal 2

- Extra-hard bits
- Torsion design against premature wear
- Universal holder with quick-release chuck and strong permanent magnet

Bit-Check 10 Universal 2



Code	EAN 4013288			
05**134200**001	*038821*			10
			895/4/1 K 1x 1/4"x52	
			855/1 TH PZ 1x PZ 1x25; 2x PZ 2x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 10 Universal 3

- Tough viscous bits for universal use
- Rapidaptor holder for rapid bit change

Bit-Check 10 Universal 3



Code	EAN 4013288			
05**056375**001	*095695*			10
			889/4/1 K 1x 1/4"x50	
			851/1 TZ PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 TZ PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	
			800/1 TZ 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Bit-Check 10 Universal 3 SB



Code	EAN 4013288			
05**073410**001	*099495*		**889/4/1 K** 1x 1/4"x50	1
			800/1 TZ 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			851/1 TZ PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 TZ PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	

Bit-Check 10 Universal 4

- Tough viscous bits for universal use
- Universal holder with stainless sleeve, retaining ring and strong permanent magnet

Bit-Check 10 Universal 4



Code	EAN 4013288			
05**056159**001	*033758*			10
			899/4/1 1x 1/4"x50	
			851/1 TZ PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			855/1 TZ PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	
			800/1 TZ 1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Bit-Check 10 Universal 5 SB

- Tough viscous bits for universal use
- Includes universal holder for the take-up of bits with 1/4" hex head drive

Bit-Check 10 Universal 5 SB



Code	EAN 4013288			
05**073416**001	*128164*		**899/4/1** 1x 1/4"x50	1
			851/1 Z PH 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	

Bit-Check 10 TX Universal 1

- Tough viscous bits for universal use
- Torsion design against premature wear
- Universal holder with quick-release chuck for rapid bit change

Bit-Check 10 TX Universal 1



Code	EAN 4013288			
05**056164**001	*033802*			10
			894/4/1 K 1x 1/4"x51	
			867/1 TZ TORX® 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 10 TX Universal 2

- Tough viscous bits for universal use
- Rapidaptor holder for rapid bit change

Bit-Check 10 TX Universal 2



Code	EAN 4013288			
05**057115**001	*127747*			10
			888/4/1 K 1x 1/4"x50	
			867/1 TORX® 1x TX 6x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 7 Universal 1

- Tough viscous bits for universal use
- Universal holder with stainless sleeve and strong permanent magnet

Bit-Check 7 Universal 1









Code	EAN 4013288			
05**056295**001	*038166*			20
			893/4/1 K 1x 1/4"x50	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			800/1 Z 1x 1,0x5,5x25; 1x 1,2x6,5x25	

Bit-Check 7 Universal 1 SB









Code	EAN 4013288			
05**073406**001	*036186*		**893/4/1 K** 1x 1/4"x50	1
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			800/1 Z 1x 1.0x5.5x25; 1x 1.2x6.5x25	

Bit-Check 7 Universal 4







Code	EAN 4013288			
05**135810**001	*179265*			20
			893/4/1 K 1x 1/4"x50	
			851/1 Z PH 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25	

Bit-Check 7 PZ Universal 1







Code	EAN 4013288			
05**056296**001	*038135*			20
			893/4/1 K 1x 1/4"x50	
			855/1 Z PZ 2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	



Bit-Check 7 TX Universal 1

- Tough viscous bits for universal use
- Universal holder with stainless sleeve and strong permanent magnet

Bit-Check 7 TX Universal 1



Code	EAN 4013288			
05**056294**001	*041500*			20
			893/4/1 K 1x 1/4"x50	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 7 TX Universal 1 SB



Code	EAN 4013288			
05**073404**001	*038111*		**893/4/1 K** 1x 1/4"x50	1
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 7 TX BO Universal 1


- Tough viscous bits for universal use
- Universal holder with quick-release chuck for rapid bit change

Bit-Check 7 TX BO Universal 1



Code	EAN 4013288			
05**056158**001	*033741*			20
			894/4/1 K 1x 1/4"x51	
			867/1 Z TORX® BO 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Hex-Plus - lets hexagon socket screws last longer

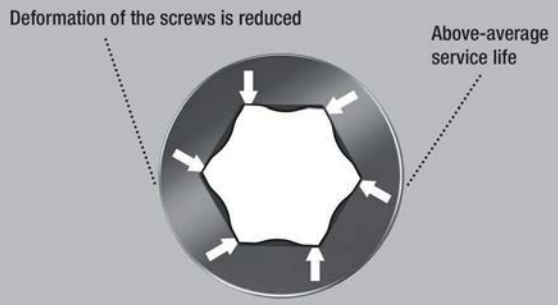

Bit-Check 7 Hex-Plus 1



Code	EAN 4013288			
05**056168**001	*033840*			20
			895/4/1 K 1x 1/4"x52	
			840/1 Z Hex-Plus 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

Bit-Check 6 Universal 1

- Tough viscous bits for universal use
- The Torsion design absorbs torque peaks
- Prevents premature breakage of the drive tip

Bit-Check 6 Universal 1




Code	EAN 4013288			
05**056474**001	*156143*			20
		PH	**851/4 TZ PH** 1x PH 1x50; 1x PH 2x50	
		PZ	**855/4 TZ PZ** 1x PZ 1x50; 1x PZ 2x50	
			800/4 Z 1x 1,0x5,5x50; 1x 1,2x6,5x50	

Bit-Check 6 Universal 1 SB




Code	EAN 4013288			
05**073635**001	*155276*	PH	**851/4 TZ PH** 1x PH 1x50; 1x PH 2x50	1
		PZ	**855/4 TZ PZ** 1x PZ 1x50; 1x PZ 2x50	
			800/4 Z 1x 1,0x5,5x50; 1x 1,2x6,5x50	

Bit-Check 6 Universal 2




Code	EAN 4013288			
05**056473**001	*156136*			20
		PH	**851/4 TZ PH** 1x PH 2x50	
		PZ	**855/4 TZ PZ** 1x PZ 1x50; 1x PZ 2x50	
		TX	**867/4 Z TORX®** 1x TX 15x50; 1x TX 20x50; 1x TX 25x50	

Bit-Check 6 Universal 2 SB




Code	EAN 4013288			
05**073638**001	*155245*	PH	**851/4 TZ PH** 1x PH 2x50	1
		PZ	**855/4 TZ PZ** 1x PZ 1x50; 1x PZ 2x50	
		TX	**867/4 Z TORX®** 1x TX 15x50; 1x TX 20x50; 1x TX 25x50	

Bit-Check 6 TX Universal 1

- Tough viscous bits for universal use

Bit-Check 6 TX Universal 1





Code	EAN 4013288			
05**056472**001	*156112*			20
			867/4 Z TORX® 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 30x50; 1x TX 40x50	

Bit-Check 6 TX Universal 1 SB





Code	EAN 4013288			
05**073637**001	*155252*		**867/4 Z TORX®** 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 30x50; 1x TX 40x50	1

Bit-Check 6 PZ Universal 1

6 50 mm-long Pozidriv bits tidily arranged in a minimum of space in a practical Bit-Check.
The tough viscous bits are suitable for universal use. Torsion design to combat premature wear.

Bit-Check 6 PZ Universal 1







Code	EAN 4013288			
05**056471**001	*156105*			20
			855/4 TZ PZ 2x PZ 1x50; 3x PZ 2x50; 1x PZ 3x50	

Bit-Check 6 V Universal 1

6 50 mm-long bits tidily arranged in a minimum of space in a practical Bit-Check. Bits for square socket screws with holding function.

The wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

Bit-Check 6 V Universal 1





Code	EAN 4013288			
05**056478**001	*190802*			10
			868/4 V 1x # 1x50; 3x # 2x50; 2x # 3x50	

Bit-Check 30 Wood TX HF 1

Bits and holder set, particularly suitable for woodworking. With their special geometry and as per the Acument Intellectual Properties specification, the 867/1 TORX® HF bits hold TORX® screws securely on the tool!

This is particularly helpful in hard-to-reach work areas where the second hand cannot be used to hold the screw.

They are also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws.

With Take it easy tool finder: Colour coding by size. Rapidaptor holder for lightning-fast bit changes. The Bit-Check allows a quick overview of the available tools.

Unused bits are simply put back in the holder and will not be lost. Easy transport e.g. in the shirt pocket. The Bit-Check can be set up at the work place, which allows for quick access of the tools.

- Holding function for recessed TORX® screws
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws

Bit-Check 30 Wood TX HF 1



Code	EAN 4013288			
05**057436**001	*226204*			10
			887/4 RR 1x 1/4"x57	
			851/1 TZ 2x PH 2x25; 1x PH 3x25	
			855/1 TH 3x PZ 1x25; 6x PZ 2x25; 2x PZ 3x25	
			867/1 TORX® HF 2x TX 10x25; 2x TX 15x25; 4x TX 20x25; 4x TX 25x25; 2x TX 30x25; 1x TX 40x25 [1]	

[1] Pound-thru hexagonal; no Take it easy.

Bit-Check 30 Wood TX HF 1 SB



Code	EAN 4013288			
05**057437**001	*227522*			1
			1x Bit-Check 30 Wood TX HF 1	
			887/4 RR 1x 1/4"x57	
			851/1 TZ 2x PH 2x25; 1x PH 3x25	
			855/1 TH 3x PZ 1x25; 6x PZ 2x25; 2x PZ 3x25	
			867/1 TORX® HF 2x TX 10x25; 2x TX 15x25; 4x TX 20x25; 4x TX 25x25; 2x TX 30x25; 1x TX 40x25 [1]	

[1] Pound-thru hexagonal; not Take it easy.

Bit-Check 30 Wood 1

- Ring magnet Rapidaptor, holder for holding even longer and heavier screws

Bit-Check 30 Wood 1



Code	EAN 4013288			
05**057433**001	*179807*			1
			887/4 RR 1x 1/4"x57	
			851/1 TZ PH 2x PH 2x25; 1x PH 3x25	
			855/1 TH PZ 3x PZ 1x25; 6x PZ 2x25; 2x PZ 3x25	
			867/1 TZ TORX® 2x TX 10x25; 2x TX 15x25; 4x TX 20x25; 4x TX 25x25; 2x TX 30x25; 1x TX 40x25	

Bit-Check 30 Wood 2

- Universal holder with stainless sleeve

Bit-Check 30 Wood 2



Code	EAN 4013288			
05**057432**001	*179845*			10
			899/4/1 1x 1/4"x50	
			851/1 Z PH 1x PH 2x25	
			855/1 Z PZ 2x PZ 1x25; 5x PZ 2x25; 2x PZ 3x25	
			867/1 TORX® 3x TX 10x25; 4x TX 15x25; 4x TX 20x25; 4x TX 25x25; 3x TX 30x25; 1x TX 40x25	

Bit-Check 30 Wood 2 SB



Code	EAN 4013288			
05**057438**001	*229625*		**899/4/1** 1x 1/4"x50	1
			851/1 Z 1x PH 2x25	
			855/1 Z 2x PZ 1x25; 5x PZ 2x25; 2x PZ 3x25	
			867/1 TORX® 3x TX 10x25; 4x TX 15x25; 4x TX 20x25; 4x TX 25x25; 3x TX 30x25; 1x TX 40x25	

Bit-Check 12 Wood TX HF 1

Bits and holder set, particularly suitable for woodworking. With their special geometry and as per the Acument Intellectual Properties specification, the 867/1 TORX® HF bits hold TORX® screws securely on the tool!

This is particularly helpful in hard-to-reach work areas where the second hand cannot be used to hold the screw. They are also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws.

With Take it easy tool finder: Colour coding by size. Ring magnet Rapidaptor holding tool to hold long and heavy screws.

The Bit-Check allows a quick overview of the available tools. Unused bits are simply put back in the holder and will not be lost.

Easy transport e.g. in the shirt pocket. The Bit-Check can be set up at the work place, which allows for quick access of the tools.

- 867/1 TORX® HF bits with holding function for TORX® screws as per the Acument Intellectual Properties specification
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws

Bit-Check 12 Wood TX HF 1






Code	EAN 4013288			
05**057435**001	*226198*			10
			887/4 RR 1x 1/4"x57	
			855/1 Z 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® HF 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 2x TX 25x25; 1x TX 30x25; 1x TX 40x25 [1]	
			867/1 TORX® 1x TX 20x25; 1x TX 25x25	

[1] Pound-thru hexagonal; no Take it easy.

Bit-Check 12 Wood TX HF 1 SB

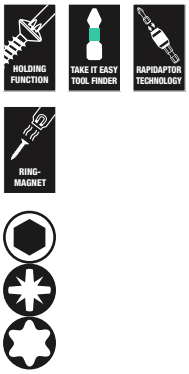





Code	EAN 4013288			
05**073641**001	*227515*			1
			1x Bit-Check 12 Wood TX HF 1	
			887/4 RR 1x 1/4"x57	
			855/1 Z 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® HF 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 2x TX 25x25; 1x TX 30x25; 1x TX 40x25 [1]	
			867/1 TORX® 1x TX 20x25; 1x TX 25x25	

[1] Pound-thru hexagonal; not Take it easy.

Bit-Check 12 Wood 1

- Ring magnet Rapidaptor, holder for holding even longer and heavier screws

Bit-Check 12 Wood 1







Code	EAN 4013288			
05**057423**001	*179876*			10
			887/4 RR 1x 1/4"x57	
			855/1 TH PZ 1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25	
			851/1 TH PH 1x PH 2x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 12 Wood 1 SB







Code	EAN 4013288			
05**136390**001	*214010*		**887/4 RR** 1x 1/4"x57	1
			851/1 TH PH 1x PH 2x25	
			855/1 TH PZ 1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® **1x** TX **10**x**25; 1x** TX **15**x**25; 1x** TX **20**x**25; 1x** TX **25**x**25; 1x** TX **30**x**25; 1x** TX **40**x**25**	

Bit-Check 12 Wood 2

- Universal holder with stainless sleeve

Bit-Check 12 Wood 2





Code	EAN 4013288			
05**057422**001	*179890*			10
			899/4/1 1x 1/4"x50	
			851/1 Z PH 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 12 Wood 2 SB





Code	EAN 4013288			
05**136391**001	*214027*		**899/4/1** 1x 1/4"x50	1
			851/1 Z PH 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Bit-Check 6 Wood TX HF 1

Bit-Set, particularly suitable for woodworking. With their special geometry and as per the Acument Intellectual Properties specification, the 867/4 TORX® HF bits hold TORX® screws securely on the tool!

This is particularly helpful in hard-to-reach work areas where the second hand cannot be used to hold the screw. They are also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws.

With Take it easy tool finder: Colour coding by size.

The Bit-Check allows a quick overview of the available tools. Unused bits are simply put back in the holder and will not be lost.

Easy transport e.g. in the shirt pocket. The Bit-Check can be set up at the work place, which allows for quick access of the tools.

- Particularly for wood applications
- For TORX® socket screws
- Holding function for TORX® screws
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws
- 50 mm-long bits

Bit-Check 6 Wood TX HF 1



Code	EAN 4013288			
05**056470**001	*226181*			20
			867/4 TORX® HF 2x TX 20x50; 2x TX 25x50; 1x TX 30x50; 1x TX 40x50 [1]	

[1] Pound-thru hexagonal; no Take it easy.

Bit-Check 6 Wood TX HF 1 SB



Code	EAN 4013288			
05**073639**001	*227508*			1
1x Bit-Check 6 Wood TX HF 1				
			867/4 TORX® HF 2x TX 20x50; 2x TX 25x50; 1x TX 30x50; 1x TX 40x50 [1]	

[1] Pound-thru hexagonal; not Take it easy.

Bit-Check 30 Metal 1

- Tough viscous bits for universal use
- Universal holder with stainless sleeve and strong permanent magnet

Bit-Check 30 Metal 1







Code	EAN 4013288			
05**057434**001	*179838*			10
			899/4/1 1x 1/4"x50	
			851/1 Z PH 3x PH 1x25; 3x PH 2x25; 2x PH 3x25	
			855/1 Z PZ 3x PZ 1x25; 3x PZ 2x25; 3x PZ 3x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			800/1 Z 1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25	
			840/1 Z Hex-Plus 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

Bit-Check 30 Metal 1 SB





Code	EAN 4013288			
05**057440**001	*229632*		**899/4/1** 1x 1/4"x50	1
			851/1 Z 3x PH 1x25; 3x PH 2x25; 2x PH 3x25	
			855/1 Z 3x PZ 1x25; 3x PZ 2x25; 3x PZ 3x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			800/1 Z 1x 0.6x4.5x25; 1x 1.0x5.5x25; 1x 1.2x6.5x25	
			840/1 Z 1x 4.0x25; 1x 5.0x25; 1x 6.0x25	



Bit-Check 12 Metal 1



Code	EAN 4013288			
05**057424**001	*179883*			10
			899/4/1 1x 1/4"x50	
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25	

Bit-Check 12 Metal 1 SB



Code	EAN 4013288			
05**136393**001	*214003*		**899/4/1** 1x 1/4"x50	1
			851/1 Z PH 1x PH 1x25; 1x PH 2x25	
			855/1 Z PZ 1x PZ 1x25; 1x PZ 2x25	
			867/1 TORX® 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			840/1 Z Hex-Plus 1x 3,0x25; 1x 4,0x25; 1x 5,0x25	

843 Stepped drill bits, 4-20 mm

9 drill steps increasing by 2 mm for material with a maximum thickness of 4.5 mm. Comes with edge breaker for 1 mm sheet metal. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

843 Stepped drill bits, 4-20 mm



	EAN							
Code	4013288	mm						
05**104672**001	*117632*	75,0						1

844 Single Tap Bits

To cut metric threads. The hexagonal shaft ensures very good power transfer. The finely-tuned material elasticity provides for great durability.

Perfect chip removal and a low tilt risk.
1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

844 Single Tap Bits



	EAN							
Code	4013288	mm	mm	mm				
05**104666**001	*117571*	3,0	10,00	33,0	M 3			1
05**104667**001	*117588*	4,0	11,00	35,0	M 4			1
05**104668**001	*117595*	5,0	12,50	36,0	M 5			1
05**104669**001	*117601*	6,0	18,00	40,0	M 6			1
05**104670**001	*117618*	8,0	20,00	40,0	M 8			1
05**104671**001	*117625*	10,0	20,00	40,0	M 10			1

844/7 Tap Bits Set

Rapidaptor universal holder for bits with 1/4" hexagon drive.
Non-magnetic design.

844/7 Tap Bits Set



Code	EAN 4013288			
05**104754**001	*233042*			1
			888/4/1 K 1x 1/4"x50	
			844 1x 3,0x33,0; 1x 4,0x35,0; 1x 5,0x36,0; 1x 6,0x40,0; 1x 8,0x40,0; 1x 10,0x40,0	

845 1-flute Countersink Bits

1-flute countersink bit by Wera. For countersinking and de-burring. The hexagon shaft ensures very good power transfer, vibration-free and score-free working.

Perfect chip removal and long service life. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

845 1-flute Countersink Bits



Code	EAN 4013288	mm	mm	mm				
05**104660**001	*117519*	6,30	21,00	32,0	M 3			1
05**104661**001	*117526*	8,30	21,00	32,0	M 4			1
05**104662**001	*117533*	10,40	21,00	34,0	M 5			1
05**104663**001	*117540*	12,40	21,00	36,0	M 6			1
05**104664**001	*117557*	16,50	22,00	40,0	M 8			1
05**104665**001	*117564*	20,50	22,00	43,0	M 10			1

816 R

Bit holder with Rapidaptor quick-release chuck for bits with 1/4" hexagon drive.

888/4/1 K

Rapidaptor universal holder for bits with 1/4" hexagon drive.
Non-magnetic design.

845/8 1-flute Countersink Bits Set



Code	EAN 4013288		
05**104655**001	*119285*		1
		816 R 1x 1/4"x119	
		888/4/1 K 1x 1/4"x50	
		845 1x 6,30x32,0; 1x 8,30x32,0; 1x 10,40x34,0; 1x 12,40x36,0; 1x 16,50x40,0; 1x 20,50x43,0	

846 3-flute Countersink Bit

3-flute countersink bit for deburring, chamfering and countersinking. A finely-tuned material elasticity provides for great durability.

Perfect chip removal and a low tilt risk ensure pleasant working. Cutting section as per DIN 335-C, 90° with 3 cutters.
1/4" hexagon, suitable for holders with take-up as per DIN ISO 1173-D 6.3.

846 3-flute Countersink Bit



Code	EAN 4013288	mm	mm	mm				
05**104630**001	*101440*	6,30	20,00	31,0	M 3			1
05**104631**001	*101457*	8,30	20,00	31,0	M 4			1
05**104632**001	*101464*	10,40	20,00	34,0	M 5			1
05**104633**001	*101471*	12,40	20,00	35,0	M 6			1
05**104634**001	*101488*	16,50	20,00	40,0	M 8			1
05**104635**001	*101495*	20,50	20,00	41,0	M 10			1

816 R

Bit holder with Rapidaptor quick-release chuck for bits with 1/4" hexagon drive.

888/4/1 K

Rapidaptor universal holder for bits with 1/4" hexagon drive. Non-magnetic design.

846/8 3-flute Countersink Bits Set



Code	EAN 4013288			
05**104650**001	*111678*			1
			816 R 1x 1/4"x119	
			888/4/1 K 1x 1/4"x50	
			846 HSS 1x 6,30x31,0; 1x 8,30x31,0; 1x 10,40x34,0; 1x 12,40x35,0; 1x 16,50x40,0; 1x 20,50x41,0	

847 HSS Combined Tap Bits

Combination tapping drill bits for drilling, tapping and deburring. Made out of high speed steel (HSS). A finely-tuned material elasticity provides for great durability.

The very good centring properties, perfect chip removal and a low tilt risk ensure pleasant working. The hexagonal shaft ensures very good power transfer. Drive: 1/4" hexagon, suitable for holders with take-up as per DIN ISO 1173-D 6.3.

847 HSS Combined Tap Bits



Code	EAN 4013288	mm	mm	mm				
05**104640**001	*101501*	2,5	12,00	36,0	M 3			1
05**104641**001	*101518*	3,3	12,00	39,0	M 4			1
05**104642**001	*101525*	4,2	12,00	41,0	M 5			1
05**104643**001	*101532*	5,0	12,00	44,0	M 6			1
05**104644**001	*101549*	6,8	12,00	51,0	M 8			1
05**104645**001	*101556*	8,5	12,00	59,0	M 10			1

888/4/1 K Rapidaptor Universal Bit holder

- Non-magnetic design

847/7 Set Combination Drill Bits Set



Code	EAN 4013288		
05**104751**001	*233035*		1
		888/4/1 K 1x 1/4"x50	
		847 HSS 1x 2,5x36,0; 1x 3,3x39,0; 1x 4,2x41,0; 1x 5,0x44,0; 1x 6,8x51,0; 1x 8,5x59,0	

848 HSS Metal Twist Drill Bits

Metal twist drill bits for precise drilling in metal. Made out of high speed steel (HSS). A finely-tuned material elasticity provides for a long service life. Very good concentricity.

Tough viscous tempered bits ensure a particularly long service life. The hexagonal shaft ensures very good power transfer.
Drive: 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

848 HSS Metal Twist Drill Bits



	EAN							
Code	4013288	mm	mm	mm				
05**104610**001	*101310*	3,0	16,00	38,0				1
05**104611**001	*101327*	3,1	18,00	40,0				1
05**104612**001	*101334*	3,3	18,00	40,0				1
05**104613**001	*101341*	4,0	20,00	44,0				1
05**104614**001	*101358*	4,1	20,00	44,0				1
05**104615**001	*101365*	4,2	20,00	45,0				1
05**104616**001	*101372*	5,0	26,00	50,0				1
05**104617**001	*101389*	5,1	26,00	50,0				1
05**104618**001	*101396*	6,0	26,00	50,0				1
05**104619**001	*101402*	6,8	30,00	50,0				1
05**104620**001	*101419*	8,0	32,00	51,0				1
05**104621**001	*101426*	8,5	33,00	53,0				1
05**104622**001	*101433*	10,0	38,00	54,0				1

849 HSS Twist Wood Drill Bits

Wood twist drill bits for precise, splinter-free drilling in soft wood, hard wood and laminated panel material. Made out of high speed steel (HSS).

The hexagonal shaft ensures very good power transfer.
A finely-tuned material elasticity provides for a long service life.
Very good concentricity. 1/4" drive suitable for holders as per DIN ISO 1173-D 6.3.

849 HSS Twist Wood Drill Bits



	EAN							
Code	4013288	mm	mm	mm				
05**104600**001	*101259*	3,0	32,00	70,0				1
05**104601**001	*101266*	4,0	32,00	74,0				1
05**104602**001	*101273*	5,0	43,00	85,0				1
05**104603**001	*101280*	6,0	45,00	95,0				1
05**104604**001	*101297*	8,0	60,00	110,0				1
05**104605**001	*101303*	10,0	70,00	120,0				1

848/851/867/19 Metal Twist Drill Bits and Bits Set

19-piece metal twist drill bit and bit set. High quality metal twist drill bits for precise drilling in metal.

Made out of high speed steel (HSS). A finely-tuned material elasticity provides for great durability.

Very good concentricity. The hexagonal shaft ensures very good power transfer. Tough viscous bits for universal use.

Drive: 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3. Includes robust belt pouch for secure storage.

848/851/867/19 Metal Twist Drill Bits and Bits Set



Code	EAN 4013288			
05**104652**001	*111654*			1
			888/4/1 K 1x 1/4"x50	
			851/1 TZ PH 2x PH 1x25; 3x PH 2x25; 1x PH 3x25	
			848 HSS 1x 3,0x38,0; 1x 4,0x44,0; 1x 4,2x45,0; 1x 5,0x50,0; 1x 6,0x50,0; 1x 8,0x51,0	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

849/855/867/18 Wood Twist Drill Bits and Bits Set

18-piece wood twist drill bit and bit set. High quality, metal twist drill bits for precise, splinter-free drilling in soft wood, hard wood and laminated panel material.

Made out of high speed steel (HSS). A finely-tuned material elasticity provides for great durability. Very good concentricity.

The hexagonal shaft ensures very good power transfer. The Rapidaptor universal holder ensures rapid bit change without any extra tools. Drive: 1/4" hexagon, suitable for holders with take-up as per DIN ISO 1173-D 6.3.

849/855/867/18 Wood Twist Drill Bits and Bits Set



Code	EAN 4013288			
05**104653**001	*111661*			1
			889/4/1 K 1x 1/4"x50	
			849 HSS 1x 3,0x70,0; 1x 4,0x74,0; 1x 5,0x85,0; 1x 6,0x95,0; 1x 8,0x110,0	
			855/1 TH PZ 2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25	
			867/1 TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	

Patio construction set T 1

Compact Wera tool set with the 17 most common screwdriving tools for patio construction. Bits in stainless steel design prevent extraneous rust.

With extra smart bit holder, which enables a uniform depth thanks to the variable screw depth limitation, and prevents damage to decking with the fitted felt ring.

- High-quality 17-piece tool set for evenly flush countersunk screw heads for decking in patio construction
- Bit holder with adjustable screw depth limitation and protective felt ring for surface protection
- 15 bits (TORX®, PH, PZ) made from stainless steel to prevent extraneous rust plus 3888/4/1 K Rapidaptor stainless steel bit holder
- Take it easy tool finder: colour coding according to profile and size
- Compact folding bag with Wera 2go compatibility incl. 4 spare felt rings

Patio construction set T 1



Code	EAN 4013288			
05**134021**001	*219510*			1
			881/4/1 1x 1/4"x90 [1]	
			3888/4/1 K 1x 1/4"x50	
			3851/1 TS PH 1x PH 1x25; 1x PH 2x25; 1x PH 3x25	
			3855/1 TS PZ 1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25	
			3867/1 TS TORX® 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25	
			3867/1 TS P TORX® 2x TX 25x25	
			9201 4x 27,0	

[1] The spare part kit with 5x felt rings can be ordered with the code number 05**130003**001.

Bit-Check 10 Drywall 1

Bit-Check for drywall construction. High quality spacer out of aluminium; the screwdriving depth can be infinitely adjusted and allows the flush-mounting of screws; 9 drywall bits with modified output shaft, 25 mm in length.

Bit-Check 10 Drywall 1



Code	EAN 4013288			
05**136011**001	*178657*			1
			896/4/1 1x 1/4"x50	
			851/1 RZ PH 9x PH 2x25	

Bit-Check 6 SHK 1 SB

6 Wera bits (50 mm length) neatly arranged in the smallest of spaces in the practical Bit-Check. Particularly suitable for plumbing, heating and air conditioning; Bit-Checks allow a quick overview of the available tools. Unused bits are simply put back in the holder and will not be lost. Easy transport e.g. in your shirt pocket. The tough bits are suitable for universal use.

- Included bits particularly suitable for HVAC applications
- Tough viscous bits for universal use
- The tough design of the bits prevents the tip from breaking prematurely
- Hex-Plus allows socket head screws to live longer
- 50 mm-long bits
- Upright positionable, multi-component Bit-Check
- Bit-Check plastic material ensures robustness and durability

Bit-Check 6 SHK 1 SB



Code	EAN 4013288			
05**073631**001	*227997*			1
			851/4 TZ 1x PH 1x50	
			867/4 Z TORX® 1x TX 15x50; 1x TX 20x50; 1x TX 25x50	
			840/4 Z 1x 5,0x50; 1x 6,0x50 [1]	

[1] Hexagonal blade


40-200 Nm
Wera

Torque Tools



Series 7400 Kraftform adjustable torque screwdrivers with Rapidaptor quick-release chuck

Variable torque setting option with highest precision. Simple adjustment of the required torque value without any special tools. Easy-to-read scale value; audible click signal. Rapidaptor quick-release technology for rapid bit change. Unlimited torque to loosen seized screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Series 7400 Kraftform adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck



Code	EAN	Art.No.		Nm	Nm	mm	mm	
050**74770**001 [1]	*179012*	7430	1/4"	0,10-0,34	0,015	89	142	1
050**74772**001 [1]	*179128*	7431	1/4"	0,30-1,00	0,05	89	142	1
050**74774**001 [1]	*179135*	7432	1/4"	0,90-1,50	0,05	89	142	1
050**74700**001	*100641*	7440	1/4"	0,3-1,2	0,05	105	155	1
050**74701**001	*100658*	7441	1/4"	1,2-3,0	0,10	105	155	1

[1] With attachable magnifying glass, significantly improving readability.

Series 7400 Kraftform adjustable torque screwdrivers (2.5-29.0 in. lbs.) with Rapidaptor quick-release chuck



Code	EAN	Art.No.		in. lbs.	in. lbs.	mm	mm	
050**74710**001	*102881*	7445	1/4"	2,5-11,5	0,5	105	155	1
050**74711**001	*102898*	7446	1/4"	11,0-29,0	1,0	105	155	1

Series 7400 Kraftform pistol grip, adjustable torque screwdrivers (3.0-8.8 Nm) with Rapidaptor quick-release chuck



Code	EAN	Art.No.		Nm	Nm	mm	mm	
050**74702**001	*101730*	7442	1/4"	3,0-6,0	0,25	150	100	1
050**74705**001	*119308*	7443	1/4"	4,0-8,8	0,40	150	100	1

Series 7400 Kraftform pistol grip, adjustable torque screwdrivers (25.0-55.0 in. lbs.) with Rapidaptor quick-release chuck



Code	EAN	Art.No.		in. lbs.	in. lbs.	mm	mm	
050**74712**001	*102904*	7447	1/4"	25,0-55,0	2,5	150	100	1

9524 Photovoltaic mounting tool set 1

7-piece tool set for installing photovoltaic systems. One adjustable torque screwdriver (pistol handle) 7442 for the measuring range 3.0-6.0 Nm. Digital torque value display. Reliable slip-over mechanism and audible signal when the set torque is reached. One 889/4/1 F Rapidaptor bitholding screwdriver with fast-rotating function for a particularly quick return movement without having to remove the tool during clockwise torque operation. One 6003 Joker ring spanner. The special open end geometry expands the placement possibilities of the tool which makes the ring spanner particularly suitable for narrow spaces.

2 installation tools for MC4 solar connectors (Multi-Contact). One socket 1/2" (with side wire cutout) size 17 for installing panel connectors, one tool shaft (adapter 1/4" to 1/2") for manually operated socket wrench inserts.

- Screwdriving tool set for installing photovoltaic systems
- Includes 2x 9108 installation tools for MC4 solar connectors (Multi-Contact)
- Includes 7442 adjustable torque screwdriver (3.0-6.0 Nm) with pistol handle
- Includes Rapidaptor 889/4/1 F bitholder with fast-rotating function for a particularly quick return movement without having to remove the tool during clockwise torque operation
- Includes Joker 6003 ring spanner, particularly suitable for narrow spaces; the special open end geometry expands the placement possibilities of the tool
- Includes 1/2" socket (with side wire cutout) size 17 for installing panel connectors
- Includes tool shaft 870/4 (adapter 1/4" hexagon to 1/2" square head) for manually operated 1/2" socket wrench inserts

9524 Photovoltaic mounting tool set 1



Code	EAN 4013288			
05**136043**001	*228017*			1
			7400 pistol grip 1x 7442, 3,0-6,0 Nm	
			8790 HMC Deep with cutout 1x 17,0x76,0	
			870/4 A 1x 1/4"x1/2"x72	
			889/4/1 F 1x 1/4"x64	
			6003 Joker 1x 17x190	
			9108 2x 115	
			Hook and Loop Fastener Strip 120 1x 50,0x120,0	

7443/12 Assembly set for tyre pressure control systems

12-piece tool set for the proper assembly and disassembly of tyre pressure control systems. Comes with torque technology for controlled screw tightening. Hand tool with multi-component Kraftform handle for high working speeds and ergonomic working. Five pre-set tools to connect the union nut with the screw and to fasten the sensor component to the valve.

Two pre-set valve insertion tools with 0.25 and 0.45 Nm. An adjustable Kraftform pistol handle for torque values of between 4.0 and 8.8 Nm. Suitable for all customary tyre pressure control systems. Dependable fastening thanks to distinctly coloured marking of the pre-set torque values (Beru/Huf®: TX 10 yellow 1.25 Nm; Schrader®: TX 10 green 1.4 Nm; Cup®/RTS®: TX 20 grey 2.0 Nm).

Two TX bits with holding function, socket adaptor, two sockets plus a valve dolly (for applications up to 4.5 Nm). Suitable for tyre control, systems from e.g. Schrader®, Alligator®, VDO®. The pre-set torque screwdriver fixed at 3.3 Nm actuates both the union nut as well as the connecting screw on the sensors of the Alligator system. Additionally included: socket adaptor, two bits, valve dolly (for applications up to 4.5 Nm).

7443/12 Assembly set for tyre pressure control systems



Code	EAN 4013288			
05**074746**001	*178404*			1
		◉	**7400 pistol grip** 1x 7443, 4,0-8,8 Nm	
		◉	**Series 7400 Kraftform torque screwdrivers with a factory pre-set measurement value** 1x 7464, 3,3 Nm, 3,0-6,0 Nm	
		✪	**300 TX** 1x TX 10x1,25; 1x TX 10x1,4	
		◉	**790 A/50** 1x 11,0x50,0; 1x 12,0x50,0	
		✪	**867/4 TORX® HF** 1x TX 15x50; 1x TX 20x50	
		▢○	**870/1** 1x 1/4"x25 [1]	
		⚫	**300 V** 1x 0,25; 1x 0,45	
		○	**327** 1x 32x70	

[1] With friction ball; for manual nut spinner sockets

7440/41 Kraftform torque screwdriver set 0.3-3.0 Nm

Wera torque screwdriver set. Two torque screwdrivers with variable torque setting option with highest precision.

Simple adjustment of the required torque value without any special tools. Easy-to-read scale value.

Rapidaptor quick-release technology for rapid bit change.

Unlimited torque to loosen seized screws. Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Includes bit assortment in a high quality and stable plastic case.

7440/41 Kraftform torque screwdriver set 0.3-3.0 Nm



Code	EAN 4013288			
05**074738**001	*112354*			1
		◉	**7400** 1x 7440, 1/4", 0,3-1,2 Nm; 1x 7441, 1/4", 1,2-3,0 Nm	
		✪	**867/1 TZ TORX®** 1x TX 6x25; 1x TX 7x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
		✪	**867/1 IP TORX PLUS®** 1x 6 IPx25; 1x 7 IPx25; 1x 8 IPx25; 1x 9 IPx25; 1x 10 IPx25; 1x 15 IPx25; 1x 20 IPx25; 1x 25 IPx25; 1x 30 IPx25	
		○	**840/1 Z Hex-Plus** 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

7440/41/42 Kraftform torque screwdriver set 0.3-6.0 Nm



Code	EAN 4013288			
05**074739**001	*113924*			1
			7400 1x 7440, 0,3-1,2 Nm; 1x 7441, 1,2-3,0 Nm	
			7400 pistol grip 1x 7442, 3,0-6,0 Nm	
			867/1 TZ TORX® 1x TX 6x25; 1x TX 7x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			867/1 IP TORX PLUS® 1x 6 IPx25; 1x 7 IPx25; 1x 8 IPx25; 1x 9 IPx25; 1x 10 IPx25; 1x 15 IPx25; 1x 20 IPx25; 1x 25 IPx25; 1x 30 IPx25	
			840/1 Z 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

7445/46/47 Kraftform torque screwdriver set 2.5-55.0 in. lbs.



Code	EAN 4013288			
05**350451**001	*161383*			1
			7400 Imperial 1x 7445, 2,5-11,5 in. lbs.; 1x 7446, 11,0-29,0 in. lbs.	
			7400 Imperial pistol grip 1x 7447, 25,0-55,0 in. lbs.	
			867/1 TZ TORX® 1x TX 6x25; 1x TX 7x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25	
			867/1 IP TORX PLUS® 1x 6 IPx25; 1x 7 IPx25; 1x 8 IPx25; 1x 9 IPx25; 1x 10 IPx25; 1x 15 IPx25; 1x 20 IPx25; 1x 25 IPx25; 1x 30 IPx25	
			840/1 Z 1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25	

7443/61/9 Assembly set for tyre pressure control systems

9-piece tool set for the proper assembly and disassembly of tyre pressure control systems. Comes with torque technology for controlled screw tightening.

Hand tool with multi-component Kraftform handle for high working speeds and ergonomic working. Two pre-set tools to connect the union nut with the screw and to fasten the sensor component to the valve.

An adjustable Kraftform pistol handle for torque values of between 4.0 and 8.8 Nm. Two TX bits with holding function, socket adaptor, two sockets plus a valve dolly (for applications up to 4.5 Nm). Suitable for tyre control, systems from e.g. Schrader®, Alligator®, VDO®.

7443/61/9 Assembly set for tyre pressure control systems



Code	EAN 4013288			
05**074745**001	*168818*			1
			Series 7400 Kraftform torque screwdrivers with a factory pre-set measurement value 1x 7461, 1,2 Nm, 1,2-3,0 Nm [1]	
			7400 pistol grip 1x 7443, 4,0-8,8 Nm	
			300 TX 1x TX 10x1,4	
			870/1 1x 1/4"x25 [2]	
			790 A/50 1x 11,0x50,0; 1x 12,0x50,0	
			867/4 TORX® HF 1x TX 15x50; 1x TX 20x50	
			327 1x 32x70	

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

[2] With friction ball; for manual nut spinner sockets

1430 Kraftform Micro ESD adjustable torque screwdrivers (0.02-0.11 Nm) with quick-release chuck

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- Suitable for bits with 4 mm halfmoon and 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

1430 Kraftform Micro ESD adjustable torque screwdrivers (0.02-0.11 Nm) with quick-release chuck





	EAN							
Code	4013288	Art.No.	Nm	Nm	mm			
05**074802**001 [1]	*179043*	1430 ESD	0,02-0,06	0,0025	141	5 7/16"		1
05**074804**001 [1]	*179104*	1431 ESD	0,05-0,11	0,005	141	5 7/16"		1

[1] With attachable magnifying glass, significantly improving readability.

Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm

Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck





	EAN							
Code	4013288	Art.No.		Nm	Nm	mm	mm	
05**074780**001 [1]	*179159*	7430 ESD	1/4"	0,10-0,34	0,015	89	142	1
05**074782**001 [1]	*179166*	7431 ESD	1/4"	0,30-1,00	0,05	89	142	1
05**074784**001 [1]	*179173*	7432 ESD	1/4"	0,90-1,50	0,05	89	142	1
05**074730**001	*106964*	7440 ESD	1/4"	0,3-1,2	0,05	105	155	1
05**074731**001	*106971*	7441 ESD	1/4"	1,2-3,0	0,10	105	155	1

[1] With attachable magnifying glass, significantly improving readability.

Series 7400 Kraftform ESD adjustable torque screwdrivers (2.5-29.0 in. lbs.) with Rapidaptor quick-release chuck

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm

Series 7400 Kraftform ESD adjustable torque screwdrivers (2.5-29.0 in. lbs.) with Rapidaptor quick-release chuck





	EAN							
Code	4013288	Art.No.		in. lbs.	in. lbs.	mm	mm	
05**074733**001	*106988*	7445 ESD	1/4"	2,5-11,5	0,5	105	155	1
05**074734**001	*106995*	7446 ESD	1/4"	11,0-29,0	1,0	105	155	1

Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-1.0 Nm)

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- Suitable for bits with 4 mm halfmoon and 4 mm HIOS drive

Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-1.0 Nm)





	EAN							
Code	4013288	Art.No.	Nm	Nm	mm	mm		
05**074786**001 [1]	*179036*	7435 ESD	0,10-0,34	0,015	89	142	5 7/16"	1
05**074788**001 [1]	*179029*	7436 ESD	0,30-1,00	0,05	89	142	5 7/16"	1

[1] With attachable magnifying glass, significantly improving readability.

Series 7400 Kraftform Torque Screwdrivers, with a factory pre-set measurement value

Wera torque screwdriver. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173). Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

7400 series Kraftform Torque screwdrivers, with factory pre-set value (0.3-3.0 Nm) and Rapidaptor quick-release chuck, handle size 105 mm

Wera torque screwdrivers. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

7400 series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 89 mm



	EAN							
Code	4013288	Art.No.		Nm	Nm	mm	mm	
05**074790**001 [1]	*179395*	7450	1/4"	0,1	0,1-0,34	89	133	1
05**074792**001 [1]	*179203*	7451	1/4"	0,3	0,3-1,0	89	133	1
05**074794**001 [1]	*179197*	7452	1/4"	0,9	0,9-1,5	89	133	1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

7400 series Kraftform Torque screwdrivers, with factory pre-set value (0.3-3.0 Nm) and Rapidaptor quick-release chuck, handle size 105 mm



	EAN							
Code	4013288	Art.No.		Nm	Nm	mm	mm	
05**074715**001 [1]	*102911*	7460	1/4"	0,3	0,3-1,2	105	155	1
05**074716**001 [1]	*102928*	7461	1/4"	1,2	1,2-3,0	105	155	1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

7400 series Kraftform Torque screwdrivers, with factory pre-set value (3.0-8.8 Nm) and Rapidaptor quick-release chuck, pistol handle

Wera torque screwdriver. Kraftform pistol handle for particularly high torque transmission, multi-component for high working speeds and particularly ergonomic screwdriving. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137002**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Please note: 1 Ncm = 0.01 Nm.

7400 Imperial series Kraftform Torque screwdrivers, with factory pre-set value (2.5-29.0 in. lbs.) and Rapidaptor quick-release chuck, handle size 105 mm

Wera torque screwdrivers. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

7400 series Kraftform Torque screwdrivers, with factory pre-set value (3.0-8.8 Nm) and Rapidaptor quick-release chuck, pistol handle





	EAN			Nm	Nm	mm	mm	
Code	4013288	Art.No.		Nm	Nm	mm	mm	
05**074717**001 [1]	*102935*	7462	1/4"	3,0	3,0-6,0	150	100	1
05**074728**001 [1]	*156167*	7463	1/4"	4,0	4,0-8,8	150	100	1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

7400 Imperial series Kraftform Torque screwdrivers, with factory pre-set value (2.5-29.0 in. lbs.) and Rapidaptor quick-release chuck, handle size 105 mm





	EAN			in. lbs.	in. lbs.	mm	mm	
Code	4013288	Art.No.		in. lbs.	in. lbs.	mm	mm	
05**074720**001 [1]	*102942*	7465	1/4"	2,5	2,5-11,5	105	155	1
05**074722**001 [1]	*103116*	7466	1/4"	11,0	11,0-29,0	105	155	1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

7400 Imperial series Kraftform Torque screwdrivers, with factory pre-set value (25.0-55.0 in. lbs.) and Rapidaptor quick-release chuck, pistol handle

Wera torque screwdriver. Kraftform pistol handle for particularly high torque transmission, multi-component for high working speeds and particularly ergonomic screwdriving. With a factory pre-set torque value set to the smallest scale value. '

For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137002**001).

Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 105 mm

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a factory pre-set torque value set to the smallest scale value.

For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm

7400 Imperial series Kraftform Torque screwdrivers, with factory pre-set value (25.0-55.0 in. lbs.) and Rapidaptor quick-release chuck, pistol handle



	EAN							
Code	4013288	Art.No.		in. lbs.	in. lbs.	mm	mm	
05**074721**001 [1]	*102959*	7467	1/4"	25,0	25,0-55,0	150	100	1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 105 mm



	EAN							
Code	4013288	Art.No.		Nm	Nm	mm	mm	
05**074840**001 [1]	*179487*	7460 ESD	1/4"	0,3	0,3-1,2	105	155	1
05**074842**001 [1]	*179098*	7461 ESD	1/4"	1,2	1,2-3,0	105	155	1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 89 mm

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm

7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.0 Nm) and quick-release chuck

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a factory pre-set torque value set to the smallest scale value.

For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001).

Afterwards you can check the set value using an off-the-shelf torque tester. With quick-release chuck for rapid bit change. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 4 mm Halfmoon drive (Wera series 9) and a 4 mm HIOS drive (Wera series 21).

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- Suitable for bits with 4 mm halfmoon and 4 mm HIOS drive

7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 89 mm






Code	EAN	Art.No.		Nm	Nm	mm	mm	
05**074820**001 [1]	*179210*	7450 ESD	1/4"	0,1	0,1-0,34	89	133	1
05**074822**001 [1]	*179470*	7451 ESD	1/4"	0,3	0,3-1,0	89	133	1
05**074824**001 [1]	*179227*	7452 ESD	1/4"	0,9	0,9-1,5	89	133	1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.0 Nm) and quick-release chuck





Code	EAN	Art.No.	Nm	Nm	mm	mm		
05**074826**001 [1]	*179067*	7455 ESD	0,1	0,1-0,34	89	138	5 1/4"	1
05**074828**001 [1]	*179050*	7456 ESD	0,3	0,3-1,0	89	138	5 1/4"	1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

1460 ESD Kraftform Micro torque screwdrivers, with factory pre-set value (0.02-0.11 Nm) and quick-release chuck

With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed within the measuring range with the extra tool 05**137004**001.

Afterwards you can check the set value using an off-the-shelf torque tester.

Compact handle/interchangeable blades system for torque-controlled precision screwdriving. The Kraftform Micro ESD torque screwdriver is ideal for torque-controlled jobs on electrostatically sensitive components. Suitable for bits with a 4 mm Halfmoon drive (Wera series 9) and a 4 mm HIOS drive (Wera series 21). Tamper-proof. Clearly audible and tactile signal when the set torque is reached. Repeatability is 100% guaranteed. Unlimited manual loosening torque.

Electrical surface resistance ≤ 10^9 ohms for safe protection against electrostatic charge.

Manufactured as per DIN EN 61340-5-1. Handle/interchangeable blades system for rapid blade changes. Kraftform Micro handle with rotating cap and free-turning zone for rapid turning, making any time-consuming repositioning of the fingers unnecessary.

Power zone with integrated soft zones ensures the transmission of high tightening and loosening torques. Precision zone directly above the blade for the correct rotation angle for adjustment work.

Rapid bit fixing: Simply push the bit into the holder for automatic locking and a secure fit. To change the bit, simply push the sleeve forward and remove the bit. Free-running actuating sleeve for easy handling of the tool during the screwdriving process.

Bits suitable for manual and machine operated screwdriving connections with electric screwdrivers (including HIOS, Delvo, Sehan). Use with e.g. smartphones, mobile phones, cameras, electronic devices, in dental laboratories and dental surgeries.

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- Suitable for the take-up of bits with 4 mm halfmoon drive and 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

1460 ESD Kraftform Micro torque screwdrivers, with factory pre-set value (0.02-0.11 Nm) and quick-release chuck



	EAN							
Code	4013288	Art.No.	Nm	Nm	mm			
05**074800**001 [1]	*168351*	1460 ESD	0,035	0,02-0,06	131	5 1/4"		1
05**074810**001 [1]	*179463*	1461 ESD	0,050	0,05-0,11	131	5 1/4"		1

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm

Wera torque screwdriver. With a customised factory pre-set torque value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

Wera torque screwdriver. With a customised factory pre-set torque value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

- Customized pre-set torque screwdriver with Rapidaptor quick-release chuck
- Only adjustable with an extra tool
- Suitable for bits with 1/4" hex head drive
- Distinct signal when pre-set value is reached
- Multi-component Kraftform handle for high working speeds

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm



	EAN							
Code	4013288	Art.No.		Nm	mm	mm		
05**074790**010	*188106*	7450	1/4"	0,1-0,34	89	133	5 1/4"	1
05**074792**010	*188113*	7451	1/4"	0,3-1,0	89	133	5 1/4"	1
05**074794**010	*188137*	7452	1/4"	0,9-1,5	89	133	5 1/4"	1

**) The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm



	EAN							
Code	4013288	Art.No.		Nm	mm	mm		
05**074715**010	*188144*	7460	1/4"	0,3-1,2	105	155	6"	1
05**074716**010	*188151*	7461	1/4"	1,2-3,0	105	155	6"	1

**) The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle

Wera torque screwdriver. Kraftform pistol handle for particularly high torque transmission, multi-component for high working speeds and particularly ergonomic screwdriving.

With a customised factory pre-set torque value. For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137002**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

Series 7400 Imperial Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

Wera torque screwdriver. With a customised factory pre-set torque value.

For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle





	EAN			Nm	mm	mm		
Code	4013288	Art.No.						
05**074717**010	*188168*	7462	1/4"	3,0-6,0	150	100	6"	1
05**074728**010	*188199*	7463	1/4"	4,0-8,8	150	100	6"	1

**)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

Series 7400 Imperial Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm





	EAN			in. lbs.	mm	mm		
Code	4013288	Art.No.						
05**074720**010	*188250*	7465	1/4"	2,5-11,5	105	155	6"	1
05**074722**010	*188267*	7466	1/4"	11,0-29,0	105	155	6"	1

**)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

Series 7400 Imperial Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle

Wera torque screwdriver. Kraftform pistol handle for particularly high torque transmission, multi-component for high working speeds and particularly ergonomic screwdriving.

With a customised factory pre-set torque value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137002**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

Series 7400 Imperial Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle





	EAN							
Code	4013288	Art.No.		in. lbs.	mm	mm		
05**074721**010	*188274*	7467	1/4"	25,0-55,0	150	100	6"	1

*) The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

1460 ESD Kraftform Micro torque screwdrivers with a customised factory pre-set measurement value with quick-release chuck

With a customised factory pre-set torque value. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137004**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Compact handle/interchangeable blades system for torque-controlled precision screwdriving.

The Kraftform Micro ESD torque screwdriver is ideal for torque-controlled jobs on electrostatically sensitive components. Suitable for bits with a 4 mm Halfmoon drive (Wera series 9) and a 4 mm HIOS drive (Wera series 21).

Tamper-proof. Clearly audible and tactile signal when the set torque is reached. Repeatability is 100% guaranteed. Unlimited manual loosening torque.

Electrical surface resistance ≤ 10^9 ohms for safe protection against electrostatic charge.

Manufactured as per DIN EN 61340-5-1. Handle/interchangeable blades system for rapid blade changes.

Kraftform Micro handle with rotating cap and free-turning zone for rapid turning, making any time-consuming repositioning of the fingers unnecessary.

Power zone with integrated soft zones ensures the transmission of high tightening and loosening torques. Precision zone directly above the blade for the correct rotation angle for adjustment work. Rapid bit fixing: Simply push the bit into the holder for automatic locking and a secure fit.

To change the bit, simply push the sleeve forward and remove the bit. Free-running actuating sleeve for easy handling of the tool during the screwdriving process.


Bits suitable for manual and machine operated screwdriving connections with electric screwdrivers (including HIOS, Delvo, Sehan).

Use with e.g. smartphones, mobile phones, cameras, electronic devices, in dental laboratories and dental surgeries.

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- Suitable for the take-up of bits with 4 mm halfmoon drive and 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

1460 ESD Kraftform Micro torque screwdrivers with a customised factory pre-set measurement value with quick-release chuck





	EAN							
Code	4013288	Art.No.	Nm	mm				
05**074800**010	*188304*	1460 ESD	0,02-0,06	131	5 1/4"			1
05**074810**010	*188311*	1461 ESD	0,05-0,11	131	5 1/4"			1

**)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a customised factory pre-set torque value.

For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm

Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm





	EAN								
Code	4013288	Art.No.		Nm	mm	mm			
05**074840**010	*188236*	7460 ESD	1/4"	0,3-1,2	105	155	6"		1
05**074842**010	*188243*	7461 ESD	1/4"	1,2-3,0	105	155	6"		1

**)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage.

With a customised factory pre-set torque value.

For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm

Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, with quick-release chuck

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a customised factory pre-set torque value.

For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed within the measuring range with the extra tool 05**137003**001. Afterwards you can check the set value using an off-the-shelf torque tester.

Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 4 mm Halfmoon drive (Wera series 9) and a 4 mm HIOS drive (Wera series 21).

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ 10^9 Ohm
- Suitable for bits with 4 mm halfmoon and 4 mm HIOS drive

Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm






Code	EAN	Art.No.		Nm	mm	mm		
05**074820**010	*188205*	7450 ESD	1/4"	0,1-0,34	89	133	5 1/4"	1
05**074822**010	*188212*	7451 ESD	1/4"	0,3-1,0	89	133	5 1/4"	1
05**074824**010	*188229*	7452 ESD	1/4"	0,9-1,5	89	133	5 1/4"	1

**)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, with quick-release chuck





Code	EAN	Art.No.	Nm	mm	mm			
05**074826**010	*188281*	7455 ESD	0,1-0,34	89	138	5 1/4"		1
05**074828**010	*188298*	7456 ESD	0,3-1,0	89	138	5 1/4"		1

**)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

7510 Kraftform Safe-Torque Speed Torque screwdriver, 1-3 Nm

- Torque screwdriver with quick torque adjustment
- Easy and quick torque setting
- Fixed position (Torque Lock) for unlimited tightening and loosening moments
- Secure slip-over torque function for clockwise/anti-clockwise torque-control
- Quick and easy setting of the selectable tightening torques (1.0; 1.5; 2.0; 2.5; 3.0 Nm)
- For bits with 1/4" external hexagon drive, also suitable for socket wrench inserts via adapter

7510 Kraftform Safe-Torque Speed Torque screwdriver, 1-3 Nm





	EAN							
Code	4013288		Nm	Nm	Nm	Nm	Nm	
05**075810**001	*230669*	1/4"	1,0	1,5	2,0	2,5	3,0	1

7510/14 Safe-Torque Speed Tool set for carbide inserts

14-piece tool set. For professional screwdriving/professional fine adjustment AND for torque-controlled screwdriving.


Secure slip-over torque mechanism with quick clockwise/counterclockwise setting and five selectable tightening torques (1.0; 1.5; 2.0; 2.5; 3.0 Nm) and one fixed position (Torque Lock) for unlimited loosening and tightening moments.

Quick-release holder for high robustness; suitable for bits with 1/4" external hexagon drive. 14 tough bits (25 mm length) for TORX PLUS®, TORX® and hexagonal socket screws.

The tool set is particularly suitable for bolting carbide inserts. The Safe-Torque Speed 7510 torque wrench with its five selectable torque values recommended by leading carbide tool manufacturers ensures a reliable torque-controlled screw connection of replaceable carbide inserts.

- Particularly suitable for bolting carbide inserts
- Quick and easy setting of the selectable tightening torques (1.0; 1.5; 2.0; 2.5; 3.0 Nm)
- Suitable for docking with the Wera 2go system

7510/14 Safe-Torque Speed Tool set for carbide inserts





Code	EAN 4013288			
05**075840**001	*230683*			1
			7510 1x 1/4"x1,0 Nm/1,5 Nm/2,0 Nm/ 2,5 Nm/3,0 Nm x 147,5	
			867/1 IP TORX PLUS® 1x 7 IPx25; 1x 8 IPx25; 1x 9 IPx25; 1x 10 IPx25; 1x 15 IPx25	
			867/1 TORX® 1x TX 7x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25	
			840/1 Z 1x 2,0x25; 1x 2,5x25; 1x 3,0x25	

7515 Kraftform Safe-Torque Speed Torque screwdriver, 2-6 Nm

- Torque screwdriver with quick torque adjustment
- Easy and quick torque setting
- Fixed position (Torque Lock) for unlimited tightening and loosening moments
- Secure slip-over torque function for clockwise/anti-clockwise torque-control
- Quick and easy setting of the selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm)
- For bits with 1/4" external hexagon drive, also suitable for socket wrench inserts via adapter
- For bits with 1/4" external hexagon drive, also suitable for socket wrench inserts via adapter

7515 Kraftform Safe-Torque Speed Torque screwdriver, 2-6 Nm



	EAN							
Code	4013288		Nm	Nm	Nm	Nm	Nm	
05**075815**001	*228314*	1/4"	2,0	3,0	4,0	5,0	6,0	1


7515/16 Kraftform Safe-Torque Speed Universal 1

16-piece tool set. For professional screwdriving/professional fine adjustment AND for torque-controlled screwdriving. Secure slip-over torque mechanism with quick clockwise/counterclockwise setting and five selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm) and one fixed position (Torque Lock) for unlimited loosening and tightening moments.

Quick-release holder for high robustness. Suitable for bits with 1/4" external hexagon drive. 15 tough bits (89 mm length).

- Torque screwdriver with quick torque adjustment
- Quick and easy setting of the selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm)
- Suitable for docking with the Wera 2go system

7515/16 Kraftform Safe-Torque Speed Universal 1





Code	EAN 4013288			
05**075851**001	*228338*			1
			7515 1x 1/4"x2,0 Nm/3,0 Nm/4,0 Nm/ 5,0 Nm/6,0 Nm x147,5	
			851/4 Z 1x PH 2x89	
			867/4 Z TORX® BO 1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89	
			867/4 IP TORX PLUS® 1x 10 IPx89; 1x 15 IPx89; 1x 20 IPx89; 1x 25 IPx89; 1x 30 IPx89	
			840/4 Z 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1]	

[1] Hexagonal blade

7515/7 Kraftform Safe-Torque Speed Bicycle 1

7-piece tool set. For professional screwdriving/professional fine adjustment AND for torque-controlled screwdriving. Secure slip-over torque mechanism with quick clockwise/counterclockwise setting and five selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm) and one fixed position (Torque Lock) for unlimited loosening and tightening moments. Quick-release holder for high robustness. Ideal for bike operations. Suitable for bits with 1/4" external hexagon drive.

6 tough bits (50 mm length), profile and size of the bits are easily recognized thanks to the Wera Take it easy Tool finder with its colour codes and labels.

- Bicycle tool set
- Torque screwdriver with quick torque adjustment
- Quick and easy setting of the selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm)
- Take it easy tool finder: colour coding according to profile and size
- Suitable for docking with the Wera 2go system

7515/7 Kraftform Safe-Torque Speed Bicycle 1



Code	EAN 4013288			
05**075850**001	*228321*			1
			7515 1x 1/4"x2,0 Nm/3,0 Nm/4,0 Nm/ 5,0 Nm/6,0 Nm x147,5	
			867/4 TORX® BTZ 1x TX 10x50; 1x TX 25x50	
			840/4 BTZ 1x 2,5x50; 1x 3,0x50; 1x 4,0x50; 1x 5,0x50	

300 Hex Torque-indicator

Wera torque screwdriver with fixed torque for hexagon socket screws. Tamperproof and with a slim hex blade. Unlimited torque for loosening seized screws.

Multi-component Kraftform handle for pleasant, ergonomic working that prevents blisters and calluses. Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

Comes with Hex-Plus profile which avoids any rounding of the screw head. The Black Point tip offers high corrosion protection and an exact fit.

300 Hex Torque-indicator



Code	EAN 4013288		Nm	ft. lb.	mm	mm	mm	
05**027910**001	*096425*	2,0	1,4	1,0	4	3,5	65	1
05**027911**001	*096432*	2,5	2,0	1,5	4	3,8	65	1
05**027912**001	*096449*	3,0	3,0	2,2	4	3,8	65	1

300 Hex Torque-indicator, pistol handle



Code	EAN 4013288		Nm	ft.lb.	mm	mm	mm	
05**027913**001	*099150*	4,0	5,0	3,7	160	100	65	1

300 TX TORX® Torque-indicator

- For recessed TORX® screws

300 TX TORX® Torque-indicator



Code	EAN 4013288		Nm	ft. lb.	mm	mm	mm	
05**027930**001	*093325*	TX 6	0,6	0,4	4	3,5	65	1
05**027931**001	*093332*	TX 7	0,9	0,7	4	3,5	65	1
05**027932**001	*093349*	TX 8	1,2	0,9	4	3,5	65	1
05**027933**001	*093356*	TX 9	1,4	1,0	4	3,5	65	1
05**027934**001	*093370*	TX 10	2,0	1,5	4	3,8	65	1
05**027935**001	*093363*	TX 15	3,0	2,2	4	3,8	65	1

300 TX TORX® Torque-indicator, pistol handle



	EAN							
Code	4013288		Nm	ft.lb.	mm	mm	mm	
05**027936**001	*099143*	TX 20	5,0	3,7	160	100	65	1

300 IP TORX PLUS® Torque-indicator

- For TORX PLUS® screws

300 IP TORX PLUS® Torque-indicator



	EAN							
Code	4013288		Nm	ft. lb.	mm	mm	mm	
05**028040**001	*093387*	6 IP	0,6	0,4	4	3,5	65	1
05**028041**001	*093394*	7 IP	0,9	0,7	4	3,5	65	1
05**028042**001	*093431*	8 IP	1,2	0,9	4	3,5	65	1
05**028043**001	*093400*	9 IP	1,4	1,0	4	3,5	65	1
05**028044**001	*093417*	10 IP	2,0	1,5	4	3,8	65	1
05**028045**001	*093424*	15 IP	3,0	2,2	4	3,8	65	1

300 IP TORX PLUS® Torque-indicator, pistol handle



	EAN							
Code	4013288		Nm	ft.lb.	mm	mm	mm	
05**028046**001	*099136*	20 IP	5,0	3,7	160	100	65	1

400 Hex Torque-indicator

Wera torque indicator with fixed torque for hexagon sockets. Tamper proof. The robust slip clutch guarantees a clearly audible and tactile trigger signal when the set torque value is reached, and it is therefore impossible to apply any further torque.

The loosening torque is significantly higher than the set tightening torque, therefore no additional tools are needed for loosening screw connections. The shape of the handle fills the whole hand well and the fingers lie in the softly rounded recessed grips. This ensures optimal, ergonomic power transmission.

400 Hex Torque-indicator



	EAN							
Code	4013288		Nm	mm	mm	mm		
05**005080**001	*208835*	4,0	4,0	60	48	100	2 3/8"	1
05**005081**001	*208842*	5,0	5,0	60	48	100	2 3/8"	1

400 TX Torque-indicator

- For recessed TORX® screws

400 TX Torque-indicator



	EAN							
Code	4013288		Nm	mm	mm	mm		
05**005090**001	*208811*	TX 20	4,0	60	48	100	2 3/8"	1
05**005091**001	*208828*	TX 25	5,0	60	48	100	2 3/8"	1

Safe-Torque A 1 torque wrench with 1/4" square head drive, 2-12 Nm

Torque wrench with slide-over mechanism. Once the set torque has been reached, the tool cannot be overtightened, so that excessive torque cannot be applied. Setting range of 2 to 12 Nm for controlled clockwise and counterclockwise torque operation.

Easy setting and saving of the default value: The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value. With Torque Lock function for use as a standard ratchet without torque function.

Max. breaking torque of the ¼" square head as per DIN 3122. The return angle of only 5° allows the ratchet to be used even in confined spaces and therefore also for applications with angles of rotation.

- Slip-over release mechanism - the set torque can never be overtightened
- Torque Lock function: The torque function can be deactivated and the tool can then be used as a standard ratchet with high loosening moments and for applications with defined angles of rotation
- For controlled clockwise and counterclockwise torque operation – tightening and loosening with or without torque
- Easy setting and saving of the desired torque value with audible and tactile clicks when reaching the scale values
- Comfortable working thanks to a small release angle of only 30°
- 1/4" square head drive with socket locking

Safe-Torque A 1 torque wrench with 1/4" square head drive, 2-12 Nm







	EAN															
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05**075800**001	*223012*	1/4"	2-12	0,10	2-9	244	94	38,5	31,6	23,7	9 39/64"	3 45/64"	1 33/64"	1 15/64"	15/16"	1

Safe-Torque A 2 torque wrench with 1/4" hexagon drive, 2-12 Nm

- 1/4" hexagon drive for the use of 1/4" bits

Safe-Torque A 2 torque wrench with 1/4" hexagon drive, 2-12 Nm







	EAN															
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05**075801**001	*223036*	1/4"	2-12	0,10	2-9	244	94	38,5	31,6	23,7	9 39/64"	3 45/64"	1 33/64"	1 15/64"	15/16"	1

Safe-Torque A 1 Set 1, 1/4" square head drive, 2-12 Nm

10-piece 1/4" torque wrench set in a robust textile box; torque wrench with slide-over mechanism. Once the set torque has been reached, the tool cannot be overtightened, so that excessive torque cannot be applied.

Setting range of 2 to 12 Nm for controlled clockwise and counterclockwise torque operation. Easy setting and saving of the default value: The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value.

The Torque Lock function allows use as a standard ratchet without torque function. Thus also usable for applications with angles of rotation. Max. breaking torque of the 1/4" square head as per DIN 3122. The return angle of only 5° allows the ratchet to be used even in confined spaces.

Included are: Safe-Torque A 1 torque wrench, 1/4" square head, 2-12 Nm, 8 sockets with 1/4" drive and one short extension.

- 1/4" square head drive with socket locking

Safe-Torque A 1 Imperial Set 1, 1/4" square head drive, 2-12 Nm

10-piece 1/4" torque wrench set in a robust textile box; torque wrench with slide-over mechanism. Once the set torque has been reached, the tool cannot be overtightened, so that excessive torque cannot be applied.

Setting range of 2 to 12 Nm for controlled clockwise and counterclockwise torque operation. Easy setting and saving of the default value: The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value.

The Torque Lock function allows use as a standard ratchet without torque function. Thus also usable for applications with angles of rotation. Max. breaking torque of the ¼" square head as per DIN 3122. The return angle of only 5° allows the ratchet to be used even in confined spaces.

Included are: Safe-Torque A 1 torque wrench, 1/4" square head, 2-12 Nm, 8 sockets with 1/4" drive and one short extension.

- 1/4" square head drive with socket locking

Safe-Torque A 1 Set 1, 1/4" square head drive, 2-12 Nm



Code	EAN 4013288			
05**075830**001	*223005*			1
			Safe-Torque A 1 1x 1/4", 2-12 Nm	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			8794 SA 1x 1/4"x75,0	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

Safe-Torque A 1 Imperial Set 1, 1/4" square head drive, 2-12 Nm



Code	EAN 4013288			
05**075831**001	*223074*			1
			Safe-Torque A 1 1x 1/4", 2-12 Nm	
			8790 HMA 1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0	
			8794 SA 1x 1/4"x75,0	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

Safe-Torque A 1 SHK Set 1, 1/4" square head, 2-12 Nm

20-piece set in a robust textile box, especially for HVAC applications. One Safe-Torque A 1 torque wrench with 1/4" square head drive, 2-12 Nm, with slide-over mechanism. Once the set torque has been reached, the tool cannot be overtightened, so that excessive torque cannot be applied. Setting range of 2 to 12 Nm for controlled clockwise and counterclockwise torque operation. Easy setting and saving of the default value: The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value.

With Torque Lock function for use as a standard ratchet without torque function and thus also usable for applications with angles of rotation. Max. breaking torque of the ¼" square head as per DIN 3122. The return angle of only 5° allows the ratchet to be used even in confined spaces.

Included are: Safe-Torque A 1 torque wrench, 1/4" square head, 2-12 Nm, 8 sockets with 1/4" drive, 9 bit sockets (hexagonal socket, TORX®) with 1/4" drive, one short extension.

- For operations in plumbing, heating and air conditioning, especially for installing shower cubicles and for assembly and maintenance of gas boilers and condensing boilers

Safe-Torque A 1 SHK Set 1, 1/4" square head, 2-12 Nm



Code	EAN 4013288			
05**136073**001	*228376*			1
			Safe-Torque A 1 1x 1/4", 2-12 Nm	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			8767 A HF 1x TX 15x28,0; 1x TX 20x28,0; 1x TX 25x28,0; 1x TX 30x28,0	
			8740 A HF 1x 3,0x28,0; 1x 4,0x28,0; 1x 5,0x28,0; 1x 6,0x28,0; 1x 8,0x28,0	
			Belt A 0/9 1x 39,0x238,0	
			8794 SA 1x 1/4"x75,0	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

Safe-Torque A 2 Set 1, 1/4" hexagonal, 2-12 Nm

23-piece set; in surface-friendly, compact and extremely robust textile box. Small size and low weight for better mobility.

1 Safe-Torque A 2 torque wrench with 1/4" hexagonal drive, measuring range 2-12 Nm; for controlled clockwise and counterclockwise torque operation; tightening and loosening with or without torque, disengageable torque function (Torque Lock function); 72 teeth; low return angle of 5°; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached, slip-over release mechanism when the set torque is reached; ergonomic 2-component handle; 9 Zyklop sockets, 12 bits (1/4", 50 mm long), one connector for sockets (1/4" external hexagon to 1/4" external square head).

- 1/4" hexagon drive for the use of 1/4" bits
- Use of 1/4" sockets also possible with the Wera adaptor 870/1

Safe-Torque A 2 Set 1, 1/4" hexagonal, 2-12 Nm



Code	EAN 4013288			
05**075832**001	*223043*			1
			Safe-Torque A 2 1x 1/4", 2-12 Nm	
			8790 HMA 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			870/1 1x 1/4"x25 [1]	
			851/4 Z 1x PH 2x50	
			867/4 Z TORX® 1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50	
			840/4 Z 1x 2,5x50; 1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50 [2]	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

[1] With friction ball; for manual nut spinner sockets
[2] Hexagonal blade

Click-Torque A 5 torque wrench with reversible ratchet

Click-Torque wrench in the unmistakable, robust Wera design with high accuracy as per DIN EN ISO 6789-1: 2017-07.
Easy setting and saving of the default value.

The audible and tactile clicks on reaching the scale values also facilitate the safe setting of the desired torque value.
The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque is reached.

For right-hand use (clockwise torque-control) and with 45-tooth reversible ratchet mechanism.

- With 1/4" square drive, reversible ratchet, 45 teeth
- Measuring range: 2.5-25 Nm; precise to +/- 4% as per DIN EN ISO 6789-1:2017-07

Click-Torque A 5 torque wrench with reversible ratchet, 2.5-25 Nm





	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075604**001	*193179*	1/4"	2,5-25	0,10	1-18	290	121	42	25	11,5	11 27/64"	4 49/64"	1 21/32"	1"	7/16"		1

Click-Torque A 6 torque wrench with reversible ratchet, 2.5-25 Nm

- With ¼" hex drive, reversible ratchet, 45 teeth
- Measuring range: 2.5-25 Nm; Precise to +/- 4% as per DIN EN ISO 6789-1:2017-07

Click-Torque A 6 torque wrench with reversible ratchet, 2.5-25 Nm





	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075605**001	*193186*	1/4"	2,5-25	0,10	1-18	290	121	42	25	11,5	11 27/64"	4 49/64"	1 21/32"	1"	7/16"		1

Click-Torque A 6 Set 1

Click torque wrench in the unmistakable Wera design.
Very robust design with high accuracy as per
DIN EN ISO 6789-1: 2017-07.

Easy setting and saving of the default value. The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value.

The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque is reached.

Provides clockwise torque-control and 45-tooth ratchet mechanism. The Wera click torque wrench is accompanied with various accessories in a compact set arrangement.

Included are: Click-Torque A 6 ¼" from 2.5 to 25 Nm, 6 sockets with ¼" drive, 11 Hex-Plus hexagon bits, Phillips head bits and TORX® bits, plus an extension and socket adaptor.

Click-Torque A 6 Set 1, 2.5-25 Nm







Code	EAN 4013288			
05**130110**001	*205643*			1
			Click-Torque A 6 1x ¼", 2,5-25 Nm	
			851/4 TZ 1x PH 2x50	
			867/4 Z TORX® 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50; 1x TX 40x50	
			840/4 Z 1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50 [1]	
			870/1 1x ¼"x25 [2]	
			8794 SA 1x ¼"x75,0	
			8790 HMA 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

[1] Hexagonal blade
[2] With friction ball; for manual nut spinner sockets

Bicycle Set Torque 1, 2.5-25 Nm

The 16-piece set from the screwdriving tool specialist Wera solves the most important screwdriving problems associated with bicycles, with reliable control of applied torque to protect sensitive components. With a click-torque wrench in the unmistakable Wera design.

Very robust design with high accuracy as per DIN EN ISO 6789-1: 2017-07. Easy setting and saving of the default values. The audible and tactile snapping on reaching the scale values also facilitates the safe setting of the desired torque values.

The robust release mechanism guarantees a clearly audible and tactile trigger signal when the set torque is reached.

For clockwise torque-control and with a reversible 45-tooth ratchet. The torque wrench is extremely space-saving and supplemented with accessories that are suitable for the torque range and adapted to the most common screwed connections on bicycles; in a robust, surface-friendly textile box.

Included are: Click Torque A 5, 1/4 „, 2.5 - 25 Nm, 4 sockets with 1/4" drive, 7 Hex Plus hexagon bit sockets and 4 TORX® bit sockets. Sockets and bit sockets with Take it easy tool finder with colour coding by size - for easy and quick location of the required tool.

Bit sockets with holding function for extra comfortable screwdriving without the screw falling off the tool. Incredibly compact arrangement for a lot of tools in a small space.

Textile box with very high robustness and longevity. Additional surface protection through the textile outer material.

Low weight and volume for easier mobility. Bit sockets with all the benefits of Wera bit technology such as fitting accuracy, wear resistance and concentric run-out properties.

Bicycle Set Torque 1, 2.5-25 Nm



Code	EAN 4013288			
05**004180**001	*207685*			1
			Click-Torque A 5 1x 1/4", 2,5-25 Nm	
		◉	**8790 HMA** 1x 10,0x23,0; 1x 13,0x23,0; 1x 14,0x23,0; 1x 15,0x23,0	
		✪	**8767 A** 1x TX 10x28,0; 1x TX 20x28,0; 1x TX 25x28,0; 1x TX 30x28,0	
		○	**8740 A HF** 1x 3,0x28,0; 1x 4,0x28,0; 1x 5,0x28,0; 1x 5,0x100,0; 1x 6,0x28,0; 1x 6,0x100,0; 1x 8,0x28,0	
			Hook and Loop Fastener Strip 240 1x 50,0x240,0	

Click-Torque B 1 torque wrench with reversible ratchet, 10-50 Nm

- With 3/8" square drive, reversible ratchet, 45 teeth
- Measuring range: 10-50 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque B 1 torque wrench with reversible ratchet, 10-50 Nm



	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075610**001	*193193*	3/8"	10-50	0,25	8-36	360	140	47	35	16,5	14 11/64"	5 33/64"	1 27/32"	1 3/8"	5/8"		1

Click-Torque B 2 torque wrench with reversible ratchet, 20-100 Nm

- With 3/8" square drive, reversible ratchet, 45 teeth
- Measuring range: 20-100 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque B 2 torque wrench with reversible ratchet, 20-100 Nm



	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075611**001	*193209*	3/8"	20-100	0,5	15-73	405	140	47	43	18,5	15 15/16"	5 33/64"	1 27/32"	1 11/16"	45/64"		1

Click-Torque C 1 torque wrench with reversible ratchet, 10-50 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 10-50 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque C 1 torque wrench with reversible ratchet, 10-50 Nm





	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075620**001	*193216*	1/2"	10-50	0,25	8-36	360	140	47	35	16,5	14 11/64"	5 33/64"	1 27/32"	1 3/8"	5/8"		1

Click-Torque C 2 torque wrench with reversible ratchet, 20-100 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 20-100 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque C 2 torque wrench with reversible ratchet, 20-100 Nm






	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075621**001	*193223*	1/2"	20-100	0,5	15-73	405	140	47	43	18,5	15 15/16"	5 33/64"	1 27/32"	1 11/16"	45/64"		1

Click-Torque C 3 torque wrench with reversible ratchet, 40-200 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 40-200 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque C 3 torque wrench with reversible ratchet, 40-200 Nm







	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075622**001	*193230*	1/2"	40-200	1,0	30-146	510	140	47	43	18,5	20 5/64"	5 33/64"	1 27/32"	1 11/16"	45/64"		1

Click-Torque C 3 Set 1, 40-200 Nm

Click torque wrench set in the unmistakable Wera design. Very robust design with high accuracy as per DIN EN ISO 6789-1: 2017-07.

Easy setting and saving of the default values. The audible and tactile snapping on reaching the scale values also facilitates the safe setting of the desired torque values.

The robust release mechanism guarantees a clearly audible and tactile trigger signal when the set torque is reached. For clockwise torque-control and with reversible 45-tooth ratchet.

Torque wrenches and torque-compatible accessories are packed in an extremely space-saving, robust, surface-friendly textile box.

Contains: Click Torque C 3, 1/2", 40-200 Nm, 4 sockets with 1/2" drive, 7 hex plus hexagon socket and TORX® bit sockets plus extension.

Click-Torque C 3 Set 1, 40-200 Nm



Code	EAN 4013288			
05**075680**001	*207609*			1
			Click-Torque C 3 1x 1/2", 40-200 Nm	
			8790 HMC 1x 10,0x37,0; 1x 13,0x37,0; 1x 17,0x37,0; 1x 19,0x37,0	
			8767 C HF 1x TX 30x60,0; 1x TX 40x60,0; 1x TX 45x60,0; 1x TX 50x60,0	
			8740 C HF 1x 6,0x60,0; 1x 8,0x60,0; 1x 10,0x60,0	
			8794 SC 1x 1/2"x125,0	

Click-Torque C 3 set 2 for cement screwdriving, 40-200 Nm

11-piece set for fitting security-relevant cement screws with defined torque moments as per screw manufacturer instructions.

With Take it easy tool finder with colour coding and size stamping - for easy and fast location of the required tool.

- For fitting security-relevant cement screws with defined torque moments as per screw manufacturer instructions
- 8790 C Impaktor socket wrench inserts for the application with compressed air or electrically driven impact wrenches with 12.5 mm = 1/2" drive (13 mm to 21 mm)
- Click-Torque C 3 torque wrench with reversible ratchet (measuring range: 40-200 Nm; precision ± 3 % as per DIN EN ISO 6789-1:2017-07)
- 11-piece set in premium textile tool box

Click-Torque C 3 set 2 for cement screwdriving, 40-200 Nm



Code	EAN 4013288			
05**075681**001	*217561*			1
			Click-Torque C 3 1x 1/2", 40-200 Nm	
			8790 C Impaktor 1x 13,0x38,0; 1x 14,0x38,0; 1x 15,0x38,0; 1x 16,0x38,0; 1x 17,0x38,0; 1x 18,0x38,0; 1x 19,0x38,0; 1x 20,0x38,0; 1x 21,0x38,0	
			8894 SC 1x 1/2"x125,0	

Click-Torque C 4 torque wrench with reversible ratchet, 60-300 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 60-300 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque C 4 torque wrench with reversible ratchet, 60-300 Nm



	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075623**001	*193247*	1/2"	60-300	1,0	45-220	595	140	47	43	18,5	23 27/64"	5 33/64"	1 27/32"	1 11/16"	45/64"		1

Click-Torque C 5 torque wrench with reversible ratchet, 80-400 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 80-400 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque C 5 torque wrench with reversible ratchet, 80-400 Nm



	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075624**001	*193254*	1/2"	80-400	1,0	60-295	680	140	47	43	18,5	26 49/64"	5 33/64"	1 27/32"	1 11/16"	45/64"		1

Click-Torque E 1 torque wrench with reversible ratchet, 200-1000 Nm

- With 3/4" square drive, reversible ratchet, 45 teeth
- Measuring range: 200-1000 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque E 1 torque wrench with reversible ratchet, 200-1000 Nm



	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075630**001	*193261*	3/4"	200-1000	1,00	148-737	1250	140	47	63	30	49 7/32"	5 33/64"	1 27/32"	2 31/64"	1 3/16"		1

Click-Torque Lock Torque wrench with Torque Lock function.

- Torque Lock function: The torque function can be deactivated so that the tool can also be used for loosening
- Extra click: audible and tactile torque setting
- Torque wrench gives an audible and tactile signal

Click-Torque Lock A 5 Torque wrench, adjustable, Torque Lock function, reversible ratchet, clockwise torque operation, 2.5-25 Nm

- With ¼" square head drive
- Reversible ratchet
- 45 teeth
- Measuring range: 2.5-25 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07

Click-Torque Lock A 5 Torque wrench, adjustable, Torque Lock function, reversible ratchet, clockwise torque operation, 2.5-25 Nm





	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075690**001	*234179*	1/4"	2,5-25	0,10	1-18	299	123	42	26	11,75	11 49/64"	4 53/64"	1 41/64"	1 1/64"	29/64"		1

Click-Torque Lock A 6 Torque wrench, adjustable, Torque Lock function, reversible ratchet, clockwise torque operation, 2.5-25 Nm

- With 1/4" bit mounting for controlled clockwise torque operation
- Reversible ratchet
- 45 teeth
- Measuring range: 2.5-25 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07

Click-Torque Lock A 6 Torque wrench, adjustable, Torque Lock function, reversible ratchet, clockwise torque operation, 2.5-25 Nm





	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075691**001	*234186*	1/4"	2,5-25	0,10	1-18	299	123	42	26	11,75	11 49/64"	4 53/64"	1 41/64"	1 1/64"	29/64"		1

Click-Torque Lock C 3 Torque wrench, adjustable, reversible ratchet, Torque Lock function, 40-200 Nm

- With 1/2" square head drive
- Reversible ratchet
- 45 teeth
- Measuring range: 40-200 Nm; precision ± 3 % as per DIN EN ISO 6789-1:2017-07

Click-Torque Lock C 3 Torque wrench, adjustable, reversible ratchet, Torque Lock function, 40-200 Nm





	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075692**001	*234193*	1/2"	40-200	1,0	30-146	512	140	47	43	18,4	20 5/32"	5 1/2"	1 27/32"	1 11/16"	23/32"		1

Click-Torque Push R/L adjustable torque wrenches for clockwise and anti-clockwise torque-control

Click torque wrench in the unmistakable Wera design. For clockwise and anti-clockwise torque-control. Very robust design with high accuracy as per DIN EN ISO 6789-1: 2017-07. Easy setting and saving of the default value. The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value. The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque is reached.

With captive 3/4" square head insert to change direction. 1/2" square head drive with socket locking.

- For clockwise and anti-clockwise torque-control thanks to the smooth reversing of the captive square head insert
- Measuring range: 20-100 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- 45 teeth and 1/2" square head drive with socket locking
- Easy setting and saving of the desired torque value with audible and tactile clicks when reaching the scale values
- Audible and tactile release mechanism when the set torque value is reached
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque C 2 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 20-100 Nm





	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075625**001	*218926*	1/2"	20-100	0,5	15-73	405	140	47	43	18,5	15 15/16"	5 33/64"	1 27/32"	1 11/16"	45/64"		1

Click-Torque C 3 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 40-200 Nm

- Measuring range: 40-200 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- For clockwise and anti-clockwise torque-control thanks to the smooth reversing of the captive square head insert
- 45 teeth and 1/2" square head drive with socket locking
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque C 3 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 40-200 Nm



	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075626**001	*218933*	1/2"	40-200	1,0	30-146	510	140	47	43	18,5	20 5/64"	5 33/64"	1 27/32"	1 11/16"	45/64"		1

Click-Torque E 1 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 200-1000 Nm

- For clockwise and anti-clockwise torque-control thanks to smooth reversing of the captive square head insert
- Measuring range: 200-1000 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- 45 teeth and 3/4" square head drive
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque E 1 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 200-1000 Nm



	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075631**001	*219053*	3/4"	200-1000	1,0	148-737	1250	140	47	63	30	49 7/32"	5 33/64"	1 27/32"	2 31/64"	1 3/16"		1

Click-Torque Lock Torque wrench with Torque Lock function.

- Torque Lock function: The torque function can be deactivated so that the tool can also be used for loosening
- Extra click: audible and tactile torque setting
- Torque wrench gives an audible and tactile signal

Click-Torque Lock A 5 R/L Torque wrench, adjustable, Torque Lock function, square head insert (1/4"), clockwise/ counterclockwise torque operation, 2,5-25 Nm

- For clockwise and counterclockwise operation
- With ¼" square head drive
- Reversible ratchet
- 45 teeth
- Measuring range: 2.5-25 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07

Click-Torque Lock A 5 R/L Torque wrench, adjustable, Torque Lock function, square head insert (1/4"), clockwise/ counterclockwise torque operation, 2,5-25 Nm







	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075693**001 [1]	*233646*	1/4"	2,5-25	0,10	1-18	299	123	42	26	11,75	11 49/64"	4 53/64"	1 41/64"	1 1/64"	29/64"		1

[1] Available from September 2025

Click-Torque Lock A 6 R/L Torque wrench, adjustable, Torque Lock function, continuous bit mounting (1/4"), 2.5-25 Nm

- For clockwise and counterclockwise operation
- With 1/4" bit mounting for controlled clockwise torque operation
- Reversible ratchet
- 45 teeth
- Measuring range: 2.5-25 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07

Click-Torque Lock A 6 R/L Torque wrench, adjustable, Torque Lock function, continuous bit mounting (1/4"), 2,5-25 Nm







	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075694**001 [1]	*233653*	1/4"	2,5-25	0,10	1-18	299	123	42	26	11,75	11 49/64"	4 53/64"	1 41/64"	1 1/64"	29/64"		1

[1] Available from September 2025

Click-Torque Lock C 3 R/L Torque wrench, adjustable, Torque function, square head insert (1/2"), clockwise/counterclockwise torque operation, 40-200 Nm

- For clockwise and counterclockwise operation
- With 1/2" square head drive
- Reversible ratchet
- 45 teeth
- Measuring range: 40-200 Nm; precision ± 3 % as per DIN EN ISO 6789-1:2017-07

Click-Torque Lock C 3 R/L Torque wrench, adjustable, Torque function, square head insert (1/2"), clockwise/counterclockwise torque operation, 40-200 Nm



	EAN																
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm							
05**075695**001 [1]	*233660*	1/2"	40-200	1,0	30-146	512	140	47	43	18,4	20 5/32"	5 1/2"	1 27/32"	1 11/16"	23/32"		1

[1] Available from September 2025

Click-Torque X 1 torque wrench for insert tools, 2.5-25 Nm

Click-Torque wrench in the unmistakable, robust Wera design with high accuracy as per DIN EN ISO 6789-1: 2017-07.
Easy setting and saving of the default value.

The audible and tactile clicks on reaching the scale values also facilitate the safe setting of the desired torque value.
The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque is reached.
For right-hand and left-hand use and with 9x12mm insert square for the insertion of insert tools.

- For 9x12 mm interchangeable insert tools
- Measuring range: 2.5-25 Nm; Precise to +/- 4% as per DIN EN ISO 6789-1:2017-07

Click-Torque X 1 torque wrench for insert tools, 2.5-25 Nm



	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075651**001	*193773*	9x12	2,5-25	0,10	1-18	292	17,5	240,0	121	42	24	20	11 9/64"	4 49/64"	1 21/32"	15/16"	1

[1] S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque X 2 torque wrench for insert tools, 10-50 Nm

- For 9x12 mm interchangeable insert tools
- Measuring range: 10-50 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque X 2 torque wrench for insert tools, 10-50 Nm



	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075652**001	*193797*	9x12	10-50	0,25	8-36	338	17,5	285,0	140	47	29	20	13 5/16"	5 33/64"	1 27/32"	1 9/64"	1

*) S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque X 3 torque wrench for insert tools, 20-100 Nm

- For 9x12 mm interchangeable insert tools
- Measuring range: 20-100 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque X 3 torque wrench for insert tools, 20-100 Nm



	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
07**5653**	*193780*	9x12	20-100	0,5	15-73	390	17,5	329,0	140	47	29	20	14 41/64"	5 33/64"	1 27/32"	1 9/64"	1

*) S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque X 4 torque wrench for insert tools, 40-200 Nm

- For 14x18 mm interchangeable insert tools
- Measuring range: 40-200 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque X 4 torque wrench for insert tools, 40-200 Nm



	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075654**001	*193803*	14x18	40-200	1,0	30-146	487	25,5	435,0	140	47	32	26	18 57/64"	5 33/64"	1 27/32"	1 17/64"	1

*) S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque X 5 torque wrench for insert tools, 60-300 Nm

- For 14x18 mm interchangeable insert tools
- Measuring range: 60-300 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque X 5 torque wrench for insert tools, 60-300 Nm



	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075655**001	*193810*	14x18	60-300	1,0	45-220	578	25,5	525,0	140	47	32	26	22 7/16"	5 33/64"	1 27/32"	1 17/64"	1

*) S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque X 6 torque wrench for insert tools, 80-400 Nm

- For 14x18 mm interchangeable insert tools
- Measuring range: 80-400 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque X 6 torque wrench for insert tools, 80-400 Nm



	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075656**001	*193827*	14x18	80-400	1,0	60-295	665	25,5	615,0	140	47	32	26	25 25/32"	5 33/64"	1 27/32"	1 17/64"	1

*) S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque X 7 torque wrench for insert tools, 10-100 Nm

- For 14x18 mm interchangeable insert tools
- Measuring range: 10-100 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided. Also serves as “anti-roll protection”
- The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used

Click-Torque X 7 torque wrench for insert tools, 10-100 Nm









	EAN						S_k	l_k										
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm						
05**075657**001	*229335*	14x18	10-100	0,5	8-73	395	25,5	343,0	140	47	29	20	14 $^{41}/_{64}$"	5 $^{33}/_{64}$"	1 $^{27}/_{32}$"	1 $^{9}/_{64}$"	1

*) Sk = Actual dimension of the test attachment; lk = Distance from the force application point to the test device axis

9530 Torque wrench set for heat pumps/air conditioning

4-piece Click-Torque torque wrench set with three self-setting exchangeable Joker insert spanners. For the proper tightening of screw connections when installing and repairing refrigeration and air conditioning systems as well as heat pumps. Click torque wrench in the distinctive Wera design.

Very robust design with high accuracy as per DIN EN ISO 6789-1:2017-07. Easy setting and saving of the default value. The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value. The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque value is reached. For clockwise and anti-clockwise torque-control and with 14x18 mm square head insert for mounting corresponding insert tools.

With its continuous and parallel jaws, the three self-setting Joker 7880 insert spanners replace several single spanner sizes.

The required size is automatically and continuously set when attaching the tool to the hexagon bolt or screw. The ratchet feature ensures fast and consistent screwdriving without removing the tool. By using the corner-width rectangular prisms, a return angle of only 30° can be achieved.

- Set for the proper tightening of screw connections when installing and repairing refrigeration and air conditioning systems as well as heat pumps
- Click-Torque X 7 torque wrench with mounting for exchangeable insert tools 14x18 mm
- Measuring range: 10-100 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07
- The adjustable 7880 Joker covers all metric and imperial dimensions in the respective field of application
- Automatic and continuous gripping of the hexagon screw or bolt
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used

9530 Torque wrench set for heat pumps/air conditioning



Code	EAN 4013288			
05**136076**001	*228987*			1
			Click-Torque X 7 1x 14x18, 10-100 Nm	
			7880 Joker XXL 1x 14x18x24-32x($^{15}/_{16}$"-1 $^{1}/_{4}$")x113,5	
			7880 Joker XL 1x 14x18x19-24x($^{3}/_{4}$"-$^{15}/_{16}$")x95,0	
			7880 Joker L 1x 14x18x16-19x($^{5}/_{8}$"-$^{3}/_{4}$")x85,5	

Click-Torque XP 1 pre-set adjustable torque wrench for insert tools, 2.5-25 Nm, 2.5 Nm

Torque wrench with pre-set torque value for all applications where the same torque and repeat accuracy is required.
The torque value can be changed within the metered range.

The robust release mechanism guarantees a clearly audible and tactile trigger signal when the set torque value is reached. Square socket for interchangeable plug-in tools for clockwise and anti-clockwise torque-control. A presetting which deviates from this value to a desired torque value within the specified metered range is possible on request.

- With square socket (9x12 mm) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control
- Pre-set click torque wrench in unmistakable Wera design
- Measuring range: 2.5-25 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- Pre-set torque values can be changed within the metered range in the test laboratory

Click-Torque XP 1 pre-set adjustable torque wrench for insert tools, 2.5-25 Nm, 2.5 Nm





	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075670**001	*206169*	9x12	2,5	2,5-25	2-18	217	17,5	180,0	137	35	24	20	8 35/64"	5 25/64"	1 3/8"	15/16"	1
05**075670**010 [1]	*206206*	9x12	2,5	2,5-25	2-18	217	17,5	180,0	137	35	24	20	8 35/64"	5 25/64"	1 3/8"	15/16"	1

[1] Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request. The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.
[*] S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque XP 2 pre-set adjustable torque wrench for insert tools, 10-50 Nm, 10 Nm

- With square socket (9x12 mm) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control
- Measuring range: 10-50 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- Pre-set torque values can be changed within the metered range in the test laboratory

Click-Torque XP 2 pre-set adjustable torque wrench for insert tools, 10-50 Nm, 10 Nm





	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075671**001	*206176*	9x12	10,0	10-50	8-36	262	17,5	225,0	137	35	24	20	10 5/16"	5 25/64"	1 3/8"	15/16"	1
05**075671**010 [1]	*206213*	9x12	10,0	10-50	8-36	262	17,5	225,0	137	35	24	20	10 5/16"	5 25/64"	1 3/8"	15/16"	1

[1] Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request. The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.
[*] S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque XP 3 pre-set adjustable torque wrench for insert tools, 15-100 Nm, 15 Nm

- With square socket (9x12 mm) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control
- Measuring range: 15-100 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- Pre-set torque values can be changed within the metered range in the test laboratory

Click-Torque XP 3 pre-set adjustable torque wrench for insert tools, 15-100 Nm, 15 Nm



	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075672**001	*206183*	9x12	15,0	15-100	11-74	332	17,5	296,0	137	35	24	20	13 5/64"	5 25/64"	1 3/8"	15/16"	1
05**075672**010 [1]	*207999*	9x12	15,0	15-100	11-74	332	17,5	296,0	137	35	24	20	13 5/64"	5 25/64"	1 3/8"	15/16"	1

[1] Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request. The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.
[*] S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

Click-Torque XP 4 pre-set adjustable torque wrench for insert tools, 20-250 Nm, 20 Nm

- With square socket (14 x18) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control
- Measuring range: 20-250 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- Pre-set torque values can be changed within the metered range in the test laboratory
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

Click-Torque XP 4 pre-set adjustable torque wrench for insert tools, 20-250 Nm, 20 Nm



	EAN						S_k	l_k									
Code	4013288		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm	mm	mm					
05**075673**001	*206190*	14x18	20,0	20-250	15-184	457	25,5	430,0	145	41	32	26	17 63/64"	5 45/64"	1 39/64"	1 17/64"	1
05**075673**010 [1]	*206220*	14x18	20,0	20-250	15-184	457	25,5	430,0	145	41	32	26	17 63/64"	5 45/64"	1 39/64"	1 17/64"	1

[1] Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request. The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.
[*] S_k = Depth gauge of test attachment to pivot point; l_k = Length of holding position to torque measurement point

NEW

Simple and error-free determination of the torque value

The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used. Simply scan with your smartphone and tablet (if available, both QR codes: Torque wrench and insert tool).

A website opens automatically which recognizes the scanned tools (no app needed!). Then enter the required torque value; the corrected value is determined automatically. No need to use formulas/calculations.



www.wera.de/torque-advisor

7870 Joker Self-setting insert spanner, 9x12 mm

- Square head insert tool 9x12 mm
- For torque wrenches from the Click-Torque X series with 9x12 mm mounting
- The adjustable 7870 Joker covers all metric and imperial dimensions in the respective field of application
- With mechanical ratchet functionality for fast and consistent screwdriving without removing the spanner
- Return angle of only 30° when using the corner-width rectangular prisms in the jaw
- The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used

7870 Joker S Self-setting insert spanner for wrench sizes 10-13 mm, 9x12 mm

RATCHETING ACTION · SELF ADJUSTING · SECURE SELF GRIPPING





	EAN	□								
Code	4013288	mm	mm	mm	mm				mm	
050020175001	*232953*	9x12	10-13	10,0 11,0 12,0 13,0	32,2 33,6 34,3 34,4	$^{7}/_{16}$"-$^{1}/_{2}$"	$^{7}/_{16}$" $^{1}/_{2}$"	33,7 34,4	57,7	1

7870 Joker M Self-setting insert spanner for wrench sizes 13-16 mm, 9x12 mm

RATCHETING ACTION · SELF ADJUSTING · SECURE SELF GRIPPING





	EAN	□								
Code	4013288	mm	mm	mm	mm				mm	
050020176001	*233059*	9x12	13-16	13,0 14,0 15,0 16,0	41,2 41,9 42,3 42,4	$^{5}/_{8}$"-$^{3}/_{4}$"	$^{1}/_{2}$" $^{17}/_{32}$" $^{9}/_{16}$" $^{19}/_{32}$" $^{5}/_{8}$"	41,0 41,5 42,2 42,3 42,4	67,7	1

7870 Joker L Self-setting insert spanner for wrench sizes 16-19 mm, 9x12 mm





	EAN	□								
Code	4013288	mm	mm	mm	mm				mm	
05**020177**001	*233066*	9x12	16-19	16,0 17,0 18,0 19,0	47,6 48,3 48,9 49,2	5/8"-3/4"	5/8" 21/32" 11/16" 3/4"	47,6 48,1 48,6 49,2	77,0	1

7880 Joker Self-setting insert spanner, 14x18 mm

- For torque wrenches of the Click-Torque X series with 14x18 mm holder
- The adjustable 7880 Joker covers all metric and imperial dimensions in the respective field of application
- Automatic and continuous gripping of the hexagon screw or bolt
- Lever mechanism when gripping avoids slippage and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- Return angle of only 30° through placement in the corner-width rectangular prisms in the open end
- The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used

7880 Joker 3XL Self-setting insert spanner for wrench sizes 32-41 mm, 14x18 mm





	EAN	□								
Code	4013288	mm	mm	mm	mm				mm	
05**020174**001	*233073*	14x18	32-41	32,0 34,0 36,0 41,0	77,0 79,0 80,0 81,5	1 1/4"-1 5/8"	1 1/4" 1 5/16" 1 3/8" 1 7/16" 1 1/2" 1 5/8"	77,0 78,0 79,5 80,5 81,0 81,5	128,1	1

7880 Joker XXL Self-setting insert spanner for wrench sizes 24-32 mm, 14x18 mm



	EAN	□								
Code	4013288	mm	mm		mm	mm		mm	mm	
05**020173**001	*229380*	14x18	24-32	15/16"-1 1/4"	24,0 27,0 30,0 32,0	62,2 68,0 70,2 70,4	15/16" 31/32" 1" 1 1/16" 1 1/8" 1 3/16" 1 1/4"	62,2 63,9 65,4 66,4 69,5 70,1 70,2	113,5	1

7880 Joker XL Self-setting insert spanner for wrench sizes 19-24 mm, 14x18 mm



	EAN	□								
Code	4013288	mm	mm	mm	mm		mm		mm	
05**020172**001	*229366*	14x18	19-24	19,0 20,0 21,0 22,0 24,0	51,6 53,6 55,4 56,7 56,7	3/4" 25/32" 13/16" 7/8" 15/16"	51,6 53,3 54,7 56,7 56,7	3/4"-15/16"	95	1

7880 Joker L Self-setting insert spanner for wrench sizes 16-19 mm, 14x18mm



	EAN	□								
Code	4013288	mm	mm		mm			mm	mm	
05**020171**001	*229359*	14x18	16-19	5/8"-3/4"	16,0 17,0 18,0 19,0	44,6 46,7 48,2 49,1	5/8" 11/16" 3/4"	44,4 47,3 49,1	85,5	1

7770 Open end insert, 9x12 mm

- Square insert tool 9x12 mm
- For torque wrenches of the Click-Torque X series with 9x12 mm holder
- Application: Hexagon screw heads or nuts
- With safety pin
- The chrome-vanadium steel version makes the plug-in tools suitable for heavy loads

7770 Open end insert, 9x12 mm

Form A

05**078600**001
05**078601**001
05**078602**001
05**078603**001
05**078604**001
05**078605**001



Form B

05**078606**001
05**078607**001
05**078608**001
05**078609**001
05**078610**001
05**078611**001
05**078612**001





	EAN	□							
Code	4013288	mm	mm	mm	mm	mm	mm	mm	
05**078600**001	*196101*	9x12	7	17,5	39,0	22,0	22,0	5,0	1
05**078601**001	*196095*	9x12	8	17,5	39,0	22,0	22,0	5,0	1
05**078602**001	*196088*	9x12	9	17,5	39,0	22,0	22,0	5,0	1
05**078603**001	*196071*	9x12	10	17,5	39,0	22,0	22,0	5,0	1
05**078604**001	*196064*	9x12	11	17,5	39,0	22,0	22,0	5,0	1
05**078605**001	*196057*	9x12	12	17,5	39,0	22,0	22,0	5,0	1
05**078606**001	*196040*	9x12	13	17,5	41,0	24,0	30,0	7,0	1
05**078607**001	*196033*	9x12	14	17,5	41,0	24,0	30,0	7,0	1
05**078608**001	*196026*	9x12	15	17,5	41,0	24,0	30,0	7,0	1
05**078609**001	*196019*	9x12	16	17,5	41,0	24,0	30,0	7,0	1
05**078610**001	*196002*	9x12	17	17,5	41,0	24,0	30,0	7,0	1
05**078611**001	*196118*	9x12	18	17,5	41,0	24,0	30,0	7,0	1
05**078612**001	*196125*	9x12	19	17,5	41,0	24,0	30,0	7,0	1

7780 Open end insert, 14x18 mm

Open end insert, for hexagon screw heads or nuts; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7780 Open end insert, 14x18 mm

Form A

05**078670**001



Form B

05**078671**001
05**078672**001
05**078673**001
05**078674**001
05**078675**001
05**078676**001





Form C

05**078677**001
05**078678**001
05**078679**001
05**078680**001
05**078681**001



Form D

05**078682**001
05**078683**001
05**078684**001
05**078685**001
05**078686**001
05**078687**001



	EAN	□							
Code	4013288	mm	mm	mm	mm	mm	mm	mm	
05**078670**001	*196729*	14x18	13	25,5	56,0	32,0	30,0	7,0	1
05**078671**001	*196736*	14x18	14	25,5	58,0	33,0	32,0	8,0	1
05**078672**001	*196743*	14x18	15	25,5	58,0	33,0	32,0	8,0	1
05**078673**001	*196750*	14x18	16	25,5	58,0	33,0	32,0	9,0	1
05**078674**001	*196767*	14x18	17	25,5	58,0	33,0	32,0	9,0	1
05**078675**001	*196774*	14x18	18	25,5	58,0	33,0	32,0	9,7	1
05**078676**001	*196781*	14x18	19	25,5	58,0	33,0	32,0	9,7	1
05**078677**001	*196798*	14x18	21	25,5	61,0	36,0	52,0	11,0	1
05**078678**001	*196804*	14x18	22	25,5	61,0	36,0	52,0	11,0	1
05**078679**001	*196811*	14x18	24	27,5	61,0	36,0	52,0	12,0	1
05**078680**001	*196828*	14x18	26	30,0	61,0	36,0	52,0	13,0	1
05**078681**001	*196835*	14x18	27	30,0	61,0	36,0	52,0	13,0	1
05**078682**001	*196842*	14x18	29	30,0	61,0	36,0	52,0	14,0	1
05**078683**001	*196859*	14x18	30	30,0	61,0	36,0	52,0	14,0	1
05**078684**001	*196866*	14x18	32	32,5	61,0	36,0	52,0	14,0	1
05**078685**001	*196873*	14x18	36	32,5	61,0	36,0	52,0	15,0	1
05**078686**001	*196880*	14x18	38	32,5	61,0	36,0	52,0	15,0	1
05**078687**001	*196897*	14x18	41	32,5	61,0	36,0	52,0	15,0	1

7771 Ring spanner insert, 9x12 mm

Ring spanner insert, for hexagon screw heads or nuts; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7771 Ring spanner insert, 9x12 mm

Form A

05**078620**001
05**078621**001
05**078622**001
05**078623**001
05**078624**001



Form B

05**078625**001
05**078626**001
05**078627**001
05**078628**001
05**078629**001
05**078630**001
05**078631**001
05**078632**001





Form C

05**078633**001



	EAN	□							
Code	4013288	mm	mm	mm	mm	mm	mm	mm	
05**078620**001	*196163*	9x12	7	17,5	41,0	24,0	22,0	8,0	1
05**078621**001	*196156*	9x12	8	17,5	41,0	24,0	22,0	8,0	1
05**078622**001	*196170*	9x12	9	17,5	41,0	24,0	22,0	8,0	1
05**078623**001	*196187*	9x12	10	17,5	41,0	24,0	22,0	8,0	1
05**078624**001	*196194*	9x12	11	17,5	41,0	24,0	22,0	8,0	1
05**078625**001	*196200*	9x12	12	17,5	44,0	27,0	22,0	11,0	1
05**078626**001	*196217*	9x12	13	17,5	44,0	27,0	22,0	11,0	1
05**078627**001	*196224*	9x12	14	17,5	44,0	27,0	22,0	11,0	1
05**078628**001	*196231*	9x12	15	17,5	44,0	27,0	22,0	11,0	1
05**078629**001	*196248*	9x12	16	17,5	44,0	27,0	22,0	11,0	1
05**078630**001	*196255*	9x12	17	17,5	44,0	27,0	22,0	11,0	1
05**078631**001	*196262*	9x12	18	17,5	44,0	27,0	22,0	11,0	1
05**078632**001	*196279*	9x12	19	17,5	44,0	27,0	22,0	11,0	1
05**078633**001	*196286*	9x12	21	17,5	51,0	34,0	33,0	15,0	1

7781 Ring spanner insert, 14x18 mm

Ring spanner insert, for hexagon screw heads or nuts; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7781 Ring spanner insert, 14x18 mm

Form A

05**078690**001
05**078691**001
05**078692**001



Form B

05**078693**001
05**078694**001
05**078695**001
05**078696**001
05**078697**001
05**078698**001
05**078699**001





Form C

05**078700**001
05**078701**001
05**078702**001
05**078703**001
05**078704**001
05**078705**001



	EAN	□							
Code	4013288	mm	mm	mm	mm	mm	mm	mm	
05**078690**001	*196132*	14x18	13	25,5	62,0	37,0	30,0	11,0	1
05**078691**001	*196576*	14x18	14	25,5	62,0	37,0	30,0	11,0	1
05**078692**001	*196583*	14x18	15	25,5	62,0	37,0	30,0	11,0	1
05**078693**001	*196590*	14x18	16	25,5	64,0	39,0	28,0	12,0	1
05**078694**001	*196606*	14x18	17	25,5	64,0	39,0	28,0	12,0	1
05**078695**001	*196620*	14x18	18	25,5	64,0	39,0	28,0	12,0	1
05**078696**001	*196637*	14x18	19	25,5	64,0	39,0	28,0	12,0	1
05**078697**001	*196644*	14x18	21	25,5	64,0	39,0	28,0	12,0	1
05**078698**001	*196613*	14x18	22	25,5	64,0	39,0	28,0	12,0	1
05**078699**001	*196651*	14x18	24	25,5	64,0	39,0	28,0	12,0	1
05**078700**001	*196668*	14x18	27	25,5	81,0	56,0	53,0	21,0	1
05**078701**001	*196675*	14x18	30	25,5	81,0	56,0	53,0	21,0	1
05**078702**001	*196682*	14x18	32	25,5	81,0	56,0	53,0	21,0	1
05**078703**001	*196699*	14x18	34	28,0	81,0	56,0	53,0	21,0	1
05**078704**001	*196705*	14x18	36	28,0	81,0	56,0	53,0	21,0	1
05**078705**001	*196712*	14x18	41	30,0	81,0	56,0	53,0	21,0	1

7772 A Ratchet insert, reversible, 9x12 mm

Ratchet insert, reversible, for 1/4" square socket wrench inserts and 1/4" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7772 A Ratchet insert, reversible, 9x12 mm







	EAN	□	○						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078635**001	*196347*	9x12	1/4"	17,5	49,0	32,0	28,0	15,0	1

7772 B Ratchet insert, reversible, 9x12 mm

Ratchet insert, reversible, for 3/8" square socket wrench inserts and 3/8" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7772 B Ratchet insert, reversible, 9x12 mm







	EAN	□	○						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078636**001	*196446*	9x12	3/8"	17,5	52,0	35,0	35,0	21,0	1

7772 C Ratchet insert, reversible, 9x12 mm

Ratchet insert, reversible, for 1/2" square socket wrench inserts and 1/2" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7772 C Ratchet insert, reversible, 9x12 mm







	EAN	□	○						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078637**001	*196453*	9x12	1/2"	20,0	58,0	41,0	42,0	23,0	1

7782 C Ratchet insert, reversible, 14x18 mm

Ratchet insert, reversible, for 1/2" square socket wrench inserts and 1/2" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7782 C Ratchet insert, reversible, 14x18 mm





	EAN	□	○						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078707**001	*196552*	14x18	1/2"	20,0	66,0	41,0	42,0	23,0	1

7782 E Ratchet insert, reversible, 14x18 mm

Ratchet insert, reversible, for 3/4" square socket wrench inserts and 3/4" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7782 E Ratchet insert, reversible, 14x18 mm





	EAN	□	○						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078708**001	*196569*	14x18	3/4"	30,0	90,0	65,0	65,0	36,0	1

7773 A Square drive insert, 9x12 mm

Square drive insert, for 1/4" square socket wrench inserts and 1/4" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7773 A Square drive insert, 9x12 mm





	EAN	□	○						
Code	4013288	mm		mm	mm	mm			
05**078200**001	*023742*	9x12	1/4"	17,5	44,0	28,0	21,0	14,0	1

7773 B Square drive insert, 9x12 mm

Square drive insert, for $^{3}/_{8}$" square socket wrench inserts and $^{3}/_{8}$" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7773 B Square drive insert, 9x12 mm





	EAN	□	○						
Code	4013288	mm		mm	mm	mm			
05**078205**001	*023759*	9x12	$^{3}/_{8}$"	17,5	44,0	28,0	21,0	14,0	1

7773 C Square drive insert, 9x12 mm

Square drive insert, for $^{1}/_{2}$" square socket wrench inserts and $^{1}/_{2}$" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7773 C Square drive insert, 9x12 mm





	EAN	□	○						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078210**001	*023766*	9x12	$^{1}/_{2}$"	17,5	44,0	28,0	21,0	14,0	1

7783 C Square drive insert, 14x18 mm

Square drive insert, for $^{1}/_{2}$" square socket wrench inserts and $^{1}/_{2}$" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7783 C Square drive insert, 14x18 mm





	EAN	□	○						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078345**001	*024183*	14x18	$^{1}/_{2}$"	25,5	65,0	40,0	30,0	18,0	1

7783 E Push-through square insert tool, 14x18 mm

Square drive insert, for 3/4" square socket wrench inserts and 3/4" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7783 E Push-through square insert tool, 14x18 mm





	EAN								
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078710**001	*196460*	14x18	3/4"	25,5	70,0	45,0	40,0	25,0	1

7774/1 Bit adapter insert, 1/4", 9x12 mm

Bit adapter insert, 1/4"; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7774/1 Bit adapter insert, 1/4", 9x12 mm





	EAN								
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078640**001	*196316*	9x12	1/4"	17,5	42,0	25,0	22,0	12,5	1

7774/2 Bit adapter insert, 5/16", 9x12 mm

Bit adapter insert, 5/16"; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7774/2 Bit adapter insert, 5/16", 9x12 mm





	EAN								
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078641**001	*196309*	9x12	5/16"	17,5	42,0	25,0	22,0	12,5	1

7774/3 Bit adapter insert, 5/16", 14x18 mm

Bit adapter insert, 5/16"; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7774/3 Bit adapter insert, 5/16", 14x18 mm





	EAN	□	⬢						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078642**001	*196293*	14x18	5/16"	25,5	58,0	33,0	30,0	13,0	1

7775 Open ring spanner insert, 9x12 mm

Open ring spanner insert, for hexagon screw heads or nuts; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7775 Open ring spanner insert, 9x12 mm

Form A

05**078650**001
05**078651**001
05**078652**001
05**078653**001
05**078654**001
05**078655**001



Form B

05**078656**001
05**078657**001
05**078658**001





	EAN	□							
Code	4013288	mm	mm	mm	mm	mm	mm	mm	
05**078650**001	*196330*	9x12	10	17,5	44,0	27,0	22,0	11,0	1
05**078651**001	*196361*	9x12	11	17,5	44,0	27,0	22,0	11,0	1
05**078652**001	*196378*	9x12	12	17,5	44,0	27,0	22,0	11,0	1
05**078653**001	*196385*	9x12	13	17,5	44,0	27,0	22,0	11,0	1
05**078654**001	*196392*	9x12	14	17,5	44,0	27,0	22,0	11,0	1
05**078655**001	*196408*	9x12	17	17,5	44,0	27,0	22,0	11,0	1
05**078656**001	*196415*	9x12	18	17,5	49,0	32,0	33,0	15,0	1
05**078657**001	*196422*	9x12	19	17,5	49,0	32,0	33,0	15,0	1
05**078658**001	*196439*	9x12	22	17,5	49,0	32,0	33,0	15,0	1

7776 External TORX® insert, 9x12 mm

External TORX® insert; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7776 External TORX® insert, 9x12 mm

Form A

05**078660**001
05**078661**001
05**078662**001
05**078663**001



Form B

05**078664**001





	EAN	□	✱						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078660**001	*195968*	9x12	TX 6	17,5	40,0	23,0	22,0	8,0	1
05**078661**001	*195975*	9x12	TX 8	17,5	40,0	23,0	22,0	8,0	1
05**078662**001	*195982*	9x12	TX 10	17,5	40,0	23,0	22,0	8,0	1
05**078663**001	*195999*	9x12	TX 12	17,5	40,0	23,0	22,0	8,0	1
05**078664**001	*196149*	9x12	TX 14	17,5	45,0	28,0	22,0	11,0	1

7786 External TORX® insert, 14x18 mm

External TORX® insert; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7786 External TORX® insert, 14x18 mm

Form A

05**078714**001
05**078715**001



Form B

05**078716**001
05**078717**001





	EAN	☐	✱						
Code	4013288	mm		mm	mm	mm	mm	mm	
05**078714**001	*196507*	14x18	TX 14	25,5	37,0	62,0	30,0	11,0	1
05**078715**001	*196514*	14x18	TX 18	25,5	37,0	62,0	30,0	11,0	1
05**078716**001	*196521*	14x18	TX 20	25,5	40,0	65,0	32,0	12,0	1
05**078717**001	*196538*	14x18	TX 24	25,5	40,0	65,0	32,0	12,0	1

7779/1 Adapter insert, 9x12 mm

Adapter insert ror the use of square plug-in tools 14x18 mm in torque wrenches with internal square 9x12 mm; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

7779/1 Adapter insert, 9x12 mm



	EAN	☐	■					
Code	4013288	mm	mm	mm	mm	mm	mm	
05**078666**001	*196323*	9x12	14x18	49,0	33,0	32,0	26,0	1

7779/2 Adapter insert, 14x18 mm

Adapter insert ror the use of square plug-in tools 9x12 mm in torque wrenches with internal square 14x18 mm; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

7779/2 Adapter insert, 14x18 mm



	EAN	☐	■					
Code	4013288	mm	mm	mm	mm	mm	mm	
05**078667**001	*196545*	14x18	9x12	52,0	27,0	28,0	21,0	1

7790/1 Push-fit weld-on adapter, 9x12 mm

Push-fit weld-on adapter; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

- For welding on specifically required tools
- Welding should ideally be carried out by a specialist welding company

7790/1 Push-fit weld-on adapter, 9x12 mm



	EAN	□					
Code	4013288	mm	mm	mm	mm	mm	
05**078720**001	*196354*	9x12	24,0	8,0	22,0	14,0	1

7790/2 Push-fit weld-on adapter, 14x18 mm

Push-fit weld-on adapter; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

- For welding on specifically required tools
- Welding should ideally be carried out by a specialist welding company

7790/2 Push-fit weld-on adapter, 14x18 mm



	EAN	□					
Code	4013288	mm	mm	mm	mm	mm	
05**078721**001	*196477*	14x18	38,0	13,0	31,0	22,0	1

Click-Torque collar

The collar prevents the handle of the Click-Torque torque wrench from touching the ground. Dirt and damage are avoided when putting down the tool while working.

Also prevents the tool from rolling away, and it serves to fix the Click-Torque torque wrench in the storage/transport box. The collar can be easily attached to the torque wrench tube and is removable.



7762 Click-Torque collar M3

Click-Torque collar as an accessory for Click-Torque Torque wrenches B 1, B 2, C 1, C 2, C 3, C 4, X 2, X 3, X 4, X 5, XP 4, Click-Torque Push R/L C 2 and Click-Torque Push R/L C 3.

7762 Click-Torque collar M3



	EAN							
Code	4013288	mm	mm	mm				
05**078709**001	*211767*	55,0	55,0	21,5				1

7761 Click-Torque collar M4

Click-Torque collar as an accessory for Click-Torque Torque wrenches C 5 and X 6.

7761 Click-Torque collar M4



	EAN							
Code	4013288	mm	mm	mm				
05**078706**001	*211750*	55,0	55,0	21,5				1

7763 Click-Torque collar M5

Click-Torque collar as an accessory for Click-Torque Torque wrench E 1 and Click-Torque Push R/L E 1.

7763 Click-Torque collar M5



	EAN							
Code	4013288	mm	mm	mm				
05**078711**001	*211774*	73,0	73,0	27,0				1

2090 Impact driver 90 Nm

High quality impact driver that can loosen rigid connections without the use of power tools simply by the force of the impact. The Wera impact drivers have a particularly high efficiency thanks to their robust, double-curved design.

Impact forces are converted into rotary motion. The use of compressed air equipment becomes unnecessary.
For M 4 to M 8 screws. Drive: 5/16" hexagon socket.

- To loosen and tighten screws without the use of power tools
- Impact forces are converted into rotary motion
- The double-curved design is particularly efficient
- 5/16" hexagon socket take-up

2090 Impact driver 90 Nm



	EAN							
Code	4013288		mm					
05**072014**001	*180926*	5/16"	142,0	5 19/32"				1

2090/17 Impact driver set

- 2090 impact driver, 90 Nm with many accessories
- To loosen and tighten screws without the use of power tools
- Impact forces are converted into rotary motion
- The double-curved design is particularly efficient
- 5/16" hexagon socket take-up

2090/17 Impact driver set



Code	EAN 4013288			
05**072017**001	*179777*			1
			2090 90 Nm 1x 5/16"x142,0	
			851/2 Z PH 1x PH 2x32; 1x PH 3x32	
			851/2 PH 1x PH 4x32	
			800/2 1x 2,0x12,0x41	
			840/2 Z 1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30	
			840/2 1x 7,0x30	
			867/2 Z TORX® 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35	
			870/2 1x 3/8"x5/16" [1]; 1x 1/2"x5/16" [1]	

[1] With friction ball; for manual nut spinner sockets

TORQUE Test Values

Slotted Tools
Drives: DIN ISO 2380, VSM 35601.
TORQUE values evaluated in test gages according to DIN ISO 2380 on TORQUE testing equipment.

Hexagon Tools
Drives: DIN ISO 2936. TORQUE values evaluated in test gages according to DIN ISO 2936 on TORQUE testing equipment.

PH and PZ Tools
Drives: DIN 5260, ISO 8764 and SMS-SS 1687.
TORQUE values evaluated in test gages according to DIN 5261, ISO 8764 on TORQUE testing equipment.

Tools with TORQ-SET® drive
TORQUE values evaluated with testing gages of Phillips Screw Company, licensor of TORQ-SET®, on TORQUE testing equipment.

a x b mm	TORQUE in Nm (min) handuse	poweruse
0,3 x 2,0	0,18	0,20
0,4 x 2,0	0,30	0,35
0,4 x 2,5	0,40	0,45
0,5 x 3,0	0,70	0,80
0,5 x 3,5	0,90	0,98
0,6 x 3,5	1,30	1,40
0,6 x 4,0	1,40	1,61
0,6 x 4,5	-	1,80
0,8 x 4,0	2,60	2,90
0,8 x 4,5	2,88	
0,8 x 5,0	3,20	3,58
0,8 x 5,5	3,50	3,90
1,0 x 5,5	5,50	6,20
1,0 x 6,5	6,50	7,28
1,0 x 7,0	7,0	7,80
1,2 x 6,5	9,40	10,50
1,2 x 7,0	10,0	11,28
1,2 x 8,0	11,5	12,90
1,4 x 9,0	17,6	19,70
1,5 x 13	29	32
1,6 x 8,0	20,5	22,9
1,6 x 9,0	23	25
1,6 x 10	25,6	28,7
2,0 x 12	48,0	53
2,0 x 13	52	58
2,5 x 14	87	98
2,5 x 16	100	112
3,0 x 18	162	181

Important note:
After the torque test with the specified minimum value, the screwdriver must not show any permanent deformation or other damage to the tip of the screwdriver that would impair its usability.

SW (mm)	TORQUE in Nm (min)
0,7	0,08
0,9	0,18
1,3	0,53
1,5	0,82
2,0	1,9
2,5	3,8
3	6,6
3,5	11
4	16
4,5	24
5	30
6	52
7	78
8	120
9	180
10	220
11	295
12	370
13	480
14	590
17	1000
19	1000
22	1000
24	1000
27	1000

	TORQUE in Nm (min) handuse	poweruse
0	1,0	1,0
1	3,5	3,9
2	8,2	10,3
3	19,5	32,0
4	38,0	88,7


Test torques for tools with TORX® and TORX PLUS® drives
Test torques evaluated with testing gages from the TORX® and TORX PLUS® licensor (Acument Global Technologies Inc.)."

	TORQUE in Nm (min) Bits	Screw-drivers
2	1,1	1,1
3	1,7	1,7
4	2,8	2,8
5	4,0	4,0
6	5,1	5,1
8	8,5	8,5
10	11,3	11,3
1/4"	28	17
5/16"	56	28
3/8"	102	62
7/16"	147	
1/2"	249	
9/16"	271	
5/8"	339	

	TORQUE in Nm (min.) TORX® Bit	Resis-Bit	Screw-driver	TORX PLUS® Bit	Resis-Bit	Screw-drivers
1	0,10	-	0,08	0,11		
2	0,14	-	0,12	0,16		
3	0,25	-	0,21	0,28		
4	0,37	-	0,31	0,44		
5	0,51	-	0,43	0,61		
6	0,91	-	0,75	1,11		0,92
7	1,7	1,4	1,4	2,10		1,68
8	2,6	2,2	2,2	3,21	2,5	2,79
9	3,4	2,9	2,8	4,19	3,3	3,49
10	4,5	3,8	3,7	5,42	4,3	4,47
15	7,7	6,5	6,4	9,62	7,3	8,06
20	12,7	10,8	10,5	16,15	11,9	13,41
25	19,0	16,1	15,9	23,50	17,4	19,58
27	26,9	22,9	22,5	34,62	25,1	28,95
30	37,4	31,8	31,1	47,18	33,5	39,34
40	65,1	55,3	54,1	82,08	59,4	68,40
45	104	88	86	137,38	97,3	114,44
50	159	135	132	194,54	152,4	162,14
55	257	218	218	352,10	291,5	299,25
60	445	379	379	566,11	483,0	481,24
70	701	596	600	910,40	713,3	773,91


Dimensions Of Profiles

TORX® Recess Screws




	A Ref. (mm)
TX 1	0,84
TX 2	0,94
TX 3	1,12
TX 4	1,30
TX 5	1,37
TX 6	1,65
TX 7	1,97
TX 8	2,30
TX 9	2,48
TX 10	2,72
TX 15	3,26
TX 20	3,84
TX 25	4,40
TX 27	4,96
TX 30	5,49
TX 40	6,60
TX 45	7,77
TX 50	8,79
TX 55	11,17
TX 60	13,20
TX 70	15,49

TORX PLUS® Recess Screws




	A Ref. (mm)
1 IP	0,84
2 IP	0,95
3 IP	1,13
4 IP	1,29
5 IP	1,41
6 IP	1,69
7 IP	1,97
8 IP	2,29
9 IP	2,48
10 IP	2,72
15 IP	3,25
20 IP	3,84
25 IP	4,39
27 IP	4,95
30 IP	5,49
40 IP	6,60
45 IP	7,77
50 IP	8,79
55 IP	11,16
60 IP	13,20
70 IP	15,48

TORQ-SET® Recess Screws




	A Ref. (mm)
0	0,43
1	0,43
2	0,43
3	0,48
4	0,56
5	0,63
6	0,71
8	0,84
10	0,96
1/4"	1,27
5/16"	1,60
3/8"	1,90
7/16"	2,23
1/2"	2,54

TRI-WING® Recess Screws




	A Ref. (mm)
0	0,45
1	0,57
2	0,75
3	0,95
4	1,08
5	1,23
6	1,54
7	1,87
8	2,17
9	2,48
10	2,78

XZN Recess Screws




	A Ref. (mm)
M 4	3,83
M 5	4,80
M 6	6,00
M 8	7,20
M 10	9,60
M 12	11,41
M 14	13,22
M 16	15,63
M 18	16,85
M 20	19,25

Square Recess Screws

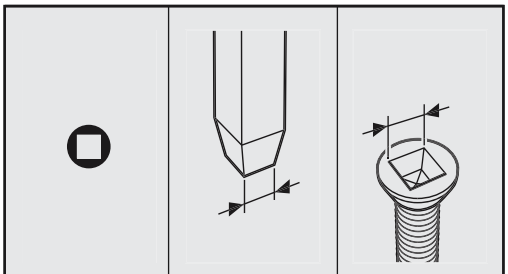

	A Ref. (mm)	A Ref. (mm)
00	1,27	1,4
0	1,78	2
1	2,31	2,5
2	2,85	3,1
3	3,37	3,7
4	4,84	5,1

Spanner Recess Screws



	A Ref. (mm)
4	1,52
6	2,41
8	2,79
10	3,30

TORQUE Conversion Table

Conversion Units	SI Units			Metric scale		USA GB scale		
	cNm	**dNm**	**Nm**	**cmkg**	**mkg**	**ft.lb**	**in.lb**	**in.oz**
1 cNm =	1	0,1	0,01	0,1020	0,0010	0,0074	0,0885	1,4161
1 dNm =	10	1	0,1	1,0197	0,0102	0,0738	0,8851	14,1612
1 Nm =	100	10	1	10,1972	0,1020	0,7376	8,8508	141,6123
1 cmkg =	9,8067	0,9807	0,0981	1	0,0100	0,0723	0,8680	13,8874
1 mkg =	980,6650	98,0665	9,8067	100	1	7,2330	86,7964	1388,7422
1 ft.lb =	135,5818	13,5581	1,3558	13,8255	0,1383	1	12	192
1 in.lb =	11,2985	1,1298	0,1130	1,1521	0,0115	0,0833	1	16
1 in. oz =	0,7062	0,0706	0,0071	0,0720	0,0007	0,0052	0,0625	1

Example 1
1 Nm = 0,102 mkg
17,4 Nm = 17,4 x 0,102 mkg
17,4 Nm = 1,775 mkg

Example 2
1 mkg = 9,8067 Nm
12,5 mkg = 12,5 x 9,8067 Nm
12,5 mkg = 122,58 Nm

Conversion Nm in mkg

1 Nm = 0,10197 mkg

Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	0,10	0,20	0,31	0,41	0,51	0,61	0,71	0,82	0,92
10	1,02	1,12	1,22	1,33	1,43	1,53	1,63	1,73	1,84	1,94
20	2,04	2,14	2,24	2,35	2,45	2,55	2,65	2,75	2,86	2,96
30	3,06	3,16	3,26	3,37	3,47	3,57	3,67	3,77	3,87	3,98
40	4,08	4,18	4,28	4,38	4,49	4,59	4,69	4,79	4,89	5,00
50	5,10	5,20	5,30	5,40	5,51	5,61	5,71	5,81	5,91	6,02
60	6,12	6,22	6,32	6,42	6,53	6,63	6,73	6,83	6,93	7,04
70	7,14	7,24	7,34	7,44	7,55	7,65	7,75	7,85	7,95	8,06
80	8,16	8,26	8,36	8,46	8,57	8,67	8,77	8,87	8,97	9,08
90	9,18	9,28	9,38	9,48	9,59	9,69	9,79	9,89	9,99	10,10
100	10,20	10,30	10,40	10,50	10,60	10,71	10,81	10,91	11,01	11,11

Conversion mkg in Nm

1 mkg = 9,80665 Nm

mkg	0	1	2	3	4	5	6	7	8	9
0	0,00	9,81	19,61	29,42	39,23	49,03	58,84	68,65	78,45	88,26
10	98,07	107,87	117,68	127,49	137,29	147,10	156,91	166,71	176,52	186,33
20	196,13	205,94	215,75	225,55	235,36	245,17	254,97	264,78	274,59	284,39
30	294,20	304,01	313,81	323,62	333,43	343,23	353,04	362,85	372,65	382,46
40	392,27	402,07	411,88	421,69	431,49	441,30	451,11	460,91	470,72	480,53
50	490,33	500,14	509,95	519,75	529,56	539,37	549,17	558,98	568,79	578,59
60	588,40	598,21	608,01	617,82	627,63	637,43	647,24	657,05	666,85	676,66
70	686,47	696,27	706,08	715,89	725,69	735,50	745,31	755,11	764,92	774,73
80	784,53	794,34	804,15	813,95	823,76	833,57	843,37	853,18	862,99	872,79
90	882,60	892,41	902,21	912,02	921,83	931,63	941,44	951,25	961,05	970,86
100	980,67	990,47	1000,28	1010,08	1019,89	1029,70	1039,50	1049,31	1059,12	1068,92

Conversion Nm in ft.lb

1 Nm = 0,73756 ft.lb

Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	0,74	1,48	2,21	2,95	3,69	4,43	5,16	5,90	6,64
10	7,38	8,11	8,85	9,59	10,33	11,06	11,80	12,54	13,28	14,01
20	14,75	15,49	16,23	16,96	17,70	18,44	19,18	19,91	20,65	21,39
30	22,13	22,86	23,60	24,34	25,08	25,81	26,55	27,29	28,03	28,76
40	29,50	30,24	30,98	31,72	32,45	33,19	33,93	34,67	35,40	36,14
50	36,88	37,62	38,35	39,09	39,83	40,57	41,30	42,04	42,78	43,52
60	44,25	44,99	45,73	46,47	47,20	47,94	48,68	49,42	50,15	50,89
70	51,63	52,37	53,10	53,84	54,58	55,32	56,05	56,79	57,53	58,27
80	59,00	59,74	60,48	61,22	61,96	62,69	63,43	64,17	64,91	65,64
90	66,38	67,12	67,86	68,59	69,33	70,07	70,81	71,54	72,28	73,02
100	73,76	74,49	75,23	75,97	76,71	77,44	78,18	78,92	79,66	80,39

Conversion ft.lb in Nm

1 ft.lb = 1,35581 Nm

ft.lb	0	1	2	3	4	5	6	7	8	9
0	0,00	1,36	2,71	4,07	5,42	6,78	8,13	9,49	10,85	12,20
10	13,56	14,91	16,27	17,63	18,98	20,34	21,69	23,05	24,40	25,76
20	27,12	28,47	29,83	31,18	32,54	33,90	35,25	36,61	37,96	39,32
30	40,67	42,03	43,39	44,74	46,10	47,45	48,81	50,16	51,52	52,88
40	54,23	55,59	56,94	58,30	59,66	61,01	62,37	63,72	65,08	66,43
50	67,79	69,15	70,50	71,86	73,21	74,57	75,93	77,28	78,64	79,99
60	81,35	82,70	84,06	85,42	86,77	88,13	89,48	90,84	92,20	93,55
70	94,91	96,26	97,62	98,97	100,33	101,69	103,04	104,40	105,75	107,11
80	108,46	109,82	111,18	112,53	113,89	115,24	116,60	117,96	119,31	120,67
90	122,02	123,38	124,73	126,09	127,45	128,80	130,16	131,51	132,87	134,23
100	135,58	136,94	138,29	139,65	141,00	142,36	143,72	145,07	146,43	147,78

Conversion Nm in in.lb

1 Nm = 8,85077 in.lb

Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	8,85	17,70	26,55	35,40	44,25	53,10	61,96	70,81	79,66
10	88,51	97,36	106,21	115,06	123,91	132,76	141,61	150,46	159,31	168,16
20	177,02	185,87	194,72	203,57	212,42	221,27	230,12	238,97	247,82	256,67
30	265,52	274,37	283,22	292,08	300,93	309,78	318,63	327,48	336,33	345,18
40	354,03	362,88	371,73	380,58	389,43	398,28	407,14	415,99	424,84	433,69
50	442,54	451,39	460,24	469,09	477,94	486,79	495,64	504,49	513,34	522,20
60	531,05	539,90	548,75	557,60	566,45	575,30	584,15	593,00	601,85	610,70
70	619,55	628,40	637,26	646,11	654,96	663,81	672,66	681,51	690,36	699,21
80	708,06	716,91	725,76	734,61	743,46	752,32	761,17	770,02	778,87	787,72
90	796,57	805,42	814,27	823,12	831,97	840,82	849,67	858,52	867,38	876,23
100	885,08	893,93	902,78	911,63	920,48	929,33	938,18	947,03	955,88	964,73

Conversion in.lb in Nm

1 in.lb = 0,11298 Nm

in.lb	0	1	2	3	4	5	6	7	8	9
0	0,00	0,11	0,23	0,34	0,45	0,56	0,68	0,79	0,90	1,02
10	1,13	1,24	1,36	1,47	1,58	1,69	1,81	1,92	2,03	2,15
20	2,26	2,37	2,49	2,60	2,71	2,82	2,94	3,05	3,16	3,28
30	3,39	3,50	3,62	3,73	3,84	3,95	4,07	4,18	4,29	4,41
40	4,52	4,63	4,75	4,86	4,97	5,08	5,20	5,31	5,42	5,54
50	5,65	5,76	5,87	5,99	6,10	6,21	6,33	6,44	6,55	6,67
60	6,78	6,89	7,00	7,12	7,23	7,34	7,46	7,57	7,68	7,80
70	7,91	8,02	8,13	8,25	8,36	8,47	8,59	8,70	8,81	8,93
80	9,04	9,15	9,26	9,38	9,49	9,60	9,72	9,83	9,94	10,06
90	10,17	10,28	10,39	10,51	10,62	10,73	10,85	10,96	11,07	11,19
100	11,30	11,41	11,52	11,64	11,75	11,86	11,98	12,09	12,20	12,31

Conversion Of Inches To Millimeters

Inches		0	1	2	3	4	5	6	7	8	9
			25.400	50.800	76.200	101.600	127.000	152.400	177.800	203.200	228.600
1/64	0.015625	0.397	25.797	51.197	76.597	101.997	127.397	152.797	178.197	203.597	228.997
1/32	0.03125	0.794	26.194	51.594	76.994	102.394	127.794	153.194	178.594	203.994	229.394
3/64	0.046875	1.191	26.591	51.991	77.391	102.791	128.191	153.591	178.991	204.391	229.791
1/16	0.0625	1.588	26.988	52.388	77.788	103.188	128.588	153.988	179.388	204.788	230.188
5/64	0.078125	1.984	27.384	52.784	78.184	103.584	128.984	154.384	179.784	205.184	230.584
3/32	0.09375	2.381	27.781	53.181	78.581	103.981	129.381	154.781	180.181	205.581	230.981
7/64	0.109375	2.778	28.178	53.578	78.978	104.378	129.778	155.178	180.578	205.978	231.378
1/8	0.125	3.175	28.575	53.975	79.375	104.775	130.175	155.575	180.975	206.375	231.775
9/64	0.140625	3.572	28.972	54.372	79.772	105.172	130.572	155.972	181.372	206.772	232.172
5/32	0.15625	3.969	29.369	54.769	80.169	105.569	130.969	156.369	181.769	207.169	232.569
11/64	0.171875	4.366	29.766	55.166	80.566	105.966	131.366	156.766	182.166	207.566	232.966
3/16	0.1875	4.762	30.162	55.562	80.962	106.362	131.762	157.162	182.562	207.962	233.362
13/64	0.203125	5.159	30.559	55.959	81.359	106.759	132.159	157.559	182.959	208.359	233.759
7/32	0.21875	5.556	30.956	56.356	81.756	107.156	132.556	157.956	183.356	208.756	234.156
15/64	0.234375	5.953	31.353	56.753	82.153	107.553	132.953	158.353	183.753	209.153	234.553
1/4	0.25	6.350	31.750	57.150	82.550	107.950	133.350	158.750	184.150	209.550	234.950
17/64	0.265625	6.747	32.147	57.547	82.947	108.347	133.747	159.147	184.547	209.947	235.347
9/32	0.28125	7.144	32.544	57.944	83.344	108.744	134.144	159.544	184.944	210.344	235.744
19/64	0.296875	7.541	32.941	58.341	83.741	109.141	134.541	159.941	185.341	210.741	236.141
5/16	0.3125	7.938	33.338	58.738	84.138	109.538	134.938	160.338	185.738	211.138	236.538
21/64	0.328125	8.334	33.734	59.134	84.534	109.934	135.334	160.734	186.134	211.534	236.934
11/32	0.34375	8.731	34.131	59.531	84.931	110.331	135.731	161.131	186.531	211.931	237.331
23/64	0.359375	9.128	34.528	59.928	85.328	110.728	136.128	161.528	186.928	212.328	237.728
3/8	0.375	9.525	34.925	60.325	85.725	111.125	136.525	161.925	187.325	212.725	238.125
25/64	0.390625	9.922	35.322	60.722	86.122	111.522	136.922	162.322	187.722	213.122	238.522
13/32	0.40625	10.319	35.719	61.119	86.519	111.919	137.319	162.719	188.119	213.519	238.919
27/64	0.421875	10.716	36.116	61.516	86.916	112.316	137.716	163.116	188.516	213.916	239.316
7/16	0.4375	11.112	36.512	61.912	87.312	112.712	138.112	163.512	188.912	214.312	239.712
29/64	0.453125	11.509	36.909	62.309	87.709	113.109	138.509	163.909	189.309	214.709	240.109
15/32	0.46875	11.906	37.306	62.706	88.106	113.506	138.906	164.306	189.706	215.106	240.506
31/64	0.484375	12.303	37.703	63.103	88.503	113.903	139.303	164.703	190.103	215.503	240.903
1/2	0.5	12.700	38.100	63.500	88.900	114.300	139.700	165.100	190.500	215.900	241.300
33/64	0.515625	13.097	38.497	63.897	89.297	114.697	140.097	165.497	190.897	216.297	241.697
17/32	0.53125	13.494	38.894	64.294	89.694	115.094	140.494	165.894	191.294	216.694	242.094
35/64	0.546875	13.891	39.291	64.691	90.091	115.491	140.891	166.291	191.691	217.091	242.491
9/16	0.5625	14.288	39.688	65.088	90.488	115.888	141.288	166.688	192.088	217.488	242.888
37/64	0.578125	14.684	40.084	65.484	90.884	116.284	141.684	167.084	192.484	217.884	243.284
19/32	0.59375	15.081	40.481	65.881	91.281	116.681	142.081	167.481	192.881	218.281	243.681
39/64	0.609375	15.478	40.878	66.278	91.678	117.078	142.478	167.878	193.278	218.678	244.078
5/8	0.625	15.875	41.275	66.675	92.075	117.475	142.875	168.275	193.675	219.075	244.475
41/64	0.640625	16.272	41.672	67.072	92.472	117.872	143.272	168.672	194.072	219.472	244.872
21/32	0.65625	16.669	42.069	67.469	92.869	118.269	143.669	169.069	194.469	219.869	245.269
43/64	0.671875	17.066	42.466	67.866	93.266	118.666	144.066	169.466	194.866	220.266	245.666
11/16	0.6875	17.462	42.862	68.262	93.662	119.062	144.462	169.862	195.262	220.662	246.062
45/64	0.703125	17.859	43.259	68.659	94.059	119.459	144.859	170.259	195.659	221.059	246.459
23/32	0.71875	18.256	43.656	69.056	94.456	119.856	145.256	170.656	196.056	221.456	246.856
47/64	0.734375	18.653	44.053	69.453	94.853	120.253	145.653	171.053	196.453	221.853	247.253
3/4	0.75	19.050	44.450	69.850	95.250	120.650	146.050	171.450	196.850	222.250	247.650
49/64	0.765625	19.447	44.847	70.247	95.647	121.047	146.447	171.847	197.247	222.647	248.047
25/32	0.78125	19.844	45.244	70.644	96.044	121.444	146.844	172.244	197.644	223.044	248.444
51/64	0.796875	20.241	45.641	71.041	96.441	121.841	147.241	172.641	198.041	223.441	248.841
13/16	0.8125	20.638	46.038	71.438	96.838	122.238	147.638	173.038	198.438	223.838	249.238
53/64	0.828125	21.034	46.434	71.834	97.234	122.634	148.034	173.434	198.834	224.234	249.634
27/32	0.84375	21.431	46.831	72.231	97.631	123.031	148.431	173.831	199.231	224.631	250.031
55/64	0.859375	21.828	47.228	72.628	98.028	123.428	148.828	174.228	199.628	225.028	250.428
7/8	0.875	22.225	47.625	73.025	98.425	123.825	149.225	174.625	200.025	225.425	250.825
57/64	0.890625	22.622	48.022	73.422	98.822	124.222	149.622	175.022	200.422	225.822	251.222
29/32	0.90625	23.019	48.419	73.819	99.219	124.619	150.019	175.419	200.819	226.219	251.619
59/64	0.921875	23.416	48.816	74.216	99.616	125.016	150.416	175.816	201.216	226.616	252.016
15/16	0.9375	23.812	49.212	74.612	100.012	125.412	150.812	176.212	201.612	227.012	252.412
61/64	0.953125	24.209	49.609	75.009	100.409	125.809	151.209	176.609	202.009	227.409	252.809
31/32	0.96875	24.606	50.006	75.406	100.806	126.206	151.606	177.006	202.406	227.806	253.206
63/64	0.984375	25.003	50.403	75.803	101.203	126.603	152.003	177.403	202.803	228.203	253.603

Values in mm

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **002900** 001	265	05 **003081** 001	139	05 **003387** 001	116	05 **003565** 001	131
05 **002910** 001	266	05 **003082** 001	139	05 **003388** 001	116	05 **003566** 001	131
05 **002913** 001	266	05 **003083** 001	139	05 **003389** 001	116	05 **003567** 001	131
05 **002920** 001	266	05 **003084** 001	139	05 **003390** 001	114	05 **003568** 001	131
05 **002923** 001	266	05 **003085** 001	139	05 **003391** 001	114	05 **003569** 001	131
05 **002926** 001	266	05 **003086** 001	139	05 **003392** 001	114	05 **003570** 001	131
05 **002930** 001	266	05 **003087** 001	139	05 **003393** 001	114	05 **003571** 001	131
05 **002933** 001	266	05 **003088** 001	139	05 **003460** 001	90	05 **003572** 001	131
05 **002936** 001	266	05 **003089** 001	139	05 **003461** 001	90	05 **003573** 001	131
05 **002938** 001	266	05 **003090** 001	139	05 **003462** 001	90	05 **003574** 001	131
05 **002940** 001	266	05 **003091** 001	139	05 **003463** 001	90	05 **003575** 001	131
05 **002943** 001	266	05 **003092** 001	139	05 **003499** 001	110	05 **003576** 001	131
05 **002946** 001	266	05 **003093** 001	139	05 **003500** 001	106	05 **003577** 001	131
05 **002948** 001	266	05 **003094** 001	139	05 **003501** 001	110	05 **003578** 001	131
05 **002950** 001	266	05 **003180** 001	141	05 **003502** 001	110	05 **003579** 001	131
05 **002960** 001	266	05 **003181** 001	141	05 **003503** 001	110	05 **003580** 001	131
05 **002966** 001	266	05 **003185** 001	139	05 **003504** 001	110	05 **003581** 001	143
05 **002968** 001	266	05 **003210** 001	265	05 **003505** 001	110	05 **003582** 001	143
05 **002970** 001	266	05 **003320** 001	117	05 **003506** 001	110	05 **003583** 001	143
05 **002973** 001	266	05 **003321** 001	117	05 **003507** 001	110	05 **003584** 001	143
05 **002976** 001	266	05 **003322** 001	117	05 **003508** 001	110	05 **003585** 001	143
05 **002980** 001	266	05 **003330** 001	116	05 **003509** 001	110	05 **003590** 001	143
05 **002990** 001	264	05 **003331** 001	116	05 **003510** 001	110	05 **003591** 001	143
05 **003010** 001	110	05 **003332** 001	116	05 **003511** 001	110	05 **003592** 001	142
05 **003030** 001	139	05 **003333** 001	116	05 **003512** 001	110	05 **003594** 001	122
05 **003031** 001	139	05 **003334** 001	116	05 **003513** 001	110	05 **003596** 001	122
05 **003032** 001	139	05 **003335** 001	116	05 **003514** 001	110	05 **003600** 001	147
05 **003033** 001	139	05 **003336** 001	116	05 **003515** 001	110	05 **003601** 001	155
05 **003034** 001	139	05 **003337** 001	116	05 **003516** 001	110	05 **003602** 001	155
05 **003035** 001	139	05 **003338** 001	116	05 **003517** 001	110	05 **003603** 001	155
05 **003036** 001	139	05 **003339** 001	116	05 **003518** 001	110	05 **003604** 001	155
05 **003037** 001	139	05 **003340** 001	116	05 **003519** 001	110	05 **003605** 001	155
05 **003038** 001	139	05 **003341** 001	116	05 **003520** 001	110	05 **003606** 001	155
05 **003039** 001	139	05 **003342** 001	116	05 **003521** 001	110	05 **003607** 001	155
05 **003040** 001	139	05 **003345** 001	117	05 **003522** 001	110	05 **003608** 001	155
05 **003041** 001	139	05 **003350** 001	117	05 **003523** 001	110	05 **003609** 001	155
05 **003042** 001	139	05 **003351** 001	117	05 **003524** 001	118	05 **003610** 001	155
05 **003043** 001	139	05 **003352** 001	117	05 **003525** 001	118	05 **003611** 001	155
05 **003044** 001	139	05 **003353** 001	117	05 **003526** 001	118	05 **003612** 001	155
05 **003050** 001	140	05 **003354** 001	117	05 **003527** 001	119	05 **003613** 001	155
05 **003051** 001	140	05 **003355** 001	117	05 **003528** 001	118	05 **003614** 001	155
05 **003052** 001	140	05 **003360** 001	114	05 **003529** 001	119	05 **003615** 001	155
05 **003054** 001	140	05 **003361** 001	114	05 **003530** 001	118	05 **003616** 001	155
05 **003056** 001	140	05 **003362** 001	114	05 **003531** 001	117	05 **003617** 001	155
05 **003059** 001	137	05 **003363** 001	114	05 **003533** 001	104	05 **003618** 001	155
05 **003060** 001	137	05 **003364** 001	114	05 **003535** 001	105	05 **003619** 001	155
05 **003061** 001	137	05 **003365** 001	114	05 **003536** 001	120	05 **003620** 001	155
05 **003062** 001	137	05 **003366** 001	114	05 **003550** 001	123	05 **003621** 001	155
05 **003063** 001	137	05 **003367** 001	114	05 **003551** 001	131	05 **003622** 001	155
05 **003064** 001	137	05 **003368** 001	114	05 **003552** 001	131	05 **003623** 001	155
05 **003065** 001	137	05 **003369** 001	114	05 **003553** 001	131	05 **003624** 001	155
05 **003066** 001	137	05 **003370** 001	114	05 **003554** 001	131	05 **003625** 001	155
05 **003067** 001	137	05 **003371** 001	114	05 **003555** 001	131	05 **003626** 001	155
05 **003068** 001	137	05 **003372** 001	114	05 **003556** 001	131	05 **003627** 001	155
05 **003069** 001	137	05 **003375** 001	115	05 **003557** 001	131	05 **003628** 001	155
05 **003070** 001	137	05 **003380** 001	116	05 **003558** 001	131	05 **003629** 001	155
05 **003071** 001	137	05 **003381** 001	116	05 **003559** 001	131	05 **003630** 001	155
05 **003072** 001	137	05 **003382** 001	116	05 **003560** 001	131	05 **003631** 001	155
05 **003073** 001	137	05 **003383** 001	116	05 **003561** 001	131	05 **003632** 001	155
05 **003074** 001	138	05 **003384** 001	116	05 **003562** 001	131	05 **003633** 001	155
05 **003075** 001	138	05 **003385** 001	116	05 **003563** 001	131	05 **003634** 001	155
05 **003080** 001	139	05 **003386** 001	116	05 **003564** 001	131	05 **003635** 001	155

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **003636** 001	164	05 **003753** 001	131	05 **003995** 001	156	05 **004351** 001	304
05 **003637** 001	164	05 **003755** 001	102	05 **003996** 001	163	05 **004352** 001	301
05 **003638** 001	164	05 **003756** 001	109	05 **003997** 001	160	05 **004353** 001	301
05 **003639** 001	165	05 **003760** 001	199	05 **004003** 001	108	05 **004354** 001	301
05 **003640** 001	165	05 **003765** 001	199	05 **004004** 001	109	05 **004355** 001	302
05 **003641** 001	165	05 **003780** 001	148	05 **004016** 001	103	05 **004356** 001	302
05 **003642** 001	164	05 **003781** 001	149	05 **004017** 001	107	05 **004357** 001	301
05 **003643** 001	164	05 **003785** 001	129	05 **004018** 001	108	05 **004500** 001	113
05 **003645** 001	146	05 **003793** 001	177	05 **004019** 001	103	05 **004501** 001	113
05 **003647** 001	147	05 **003820** 001	162	05 **004020** 001	107	05 **004502** 001	113
05 **003660** 001	176	05 **003821** 001	162	05 **004021** 001	109	05 **004503** 001	113
05 **003662** 001	176	05 **003822** 001	162	05 **004033** 001	127	05 **004504** 001	113
05 **003665** 001	177	05 **003823** 001	162	05 **004034** 001	129	05 **004505** 001	113
05 **003666** 001	177	05 **003824** 001	162	05 **004046** 001	121	05 **004506** 001	113
05 **003667** 001	177	05 **003825** 001	162	05 **004047** 001	126	05 **004507** 001	113
05 **003668** 001	177	05 **003826** 001	162	05 **004048** 001	128	05 **004508** 001	113
05 **003669** 001	177	05 **003827** 001	162	05 **004049** 001	121	05 **004509** 001	113
05 **003670** 001	177	05 **003828** 001	162	05 **004050** 001	127	05 **004510** 001	113
05 **003675** 001	177	05 **003829** 001	162	05 **004051** 001	129	05 **004511** 001	113
05 **003684** 001	177	05 **003830** 001	160	05 **004063** 001	150	05 **004512** 001	113
05 **003685** 001	177	05 **003831** 001	160	05 **004064** 001	152	05 **004525** 001	113
05 **003690** 001	177	05 **003832** 001	160	05 **004076** 001	145	05 **004530** 001	136
05 **003692** 001	170	05 **003833** 001	160	05 **004077** 001	149	05 **004531** 001	136
05 **003695** 001	170	05 **003834** 001	160	05 **004078** 001	151	05 **004532** 001	136
05 **003696** 001	170	05 **003835** 001	160	05 **004079** 001	146	05 **004533** 001	136
05 **003697** 001	170	05 **003836** 001	160	05 **004080** 001	150	05 **004534** 001	136
05 **003717** 001	110	05 **003837** 001	160	05 **004081** 001	152	05 **004535** 001	136
05 **003718** 001	110	05 **003838** 001	160	05 **004090** 001	148	05 **004536** 001	136
05 **003719** 001	110	05 **003840** 001	162	05 **004095** 001	148	05 **004537** 001	136
05 **003720** 001	110	05 **003841** 001	162	05 **004170** 001	175	05 **004538** 001	136
05 **003721** 001	110	05 **003842** 001	162	05 **004171** 001	259	05 **004539** 001	136
05 **003722** 001	110	05 **003843** 001	162	05 **004173** 001	220	05 **004540** 001	136
05 **003723** 001	110	05 **003844** 001	162	05 **004174** 001	48	05 **004541** 001	136
05 **003724** 001	110	05 **003845** 001	162	05 **004175** 001	123	05 **004542** 001	136
05 **003725** 001	110	05 **003850** 001	160	05 **004176** 001	142	05 **004543** 001	136
05 **003726** 001	110	05 **003851** 001	160	05 **004177** 001	175	05 **004544** 001	136
05 **003727** 001	110	05 **003852** 001	160	05 **004178** 001	202	05 **004545** 001	136
05 **003728** 001	110	05 **003853** 001	160	05 **004179** 001	264	05 **004550** 001	158
05 **003729** 001	110	05 **003854** 001	160	05 **004180** 001	424	05 **004551** 001	158
05 **003730** 001	155	05 **003855** 001	160	05 **004181** 001	202	05 **004552** 001	158
05 **003731** 001	155	05 **003856** 001	160	05 **004182** 001	33	05 **004553** 001	158
05 **003732** 001	155	05 **003857** 001	160	05 **004184** 001	33	05 **004554** 001	158
05 **003733** 001	155	05 **003858** 001	160	05 **004186** 001	245	05 **004555** 001	158
05 **003734** 001	155	05 **003880** 001	111	05 **004187** 001	187	05 **004556** 001	158
05 **003735** 001	155	05 **003881** 001	116	05 **004188** 001	188	05 **004557** 001	158
05 **003736** 001	155	05 **003882** 001	115	05 **004190** 001	27	05 **004558** 001	158
05 **003737** 001	155	05 **003883** 001	111	05 **004201** 001	163	05 **004559** 001	158
05 **003738** 001	155	05 **003884** 001	112	05 **004202** 001	161	05 **004560** 001	158
05 **003739** 001	155	05 **003890** 001	119	05 **004203** 001	157	05 **004561** 001	158
05 **003740** 001	131	05 **003891** 001	119	05 **004210** 001	163	05 **004562** 001	158
05 **003741** 001	131	05 **003892** 001	171	05 **004211** 001	161	05 **004563** 001	158
05 **003742** 001	131	05 **003893** 001	171	05 **004212** 001	162	05 **004565** 001	159
05 **003743** 001	131	05 **003970** 001	134	05 **004280** 001	165	05 **004570** 001	152
05 **003744** 001	131	05 **003971** 001	140	05 **004281** 001	167	05 **004571** 001	152
05 **003745** 001	131	05 **003972** 001	138	05 **004282** 001	166	05 **004572** 001	152
05 **003746** 001	131	05 **003973** 001	134	05 **004283** 001	167	05 **004573** 001	152
05 **003747** 001	131	05 **003974** 001	142	05 **004284** 001	168	05 **004574** 001	152
05 **003748** 001	131	05 **003980** 001	144	05 **004285** 001	169	05 **004575** 001	152
05 **003749** 001	131	05 **003981** 001	144	05 **004310** 001	65	05 **004576** 001	152
05 **003750** 001	131	05 **003982** 001	97	05 **004313** 001	22	05 **004577** 001	152
05 **003751** 001	131	05 **003990** 001	84	05 **004350** 001	300	05 **004578** 001	152
05 **003752** 001	131	05 **003991** 001	70	05 **004351** 001	300	05 **004580** 001	153

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **004590** 001	157	05 **005300** 001	64	05 **005561** 001	130	05 **006153** 001	61
05 **004591** 001	157	05 **005305** 001	64	05 **005562** 001	130	05 **006154** 001	61
05 **004592** 001	157	05 **005310** 001	64	05 **005563** 001	130	05 **006156** 001	61
05 **004595** 001	158	05 **005315** 001	64	05 **005564** 001	130	05 **006158** 001	61
05 **004780** 001	63	05 **005320** 001	64	05 **005565** 001	130	05 **006159** 001	61
05 **004781** 001	63	05 **005325** 001	64	05 **005566** 001	130	05 **006160** 001	61
05 **004782** 001	63	05 **005330** 001	64	05 **005567** 001	130	05 **006162** 001	61
05 **004783** 001	63	05 **005335** 001	64	05 **005568** 001	130	05 **006163** 001	61
05 **004784** 001	63	05 **005340** 001	64	05 **005569** 001	130	05 **006164** 001	61
05 **004830** 001	154	05 **005400** 001	112	05 **005570** 001	130	05 **006165** 001	61
05 **004831** 001	154	05 **005410** 001	114	05 **005571** 001	130	05 **006166** 001	61
05 **004832** 001	154	05 **005420** 001	112	05 **005572** 001	130	05 **006168** 001	61
05 **004833** 001	154	05 **005430** 001	135	05 **005573** 001	130	05 **006169** 001	63
05 **004834** 001	154	05 **005440** 001	137	05 **005574** 001	130	05 **006170** 001	63
05 **004835** 001	154	05 **005450** 001	135	05 **005575** 001	130	05 **006172** 001	63
05 **004836** 001	154	05 **005451** 001	132	05 **005576** 001	130	05 **006174** 001	63
05 **004837** 001	154	05 **005452** 001	132	05 **005580** 001	133	05 **006176** 001	63
05 **004838** 001	154	05 **005460** 001	161	05 **005581** 001	133	05 **006177** 001	63
05 **004839** 001	154	05 **005470** 001	159	05 **005590** 001	132	05 **006178** 001	63
05 **004840** 001	154	05 **005480** 001	156	05 **005591** 001	133	05 **006179** 001	63
05 **004841** 001	154	05 **005490** 001	153	05 **005655** 001	64	05 **006181** 001	63
05 **004900** 001	96	05 **005500** 001	130	05 **005900** 001	93	05 **006182** 001	63
05 **004901** 001	96	05 **005501** 001	130	05 **005901** 001	93	05 **006183** 001	63
05 **004902** 001	96	05 **005502** 001	130	05 **005902** 001	93	05 **006184** 001	63
05 **004903** 001	96	05 **005503** 001	130	05 **005903** 001	93	05 **006190** 001	62
05 **004920** 001	96	05 **005504** 001	130	05 **005904** 001	93	05 **006191** 001	62
05 **004921** 001	96	05 **005505** 001	130	05 **005920** 001	93	05 **006380** 001	62
05 **004922** 001	96	05 **005506** 001	130	05 **005921** 001	93	05 **006381** 001	62
05 **004923** 001	96	05 **005507** 001	130	05 **005922** 001	93	05 **006440** 001	60
05 **004924** 001	96	05 **005508** 001	130	05 **005923** 001	93	05 **006441** 001	60
05 **004925** 001	96	05 **005509** 001	130	05 **005924** 001	93	05 **006442** 001	60
05 **004930** 001	95	05 **005510** 001	130	05 **005925** 001	93	05 **006450** 001	61
05 **004940** 001	96	05 **005511** 001	130	05 **005926** 001	93	05 **006451** 001	61
05 **004941** 001	96	05 **005512** 001	130	05 **005930** 001	93	05 **006455** 001	62
05 **004942** 001	96	05 **005513** 001	130	05 **005931** 001	93	05 **006456** 001	62
05 **004950** 001	96	05 **005514** 001	130	05 **005932** 001	93	05 **006460** 001	62
05 **004951** 001	96	05 **005515** 001	130	05 **005933** 001	93	05 **006461** 001	62
05 **004952** 001	96	05 **005516** 001	130	05 **005934** 001	93	05 **006465** 001	63
05 **004953** 001	96	05 **005517** 001	130	05 **005935** 001	93	05 **006466** 001	63
05 **004954** 001	96	05 **005518** 001	130	05 **005936** 001	93	05 **006470** 001	67
05 **004955** 001	96	05 **005519** 001	130	05 **005937** 001	93	05 **006480** 001	66
05 **004956** 001	96	05 **005520** 001	130	05 **005938** 001	93	05 **006500** 001	85
05 **004957** 001	96	05 **005521** 001	130	05 **005939** 001	93	05 **006501** 001	85
05 **004958** 001	96	05 **005522** 001	130	05 **005940** 001	93	05 **006502** 001	85
05 **004959** 001	96	05 **005523** 001	130	05 **005950** 001	94	05 **006503** 001	85
05 **004960** 001	96	05 **005524** 001	130	05 **006100** 001	60	05 **006504** 001	85
05 **004961** 001	96	05 **005525** 001	130	05 **006105** 001	60	05 **006505** 001	85
05 **004962** 001	96	05 **005526** 001	130	05 **006110** 001	60	05 **006506** 001	86
05 **004963** 001	96	05 **005530** 001	124	05 **006115** 001	60	05 **006507** 001	86
05 **004964** 001	97	05 **005531** 001	125	05 **006116** 001	60	05 **006508** 001	86
05 **004965** 001	97	05 **005540** 001	125	05 **006120** 001	60	05 **006509** 001	86
05 **004966** 001	95	05 **005550** 001	130	05 **006121** 001	60	05 **006510** 001	86
05 **004970** 001	94	05 **005551** 001	130	05 **006125** 001	60	05 **006511** 001	86
05 **004980** 001	99	05 **005552** 001	130	05 **006126** 001	60	05 **006512** 001	86
05 **004981** 001	99	05 **005553** 001	130	05 **006130** 001	60	05 **006513** 001	86
05 **005080** 001	418	05 **005554** 001	130	05 **006135** 001	60	05 **006514** 001	87
05 **005081** 001	418	05 **005555** 001	130	05 **006140** 001	60	05 **006515** 001	87
05 **005090** 001	418	05 **005556** 001	130	05 **006145** 001	65	05 **006516** 001	87
05 **005091** 001	418	05 **005557** 001	130	05 **006147** 001	65	05 **006517** 001	87
05 **005120** 001	92	05 **005558** 001	130	05 **006148** 001	65	05 **006518** 001	90
05 **005121** 001	92	05 **005559** 001	130	05 **006150** 001	61	05 **006519** 001	90
05 **005122** 001	92	05 **005560** 001	130	05 **006152** 001	61	05 **006520** 001	90

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **006521** 001	90	05 **006586** 001	73	05 **008100** 001	26	05 **009340** 001	13
05 **006522** 001	90	05 **006587** 001	73	05 **008101** 001	18	05 **009341** 001	13
05 **006523** 001	87	05 **006588** 001	73	05 **008102** 001	18	05 **009342** 001	13
05 **006524** 001	87	05 **006589** 001	73	05 **008705** 001	13	05 **009343** 001	13
05 **006525** 001	87	05 **006590** 001	72	05 **008706** 001	13	05 **017005** 001	9
05 **006526** 001	87	05 **006591** 001	72	05 **008710** 001	13	05 **017010** 001	9
05 **006527** 001	87	05 **006592** 001	72	05 **008712** 001	13	05 **017015** 001	9
05 **006528** 001	88	05 **006600** 001	82	05 **008715** 001	13	05 **017020** 001	9
05 **006529** 001	88	05 **006601** 001	83	05 **008720** 001	13	05 **017040** 001	9
05 **006530** 001	88	05 **006603** 001	82	05 **008723** 001	13	05 **017041** 001	9
05 **006531** 001	88	05 **006604** 001	82	05 **008725** 001	13	05 **017050** 001	9
05 **006532** 001	88	05 **006605** 001	76	05 **008730** 001	13	05 **017052** 001	9
05 **006533** 001	88	05 **006607** 001	81	05 **008735** 001	13	05 **017054** 001	9
05 **006534** 001	88	05 **006608** 001	81	05 **008740** 001	13	05 **017056** 001	9
05 **006535** 001	88	05 **006609** 001	76	05 **008750** 001	13	05 **018100** 001	268
05 **006536** 001	88	05 **006610** 001	80	05 **008751** 001	13	05 **018110** 001	267
05 **006537** 001	88	05 **006611** 001	80	05 **008752** 001	13	05 **018111** 001	267
05 **006538** 001	88	05 **006612** 001	79	05 **008753** 001	13	05 **018140** 001	269
05 **006539** 001	88	05 **006613** 001	78	05 **008840** 001	19	05 **018141** 001	269
05 **006540** 001	89	05 **006614** 001	79	05 **008841** 001	19	05 **018142** 001	269
05 **006541** 001	89	05 **006616** 001	78	05 **008842** 001	19	05 **018150** 001	269
05 **006542** 001	89	05 **006617** 001	77	05 **008843** 001	19	05 **018151** 001	269
05 **006543** 001	89	05 **006618** 001	75	05 **008844** 001	19	05 **018152** 001	269
05 **006544** 001	89	05 **006619** 001	75	05 **008850** 001	19	05 **018153** 001	269
05 **006545** 001	89	05 **006630** 001	70	05 **008851** 001	19	05 **018154** 001	269
05 **006546** 001	89	05 **006631** 001	69	05 **008852** 001	19	05 **018155** 001	269
05 **006550** 001	85	05 **006632** 001	74	05 **008853** 001	19	05 **018156** 001	269
05 **006551** 001	85	05 **006633** 001	68	05 **008854** 001	19	05 **018157** 001	269
05 **006552** 001	85	05 **006640** 001	84	05 **008855** 001	19	05 **018160** 001	268
05 **006553** 001	85	05 **006641** 001	85	05 **008856** 001	19	05 **018161** 001	268
05 **006554** 001	85	05 **006642** 001	83	05 **008857** 001	19	05 **018162** 001	268
05 **006555** 001	85	05 **007610** 001	12	05 **008858** 001	19	05 **018163** 001	268
05 **006556** 001	86	05 **007620** 001	12	05 **008859** 001	19	05 **018164** 001	268
05 **006557** 001	86	05 **007621** 001	12	05 **008860** 001	19	05 **018165** 001	268
05 **006558** 001	86	05 **007635** 001	12	05 **008861** 001	19	05 **018166** 001	268
05 **006559** 001	86	05 **007640** 001	12	05 **008862** 001	19	05 **018167** 001	268
05 **006560** 001	86	05 **007670** 001	12	05 **008863** 001	20	05 **018168** 001	268
05 **006561** 001	90	05 **007671** 001	12	05 **008864** 001	20	05 **018169** 001	268
05 **006562** 001	90	05 **007672** 001	12	05 **008870** 001	26	05 **018170** 001	268
05 **006563** 001	90	05 **007673** 001	12	05 **008871** 001	27	05 **018171** 001	269
05 **006564** 001	90	05 **007674** 001	12	05 **008872** 001	27	05 **018172** 001	269
05 **006565** 001	90	05 **007675** 001	12	05 **008873** 001	262	05 **018173** 001	269
05 **006566** 001	87	05 **007676** 001	12	05 **008874** 001	262	05 **018260** 001	8
05 **006567** 001	87	05 **007677** 001	12	05 **008875** 001	263	05 **018262** 001	8
05 **006568** 001	88	05 **007680** 001	22	05 **008876** 001	27	05 **018264** 001	8
05 **006569** 001	88	05 **007681** 001	22	05 **008877** 001	263	05 **018266** 001	8
05 **006570** 001	89	05 **007900** 001	28	05 **008878** 001	263	05 **018268** 001	8
05 **006571** 001	89	05 **007901** 001	28	05 **008880** 001	279	05 **018270** 001	8
05 **006572** 001	89	05 **007905** 001	28	05 **008881** 001	57	05 **018272** 001	8
05 **006573** 001	89	05 **007906** 001	28	05 **008882** 001	57	05 **018274** 001	8
05 **006574** 001	89	05 **007907** 001	28	05 **008891** 001	244	05 **018282** 001	10
05 **006575** 001	71	05 **007908** 001	28	05 **008892** 001	245	05 **018283** 001	10
05 **006576** 001	71	05 **007910** 001	28	05 **008893** 001	245	05 **018287** 001	10
05 **006577** 001	71	05 **008006** 001	11	05 **009305** 001	14	05 **018300** 001	8
05 **006578** 001	71	05 **008007** 001	11	05 **009310** 001	14	05 **018301** 001	8
05 **006579** 001	71	05 **008008** 001	11	05 **009312** 001	14	05 **018302** 001	8
05 **006580** 001	71	05 **008009** 001	11	05 **009313** 001	14	05 **020012** 001	196
05 **006581** 001	71	05 **008015** 001	11	05 **009315** 001	14	05 **020013** 001	196
05 **006582** 001	72	05 **008027** 001	11	05 **009317** 001	14	05 **020014** 001	195
05 **006583** 001	72	05 **008055** 001	11	05 **009319** 001	14	05 **020015** 001	195
05 **006584** 001	72	05 **008060** 001	11	05 **009320** 001	14	05 **020016** 001	195
05 **006585** 001	72	05 **008061** 001	11	05 **009325** 001	14	05 **020022** 001	196

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **020064** 001	197	05 **020212** 001	199	05 **021070** 001	225	05 **022120** 001	225
05 **020065** 001	197	05 **020213** 001	199	05 **021075** 001	225	05 **022121** 001	225
05 **020066** 001	197	05 **020214** 001	199	05 **021080** 001	225	05 **022122** 001	225
05 **020067** 001	197	05 **020215** 001	199	05 **021085** 001	225	05 **022123** 001	225
05 **020068** 001	197	05 **020216** 001	199	05 **021090** 001	225	05 **022124** 001	225
05 **020069** 001	197	05 **020217** 001	199	05 **021095** 001	225	05 **022125** 001	225
05 **020070** 001	197	05 **020218** 001	199	05 **021406** 001	217	05 **022130** 001	216
05 **020071** 001	197	05 **020219** 001	199	05 **021600** 001	225	05 **022171** 001	220
05 **020072** 001	197	05 **020220** 001	199	05 **021605** 001	225	05 **022181** 001	218
05 **020073** 001	197	05 **020221** 001	200	05 **021610** 001	225	05 **022200** 001	222
05 **020074** 001	197	05 **020228** 001	203	05 **021615** 001	225	05 **022201** 001	222
05 **020075** 001	197	05 **020229** 001	204	05 **021620** 001	225	05 **022202** 001	222
05 **020076** 001	197	05 **020230** 001	201	05 **021625** 001	225	05 **022203** 001	222
05 **020077** 001	197	05 **020231** 001	201	05 **021630** 001	225	05 **022204** 001	222
05 **020078** 001	197	05 **020232** 001	200	05 **021632** 001	225	05 **022205** 001	222
05 **020079** 001	197	05 **020233** 001	204	05 **021635** 001	225	05 **022210** 001	213
05 **020080** 001	197	05 **020234** 001	204	05 **021640** 001	225	05 **022534** 001	216
05 **020081** 001	197	05 **020235** 001	204	05 **021645** 001	225	05 **022600** 001	223
05 **020082** 001	197	05 **020240** 001	203	05 **021721** 001	219	05 **022602** 001	223
05 **020090** 001	198	05 **020241** 001	201	05 **021728** 001	219	05 **022604** 001	223
05 **020091** 001	198	05 **020259** 001	199	05 **021737** 001	217	05 **022606** 001	223
05 **020092** 001	198	05 **020260** 001	199	05 **021909** 001	216	05 **022608** 001	223
05 **020093** 001	198	05 **020261** 001	199	05 **021909** 001	304	05 **022610** 001	223
05 **020099** 001	205	05 **020262** 001	199	05 **022040** 001	224	05 **022612** 001	223
05 **020100** 001	205	05 **020263** 001	199	05 **022041** 001	224	05 **022614** 001	223
05 **020101** 001	206	05 **020264** 001	199	05 **022042** 001	224	05 **022616** 001	223
05 **020102** 001	206	05 **020302** 001	201	05 **022043** 001	224	05 **022630** 001	223
05 **020103** 001	205	05 **020310** 001	207	05 **022044** 001	224	05 **022631** 001	223
05 **020104** 001	206	05 **020311** 001	207	05 **022045** 001	224	05 **022632** 001	223
05 **020110** 001	206	05 **020312** 001	207	05 **022046** 001	224	05 **022633** 001	223
05 **020129** 001	60	05 **020313** 001	207	05 **022047** 001	224	05 **022634** 001	223
05 **020131** 001	61	05 **020314** 001	207	05 **022048** 001	224	05 **022635** 001	223
05 **020132** 001	63	05 **020330** 001	208	05 **022050** 001	224	05 **022636** 001	223
05 **020133** 001	61	05 **020331** 001	208	05 **022052** 001	224	05 **022637** 001	223
05 **020134** 001	63	05 **020340** 001	207	05 **022054** 001	224	05 **022638** 001	223
05 **020150** 001	98	05 **020350** 001	209	05 **022056** 001	224	05 **022639** 001	215
05 **020151** 001	99	05 **020351** 001	209	05 **022058** 001	224	05 **022640** 001	215
05 **020152** 001	99	05 **020352** 001	209	05 **022060** 001	224	05 **022641** 001	215
05 **020153** 001	99	05 **020353** 001	209	05 **022062** 001	224	05 **022651** 001	223
05 **020170** 001	98	05 **020354** 001	209	05 **022063** 001	224	05 **022652** 001	223
05 **020171** 001	444	05 **020380** 001	209	05 **022064** 001	224	05 **022653** 001	223
05 **020172** 001	443	05 **020500** 001	199	05 **022066** 001	224	05 **022654** 001	223
05 **020173** 001	443	05 **020501** 001	199	05 **022067** 001	224	05 **022655** 001	223
05 **020174** 001	442	05 **020502** 001	199	05 **022068** 001	224	05 **022656** 001	223
05 **020175** 001	441	05 **020503** 001	199	05 **022070** 001	224	05 **022657** 001	223
05 **020176** 001	441	05 **020504** 001	199	05 **022071** 001	224	05 **022658** 001	223
05 **020177** 001	442	05 **020505** 001	199	05 **022072** 001	224	05 **022659** 001	223
05 **020190** 001	199	05 **020506** 001	199	05 **022073** 001	224	05 **022660** 001	221
05 **020198** 001	199	05 **020507** 001	199	05 **022074** 001	224	05 **022661** 001	221
05 **020199** 001	199	05 **021005** 001	225	05 **022076** 001	224	05 **022662** 001	221
05 **020200** 001	199	05 **021010** 001	225	05 **022078** 001	224	05 **022663** 001	221
05 **020201** 001	199	05 **021015** 001	225	05 **022079** 001	224	05 **022664** 001	221
05 **020202** 001	199	05 **021020** 001	225	05 **022080** 001	224	05 **022665** 001	221
05 **020203** 001	199	05 **021025** 001	225	05 **022081** 001	224	05 **022666** 001	221
05 **020204** 001	199	05 **021030** 001	225	05 **022082** 001	224	05 **022667** 001	221
05 **020205** 001	199	05 **021035** 001	225	05 **022086** 001	217	05 **022668** 001	221
05 **020206** 001	199	05 **021040** 001	225	05 **022087** 001	216	05 **022669** 001	212
05 **020207** 001	199	05 **021045** 001	225	05 **022089** 001	213	05 **022670** 001	223
05 **020208** 001	199	05 **021050** 001	225	05 **022095** 001	224	05 **022671** 001	223
05 **020209** 001	199	05 **021055** 001	225	05 **022096** 001	224	05 **022672** 001	223
05 **020210** 001	199	05 **021060** 001	225	05 **022101** 001	218	05 **022673** 001	223
05 **020211** 001	199	05 **021065** 001	225	05 **022102** 001	218	05 **022674** 001	223

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **022675** 001	223	05 **022810** 001	15	05 **023374** 001	42	05 **024200** 001	231
05 **022676** 001	223	05 **022815** 001	15	05 **023375** 001	42	05 **024202** 001	231
05 **022677** 001	223	05 **022820** 001	15	05 **023376** 001	42	05 **024204** 001	231
05 **022678** 001	223	05 **022825** 001	15	05 **023377** 001	42	05 **024206** 001	231
05 **022680** 001	229	05 **022830** 001	15	05 **023378** 001	42	05 **024208** 001	231
05 **022681** 001	229	05 **022835** 001	15	05 **023379** 001	42	05 **024210** 001	231
05 **022682** 001	229	05 **022850** 001	222	05 **023380** 001	42	05 **024242** 001	228
05 **022683** 001	229	05 **022851** 001	222	05 **023381** 001	43	05 **024244** 001	227
05 **022684** 001	229	05 **022852** 001	222	05 **023382** 001	43	05 **024335** 001	228
05 **022685** 001	229	05 **022853** 001	222	05 **023383** 001	43	05 **024350** 001	230
05 **022686** 001	229	05 **022854** 001	222	05 **023384** 001	43	05 **024351** 001	230
05 **022687** 001	229	05 **022855** 001	222	05 **023385** 001	43	05 **024352** 001	230
05 **022688** 001	229	05 **022856** 001	222	05 **023386** 001	43	05 **024353** 001	230
05 **022689** 001	227	05 **022857** 001	222	05 **023387** 001	43	05 **024354** 001	230
05 **022693** 001	221	05 **022858** 001	222	05 **023389** 001	43	05 **024355** 001	230
05 **022694** 001	221	05 **022860** 001	215	05 **023391** 001	43	05 **024356** 001	230
05 **022695** 001	221	05 **022905** 001	15	05 **023393** 001	43	05 **024357** 001	230
05 **022696** 001	221	05 **022910** 001	15	05 **023400** 001	265	05 **024358** 001	230
05 **022697** 001	221	05 **022920** 001	15	05 **023404** 001	43	05 **024400** 001	9
05 **022698** 001	221	05 **023105** 001	14	05 **023450** 001	45	05 **024401** 001	9
05 **022699** 001	212	05 **023107** 001	14	05 **023451** 001	46	05 **024402** 001	9
05 **022700** 001	222	05 **023110** 001	14	05 **023452** 001	47	05 **024403** 001	9
05 **022701** 001	222	05 **023115** 001	14	05 **023453** 001	45	05 **024404** 001	9
05 **022702** 001	222	05 **023120** 001	14	05 **023454** 001	46	05 **024405** 001	9
05 **022703** 001	222	05 **023125** 001	14	05 **023456** 001	47	05 **024410** 001	11
05 **022704** 001	222	05 **023130** 001	14	05 **023460** 001	44	05 **024450** 001	227
05 **022705** 001	222	05 **023330** 001	41	05 **023461** 001	44	05 **024451** 001	230
05 **022706** 001	222	05 **023332** 001	41	05 **023470** 001	239	05 **024452** 001	230
05 **022708** 001	222	05 **023334** 001	42	05 **023471** 001	238	05 **024453** 001	230
05 **022709** 001	222	05 **023338** 001	42	05 **024001** 001	231	05 **024454** 001	230
05 **022710** 001	222	05 **023339** 001	42	05 **024002** 001	231	05 **024455** 001	230
05 **022711** 001	222	05 **023340** 001	42	05 **024003** 001	231	05 **024456** 001	230
05 **022712** 001	222	05 **023342** 001	42	05 **024004** 001	231	05 **024457** 001	230
05 **022713** 001	222	05 **023343** 001	42	05 **024005** 001	231	05 **024458** 001	230
05 **022714** 001	222	05 **023344** 001	42	05 **024008** 001	231	05 **024459** 001	230
05 **022715** 001	222	05 **023346** 001	42	05 **024010** 001	231	05 **024460** 001	228
05 **022716** 001	222	05 **023347** 001	42	05 **024012** 001	231	05 **024461** 001	231
05 **022717** 001	222	05 **023348** 001	42	05 **024013** 001	231	05 **024462** 001	231
05 **022718** 001	222	05 **023350** 001	42	05 **024015** 001	231	05 **024463** 001	231
05 **022720** 001	212	05 **023351** 001	42	05 **024020** 001	231	05 **024464** 001	230
05 **022721** 001	213	05 **023352** 001	42	05 **024100** 001	231	05 **024465** 001	230
05 **022728** 001	59	05 **023353** 001	42	05 **024105** 001	231	05 **024466** 001	230
05 **022729** 001	58	05 **023354** 001	42	05 **024160** 001	231	05 **024467** 001	230
05 **022730** 001	58	05 **023355** 001	42	05 **024161** 001	231	05 **024468** 001	230
05 **022731** 001	58	05 **023356** 001	42	05 **024162** 001	231	05 **024469** 001	230
05 **022732** 001	58	05 **023357** 001	42	05 **024163** 001	231	05 **024470** 001	227
05 **022733** 001	58	05 **023358** 001	42	05 **024164** 001	231	05 **024471** 001	229
05 **022734** 001	58	05 **023359** 001	42	05 **024165** 001	231	05 **024472** 001	229
05 **022740** 001	58	05 **023360** 001	42	05 **024166** 001	231	05 **024473** 001	229
05 **022741** 001	58	05 **023361** 001	42	05 **024167** 001	231	05 **024474** 001	229
05 **022745** 001	59	05 **023362** 001	42	05 **024168** 001	231	05 **024475** 001	229
05 **022760** 001	59	05 **023363** 001	42	05 **024170** 001	229	05 **024476** 001	229
05 **022761** 001	59	05 **023364** 001	42	05 **024171** 001	229	05 **024477** 001	229
05 **022762** 001	59	05 **023365** 001	42	05 **024172** 001	229	05 **024478** 001	229
05 **022763** 001	59	05 **023366** 001	42	05 **024173** 001	229	05 **024479** 001	229
05 **022764** 001	59	05 **023367** 001	42	05 **024174** 001	229	05 **024480** 001	227
05 **022765** 001	59	05 **023368** 001	42	05 **024175** 001	229	05 **024481** 001	230
05 **022766** 001	59	05 **023369** 001	42	05 **024176** 001	229	05 **024482** 001	230
05 **022767** 001	59	05 **023370** 001	42	05 **024177** 001	229	05 **024483** 001	230
05 **022795** 001	15	05 **023371** 001	42	05 **024178** 001	229	05 **024484** 001	229
05 **022800** 001	15	05 **023372** 001	42	05 **024179** 001	227	05 **024485** 001	229
05 **022805** 001	15	05 **023373** 001	42	05 **024199** 001	231	05 **024486** 001	229

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **024487** 001	229	05 **028008** 001	16	05 **029462** 001	19	05 **030412** 001	51
05 **024488** 001	229	05 **028010** 001	16	05 **029463** 001	19	05 **030413** 001	51
05 **024489** 001	229	05 **028012** 001	16	05 **029464** 001	19	05 **030414** 001	51
05 **026350** 001	30	05 **028013** 001	16	05 **029465** 001	19	05 **030415** 001	51
05 **026351** 001	30	05 **028015** 001	16	05 **029466** 001	19	05 **030416** 001	51
05 **026352** 001	30	05 **028020** 001	16	05 **029501** 001	19	05 **030417** 001	51
05 **026353** 001	30	05 **028029** 001	17	05 **029502** 001	19	05 **030418** 001	51
05 **026354** 001	30	05 **028030** 001	17	05 **029503** 001	19	05 **032001** 001	6
05 **026360** 001	30	05 **028031** 001	17	05 **029504** 001	19	05 **032002** 001	6
05 **026361** 001	30	05 **028032** 001	17	05 **029505** 001	19	05 **032003** 001	6
05 **026363** 001	30	05 **028033** 001	17	05 **029506** 001	19	05 **032004** 001	6
05 **026372** 001	30	05 **028034** 001	17	05 **029507** 001	19	05 **032005** 001	6
05 **026373** 001	30	05 **028035** 001	17	05 **029510** 001	25	05 **032006** 001	6
05 **026374** 001	30	05 **028036** 001	17	05 **030080** 001	51	05 **032007** 001	6
05 **026382** 001	30	05 **028037** 001	17	05 **030081** 001	51	05 **032020** 001	6
05 **027101** 001	224	05 **028038** 001	17	05 **030082** 001	51	05 **032021** 001	6
05 **027102** 001	224	05 **028040** 001	418	05 **030083** 001	51	05 **032022** 001	6
05 **027103** 001	224	05 **028041** 001	418	05 **030084** 001	51	05 **032023** 001	6
05 **027104** 001	224	05 **028042** 001	418	05 **030099** 001	49	05 **032030** 001	7
05 **027105** 001	224	05 **028043** 001	418	05 **030100** 001	49	05 **032031** 001	7
05 **027106** 001	224	05 **028044** 001	418	05 **030101** 001	49	05 **032032** 001	7
05 **027107** 001	224	05 **028045** 001	418	05 **030102** 001	49	05 **032033** 001	7
05 **027108** 001	224	05 **028046** 001	418	05 **030103** 001	49	05 **032050** 001	7
05 **027109** 001	224	05 **028048** 001	15	05 **030104** 001	49	05 **032051** 001	7
05 **027110** 001	224	05 **028049** 001	15	05 **030105** 001	49	05 **032052** 001	7
05 **027111** 001	224	05 **028050** 001	15	05 **030106** 001	49	05 **032053** 001	7
05 **027201** 001	226	05 **028051** 001	15	05 **030107** 001	49	05 **032054** 001	7
05 **027202** 001	226	05 **028052** 001	15	05 **030108** 001	49	05 **032055** 001	7
05 **027203** 001	226	05 **028053** 001	15	05 **030109** 001	50	05 **032056** 001	7
05 **027204** 001	226	05 **028054** 001	15	05 **030110** 001	49	05 **032057** 001	7
05 **027205** 001	226	05 **028055** 001	15	05 **030111** 001	49	05 **032058** 001	7
05 **027206** 001	226	05 **028056** 001	15	05 **030112** 001	49	05 **032060** 001	7
05 **027207** 001	226	05 **028059** 001	24	05 **030113** 001	50	05 **032061** 001	7
05 **027208** 001	226	05 **028062** 001	25	05 **030114** 001	50	05 **032063** 001	8
05 **027209** 001	226	05 **028070** 001	15	05 **030115** 001	50	05 **032070** 002	7
05 **027210** 001	226	05 **028071** 001	15	05 **030116** 001	50	05 **032071** 002	7
05 **027211** 001	226	05 **028072** 001	15	05 **030117** 001	49	05 **033404** 001	31
05 **027212** 001	226	05 **028073** 001	15	05 **030118** 001	49	05 **040001** 001	265
05 **027213** 001	226	05 **028074** 001	24	05 **030119** 001	49	05 **042605** 001	367
05 **027214** 001	226	05 **028148** 001	18	05 **030120** 001	50	05 **042655** 001	367
05 **027215** 001	226	05 **028150** 001	18	05 **030121** 001	50	05 **042665** 001	367
05 **027405** 001	31	05 **028152** 001	18	05 **030122** 001	50	05 **042670** 001	366
05 **027450** 001	51	05 **028160** 001	278	05 **030135** 001	50	05 **042671** 001	366
05 **027455** 001	31	05 **028161** 001	278	05 **030150** 001	51	05 **042672** 001	366
05 **027456** 001	37	05 **028205** 001	18	05 **030151** 001	51	05 **042673** 001	366
05 **027910** 001	417	05 **028210** 001	18	05 **030158** 001	50	05 **042674** 001	366
05 **027911** 001	417	05 **028215** 001	18	05 **030159** 001	50	05 **042680** 001	366
05 **027912** 001	417	05 **028220** 001	18	05 **030160** 001	35	05 **042705** 001	367
05 **027913** 001	417	05 **028225** 001	18	05 **030170** 001	53	05 **042715** 001	367
05 **027930** 001	417	05 **028230** 001	18	05 **030180** 001	53	05 **042750** 001	367
05 **027931** 001	417	05 **029405** 001	18	05 **030181** 001	40	05 **042755** 001	367
05 **027932** 001	417	05 **029410** 001	18	05 **030330** 001	51	05 **042760** 001	367
05 **027933** 001	417	05 **029415** 001	18	05 **030331** 001	51	05 **042765** 001	367
05 **027934** 001	417	05 **029420** 001	18	05 **030400** 001	50	05 **042768** 001	367
05 **027935** 001	417	05 **029425** 001	18	05 **030401** 001	50	05 **049000** 001	180
05 **027936** 001	418	05 **029430** 001	18	05 **030402** 001	50	05 **049001** 001	181
05 **028000** 001	16	05 **029435** 001	18	05 **030403** 001	50	05 **049002** 001	182
05 **028001** 001	16	05 **029440** 001	18	05 **030404** 001	50	05 **049003** 001	181
05 **028002** 001	16	05 **029445** 001	18	05 **030405** 001	50	05 **049004** 001	184
05 **028003** 001	16	05 **029450** 001	18	05 **030406** 001	50	05 **049005** 001	184
05 **028004** 001	16	05 **029460** 001	19	05 **030410** 001	51	05 **049020** 001	183
05 **028005** 001	16	05 **029461** 001	19	05 **030411** 001	51	05 **049025** 001	184

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **049050** 001	189	05 **051536** 001	244	05 **056342** 001	347	05 **056820** 001	322
05 **049055** 001	185	05 **051540** 001	246	05 **056343** 001	347	05 **056825** 001	322
05 **049056** 001	186	05 **051575** 001	91	05 **056344** 001	347	05 **056835** 001	322
05 **049060** 001	186	05 **051576** 001	92	05 **056345** 001	347	05 **056910** 001	322
05 **049065** 001	190	05 **051580** 001	91	05 **056346** 001	347	05 **056915** 001	322
05 **049070** 001	191	05 **051582** 001	91	05 **056350** 001	343	05 **056925** 001	322
05 **050005** 001	111	05 **051583** 001	91	05 **056352** 001	343	05 **057113** 001	260
05 **050205** 001	365	05 **051587** 001	91	05 **056354** 001	343	05 **057114** 001	260
05 **050210** 001	365	05 **051601** 001	91	05 **056356** 001	343	05 **057115** 001	382
05 **050215** 001	365	05 **051603** 001	91	05 **056358** 001	343	05 **057122** 001	379
05 **050220** 001	365	05 **051611** 001	91	05 **056374** 001	376	05 **057150** 001	353
05 **050510** 001	365	05 **051613** 001	91	05 **056375** 001	381	05 **057151** 001	353
05 **050650** 001	365	05 **051835** 001	265	05 **056400** 001	309	05 **057152** 001	353
05 **051005** 001	279	05 **052490** 001	360	05 **056402** 001	309	05 **057153** 001	353
05 **051010** 001	21	05 **052500** 001	360	05 **056404** 001	309	05 **057160** 001	353
05 **051011** 001	21	05 **052501** 001	361	05 **056410** 001	309	05 **057161** 001	353
05 **051012** 001	20	05 **052502** 001	360	05 **056412** 001	309	05 **057162** 001	353
05 **051016** 001	250	05 **052503** 001	360	05 **056414** 001	309	05 **057163** 001	353
05 **051017** 001	251	05 **052504** 001	360	05 **056420** 001	310	05 **057225** 001	340
05 **051021** 001	251	05 **052575** 001	362	05 **056422** 001	310	05 **057235** 001	340
05 **051024** 001	252	05 **053425** 001	363	05 **056424** 001	310	05 **057240** 001	340
05 **051025** 001	252	05 **053455** 001	363	05 **056440** 001	380	05 **057412** 001	378
05 **051028** 001	252	05 **053457** 001	363	05 **056470** 001	390	05 **057415** 001	378
05 **051032** 001	253	05 **053458** 001	363	05 **056471** 001	386	05 **057416** 001	377
05 **051042** 001	258	05 **053459** 001	363	05 **056472** 001	386	05 **057417** 001	371
05 **051043** 001	54	05 **053520** 001	361	05 **056473** 001	385	05 **057418** 001	174
05 **051045** 001	106	05 **053522** 001	361	05 **056474** 001	385	05 **057420** 001	375
05 **051060** 001	241	05 **053870** 001	361	05 **056478** 001	386	05 **057421** 001	377
05 **051061** 001	242	05 **053872** 001	361	05 **056500** 001	312	05 **057422** 001	389
05 **051065** 001	241	05 **053923** 001	359	05 **056505** 001	312	05 **057423** 001	389
05 **051066** 001	242	05 **056064** 001	339	05 **056507** 001	312	05 **057424** 001	392
05 **051205** 001	279	05 **056066** 001	339	05 **056510** 001	312	05 **057430** 001	375
05 **051272** 001	278	05 **056068** 001	339	05 **056515** 001	312	05 **057431** 001	377
05 **051273** 001	54	05 **056158** 001	384	05 **056520** 001	312	05 **057432** 001	388
05 **051274** 001	279	05 **056159** 001	382	05 **056525** 001	312	05 **057433** 001	387
05 **051276** 001	37	05 **056161** 001	381	05 **056535** 001	312	05 **057434** 001	391
05 **051278** 001	37	05 **056164** 001	382	05 **056605** 001	311	05 **057435** 001	388
05 **051462** 001	278	05 **056168** 001	384	05 **056610** 001	311	05 **057436** 001	387
05 **051464** 001	54	05 **056172** 001	338	05 **056625** 001	311	05 **057437** 001	387
05 **051465** 001	277	05 **056174** 001	338	05 **056653** 001	249	05 **057438** 001	388
05 **051482** 001	277	05 **056176** 001	338	05 **056662** 001	312	05 **057440** 001	391
05 **051492** 001	247	05 **056200** 001	339	05 **056680** 001	342	05 **057441** 001	374
05 **051493** 001	247	05 **056203** 001	339	05 **056681** 001	342	05 **057450** 001	379
05 **051494** 001	246	05 **056210** 001	339	05 **056682** 001	342	05 **057460** 001	261
05 **051495** 001	247	05 **056220** 001	339	05 **056683** 001	342	05 **057471** 001	263
05 **051500** 001	362	05 **056225** 001	339	05 **056684** 001	342	05 **057472** 001	56
05 **051501** 001	362	05 **056233** 001	339	05 **056685** 001	342	05 **057473** 001	239
05 **051502** 001	362	05 **056240** 001	339	05 **056686** 001	342	05 **057474** 001	240
05 **051510** 001	253	05 **056294** 001	384	05 **056687** 001	342	05 **057480** 001	249
05 **051511** 001	254	05 **056295** 001	383	05 **056700** 001	320	05 **057481** 001	85
05 **051512** 001	254	05 **056296** 001	383	05 **056702** 001	320	05 **057482** 001	248
05 **051513** 001	234	05 **056303** 001	342	05 **056704** 001	320	05 **057483** 001	248
05 **051514** 001	234	05 **056305** 001	342	05 **056710** 001	321	05 **057490** 001	73
05 **051515** 001	235	05 **056310** 001	342	05 **056712** 001	321	05 **057505** 001	346
05 **051516** 001	235	05 **056315** 001	342	05 **056714** 001	321	05 **057510** 001	346
05 **051517** 001	235	05 **056320** 001	342	05 **056720** 001	321	05 **057515** 001	346
05 **051518** 001	236	05 **056325** 001	342	05 **056722** 001	321	05 **057520** 001	346
05 **051519** 001	236	05 **056330** 001	342	05 **056724** 001	321	05 **057525** 001	346
05 **051520** 001	236	05 **056332** 001	342	05 **056805** 001	322	05 **057530** 001	346
05 **051530** 001	237	05 **056335** 001	342	05 **056810** 001	322	05 **057603** 001	341
05 **051531** 001	238	05 **056340** 001	342	05 **056812** 001	322	05 **057604** 001	341
05 **051535** 001	243	05 **056341** 001	347	05 **056815** 001	322	05 **057605** 001	341

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **057606** 001	341	05 **058005** 001	326	05 **059550** 001	315	05 **059810** 001	316
05 **057615** 001	308	05 **058010** 001	326	05 **059552** 001	315	05 **059815** 001	316
05 **057616** 001	308	05 **058015** 001	326	05 **059554** 001	315	05 **059855** 001	316
05 **057617** 001	308	05 **058020** 001	326	05 **059602** 001	345	05 **059860** 001	316
05 **057620** 001	319	05 **058101** 001	340	05 **059603** 001	345	05 **059865** 001	316
05 **057621** 001	319	05 **058102** 001	335	05 **059604** 001	345	05 **059896** 001	327
05 **057622** 001	319	05 **058104** 001	340	05 **059605** 001	345	05 **059897** 001	327
05 **057623** 001	327	05 **058105** 001	340	05 **059610** 001	345	05 **059900** 001	324
05 **057624** 001	327	05 **058108** 001	346	05 **059615** 001	345	05 **059902** 001	324
05 **057625** 001	327	05 **058109** 001	346	05 **059620** 001	345	05 **059904** 001	324
05 **057626** 001	327	05 **058110** 001	346	05 **059625** 001	345	05 **059910** 001	324
05 **057627** 001	327	05 **058111** 001	346	05 **059628** 001	345	05 **059912** 001	324
05 **057628** 001	327	05 **058112** 001	346	05 **059629** 001	345	05 **059914** 001	324
05 **057631** 001	348	05 **058119** 001	318	05 **059630** 001	345	05 **059920** 001	325
05 **057632** 001	348	05 **058120** 001	318	05 **059631** 001	345	05 **059922** 001	325
05 **057644** 001	343	05 **058121** 001	318	05 **059632** 001	345	05 **059924** 001	325
05 **057645** 001	343	05 **058122** 001	318	05 **059633** 001	345	05 **060005** 001	325
05 **057646** 001	343	05 **058129** 001	335	05 **059634** 001	345	05 **060010** 001	325
05 **057656** 001	313	05 **058130** 001	335	05 **059635** 001	345	05 **060015** 001	325
05 **057657** 001	313	05 **058131** 001	335	05 **059636** 001	345	05 **060027** 001	325
05 **057661** 001	323	05 **058132** 001	335	05 **059637** 001	345	05 **060029** 001	325
05 **057662** 001	323	05 **058133** 001	335	05 **059640** 001	347	05 **060030** 001	325
05 **057664** 001	332	05 **058140** 001	326	05 **059641** 001	347	05 **060031** 001	325
05 **057665** 001	332	05 **058141** 001	326	05 **059642** 001	347	05 **060033** 001	325
05 **057666** 001	332	05 **059293** 001	256	05 **059643** 001	347	05 **060035** 001	325
05 **057667** 001	332	05 **059294** 001	258	05 **059644** 001	347	05 **060036** 001	325
05 **057671** 001	349	05 **059295** 001	257	05 **059645** 001	347	05 **060037** 001	325
05 **057672** 001	349	05 **059297** 001	259	05 **059660** 001	345	05 **060038** 001	325
05 **057675** 001	358	05 **059298** 001	255	05 **059661** 001	345	05 **060041** 001	325
05 **057676** 001	358	05 **059299** 001	255	05 **059662** 001	345	05 **060043** 001	325
05 **057680** 001	370	05 **059305** 001	340	05 **059663** 001	345	05 **060045** 001	325
05 **057682** 001	371	05 **059307** 001	340	05 **059664** 001	345	05 **060047** 001	325
05 **057683** 001	371	05 **059310** 001	340	05 **059665** 001	345	05 **060048** 001	336
05 **057684** 001	371	05 **059315** 001	340	05 **059666** 001	345	05 **060049** 001	336
05 **057688** 001	371	05 **059320** 001	340	05 **059667** 001	345	05 **060050** 001	336
05 **057690** 001	370	05 **059325** 001	340	05 **059668** 001	345	05 **060051** 001	336
05 **057691** 001	372	05 **059330** 001	340	05 **059680** 001	346	05 **060052** 001	336
05 **057692** 001	372	05 **059335** 001	340	05 **059681** 001	346	05 **060053** 001	336
05 **057693** 001	372	05 **059337** 001	340	05 **059682** 001	346	05 **060054** 001	336
05 **057695** 001	372	05 **059340** 001	340	05 **059683** 001	346	05 **060055** 001	325
05 **057697** 001	370	05 **059345** 001	340	05 **059700** 001	333	05 **060056** 001	336
05 **057705** 001	318	05 **059450** 001	340	05 **059701** 001	333	05 **060057** 001	336
05 **057710** 001	318	05 **059451** 001	340	05 **059702** 001	333	05 **060060** 001	325
05 **057715** 001	318	05 **059452** 001	340	05 **059703** 001	333	05 **060065** 001	325
05 **057720** 001	318	05 **059453** 001	340	05 **059704** 001	333	05 **060098** 001	334
05 **057750** 001	313	05 **059466** 001	340	05 **059705** 001	333	05 **060100** 001	334
05 **057751** 001	310	05 **059472** 001	340	05 **059720** 001	326	05 **060105** 001	334
05 **057752** 001	308	05 **059478** 001	340	05 **059721** 001	326	05 **060110** 001	334
05 **057760** 001	323	05 **059480** 001	340	05 **059755** 001	316	05 **060115** 001	334
05 **057761** 001	321	05 **059486** 001	340	05 **059760** 001	316	05 **060120** 001	334
05 **057762** 001	321	05 **059488** 001	340	05 **059765** 001	316	05 **060125** 001	334
05 **057763** 001	319	05 **059489** 001	340	05 **059766** 001	316	05 **060130** 001	334
05 **057770** 001	331	05 **059490** 001	340	05 **059770** 001	316	05 **060131** 001	334
05 **057772** 001	327	05 **059492** 001	340	05 **059775** 001	316	05 **060132** 001	334
05 **057773** 001	331	05 **059496** 001	340	05 **059780** 001	316	05 **060133** 001	334
05 **057775** 001	327	05 **059500** 001	340	05 **059785** 001	316	05 **060134** 001	334
05 **057776** 001	327	05 **059530** 001	314	05 **059786** 001	316	05 **060135** 001	334
05 **057777** 001	330	05 **059532** 001	314	05 **059790** 001	316	05 **060136** 001	334
05 **057778** 001	330	05 **059534** 001	314	05 **059795** 001	316	05 **060137** 001	334
05 **057790** 001	349	05 **059540** 001	315	05 **059800** 001	316	05 **060138** 001	334
05 **057900** 001	380	05 **059542** 001	315	05 **059802** 001	316	05 **060139** 001	336
05 **057908** 001	380	05 **059544** 001	315	05 **059805** 001	316	05 **060140** 001	336

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **060141** 001	336	05 **060298** 001	351	05 **066128** 001	329	05 **066496** 001	330
05 **060142** 001	336	05 **060300** 001	351	05 **066130** 001	329	05 **066497** 001	335
05 **060143** 001	336	05 **060301** 001	351	05 **066140** 001	329	05 **066498** 001	335
05 **060144** 001	336	05 **060302** 001	351	05 **066141** 001	329	05 **066499** 001	335
05 **060145** 001	336	05 **060303** 001	351	05 **066142** 001	329	05 **066500** 001	335
05 **060146** 001	336	05 **060304** 001	351	05 **066143** 001	329	05 **066505** 001	335
05 **060147** 001	350	05 **060400** 001	353	05 **066144** 001	329	05 **066510** 001	335
05 **060148** 001	350	05 **060401** 001	353	05 **066145** 001	329	05 **066515** 001	335
05 **060149** 001	350	05 **060402** 001	353	05 **066150** 001	352	05 **066520** 001	335
05 **060150** 001	350	05 **060403** 001	353	05 **066155** 001	352	05 **066525** 001	335
05 **060155** 001	350	05 **060404** 001	353	05 **066160** 001	352	05 **066530** 001	335
05 **060160** 001	350	05 **060405** 001	353	05 **066165** 001	352	05 **066618** 001	351
05 **060165** 001	350	05 **060406** 001	353	05 **066170** 001	352	05 **066619** 001	351
05 **060170** 001	350	05 **060407** 001	353	05 **066272** 001	337	05 **066620** 001	351
05 **060175** 001	350	05 **060408** 001	353	05 **066274** 001	337	05 **066622** 001	351
05 **060180** 001	350	05 **060409** 001	353	05 **066276** 001	337	05 **066624** 001	351
05 **060182** 001	350	05 **060410** 001	353	05 **066278** 001	337	05 **066626** 001	351
05 **060184** 001	350	05 **060411** 001	353	05 **066279** 001	337	05 **066628** 001	351
05 **060185** 001	334	05 **060412** 001	353	05 **066280** 001	337	05 **066630** 001	351
05 **060186** 001	334	05 **060420** 001	354	05 **066282** 001	337	05 **066632** 001	351
05 **060187** 001	334	05 **060421** 001	354	05 **066284** 001	337	05 **066633** 001	351
05 **060188** 001	334	05 **060422** 001	354	05 **066286** 001	337	05 **066634** 001	351
05 **060189** 001	334	05 **060423** 001	354	05 **066287** 001	337	05 **066635** 001	351
05 **060190** 001	334	05 **060424** 001	354	05 **066288** 001	337	05 **066638** 001	351
05 **060191** 001	334	05 **060425** 001	354	05 **066290** 001	337	05 **066640** 001	351
05 **060192** 001	334	05 **060426** 001	354	05 **066300** 001	330	05 **066642** 001	351
05 **060193** 001	334	05 **060427** 001	354	05 **066301** 001	330	05 **066644** 001	351
05 **060194** 001	334	05 **060428** 001	354	05 **066302** 001	330	05 **066646** 001	351
05 **060195** 001	334	05 **060429** 001	354	05 **066303** 001	330	05 **066654** 001	352
05 **060196** 001	334	05 **060430** 001	354	05 **066304** 001	330	05 **066656** 001	352
05 **060197** 001	334	05 **060431** 001	354	05 **066305** 001	330	05 **066660** 001	352
05 **060198** 001	334	05 **060432** 001	354	05 **066308** 001	330	05 **066662** 001	352
05 **060199** 001	334	05 **060505** 001	333	05 **066310** 001	330	05 **066664** 001	352
05 **060200** 001	334	05 **060506** 001	333	05 **066312** 001	330	05 **066666** 001	352
05 **060201** 001	334	05 **060507** 001	333	05 **066313** 001	330	05 **066668** 001	352
05 **060202** 001	334	05 **060508** 001	333	05 **066315** 001	330	05 **066670** 001	352
05 **060210** 001	354	05 **060509** 001	333	05 **066320** 001	330	05 **066672** 001	352
05 **060215** 001	354	05 **060510** 001	333	05 **066325** 001	330	05 **066674** 001	352
05 **060220** 001	354	05 **060511** 001	333	05 **066330** 001	330	05 **066676** 001	352
05 **060225** 001	354	05 **064155** 001	335	05 **066335** 001	330	05 **066678** 001	352
05 **060230** 001	354	05 **064170** 001	335	05 **066394** 001	349	05 **066680** 001	352
05 **060235** 001	354	05 **064175** 001	335	05 **066395** 001	349	05 **066682** 001	352
05 **060237** 001	354	05 **065081** 001	318	05 **066396** 001	349	05 **066683** 001	352
05 **060238** 001	354	05 **065096** 001	326	05 **066400** 001	349	05 **066684** 001	352
05 **060240** 001	354	05 **065110** 001	318	05 **066405** 001	349	05 **066685** 001	352
05 **060255** 001	354	05 **065112** 001	318	05 **066410** 001	349	05 **066686** 001	352
05 **060260** 001	354	05 **065114** 001	318	05 **066415** 001	349	05 **066687** 001	352
05 **060265** 001	354	05 **065129** 001	326	05 **066420** 001	349	05 **066688** 001	351
05 **060272** 001	353	05 **065197** 001	318	05 **066455** 001	331	05 **066690** 001	351
05 **060274** 001	353	05 **066081** 001	332	05 **066460** 001	331	05 **066692** 001	351
05 **060276** 001	353	05 **066082** 001	332	05 **066465** 001	331	05 **066694** 001	351
05 **060278** 001	353	05 **066083** 001	332	05 **066485** 001	330	05 **066696** 001	351
05 **060280** 001	353	05 **066100** 001	329	05 **066486** 001	330	05 **066758** 001	352
05 **060281** 001	353	05 **066102** 001	329	05 **066487** 001	330	05 **066760** 001	352
05 **060282** 001	353	05 **066104** 001	329	05 **066488** 001	330	05 **066762** 001	352
05 **060283** 001	353	05 **066106** 001	329	05 **066489** 001	330	05 **066764** 001	352
05 **060284** 001	353	05 **066108** 001	329	05 **066490** 001	330	05 **066766** 001	352
05 **060286** 001	353	05 **066110** 001	329	05 **066491** 001	330	05 **066768** 001	352
05 **060288** 001	353	05 **066120** 001	329	05 **066492** 001	330	05 **066785** 001	352
05 **060290** 001	353	05 **066122** 001	329	05 **066493** 001	330	05 **066786** 001	352
05 **060296** 001	351	05 **066124** 001	329	05 **066494** 001	330	05 **066787** 001	352
05 **060297** 001	351	05 **066126** 001	329	05 **066495** 001	330	05 **066788** 001	352

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **066850** 001	352	05 **071116** 001	256	05 **073074** 001	349	05 **073342** 001	343
05 **066851** 001	352	05 **071117** 001	257	05 **073075** 001	349	05 **073344** 001	343
05 **066852** 001	352	05 **071222** 001	353	05 **073076** 001	350	05 **073346** 001	330
05 **066853** 001	352	05 **071223** 001	353	05 **073077** 001	350	05 **073357** 001	363
05 **066854** 001	352	05 **071224** 001	353	05 **073200** 001	365	05 **073370** 001	322
05 **066900** 001	335	05 **071225** 001	353	05 **073201** 001	347	05 **073371** 001	322
05 **066901** 001	335	05 **071228** 001	353	05 **073202** 001	348	05 **073372** 001	322
05 **066902** 001	335	05 **072014** 001	456	05 **073210** 001	364	05 **073373** 001	322
05 **066905** 001	335	05 **072017** 001	456	05 **073230** 001	176	05 **073375** 001	330
05 **066910** 001	335	05 **072050** 001	339	05 **073240** 001	254	05 **073376** 001	330
05 **066915** 001	335	05 **072055** 001	339	05 **073241** 001	254	05 **073380** 001	323
05 **066920** 001	335	05 **072057** 001	339	05 **073260** 001	106	05 **073391** 001	216
05 **066925** 001	335	05 **072059** 001	339	05 **073261** 001	124	05 **073401** 001	362
05 **066941** 001	335	05 **072061** 001	339	05 **073262** 001	147	05 **073404** 001	384
05 **066950** 001	335	05 **072063** 001	339	05 **073268** 001	194	05 **073406** 001	383
05 **071010** 001	308	05 **072065** 001	339	05 **073270** 001	194	05 **073410** 001	381
05 **071011** 001	308	05 **072070** 001	312	05 **073271** 001	194	05 **073416** 001	382
05 **071012** 001	308	05 **072072** 001	312	05 **073272** 001	194	05 **073418** 001	376
05 **071020** 001	320	05 **072074** 001	312	05 **073273** 001	194	05 **073419** 001	378
05 **071021** 001	320	05 **072080** 001	322	05 **073274** 001	194	05 **073420** 001	359
05 **071022** 001	320	05 **072082** 001	322	05 **073275** 001	194	05 **073421** 001	360
05 **071030** 001	328	05 **072084** 001	322	05 **073276** 001	194	05 **073470** 001	334
05 **071032** 001	328	05 **072400** 001	312	05 **073277** 001	194	05 **073471** 001	334
05 **071033** 001	328	05 **072401** 001	312	05 **073278** 001	194	05 **073472** 001	334
05 **071034** 001	328	05 **072402** 001	312	05 **073279** 001	194	05 **073473** 001	334
05 **071035** 001	328	05 **072403** 001	323	05 **073280** 001	194	05 **073474** 001	334
05 **071037** 001	328	05 **072404** 001	323	05 **073281** 001	194	05 **073495** 001	355
05 **071038** 001	328	05 **072405** 001	323	05 **073282** 001	194	05 **073500** 001	354
05 **071070** 001	341	05 **072406** 001	331	05 **073283** 001	194	05 **073501** 001	354
05 **071071** 001	341	05 **072407** 001	331	05 **073284** 001	194	05 **073502** 001	354
05 **071072** 001	341	05 **072408** 001	331	05 **073285** 001	194	05 **073503** 001	354
05 **071073** 001	341	05 **072409** 001	331	05 **073286** 001	194	05 **073504** 001	354
05 **071074** 001	341	05 **072411** 001	331	05 **073287** 001	194	05 **073505** 001	354
05 **071075** 001	341	05 **072412** 001	331	05 **073290** 001	196	05 **073506** 001	354
05 **071076** 001	341	05 **072441** 001	313	05 **073295** 001	197	05 **073507** 001	354
05 **071077** 001	341	05 **072443** 001	323	05 **073304** 001	312	05 **073508** 001	354
05 **071080** 001	339	05 **072444** 001	323	05 **073305** 001	312	05 **073509** 001	354
05 **071081** 001	314	05 **072446** 001	331	05 **073306** 001	312	05 **073510** 001	354
05 **071082** 001	314	05 **072447** 001	331	05 **073307** 001	312	05 **073511** 001	360
05 **071083** 001	314	05 **072448** 001	331	05 **073308** 001	323	05 **073520** 001	317
05 **071084** 001	324	05 **072449** 001	331	05 **073309** 001	323	05 **073521** 001	317
05 **071085** 001	324	05 **072451** 001	331	05 **073310** 001	323	05 **073522** 001	317
05 **071086** 001	324	05 **072452** 001	331	05 **073311** 001	323	05 **073523** 001	326
05 **071089** 001	336	05 **073050** 001	343	05 **073313** 001	330	05 **073524** 001	326
05 **071090** 001	336	05 **073051** 001	343	05 **073314** 001	330	05 **073525** 001	326
05 **071091** 001	336	05 **073052** 001	343	05 **073315** 001	330	05 **073526** 001	334
05 **071092** 001	336	05 **073053** 001	343	05 **073316** 001	330	05 **073527** 001	334
05 **071094** 001	336	05 **073054** 001	343	05 **073317** 001	330	05 **073528** 001	334
05 **071097** 001	350	05 **073055** 001	343	05 **073318** 001	361	05 **073529** 001	334
05 **071098** 001	350	05 **073056** 001	345	05 **073323** 001	312	05 **073530** 001	334
05 **071099** 001	350	05 **073057** 001	345	05 **073324** 001	312	05 **073531** 001	334
05 **071100** 001	359	05 **073058** 001	345	05 **073325** 001	312	05 **073540** 001	278
05 **071101** 001	344	05 **073059** 001	345	05 **073326** 001	312	05 **073541** 001	277
05 **071102** 001	344	05 **073060** 001	345	05 **073332** 001	309	05 **073544** 001	213
05 **071103** 001	344	05 **073061** 001	345	05 **073333** 001	309	05 **073593** 001	214
05 **071104** 001	344	05 **073064** 001	336	05 **073334** 001	309	05 **073594** 001	217
05 **071105** 001	344	05 **073065** 001	336	05 **073335** 001	309	05 **073596** 001	217
05 **071106** 001	344	05 **073066** 001	336	05 **073336** 001	321	05 **073598** 001	228
05 **071107** 001	344	05 **073070** 001	337	05 **073337** 001	321	05 **073599** 001	228
05 **071108** 001	344	05 **073071** 001	337	05 **073338** 001	321	05 **073610** 001	309
05 **071109** 001	373	05 **073072** 001	337	05 **073339** 001	321	05 **073611** 001	309
05 **071110** 001	373	05 **073073** 001	337	05 **073340** 001	330	05 **073613** 001	320

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **073614** 001	320	05 **074700** 001	400	05 **074840** 001	407	05 **078606** 001	444
05 **073615** 001	320	05 **074701** 001	400	05 **074840** 010	413	05 **078607** 001	444
05 **073616** 001	359	05 **074702** 001	400	05 **074842** 001	407	05 **078608** 001	444
05 **073620** 001	328	05 **074705** 001	400	05 **074842** 010	413	05 **078609** 001	444
05 **073621** 001	328	05 **074710** 001	400	05 **075604** 001	422	05 **078610** 001	444
05 **073622** 001	328	05 **074711** 001	400	05 **075605** 001	422	05 **078611** 001	444
05 **073623** 001	328	05 **074712** 001	400	05 **075610** 001	425	05 **078612** 001	444
05 **073625** 001	328	05 **074715** 001	405	05 **075611** 001	425	05 **078620** 001	446
05 **073630** 001	373	05 **074715** 010	410	05 **075620** 001	426	05 **078621** 001	446
05 **073631** 001	397	05 **074716** 001	405	05 **075621** 001	426	05 **078622** 001	446
05 **073634** 001	373	05 **074716** 010	410	05 **075622** 001	427	05 **078623** 001	446
05 **073635** 001	385	05 **074717** 001	406	05 **075623** 001	429	05 **078624** 001	446
05 **073637** 001	386	05 **074717** 010	411	05 **075624** 001	429	05 **078625** 001	446
05 **073638** 001	385	05 **074720** 001	406	05 **075625** 001	431	05 **078626** 001	446
05 **073639** 001	390	05 **074720** 010	411	05 **075626** 001	432	05 **078627** 001	446
05 **073640** 001	172	05 **074721** 001	407	05 **075630** 001	429	05 **078628** 001	446
05 **073641** 001	389	05 **074721** 010	412	05 **075631** 001	432	05 **078629** 001	446
05 **073645** 001	174	05 **074722** 001	406	05 **075651** 001	434	05 **078630** 001	446
05 **073670** 001	56	05 **074722** 010	411	05 **075652** 001	435	05 **078631** 001	446
05 **073671** 001	55	05 **074728** 001	406	05 **075653** 001	435	05 **078632** 001	446
05 **073675** 001	38	05 **074728** 010	411	05 **075654** 001	435	05 **078633** 001	446
05 **073676** 001	39	05 **074730** 001	404	05 **075655** 001	436	05 **078635** 001	448
05 **073677** 001	39	05 **074731** 001	404	05 **075656** 001	436	05 **078636** 001	448
05 **073680** 001	32	05 **074733** 001	404	05 **075657** 001	437	05 **078637** 001	448
05 **073681** 001	32	05 **074734** 001	404	05 **075670** 001	439	05 **078640** 001	451
05 **073702** 001	83	05 **074738** 001	402	05 **075670** 010	439	05 **078641** 001	451
05 **073720** 001	334	05 **074739** 001	403	05 **075671** 001	439	05 **078642** 001	452
05 **073721** 001	334	05 **074745** 001	403	05 **075671** 010	439	05 **078650** 001	452
05 **073722** 001	334	05 **074746** 001	402	05 **075672** 001	440	05 **078651** 001	452
05 **073723** 001	334	05 **074750** 001	83	05 **075672** 010	440	05 **078652** 001	452
05 **073724** 001	334	05 **074752** 001	83	05 **075673** 001	440	05 **078653** 001	452
05 **073890** 001	372	05 **074757** 001	83	05 **075673** 010	440	05 **078654** 001	452
05 **073904** 001	341	05 **074770** 001	400	05 **075680** 001	428	05 **078655** 001	452
05 **073905** 001	341	05 **074772** 001	400	05 **075681** 001	428	05 **078656** 001	452
05 **073906** 001	341	05 **074774** 001	400	05 **075690** 001	430	05 **078657** 001	452
05 **073916** 001	308	05 **074780** 001	404	05 **075691** 001	430	05 **078658** 001	452
05 **073917** 001	308	05 **074782** 001	404	05 **075692** 001	431	05 **078660** 001	452
05 **073921** 001	319	05 **074784** 001	404	05 **075693** 001	433	05 **078661** 001	452
05 **073922** 001	319	05 **074786** 001	404	05 **075694** 001	433	05 **078662** 001	452
05 **073924** 001	327	05 **074788** 001	404	05 **075695** 001	434	05 **078663** 001	452
05 **073925** 001	327	05 **074790** 001	405	05 **075800** 001	419	05 **078664** 001	452
05 **073926** 001	327	05 **074790** 010	410	05 **075801** 001	419	05 **078666** 001	453
05 **073927** 001	327	05 **074792** 001	405	05 **075810** 001	415	05 **078667** 001	453
05 **073931** 001	348	05 **074792** 010	410	05 **075815** 001	416	05 **078670** 001	445
05 **073932** 001	348	05 **074794** 001	405	05 **075830** 001	420	05 **078671** 001	445
05 **073944** 001	344	05 **074794** 010	410	05 **075831** 001	420	05 **078672** 001	445
05 **073945** 001	344	05 **074800** 001	409	05 **075832** 001	421	05 **078673** 001	445
05 **073946** 001	344	05 **074800** 010	413	05 **075840** 001	415	05 **078674** 001	445
05 **073956** 001	314	05 **074802** 001	404	05 **075850** 001	417	05 **078675** 001	445
05 **073957** 001	314	05 **074804** 001	404	05 **075851** 001	416	05 **078676** 001	445
05 **073961** 001	324	05 **074810** 001	409	05 **075870** 001	69	05 **078677** 001	445
05 **073962** 001	324	05 **074810** 010	413	05 **075876** 001	69	05 **078678** 001	445
05 **073964** 001	332	05 **074820** 001	408	05 **078200** 001	449	05 **078679** 001	445
05 **073965** 001	332	05 **074820** 010	414	05 **078205** 001	450	05 **078680** 001	445
05 **073966** 001	332	05 **074822** 001	408	05 **078210** 001	450	05 **078681** 001	445
05 **073967** 001	332	05 **074822** 010	414	05 **078345** 001	450	05 **078682** 001	445
05 **073971** 001	350	05 **074824** 001	408	05 **078600** 001	444	05 **078683** 001	445
05 **073972** 001	350	05 **074824** 010	414	05 **078601** 001	444	05 **078684** 001	445
05 **073980** 001	371	05 **074826** 001	408	05 **078602** 001	444	05 **078685** 001	445
05 **073984** 001	57	05 **074826** 010	414	05 **078603** 001	444	05 **078686** 001	445
05 **073985** 001	365	05 **074828** 001	408	05 **078604** 001	444	05 **078687** 001	445
05 **073990** 001	358	05 **074828** 010	414	05 **078605** 001	444	05 **078690** 001	447

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **078691** 001	447	05 **100075** 001	9	05 **105631** 001	64	05 **118052** 001	35
05 **078692** 001	447	05 **100076** 001	9	05 **105650** 001	22	05 **118054** 001	35
05 **078693** 001	447	05 **100077** 001	9	05 **105656** 001	23	05 **118060** 001	36
05 **078694** 001	447	05 **100080** 001	9	05 **110000** 001	11	05 **118062** 001	36
05 **078695** 001	447	05 **100081** 001	9	05 **110001** 001	11	05 **118064** 001	36
05 **078696** 001	447	05 **100082** 001	9	05 **110002** 001	11	05 **118066** 001	36
05 **078697** 001	447	05 **100085** 001	8	05 **110003** 001	11	05 **118068** 001	36
05 **078698** 001	447	05 **100086** 001	8	05 **110004** 001	11	05 **118070** 001	36
05 **078699** 001	447	05 **100087** 001	8	05 **110005** 001	11	05 **118072** 001	36
05 **078700** 001	447	05 **100100** 001	64	05 **110006** 001	11	05 **118074** 001	36
05 **078701** 001	447	05 **104600** 001	395	05 **110007** 001	11	05 **118075** 001	36
05 **078702** 001	447	05 **104601** 001	395	05 **110008** 001	11	05 **118076** 001	36
05 **078703** 001	447	05 **104602** 001	395	05 **110010** 001	12	05 **118078** 001	36
05 **078704** 001	447	05 **104603** 001	395	05 **110011** 001	12	05 **118080** 001	36
05 **078705** 001	447	05 **104604** 001	395	05 **110104** 001	12	05 **118082** 001	36
05 **078706** 001	455	05 **104605** 001	395	05 **110105** 001	12	05 **118089** 001	36
05 **078707** 001	449	05 **104610** 001	395	05 **117680** 001	17	05 **118090** 001	36
05 **078708** 001	449	05 **104611** 001	395	05 **117681** 001	17	05 **118092** 001	36
05 **078709** 001	455	05 **104612** 001	395	05 **117682** 001	17	05 **118094** 001	36
05 **078710** 001	451	05 **104613** 001	395	05 **117683** 001	17	05 **118096** 001	36
05 **078711** 001	455	05 **104614** 001	395	05 **117684** 001	17	05 **118098** 001	36
05 **078714** 001	453	05 **104615** 001	395	05 **117685** 001	17	05 **118100** 001	36
05 **078715** 001	453	05 **104616** 001	395	05 **117686** 001	17	05 **118102** 001	36
05 **078716** 001	453	05 **104617** 001	395	05 **117687** 001	17	05 **118103** 001	36
05 **078717** 001	453	05 **104618** 001	395	05 **117691** 001	17	05 **118106** 001	36
05 **078720** 001	454	05 **104619** 001	395	05 **117990** 001	34	05 **118108** 001	37
05 **078721** 001	454	05 **104620** 001	395	05 **117991** 001	34	05 **118109** 001	37
05 **100000** 001	60	05 **104621** 001	395	05 **117992** 001	34	05 **118110** 001	37
05 **100001** 001	60	05 **104622** 001	395	05 **117993** 001	34	05 **118112** 001	37
05 **100002** 001	60	05 **104630** 001	393	05 **117994** 001	34	05 **118114** 001	37
05 **100003** 001	60	05 **104631** 001	393	05 **117995** 001	34	05 **118116** 001	37
05 **100004** 001	60	05 **104632** 001	393	05 **117997** 001	34	05 **118118** 001	37
05 **100011** 001	61	05 **104633** 001	393	05 **118000** 001	34	05 **118120** 001	37
05 **100012** 001	61	05 **104634** 001	393	05 **118002** 001	34	05 **118122** 001	37
05 **100015** 001	61	05 **104635** 001	393	05 **118003** 001	34	05 **118124** 001	37
05 **100016** 001	61	05 **104640** 001	394	05 **118004** 001	34	05 **118126** 001	37
05 **100019** 001	62	05 **104641** 001	394	05 **118005** 001	34	05 **118128** 001	37
05 **100020** 001	62	05 **104642** 001	394	05 **118006** 001	34	05 **118130** 001	37
05 **100021** 001	62	05 **104643** 001	394	05 **118007** 001	34	05 **118132** 001	37
05 **100022** 001	62	05 **104644** 001	394	05 **118008** 001	34	05 **118134** 001	37
05 **100024** 001	63	05 **104645** 001	394	05 **118010** 001	34	05 **118135** 001	37
05 **100025** 001	63	05 **104650** 001	394	05 **118012** 001	34	05 **118136** 001	37
05 **100026** 001	63	05 **104652** 001	395	05 **118014** 001	34	05 **118137** 001	37
05 **100030** 001	12	05 **104653** 001	396	05 **118017** 001	34	05 **118145** 001	36
05 **100031** 001	12	05 **104655** 001	393	05 **118019** 001	35	05 **118150** 001	40
05 **100042** 001	12	05 **104660** 001	393	05 **118020** 001	35	05 **118152** 001	40
05 **100043** 001	12	05 **104661** 001	393	05 **118022** 001	35	05 **118154** 001	41
05 **100044** 001	12	05 **104662** 001	393	05 **118023** 001	35	05 **118156** 001	41
05 **100050** 001	13	05 **104663** 001	393	05 **118024** 001	35	05 **118158** 001	41
05 **100051** 001	13	05 **104664** 001	393	05 **118026** 001	35	05 **118180** 001	35
05 **100052** 001	13	05 **104665** 001	393	05 **118030** 001	34	05 **118181** 001	35
05 **100055** 001	14	05 **104666** 001	392	05 **118032** 001	34	05 **118182** 001	35
05 **100056** 001	14	05 **104667** 001	392	05 **118035** 001	35	05 **118183** 001	35
05 **100057** 001	14	05 **104668** 001	392	05 **118036** 001	35	05 **118184** 001	35
05 **100060** 001	16	05 **104669** 001	392	05 **118037** 001	35	05 **118185** 001	35
05 **100061** 001	16	05 **104670** 001	392	05 **118039** 001	35	05 **118186** 001	35
05 **100062** 001	16	05 **104671** 001	392	05 **118040** 001	35	05 **130002** 001	364
05 **100063** 001	16	05 **104672** 001	392	05 **118042** 001	35	05 **130003** 001	364
05 **100064** 001	16	05 **104751** 001	394	05 **118044** 001	35	05 **130110** 001	423
05 **100070** 001	17	05 **104754** 001	393	05 **118046** 001	35	05 **133150** 001	225
05 **100071** 001	17	05 **105622** 001	23	05 **118048** 001	35	05 **133151** 001	225
05 **100072** 001	17	05 **105630** 001	20	05 **118050** 001	35	05 **133152** 001	225

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05 **133153** 001	225	05 **134674** 001	337	05 **135068** 001	342	05 **135531** 001	317
05 **133154** 001	225	05 **134675** 001	337	05 **135069** 001	342	05 **135532** 001	317
05 **133155** 001	225	05 **134676** 001	337	05 **135070** 001	342	05 **135810** 001	383
05 **133156** 001	225	05 **134677** 001	337	05 **135071** 001	342	05 **135870** 001	271
05 **133157** 001	225	05 **134678** 001	337	05 **135072** 001	342	05 **135871** 001	271
05 **133158** 001	225	05 **134679** 001	337	05 **135073** 001	342	05 **135903** 001	355
05 **133163** 001	217	05 **134680** 001	337	05 **135074** 001	342	05 **135904** 001	355
05 **133164** 001	214	05 **134681** 001	337	05 **135075** 001	342	05 **135918** 001	173
05 **133165** 001	214	05 **134682** 001	337	05 **135076** 001	342	05 **135926** 001	270
05 **133180** 001	220	05 **134683** 001	337	05 **135077** 001	342	05 **135927** 001	274
05 **133285** 001	10	05 **134684** 001	337	05 **135078** 001	342	05 **135928** 001	273
05 **133355** 001	67	05 **134685** 001	337	05 **135079** 001	342	05 **135938** 001	40
05 **133356** 001	66	05 **134686** 001	337	05 **135090** 001	345	05 **135939** 001	272
05 **133862** 001	169	05 **134687** 001	337	05 **135091** 001	345	05 **135942** 001	249
05 **134000** 001	38	05 **134688** 001	337	05 **135092** 001	345	05 **135949** 001	104
05 **134001** 001	31	05 **134690** 001	337	05 **135093** 001	345	05 **135961** 001	66
05 **134002** 001	31	05 **134691** 001	337	05 **135094** 001	345	05 **135973** 001	55
05 **134011** 001	302	05 **134695** 001	337	05 **135095** 001	345	05 **136000** 001	364
05 **134013** 001	275	05 **134698** 001	338	05 **135096** 001	345	05 **136001** 001	365
05 **134015** 001	276	05 **134699** 001	338	05 **135097** 001	345	05 **136002** 001	365
05 **134019** 001	52	05 **134700** 001	338	05 **135098** 001	345	05 **136011** 001	397
05 **134021** 001	396	05 **134701** 001	338	05 **135099** 001	345	05 **136026** 001	275
05 **134025** 001	303	05 **134702** 001	338	05 **135120** 001	337	05 **136033** 001	29
05 **134200** 001	381	05 **134703** 001	338	05 **135121** 001	337	05 **136039** 001	32
05 **134275** 001	26	05 **134704** 001	338	05 **135140** 001	330	05 **136042** 001	276
05 **134370** 001	315	05 **134705** 001	338	05 **135141** 001	330	05 **136043** 001	401
05 **134371** 001	315	05 **134706** 001	338	05 **135142** 001	330	05 **136070** 001	47
05 **134372** 001	315	05 **134707** 001	338	05 **135143** 001	330	05 **136071** 001	304
05 **134373** 001	315	05 **134720** 001	338	05 **135200** 001	334	05 **136072** 001	240
05 **134374** 001	329	05 **134722** 001	338	05 **135201** 001	334	05 **136073** 001	421
05 **134375** 001	329	05 **134723** 001	338	05 **135202** 001	334	05 **136074** 001	164
05 **134376** 001	329	05 **134732** 001	338	05 **135204** 001	334	05 **136075** 001	253
05 **134377** 001	329	05 **134740** 001	334	05 **135205** 001	334	05 **136076** 001	438
05 **134378** 001	329	05 **134800** 001	350	05 **135220** 001	335	05 **136301** 001	345
05 **134379** 001	329	05 **134801** 001	350	05 **135221** 001	335	05 **136302** 001	345
05 **134380** 001	316	05 **134802** 001	350	05 **135222** 001	335	05 **136303** 001	345
05 **134381** 001	316	05 **134805** 001	350	05 **135224** 001	355	05 **136304** 001	345
05 **134382** 001	316	05 **134806** 001	350	05 **135225** 001	355	05 **136305** 001	317
05 **134384** 001	325	05 **134807** 001	350	05 **135230** 001	337	05 **136306** 001	317
05 **134385** 001	325	05 **134905** 001	312	05 **135231** 001	337	05 **136307** 001	317
05 **134386** 001	325	05 **134906** 001	315	05 **135232** 001	337	05 **136308** 001	326
05 **134397** 001	363	05 **134907** 001	315	05 **135233** 001	337	05 **136309** 001	326
05 **134398** 001	363	05 **134910** 001	315	05 **135234** 001	337	05 **136310** 001	326
05 **134399** 001	365	05 **134911** 001	315	05 **135235** 001	337	05 **136311** 001	334
05 **134480** 001	362	05 **134913** 001	315	05 **135264** 001	340	05 **136312** 001	334
05 **134491** 001	255	05 **134914** 001	315	05 **135265** 001	340	05 **136313** 001	334
05 **134605** 001	318	05 **134915** 001	315	05 **135266** 001	340	05 **136314** 001	334
05 **134609** 001	337	05 **134919** 001	310	05 **135267** 001	340	05 **136315** 001	334
05 **134654** 001	338	05 **134920** 001	310	05 **135268** 001	346	05 **136316** 001	334
05 **134655** 001	338	05 **134921** 001	310	05 **135269** 001	346	05 **136385** 001	375
05 **134656** 001	338	05 **134929** 001	315	05 **135270** 001	318	05 **136390** 001	389
05 **134657** 001	338	05 **134930** 001	315	05 **135271** 001	318	05 **136391** 001	390
05 **134658** 001	338	05 **134931** 001	315	05 **135272** 001	318	05 **136392** 001	377
05 **134664** 001	337	05 **134932** 001	315	05 **135273** 001	318	05 **136393** 001	392
05 **134665** 001	337	05 **135003** 001	322	05 **135276** 001	318	05 **136400** 001	170
05 **134667** 001	337	05 **135005** 001	311	05 **135277** 001	318	05 **136413** 001	209
05 **134668** 001	337	05 **135008** 001	310	05 **135280** 001	319	05 **136414** 001	31
05 **134669** 001	337	05 **135009** 001	311	05 **135281** 001	319	05 **136420** 001	119
05 **134670** 001	337	05 **135017** 001	322	05 **135284** 001	319	05 **136421** 001	144
05 **134671** 001	337	05 **135040** 001	313	05 **135285** 001	319	05 **136422** 001	171
05 **134672** 001	337	05 **135041** 001	313	05 **135311** 001	26	05 **136424** 001	48
05 **134673** 001	337	05 **135060** 001	342	05 **135530** 001	317	05 **136425** 001	48

Code No.	Page
05 **136426** 001	49
05 **136700** 001	32
05 **138006** 001	364
05 **138007** 001	159
05 **138070** 001	15
05 **138250** 001	25
05 **138257** 001	16
05 **138258** 001	16
05 **138259** 001	16
05 **138260** 001	16
05 **138261** 001	16
05 **138262** 001	16
05 **138263** 001	16
05 **138264** 001	16
05 **138265** 001	16
05 **138266** 001	16
05 **138268** 001	16
05 **138269** 001	16
05 **138270** 001	16
05 **140310** 001	266
05 **145100** 001	279
05 **150101** 001	283
05 **150102** 001	284
05 **150103** 001	284
05 **150104** 001	285
05 **150105** 001	285
05 **150106** 001	286
05 **150110** 001	286
05 **150111** 001	287
05 **150112** 001	287
05 **150113** 001	288
05 **150114** 001	288
05 **150115** 001	289
05 **150116** 001	289
05 **150120** 001	290
05 **150121** 001	290
05 **150122** 001	291
05 **150123** 001	291
05 **150124** 001	292
05 **150130** 001	282
05 **150140** 001	292
05 **150150** 001	293
05 **150151** 001	294
05 **150152** 001	295
05 **150180** 001	296
05 **150181** 001	296
05 **150182** 001	296
05 **150183** 001	297
05 **150184** 001	297
05 **160785** 001	105
05 **160821** 001	338
05 **160830** 001	334
05 **160885** 001	345
05 **160895** 001	318
05 **160896** 001	316
05 **160899** 001	316
05 **160901** 001	318
05 **160908** 001	318
05 **160917** 001	337
05 **160924** 001	363
05 **160956** 001	337
05 **160976** 001	363
05 **160977** 001	363
05 **160979** 001	363
05 **160981** 001	363
05 **160983** 001	315
05 **200496** 001	335
05 **203913** 001	317
05 **203914** 001	317
05 **204126** 001	338
05 **221110** 001	352
05 **223161** 001	24
05 **259135** 001	338
05 **300004** 001	53
05 **308428** 001	334
05 **311517** 001	364
05 **319835** 001	334
05 **320430** 001	337
05 **320540** 001	24
05 **323780** 001	317
05 **323781** 001	317
05 **324901** 001	351
05 **326310** 001	337
05 **328448** 001	334
05 **332600** 001	334
05 **332606** 001	337
05 **332607** 001	335
05 **332609** 001	335
05 **332610** 001	335
05 **340245** 001	349
05 **340330** 001	12
05 **344511** 001	367
05 **344512** 001	367
05 **344513** 001	367
05 **344514** 001	367
05 **344900** 001	337
05 **345018** 001	335
05 **345019** 001	337
05 **345026** 001	335
05 **345028** 001	335
05 **345032** 001	335
05 **345035** 001	335
05 **345047** 001	334
05 **345056** 001	335
05 **345281** 001	37
05 **345282** 001	37
05 **345284** 001	36
05 **345285** 001	36
05 **345290** 001	35
05 **345350** 001	335
05 **345351** 001	335
05 **345352** 001	335
05 **346281** 001	311
05 **346286** 001	317
05 **346288** 001	345
05 **346293** 001	173
05 **347100** 001	363
05 **347106** 001	21
05 **347153** 001	376
05 **347735** 002	23
05 **347736** 002	23
05 **347743** 001	14
05 **347777** 001	67
05 **347778** 001	25
05 **350430** 001	345
05 **350451** 001	403
05 **380033** 001	345
05 **380045** 001	345
05 **380046** 001	345
05 **380047** 001	345
05 **380048** 001	345
05 **380049** 001	345
05 **380050** 001	345
05 **380124** 001	346
05 **380125** 001	346
05 **380126** 001	346
05 **380127** 001	346
05 **380128** 001	346
05 **380129** 001	346
05 **380130** 001	346
05 **380131** 001	346
05 **380161** 001	315
05 **380200** 001	317
05 **380201** 001	317
05 **380202** 001	317
05 **480172** 001	311
05 **480222** 001	322
05 **670446** 001	305
05 **670447** 001	305
05 **670448** 001	305

Article No. Index

Article No.	Page
68	266
80	265
80 RA	247
81	266
82	266
83	266
84	266
85	266
86	266
87	266
88/1	264
91	265
95 Vario	265
160 i VDE	60
160 i VDE SB	60
160 i/162 i/167 i/9	67
160 i/165 i/7 Rack	65
160 i/168 i/6 Rack	67
160 i/6 Rack	65
160 i/7 Rack	65
160 iS VDE	60
160 iS/7	66
160 iSS	60
160 iSS/7	66
162 i PH/S VDE	62
162 i PH/S VDE SB	62
162 i VDE PH	61
162 i VDE PH SB	61
162 iS PH VDE	61
162 iS PH/S VDE	62
162 iSS PH VDE	61
165 i PZ VDE	61
165 i PZ VDE SB	61
165 i PZ/S VDE	62
165 i PZ/S VDE SB	62
165 iS PZ VDE	62
165 iS PZ/S VDE	63
165 iS PZ/S VDE # 1 + 2	67
165 iSS PZ/S VDE	63
167 i TORX® VDE	63
167 i/6 TORX® VDE	66
168 i VDE	63
168 i VDE SB	63
190 i VDE	64
247	64
247 SB	64
300 Hex	417
300 IP	418
300 TX	417
334	12
334 SB	12
334 SK	12
334 SK/6	22
334/355 SK/6	22
334/355/6 Rack	23
334/368/6	25
334/6	22
335	11
335 SB	12
335 Stubby	19
335/350/355/3	23
335/350/355/4	23
335/350/355/6	23
335/350/367/7	24
338	18
338/2	26
350 PH	13
350 PH SB	13
350 SK	13
350 PH Stubby	19
352	15
354	14
355 PZ	14
355 PZ SB	14
355 SK	13
355 Stubby	19
367 TORX®	16
367 TORX® SB	16
367/6 TORX®	25
367 TORX® BO	16
367/6 TORX® BO	25
367 TORX® HF	15
367/4 TORX® HF	24
367/6 TORX® HF	24
367/7 TORX® HF	24
367 TORX® Stubby	19
367 TORX PLUS®	17
368	17
368 SB	17
368 Stubby	20
391	18
391/3	26
392	278
393 S	278
395	18
395 HO	19
395 HO/3	26
395 HO/7 SM	25
400 Hex	418
400 i Hex	99
400 TX	418
410 i VDE A RA	92
410 i VDE B	92
410 i VDE B RA	92
411 A RA	44
416 R	43
416 RA	44
454	41
454 HF	42
454 Imperial	42
454 Imperial HF	42
454/5 HF SHK Set 1	47
454/7 HF Set 1	45
454/7 HF Set 2	45
454/10 HF Set Imperial 1	46
454/10 HF Set Imperial 2	46
467 TORX® HF	42
467/7 TORX® HF Set 1	47
467/7 TORX® HF Set 2	47
495	43
712	265
780 A	367
780 B	367
780 C	367
781 A	366
781 B	366
781 C	366
781/5 Set 1	366
784 A/1	367
784 B	367
784 C	367
800 S	269
800/0 Micro	340
800/1 BDC	338
800/1 BTZ	339
800/1 TZ	339
800/1 Z	339
800/2 Z	340
800/4 Z	340
800/9 C	340
809/1 ESD Stubby	57
810/1 Vario	279
811/1 ESD Stubby	57
811/1 Stubby	279
812/1 Vario	279
813	279
813 R	278
813 R ESD	54
815/1	279
816 R	278
816 R SB	278
816 R ESD	54
817 R	277
817 R SB	277
817 VDE	84
826 T Kraftform Turbo	249
827 T Kraftform Turbo	85
830	265
837 i RA	73
838 RA S	247
838 RA-R L	246
838 RA-R M	247
840 S	269
840/0 Micro	346
840/1 BTZ	342

Article No.	Page
840/1 IMP DC DIY	341
840/1 IMP DC SB	341
840/1 Z	342
840/1 Z SB	343
840/1 Z BO	347
840/2 Z	346
840/4 IMP DC DIY	343
840/4 IMP DC SB	344
840/4 Z	345
840/4 Z SB	345
840/4 Z BO	347
840/9 C	346
842/1 Z	343
842/4	346
843	392
844	392
844/7	393
845	393
845/8	393
846 HSS	393
846/8	394
847 HSS	394
847/7	394
848 HSS	395
848/851/867/19	395
849 HSS	395
849/855/867/18	396
851 S	268
851/0 Micro	318
851/1 A	310
851/1 BDC	309
851/1 BDC SB	309
851/1 BTH	309
851/1 BTZ	310
851/1 IMP DC DIY	308
851/1 IMP DC SB	308
851/1 J	313
851/1 RDC	310
851/1 RH	311
851/1 RZ	311
851/1 RZ SB	311
851/1 TH	311
851/1 TiN	311
851/1 TZ	312
851/1 TZ SB	312
851/1 Z	312
851/1 Z DIY	312
851/1 Z DIY 100	313
851/1 Z SB	312
851/2 Z	318
851/4 A	315
851/4 BDC	314
851/4 BTH	315
851/4 BTZ	315
851/4 IMP DC DIY	313
851/4 IMP DC SB	314
851/4 J	317
851/4 PH/S	326
851/4 R	316
851/4 RH	315
851/4 TH	316
851/4 TZ	316
851/4 TZ SB	316
851/4 Z	316
851/4 Z SB	317
851/9 C	318
851/11	318
851/12	318
851/16	318
851/21 J	319
853/1 TZ ACR®	312
853/4 ACR®	317
853/4 ACR® Harpoon	318
853/4 ACR® SL	317
855 S	268
855/0 Micro	326
855/1 BDC	320
855/1 BDC SB	321
855/1 BTH	321
855/1 BTZ	321
855/1 IMP DC DIY	319
855/1 IMP DC SB	319
855/1 RZ	322
855/1 TH	322
855/1 TH SB	322
855/1 TiN	322
855/1 TZ	322
855/1 Z	322
855/1 Z DIY	323
855/1 Z DIY 100	323
855/1 Z SB	323
855/2 Z	326
855/4 BDC	324
855/4 BTH	324
855/4 BTZ	325
855/4 IMP DC DIY	323
855/4 IMP DC SB	324
855/4 PZ/S	327
855/4 TH	325
855/4 TZ	325
855/4 TZ SB	325
855/4 Z	325
855/4 Z SB	326
855/11	326
855/12	326
857/1 Z	353
857/4 Z	353
860/1 XZN	352
867 S TORX®	268
867/0 Micro TORX®	335
867/1 IMP DC TORX® DIY	327
867/1 IMP DC TORX® SB	327
867/1 TORX®	330
867/1 TORX® SB	330
867/1 TORX® BDC	329
867/1 TORX® BDC SB	329
867/1 TORX® BTZ	329
867/1 TORX® DIY	331
867/1 TORX® DIY 100	331
867/1 TORX® HF	329
867/1 TZ TORX®	330
867/1 Z TORX® BO	335
867/1 Z TORX® BO SB	336
867/1 Z TORX® W	331
867/1 ZA TORX®	332
867/2 Z TORX®	335
867/4 IMP DC TORX® DIY	332
867/4 IMP DC TORX® SB	332
867/4 TORX® HF	333
867/4 TORX® KK	333
867/4 Z TORX®	334
867/4 Z TORX® BO	336
867/4 Z TORX® BO SB	337
867/4 Z TORX® SB	334
867/9 C TORX®	335
867/12 TORX®	335
867/15 TORX®	335
867/1 IP TORX PLUS®	337
867/4 IP TORX PLUS®	337
867/9 C IP TORX PLUS®	337
867/1 IPR TORX PLUS®	338
867/4 IPR TORX PLUS®	338
868 S	269
868/1 IMP DC DIY	348
868/1 IMP DC SB	348
868/1 V	349
868/1 Z	349
868/1 Z SB	349
868/4	350
868/4 SB	350
868/4 BTZ	350
868/4 IMP DC DIY	349
868/4 IMP DC SB	350
868/4 V	351
869/4	353
869/4 M	354
869/4 M SB	354
869/4 M SB Set A	355
869/9	355
870/1	364
870/2	365
870/4	365
870/4 A	364
870/4 SB	365
870/4/7 Set A SB	365

Article No. Index

Article No.	Page
870/7	365
870/14	365
871/1 DC TORQ-SET® Mplus	351
871/1 TORQ-SET® Mplus 25 mm	351
871/1 TORQ-SET® Mplus 32 mm	351
871/2 TORQ-SET® Mplus	352
871/4 DC TORQ-SET® Mplus	351
871/4 TORQ-SET® Mplus	352
872/9	352
875/1 TRI-WING® 25 mm	352
875/4 TRI-WING®	352
879/4	355
881/4/1 SB	364
887/4 RR	360
887/4 RR SB	360
888/4/1 K	360
889/4 R	360
889/4/1	360
889/4/1 F	361
889/4/1 K	360
889/4/1 K SB	360
890/4/1	362
893/4/1 K	362
893/4/1 K SB	362
894/4/1	361
894/4/1 K	361
895/4/1	361
895/4/1 K	361
895/4/1 K SB	361
896/4/1 SB	364
897/4 IMP R	358
897/4 Impaktor	358
897/4 Impaktor R	358
897/4 R	359
897/4 R SB	359
898/4	362
898/9	362
898/21	362
899/3/1	363
899/4/1	363
899/4/1 SB	363
899/4/1 S	363
899/14/1 SB	363
917 SPH	9
917 SPH SB	9
917 SPHS	9
918 SPZ	9
918 SPZ SB	9
921	268
932 A	8
932 A SB	8
932 AS	8
932/6	10
932/918/6	10
932 S/6	10
950	225
950 BM	226
950 L	225
950 L HF	225
950 PKL	224
950 PKL BM	224
950 PKL Imperial	224
950 PKLS	224
950 PKS	225
950 SPKL HF Multicolour	222
950 SPKL Multicolour	223
950 SPKL Multicolour Imperial	223
950 SPKS Multicolour	223
950 SPKS Multicolour Imperial	223
950/7 Hex-Plus 1	218
950/7 Hex-Plus Magnet 1	218
950/7 Hex-Plus Multicolour Magnet 1	216
950/9 Hex-Plus 1	216
950/9 Hex-Plus 1 SB	216
950/9 Hex-Plus 2	216
950/9 Hex-Plus 3	217
950/9 Hex-Plus 4	217
950/9 Hex-Plus 5	217
950/9 Hex-Plus 6	217
950/9 Hex-Plus 6 SB	217
950/9 Hex-Plus 7	217
950/9 Hex-Plus 8	218
950/9 Hex-Plus Imperial 1	220
950/9 Hex-Plus Imperial 1 SB	220
950/9 Hex-Plus Multicolour 1	213
950/9 Hex-Plus Multicolour 1 SB	214
950/9 Hex-Plus Multicolour 2	214
950/9 Hex-Plus Multicolour 3	214
950/9 Hex-Plus Multicolour HF 1	213
950/9 Hex-Plus Multicolour Imperial 1	215
950/9 Hex-Plus Multicolour Imperial 2	215
950/9 Hex-Plus Multicolour Imperial 3	215
950/9 L Hex-Plus HF 1	216
950/13 Hex-Plus Imperial 1	219
950/13 Hex-Plus Imperial 1 SB	219
967 L TORX® HF	231
967 PKL TORX®	231
967 PKXL TORX®	230
967 SL TORX® HF	229
967 SPKL TORX® BO Multicolour	230
967 SPKXL TORX® Multicolour	229
967 SXL HF TORX® Multicolour	229
967 SXL TORX® Multicolour	230
967 TORX®	231
967 XL HF TORX®	230
967 XL TORX®	231
967/9 TORX® BO Multicolour 1	228
967/9 TORX® BO Multicolour 1 SB	228
967/9 TX 1	228
967/9 TX 1 SB	228
967/9 TX HF 1	227
967/9 TX Multicolour HF 1	227
967/9 TX XL 1	228
967/9 TX XL HF 1	227
967/9 TX XL Multicolour 1	227
967/9 TX XL Multicolour HF 1	227
977 TORX®	9
977/6 TORX®	11
1013	37
1013 ESD	53
1014	37
1060 i VDE	91
1060 i/1062 i/6 VDE	91
1060 i/1065 i/6 VDE	92
1062 i PH VDE	91
1065 i PZ VDE	91
1267 A TORX PLUS®	30
1267 A TORX®	30
1267 B TORX PLUS®	30
1267 B TORX®	30
1427	31
1428	31
1429	37
1430 ESD	404
1440/1442	32
1441	32
1460 ESD Kraftform Micro	409, 413
1529 ESD	51
1550 PH ESD	49
1550 PH S ESD	50
1550/6 ESD	53
1555 PZ ESD	50
1567 TORX® ESD	50
1567 TORX® HF ESD	50
1567 TORX® BO ESD	50
1567 TORX PLUS® IPR ESD	50
1569 ESD	51
1572 ESD	51
1573 ESD	51
1578 A ESD	49
1578 A/6 ESD	53
1834	28
1850 PH	28
1855 PZ	28
2035	34
2035/6 A Micro	40
2035/6 B Micro	40
2050 PH	35
2050/6 Micro	40
2052	36
2052/6 Micro	41
2054	36
2055 PZ	34
2067 TORX®	35
2067 TORX® HF	35

Article No.	Page
2067 TORX® BO	35
2067/6 TORX® BO	41
2067 TORX PLUS® IPR	35
2069 Micro	37
2069/6 Micro	41
2072	36
2090	456
2090/17	456
3160 i VDE	58
3160 i/7 Rack	59
3162 i PH VDE	58
3165 i VDE	58
3165 i/6 Rack	59
3167 i VDE TORX®	59
3167 i/7 Rack	59
3334	6
3334/3350/3355/6	8
3334/3355/6	7
3334/6	7
3335	6
3350 PH	6
3355 PZ	7
3367	7
3368	7
3800/4	339
3816 R	277
3817 VDE Stainless	70
3840/1 TS	341
3840/4	344
3851/1 TS PH	308
3851/1 TS PH SB	309
3851/4 PH	314
3855/1 TS PZ	320
3855/1 TS PZ SB	320
3855/4 PZ	324
3867/1 TS TORX®	328
3867/1 TS TORX® SB	328
3867/4 TORX® BO	336
3868/4	350
3869/4	353
3888/4/1 K	359
3888/4/1 K SB	359
3950 PKL	222
3950 PKL Imperial	222
3950 SPKL Multicolour	221
3950 SPKL Multicolour HF	221
3950 SPKL Multicolour Imperial	222
3950/9 Hex-Plus Imperial Stainless 1	213
3950/9 Hex-Plus Multicolour HF Stainless 1	212
3950/9 Hex-Plus Multicolour Imperial Stainless 1	215
3950/9 Hex-Plus Multicolour Stainless 1	212
3950/9 Hex-Plus Stainless 1	212
3950/9 Hex-Plus Stainless 1 SB	213
3967 SXL HF TORX® Multicolour	229
3967/9 TX SXL Multicolour HF Stainless 1	227
6000 Joker	194
6000 Joker 4 Set 1	196
6000 Joker 11 Set 1	196
6000 Joker Imperial	194
6000 Joker 4 Imperial Set 1	197
6000 Joker 8 Imperial Set 1	196
6000/6002 Joker 6 Set 1	196
6001 Joker Switch	197
6001 Joker Switch 4 Set 1	198
6001 Joker Switch 11 Set 1	198
6001 Joker Switch Imperial	197
6001 Joker Switch 4 Imperial Set 1	198
6001 Joker Switch 8 Imperial Set 1	198
6002 Joker Double	199
6003 Joker	199
6003 Joker 4 Set 1	203
6003 Joker 5 Set 1	201
6003 Joker 11 Set 1	201
6003 Joker 15 Set 1	201
6003 Joker 22 Set 1	200
6003 Joker Imperial	199
6003 Joker 4 Imperial Set 1	204
6003 Joker 5 Imperial Set 1	203
6003 Joker 8 Imperial Set 1	201
6003 Joker Pedal	200
6004 Joker S	205
6004 Joker M	205
6004 Joker L	206
6004 Joker XS	205
6004 Joker XL	206
6004 Joker XXL	206
6004 Joker 4 Set 1	206
6004 Joker VDE XS	98
6004 Joker VDE S	99
6004 Joker VDE M	99
6004 Joker VDE L	99
6004 Joker VDE 4 Set 1	98
6005 Joker Double	207
6005 Joker 4 Set 1	207
6006 Joker XS/S	208
6006 Joker M/L	208
6006 Joker 2 Set 1	207
6007 Joker	209
6007 Joker 5 Set 1	209
7400	400, 404, 405, 406, 407, 410, 411, 412
7400 ESD	404, 407, 408, 413, 414
7400 ESD Halfmoon	404, 408, 414
7400 ESD Imperial	404
7400 VDE	83
7440/41	402
7440/41/42	403
7443/12	402
7443/61/9	403
7445/46/47	403
7508 VDE	69
7510	415
7510/14	415
7515	416
7515/7	417
7515/16	416
7516 VDE	69
7761	455
7762	455
7763	455
7770	444
7771	446
7772 A	448
7772 B	448
7772 C	448
7773 A	449
7773 B	450
7773 C	450
7774/1	451
7774/2	451
7774/3	452
7775	452
7776	452
7779/1	453
7779/2	453
7780	445
7781	447
7782 C	449
7782 E	449
7783 C	450
7783 E	451
7786	453
7790/1	454
7790/2	454
7870 Joker L	442
7870 Joker M	441
7870 Joker S	441
7880 Joker L	444
7880 Joker XL	443
7880 Joker XXL	443
7880 Joker 3XL	442
8000 A	106
8000 A SB	106
8000 B	123
8000 B SB	124
8000 C	147
8000 C SB	147
8000 E	170
8001 A SB	176
8002 C KOLOSS All Inclusive Set	169
8002 C KOLOSS Set	170
8003 A	108
8003 B	127

Article No. Index

Article No.	Page
8003 C	150
8004 A	109
8004 B	129
8004 C	152
8005	176
8006 C	148
8006 SC 1	148
8007 B VDE	95
8008 A	177
8009 Zyklop Pocket Set 1	165
8009 Zyklop Pocket Set 2	167
8009 Zyklop Pocket Set 3	168
8009 Zyklop Pocket Set 4	169
8009 Zyklop Pocket Imperial Set 1	166
8009 Zyklop Pocket Imperial Set 2	167
8010 B	125
8011 A	176
8100 SA 2	104
8100 SA 4	105
8100 SA 6	103
8100 SA 7	107
8100 SA 8	108
8100 SA 9	103
8100 SA 10	107
8100 SA 11	109
8100 SA 12 HF	109
8100 SA All-In	102
8100 SA/SC 2	105
8100 SB 2	122
8100 SB 4	122
8100 SB 6	121
8100 SB 7	126
8100 SB 8	128
8100 SB 9	121
8100 SB 10	127
8100 SB 11	129
8100 SB 12	124
8100 SB 13	125
8100 SB All-in	120
8100 SB HF 1	129
8100 SB VDE 1	94
8100 SC 2	146
8100 SC 4	147
8100 SC 6	145
8100 SC 7	149
8100 SC 8	151
8100 SC 9	146
8100 SC 10	150
8100 SC 11	152
8700 A FL	117
8740 A	116
8740 A HF	116
8740 A HF 1	117
8740 A VDE HF	93
8740 B	140
8740 B HF	139
8740 B HF 1	141
8740 B HF Imperial 1	141
8740 B VDE HF	96
8740 C HF	162
8740 C HF 1	163
8740 C HF 2	163
8751 A	117
8755 A	117
8760 B VDE XZN	96
8767 A	114
8767 A HF	114
8767 A HF 1	115
8767 A VDE HF	93
8767 B	138
8767 B HF	137
8767 B HF 1	139
8767 B VDE HF	96
8767 C HF	160
8767 C HF 1	161
8767 C HF 2	161
8767 C HF 3	162
8780 C	170
8781 C	170
8782 C	170
8784 A1	119
8784 B1	143
8784 C2	165
8789 A	118
8789 B	143
8789 C	164
8790 A VDE	93
8790 B Impaktor	130
8790 B Impaktor Deep	130
8790 B Impaktor Deep Set 1	133
8790 B Impaktor Deep Imperial Set 1	133
8790 B VDE	96
8790 C HF 1	157
8790 C Impaktor	152
8790 C Impaktor Deep	154
8790 C Impaktor Deep Set 1	154
8790 C Wheel Impaktor	157
8790 FA	177
8790 HMA	110
8790 HMA Deep	113
8790 HMA HF	110
8790 HMB	131
8790 HMB Deep	136
8790 HMB HF	131
8790 HMC	155
8790 HMC Deep	158, 159
8790 HMC Deep	159
8790 HMC HF	155
8794 A	119
8794 B	143
8794 C	165
8794 LA	118
8794 LB	143
8794 LB VDE	97
8794 LC	164
8794 SA	118
8794 SA VDE	94
8794 SB	143
8794 SB VDE	97
8794 SC	164
8795 A	118
8795 B	143
8795 C	165
8796 LA	117
8796 LB	142
8796 LC	164
8796 SA	118
8796 SB	143
8796 SC	164
8797 C	149
9100	276
9108/2	32
9200	364
9500	31
9506 SB	347
9507 SB	348
9514 ESD	57
9523	32
9524	401
9529 C SB	164
9530	438
9532	276
9549	184
9550	184
9600	119
9601	144
9602	171
9604	48
9605	48
9606	49
9607	132
9608	132
9610	209
9611	31
9621	29
9630	195
9631	195
9632	195
9640	204
9641	204
9642	204
9650	20
9660	132
9661	133
9700	282

Article No.	Page
9710	283
9711	284
9712	284
9713	285
9714	285
9715	286
9720	286
9721	287
9722	287
9723	288
9724	288
9725	289
9726	289
9730	290
9731	290
9732	291
9733	291
9734	292
9740	292
9750	293
9751	294
9752	295
9780	296
9781	296
9782	296
9783	297
9784	297
Belt A 1	111
Belt A 2	116
Belt A 3	115
Belt A 4	111
Belt A Deep 1	113
Belt A Imperial 1	112
Belt A 8/0	119
Belt A 9/0	119
Belt B 1	134
Belt B 2	140
Belt B 3	138
Belt B 4	134
Belt B Deep 1	136
Belt B Imperial 1	142
Belt B VDE 1	95
Belt B VDE 10/0	97
Belt B 8/0	144
Belt B, 9/0	144
Belt C 1	156
Belt C 2	163
Belt C 3	160
Belt C Deep 1	159
Belt C Impaktor 1	153
Belt C Impaktor 9/0	171
Belt C, 6/0	171
Bicycle Big Pack 1	27
Bicycle Set 1	175
Bicycle Set 2	259
Bicycle Set 3	187
Bicycle Set 3 A	188
Bicycle Set 4	220
Bicycle Set 5	245
Bicycle Set 6	48
Bicycle Set 7	123
Bicycle Set 8	142
Bicycle Set 9	175
Bicycle Set 10	202
Bicycle Set 11	264
Bicycle Set 12	202
Bicycle Set 13	33
Bicycle Set 15	33
Bicycle Set Torque 1	424
Bit-Box 15 Impaktor PH	308
Bit-Box 15 Impaktor PZ	319
Bit-Box 15 Impaktor TX	327
Bit-Box 20 BTH PZ	321
Bit-Box 20 BTZ PH	310
Bit-Box 20 BTZ PZ	321
Bit-Box 20 PH	313
Bit-Box 20 PZ	323
Bit-Box 20 TX	331
Bit-Box 20 TX HF	330
Bit-Box 20 V Robertson	349
Bit-Check 6 Impaktor 1	372
Bit-Check 6 Impaktor 1 SB	372
Bit-Check 6 PH Impaktor 1	372
Bit-Check 6 PZ Impaktor 1	372
Bit-Check 6 PZ Universal 1	386
Bit-Check 6 SHK 1 SB	397
Bit-Check 6 Stainless 1	373
Bit-Check 6 TX Impaktor 1	372
Bit-Check 6 TX Universal 1	386
Bit-Check 6 TX Universal 1 SB	386
Bit-Check 6 Universal 1	385
Bit-Check 6 Universal 1 SB	385
Bit-Check 6 Universal 2	385
Bit-Check 6 Universal 2 SB	385
Bit-Check 6 V Universal 1	386
Bit-Check 6 Wood TX HF 1	390
Bit-Check 6 Wood TX HF 1 SB	390
Bit-Check 7 Diamond 1	377
Bit-Check 7 Diamond 1 SB	378
Bit-Check 7 Hex-Plus 1	384
Bit-Check 7 PZ Diamond 1	378
Bit-Check 7 PZ Universal 1	383
Bit-Check 7 TX BO Universal 1	384
Bit-Check 7 TX Diamond 1	378
Bit-Check 7 TX Universal 1	384
Bit-Check 7 TX Universal 1 SB	384
Bit-Check 7 Universal 1	383
Bit-Check 7 Universal 1 SB	383
Bit-Check 7 Universal 4	383
Bit-Check 10 BiTorsion 1	376
Bit-Check 10 BiTorsion 3 SB	376
Bit-Check 10 Drywall 1	397
Bit-Check 10 Impaktor 1	370
Bit-Check 10 Impaktor 1 SB	371
Bit-Check 10 Impaktor 2	371
Bit-Check 10 Impaktor 3	371
Bit-Check 10 Impaktor 4	371
Bit-Check 10 PZ BiTorsion 2	376
Bit-Check 10 PZ Impaktor 1	371
Bit-Check 10 Stainless 1	373
Bit-Check 10 Stainless 1 SB	373
Bit-Check 10 TX Impaktor 1	371
Bit-Check 10 TX Universal 1	382
Bit-Check 10 TX Universal 2	382
Bit-Check 10 Universal 1	381
Bit-Check 10 Universal 2	381
Bit-Check 10 Universal 3	381
Bit-Check 10 Universal 3 SB	381
Bit-Check 10 Universal 4	382
Bit-Check 10 Universal 5 SB	382
Bit-Check 10 Zyklop Mini 1	174
Bit-Check 10 Zyklop Mini BiTorsion 1	174
Bit-Check 12 BiTorsion 1	375
Bit-Check 12 BiTorsion 1 SB	375
Bit-Check 12 Diamond 1	377
Bit-Check 12 Diamond 1 SB	377
Bit-Check 12 Metal 1	392
Bit-Check 12 Metal 1 SB	392
Bit-Check 12 Wood 1	389
Bit-Check 12 Wood 1 SB	389
Bit-Check 12 Wood 2	389
Bit-Check 12 Wood 2 SB	390
Bit-Check 12 Wood TX HF 1	388
Bit-Check 12 Wood TX HF 1 SB	389
Bit-Check 30 BiTorsion 1	375
Bit-Check 30 Diamond 1	377
Bit-Check 30 Impaktor 1	370
Bit-Check 30 Impaktor 2	370
Bit-Check 30 Metal 1	391
Bit-Check 30 Metal 1 SB	391
Bit-Check 30 Stainless 1	373
Bit-Check 30 TX Universal 1	380
Bit-Check 30 TX Universal 1 SB	380
Bit-Check 30 Universal 1	380
Bit-Check 30 Wood 1	387
Bit-Check 30 Wood 2	388
Bit-Check 30 Wood 2 SB	388
Bit-Check 30 Wood TX HF 1	387
Bit-Check 30 Wood TX HF 1 SB	387
Bit-Check 30 Zyklop Mini 1	172
Bit-Check 30 Zyklop Mini 2	173
Bit-Safe 43 Universal 1	379
Bit-Safe 61 BiTorsion 1	374
Bit-Safe 61 Universal 1	379
Click-Torque A 5	422

Article No. Index

Article No.	Page
Click-Torque A 6	422
Click-Torque A 6 Set 1	423
Click-Torque B 1	425
Click-Torque B 2	425
Click-Torque C 1	426
Click-Torque C 2	426
Click-Torque C 2 Push R/L	431
Click-Torque C 3	427
Click-Torque C 3 Push R/L	432
Click-Torque C 3 Set 1	428
Click-Torque C 3 Set 2	428
Click-Torque C 4	429
Click-Torque C 5	429
Click-Torque E 1	429
Click-Torque E 1 Push R/L	432
Click-Torque Lock A 5	430
Click-Torque Lock A 5 R/L	433
Click-Torque Lock A 6	430
Click-Torque Lock A 6 R/L	433
Click-Torque Lock C 3	431
Click-Torque Lock C 3 R/L	434
Click-Torque X 1	434
Click-Torque X 2	435
Click-Torque X 3	435
Click-Torque X 4	435
Click-Torque X 5	436
Click-Torque X 6	436
Click-Torque X 7	437
Click-Torque XP 1	439
Click-Torque XP 2	439
Click-Torque XP 3	440
Click-Torque XP 4	440
K 50	305
K 70	305
K 120	305
Kraftform 2go 100	65
Kraftform 2go 300	22
Kraftform Big Pack 100 VDE	64
Kraftform Big Pack 300	20
Kraftform Big Pack 900	10
Kraftform Kompakt 10	249
Kraftform Kompakt 12	249
Kraftform Kompakt 20	251
Kraftform Kompakt 20 RA-R	234
Kraftform Kompakt 20 Tool Finder 1	250
Kraftform Kompakt 20 Tool Finder 2	251
Kraftform Kompakt 25	252
Kraftform Kompakt 25 RA-R	235
Kraftform Kompakt 26	252
Kraftform Kompakt 26 RA-R	235
Kraftform Kompakt 27 Imperial Set 1	254
Kraftform Kompakt 27 RA 1	235
Kraftform Kompakt 27 RA 2	236
Kraftform Kompakt 27 Set 1	253
Kraftform Kompakt 27 Set 2	254
Kraftform Kompakt 27 XL SHK 1	253
Kraftform Kompakt 27 XL Universal 1	252
Kraftform Kompakt 27 XL Universal Imperial Set 1	253
Kraftform Kompakt 28	255
Kraftform Kompakt 28 Imperial 1	254
Kraftform Kompakt 28 RA 1	236
Kraftform Kompakt 28 SB	254
Kraftform Kompakt 40	255
Kraftform Kompakt 41	255
Kraftform Kompakt 60	257
Kraftform Kompakt 60 ESD	54
Kraftform Kompakt 60 Imperial	258
Kraftform Kompakt 60 KK	258
Kraftform Kompakt 60 RA-R 1	237
Kraftform Kompakt 60 RA-R Imperial 1	238
Kraftform Kompakt 60 Stainless	256
Kraftform Kompakt 60 Stainless Imperial	257
Kraftform Kompakt 60 Torque	256
Kraftform Kompakt 62	259
Kraftform Kompakt 70 Universal	260
Kraftform Kompakt 71 Security	260
Kraftform Kompakt 96 VK 6,3	90
Kraftform Kompakt 97 VK 8,1	90
Kraftform Kompakt 98 DK	90
Kraftform Kompakt 99 FL	90
Kraftform Kompakt 100	261
Kraftform Kompakt 400 RA Imperial Set 1	239
Kraftform Kompakt 400 RA Imperial Set 2	240
Kraftform Kompakt 400 RA Set 1	238
Kraftform Kompakt 400 RA Set 2	239
Kraftform Kompakt 400 RA SHK Set 1	240
Kraftform Kompakt 838 RA S Imperial Set 1	241
Kraftform Kompakt 838 RA S Set 1	241
Kraftform Kompakt 838 RA-R M Imperial Set 1	242
Kraftform Kompakt 838 RA-R M Set 1	242
Kraftform Kompakt 900	267
Kraftform Kompakt 900 Imperial Set 1	267
Kraftform Kompakt A VDE 712 i	83
Kraftform Kompakt A VDE 712 i SB2	83
Kraftform Kompakt F 1	275
Kraftform Kompakt H 1	272
Kraftform Kompakt M 1	273
Kraftform Kompakt Micro 11 Electronics 1	39
Kraftform Kompakt Micro 11 ESD 1	56
Kraftform Kompakt Micro 11 Universal 1	40
Kraftform Kompakt Micro 20 ESD 1	55
Kraftform Kompakt Micro 21 ESD 1	55
Kraftform Kompakt Pistol RA-R 1	243
Kraftform Kompakt Pistol RA-R 2	244
Kraftform Kompakt SH 1	274
Kraftform Kompakt SH 2	275
Kraftform Kompakt Stubby 1	263
Kraftform Kompakt Stubby ESD 1	56
Kraftform Kompakt Stubby Magazin 1	262
Kraftform Kompakt Stubby Magazin 2	262
Kraftform Kompakt Stubby Magazin 3	263
Kraftform Kompakt Stubby Magazin 4	263
Kraftform Kompakt Stubby Magazin 5	263
Kraftform Kompakt Stubby Magazin RA 1	244
Kraftform Kompakt Stubby Magazin RA 2	245
Kraftform Kompakt Stubby Magazin RA 4	245
Kraftform Kompakt Turbo 1	248
Kraftform Kompakt Turbo i 1 Tool Finder	84
Kraftform Kompakt Turbo i Imperial 1 Tool Finder	85
Kraftform Kompakt Turbo Imperial 1	248
Kraftform Kompakt Vario RA	246
Kraftform Kompakt VDE 7 extra slim 1 Tool Finder	82
Kraftform Kompakt VDE 7 Imperial 1 Tool Finder	82
Kraftform Kompakt VDE 7 Universal 1 Tool Finder	82
Kraftform Kompakt VDE 7 Universal 2 Tool Finder	83
Kraftform Kompakt VDE 15 Torque 1,2-3,0 Nm extra slim 1 Tool Finder	76
Kraftform Kompakt VDE 16 extra slim 1 Tool Finder	81
Kraftform Kompakt VDE 16 Torque 1,2-3,0 Nm extra slim 1 Tool Finder	76
Kraftform Kompakt VDE 16 Universal 1 Tool Finder	81
Kraftform Kompakt VDE 17 extra slim 1 Tool Finder	79
Kraftform Kompakt VDE 17 extra slim 2 Tool Finder	80
Kraftform Kompakt VDE 17 RA 1	75
Kraftform Kompakt VDE 17 RA Imperial 1	75
Kraftform Kompakt VDE 17 Universal 1 Tool Finder	80
Kraftform Kompakt VDE 18 Imperial 1 Tool Finder	78
Kraftform Kompakt VDE 18 Safe-Torque Speed Set 1	68
Kraftform Kompakt VDE 18 Universal 1 Tool Finder	78
Kraftform Kompakt VDE 18 Universal 2 Tool Finder	79
Kraftform Kompakt VDE 24 Allrounder Set 1	74
Kraftform Kompakt VDE 60 i Take it easy	85
Kraftform Kompakt VDE 60 i Take it easy SB	85
Kraftform Kompakt VDE 60 iS Take it easy	86
Kraftform Kompakt VDE 60 iS Take it easy SB	86

Article No.	Page
Kraftform Kompakt VDE 62 i PH/S Take it easy	87
Kraftform Kompakt VDE 62 i Take it easy	86
Kraftform Kompakt VDE 62 iS PH/S Take it easy	87
Kraftform Kompakt VDE 62 iS Take it easy	86
Kraftform Kompakt VDE 62 iS Take it easy SB	86
Kraftform Kompakt VDE 64 i Take it easy	90
Kraftform Kompakt VDE 64 i Take it easy SB	90
Kraftform Kompakt VDE 65 i PZ/S Take it easy	88
Kraftform Kompakt VDE 65 i Take it easy	87
Kraftform Kompakt VDE 65 iS PZ/S Take it easy	88
Kraftform Kompakt VDE 65 iS PZ/S Take it easy SB	88
Kraftform Kompakt VDE 65 iS Take it easy	87
Kraftform Kompakt VDE 65 iS Take it easy SB	87
Kraftform Kompakt VDE 67 i TORX® Take it easy	88
Kraftform Kompakt VDE 67 i TORX® Take it easy SB	89
Kraftform Kompakt VDE 67 iS TORX® Take it easy	89
Kraftform Kompakt VDE 68 i Take it easy	89
Kraftform Kompakt VDE 68 iS Take it easy	89
Kraftform Kompakt VDE 3060 i Take it easy SB	71
Kraftform Kompakt VDE 3060 iS Take it easy SB	71
Kraftform Kompakt VDE 3062 iS Take it easy SB	71
Kraftform Kompakt VDE 3065 iS PZ Take it easy SB	72
Kraftform Kompakt VDE 3065 iS PZ/S Take it easy SB	72
Kraftform Kompakt VDE 3067 i TORX® Take it easy SB	73
Kraftform Kompakt VDE 3067 iS TORX® Take it easy SB	72
Kraftform Kompakt VDE Big Pack 1	77
Kraftform Kompakt VDE Stainless 17 extra slim 1 Tool Finder	69
Kraftform Kompakt VDE Stainless 8 extra slim 1 Tool Finder	70
Kraftform Kompakt W 1	270
Kraftform Kompakt W 2	271
Kraftform Kompakt W Imperial 1	271
Kraftform Kompakt Zyklop	106
Kraftform Kompakt Zyklop Mini 2	173
Kraftform Kompakt Zyklop MS1 Metal/Speed 1/4"	104
Kraftform Micro 12 Electronics 1	39
Kraftform Micro 12 Universal 1	38
Kraftform Micro Big Pack 1	38
Kraftform Micro ESD Big Pack 1	52
Kraftform XXL	21
Kraftform XXL 2	21
Kraftform XXL 3	21
M 1	111
Magnetic socket rail A 4	112
Magnetic socket rail A Deep 1	114
Magnetic socket rail A Imperial 1	112
Magnetic socket rail B 4	135
Magnetic socket rail B Deep 1	137
Magnetic socket rail B Imperial 1	135
Magnetic socket rail C 4	161
Magnetic socket rail C Deep 1	159
Magnetic socket rail C Impaktor 1	153
Magnetic socket rail C Imperial 1	156
Rack Kraftform	31
Rack Kraftform Micro	31
Safe-Torque A 1	419
Safe-Torque A 1 Imperial Set 1	420
Safe-Torque A 1 Set 1	420
Safe-Torque A 1 SHK Set 1	421
Safe-Torque A 2	419
Safe-Torque A 2 Set 1	421
Stubby Set 1	26
Stubby Set 2	27
Stubby Set 3	27
Stubby Set TX 1	27
T 1	396
Tool-Check 1	189
Tool-Check Automotive 1	190
Tool-Check Combi 1	191
Tool-Check Modular 1	180
Tool-Check Modular Imperial 1	181
Tool-Check Modular Micro 1	182
Tool-Check Modular Set 1	183
Tool-Check Modular Set Imperial 1	184
Tool-Check Modular Hex-Plus 1	181
Tool-Check PLUS 1	185
Tool-Check PLUS 2	186
Tool-Check PLUS Imperial 1	186
Wera 2go 1	300
Wera 2go 2	300
Wera 2go 2 XL	301
Wera 2go 3	301
Wera 2go 4	301
Wera 2go 5	301
Wera 2go 6	302
Wera 2go 7	302
Wera 2go E 1	303
Wera 2go H 1	302
Wera 2go SHK 1	304
Wheel Impaktor C Set 1	158
Zyklop Hybrid Set	148



Wera Werkzeuge GmbH
Korzerter Straße 21-25
42349 Wuppertal

+49 / (0)202 / 40 45 - 0
E-Mail: info@wera.de

Wera Tools Ibérica, S.L.
Avda. Corts Catalanes 2, Local 5
08173 Sant Cugat del Vallès, Barcelona
+34/93/72 97 - 240
E-Mail: ventas@weraspain.com

Wera Tools Finland Oy
Vantaankoskentie 14
01670 Vantaa, Finland
+358 50 362 8935
E-Mail: joki@wera.de

Wera Outillages S.A.S.
13, rue Ampère
F - 67500 Haguenau
+33 9 72 61 16 52
E-Mail: info@wera-outillages.fr

Wera Tools (UK) Ltd.
Railway View
Clay Cross
Chesterfield
S45 9FR
+44 (0)1246 / 27 77 56
Fax: +44 (0)1246 / 27 33 35
E-Mail: queries@wera-tools.co.uk

Wera Tools Inc.
3325 Harvester Rd., Unit 16
Burlington, Ontario
Canada, L7N 3N2
1-800-267-55 41
E-Mail: info@weratools.com

Wera Tools Inc.
3325 Harvester Rd., Unit 16
Burlington, Ontario
Canada, L7N 3N2
1-800-267-55 41
E-Mail: info@weratools.com

NL - Noord
Frederik Koning
+31 / 615 26 36 97
E-Mail: koning@wera.de

NL - Zuid
Wouter Steijvers
+31 / 652 85 01 62
E-Mail: steijvers@wera.de

NL - Midden
Martijn van Houdt
+31 / 611 06 35 35
E-Mail: vanhoudt@wera.de

Demovan
Vincent van Gaalen
+31 / 615 44 37 19
E-Mail: vangaalen@wera.de

Wera Tools Inc.
3325 Harvester Rd., Unit 16
Burlington, Ontario
Canada, L7N 3N2
1-800-267-55 41
E-Mail: info@weratools.com

Wera Tools Japan G.K
2F, Eden Bldg.,
1-10-8 Kamiikebukuro, Toshima-Ku,
Tokyo, 170-0012 Japan
東京都豊島区上池袋1-10-8
エデンビル2階
+81-3-3915-2555
E-Mail メール: frank.yang@wera.de

Wera Tools Australia Pty Ltd
Australia
+61-435 755 123
E-Mail: mike.sack@wera.de

Imprint

Subject to technical modifications!
Any reprinting – even only excerpts – shall only be permissible with the prior written consent of the company Wera Werkzeuge GmbH.

Edition: EN 2/2025

Trademarks used:

ACR	Phillips Screw Company
ASSY	Adolf Würth GmbH & Co. KG
AW	Adolf Würth GmbH & Co. KG
HIOS	Totsu, Katsuyuki
Microstix	OSG System Products Co. Ltd.
Phillips Recess	Phillips Screw Company
Pozidriv	registered trademark for Phillips Screw Company in Canada, Mexico and in the USA; for Trifast plc in the UK
PZ	registered trademark for Phillips Screw Company in Canada, Mexico and in the USA
PZ1, PZ2, PZ3	registered trademark in the USA for Phillips Screw Company
PUK	Josef Haunstetter Sägenfabrik KG
Robertson	British Robertson S.L.U.
SDS plus	Robert Bosch GmbH
SIT	Adolf Würth GmbH & Co. KG
SPAX	Altenloh, Brinck & Co. GmbH & Co. KG
T-STAR plus	Altenloh, Brinck & Co. GmbH & Co. KG
TORQ-SET	Phillips Screw Company
TORX	Acument Intellectual Properties, LLC, Troy, Mich., US
TORX PLUS	Acument Intellectual Properties, LLC, Troy, Mich., US
TRI-WING	Phillips Screw Company

BESSEY®	BESSEY Tool GmbH & Co. KG
“KIRSCHEN“®	Wilh. Schmitt & Comp. GmbH & Co. KG
KNIPEX®	KNIPEX-Werk C. Gustav Putsch KG
COBRA®	KNIPEX-Werk C. Gustav Putsch KG
Lyra®	Johann Froescheis Lyra-Bleistift-Fabrik GmbH & Co. KG
PFERD	August Rüggeberg GmbH & Co. KG
PICARD®	Picard GmbH
RENNSTEIG	Rennsteig Werkzeuge GmbH
Stabila®	STABILA Messgeräte Gustav Ullrich GmbH

We reserve the right to modify without prior notification any details stated in this catalogue regarding product features, versions and designs.
No liability for printing errors or mistakes shall be assumed.

Wera
BE A TOOL REBEL

Contact us

All regions (except for North America, UK and Republic of Ireland)

Wera Werkzeuge GmbH ·
Germany

Korzerter Straße 21–25
D-42349 Wuppertal
Phone: +49 (0) 202 / 40 45-0

E-Mail: info@wera.de
Internet: www.wera.de

North America

Wera Tools Inc.
3325 Harvester Rd., Unit 16
Burlington, Ontario
Canada, L7N 3N2

Phone: 1-800-267-55 41
E-Mail: info@weratools.com

Internet: www.weratools.com

UK & Republic of Ireland

Wera Tools (UK) Ltd.
Railway View
Clay Cross
Chesterfield
S45 9FR

Phone: +44 (0)1246 / 27 77 56
E-Mail: queries@wera-tools.co.uk

Internet: www.wera-tools.co.uk
Socials: @weratoolsuk

EN-2/2025